

Wirewound Resistor, Commercial Power, Silicone Coated, Axial Lead



FEATURES

- High temperature coating (> 350 °C)
- Complete welded construction
- Available in non-inductive styles with Ayrton-Perry winding for lowest reactive components, special "NI"
- Will meet flammability requirements of UL 94 V-0
- Material categorization:

For definitions of compliance please see www.vishay.com/doc?99912



RoHS
COMPLIANT
GREEN
(5-2008)

STANDARD ELECTRICAL SPECIFICATIONS

GLOBAL MODEL	HISTORICAL MODEL	POWER RATING ⁽¹⁾ $P_{25^{\circ}\text{C}}$ W CHARACTERISTIC U + 250 °C	POWER RATING ⁽¹⁾ $P_{25^{\circ}\text{C}}$ W CHARACTERISTIC V + 350 °C	RESISTANCE RANGE Ω $\pm 0.1 \%$	RESISTANCE RANGE Ω $\pm 0.25 \%$	RESISTANCE RANGE Ω $\pm 0.5 \%, \pm 1 \%,$ $\pm 5 \%, \pm 10 \%$	WEIGHT (typical) g
FA3/4	FA3/4	0.75	1.0	0.499 to 1.0K	0.499 to 1.5K	0.1 to 1.5K	0.26
FA001	FA1	1.0	1.5	0.499 to 1.3K	0.499 to 4.0K	0.1 to 4.0K	0.51
FA01A	FA1A	1.0	1.5	0.499 to 2.74K	0.499 to 5.0K	0.1 to 5.0K	0.35
FA002	FA2	2.0	2.6	0.499 to 4.49K	0.499 to 7.2K	0.1 to 7.2K	0.87
FA003	FA3	3.0	3.6	0.499 to 8.6K	0.499 to 9.5K	0.1 to 9.5K	0.87
FA03A	FA3A	3.0	3.7	0.499 to 6.5K	0.1 to 11.0K	0.1 to 11.0K	0.93
FA004	FA4	4.0	5.0	0.499 to 12.7K	0.1 to 24.0K	0.1 to 24.0K	1.36
FA04B	FA4B	4.0	5.0	0.499 to 10.5K	0.1 to 14.0K	0.1 to 14.0K	0.93
FA005	FA5	5.0	6.5	0.499 to 25.7K	0.1 to 42.0K	0.1 to 42.0K	3.01
FA07A	FA7A	7.0	8.0	0.499 to 41.4K	0.1 to 63.0K	0.1 to 63.0K	3.29
FA007	FA7	7.0	8.0	0.499 to 41.4K	0.1 to 80.0K	0.1 to 80.0K	3.90
FA10A	FA10A	10.0	11.0	0.499 to 73.4K	0.1 to 92.0K	0.1 to 92.0K	4.70
FA010	FA10	10.0	12.5	0.499 to 73.4K	0.1 to 100K	0.1 to 100K	8.71

Note

⁽¹⁾ Vishay Central FA models have two power ratings depending on operation temperature and stability requirements.

GLOBAL PART NUMBER INFORMATION

Global Part Numbering example: **FA0105K600JE12** (visit www.vishay.net Vishay Dale parts numbering manual for all options)

F **A** **0** **1** **0** **5** **K** **6** **0** **0** **J** **E** **1** **2**

GLOBAL MODEL
(5 digits)

(See Standard Electrical Specifications Global Model column for options)

VALUE
(5 digits)

R = Decimal
K = Thousand
1R500 = 1.5 Ω
1K500 = 1.5 k Ω

TOLERANCE
(1 digit)

B = $\pm 0.1 \%$
C = $\pm 0.25 \%$
D = $\pm 0.5 \%$
F = $\pm 1 \%$
J = $\pm 5 \%$
K = $\pm 10 \%$

PACKAGING CODE
(3 digits)

E07 = Tape/reel
(FA004, FA005, FA07A)
E08 = Tape/reel
(FA3/4, FA001, FA01A)
E29 = Tape/reel
(FA007, FA010, FA10A)
E48 = Tape/reel
(FA002, FA003, FA03A, FA04B)
E12 = Bulk, up to 100 pc boxes

SPECIAL
(up to 3 digits)

(Dash Number)
From **1** to **999**
as applicable
NI =
Non-inductive

Historical Part Number example: **FA10 5.6K 5 %**

FA10

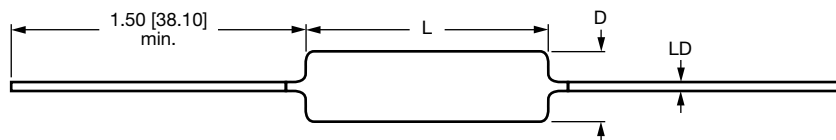
HISTORICAL MODEL

5.6 k Ω

RESISTANCE VALUE

5 %

TOLERANCE

DIMENSIONS in inches [millimeters]


MODEL	DIMENSIONS in inches [millimeters]		
	L	D	LD ± 0.002 [0.051]
FA3/4	0.250 ± 0.030 [6.35 ± 0.762]	0.095 ± 0.015 [2.41 ± 0.381]	0.025 [0.635]
FA001	0.375 ± 0.030 [9.53 ± 0.762]	0.135 ± 0.030 [3.43 ± 0.762]	0.032 [0.813]
FA01A	0.410 ± 0.030 [10.41 ± 0.762]	0.110 ± 0.030 [2.79 ± 0.762]	0.020 [0.508]
FA002	0.500 ± 0.062 [12.70 ± 1.57]	0.185 ± 0.031 [4.70 ± 0.787]	0.032 [0.813]
FA003	0.500 ± 0.062 [12.70 ± 1.57]	0.185 ± 0.031 [4.70 ± 0.787]	0.032 [0.813]
FA03A	0.560 ± 0.062 [14.22 ± 1.57]	0.187 ± 0.031 [4.75 ± 0.787]	0.032 [0.813]
FA004	0.770 ± 0.062 [19.55 ± 1.57]	0.230 ± 0.031 [5.84 ± 0.787]	0.032 [0.813]
FA04B	0.560 ± 0.062 [14.22 ± 1.57]	0.187 ± 0.031 [4.75 ± 0.787]	0.032 [0.813]
FA005	0.875 ± 0.062 [22.33 ± 1.57]	0.312 ± 0.031 [7.92 ± 0.787]	0.032 [0.813]
FA07A	1.22 ± 0.062 [30.99 ± 1.57]	0.312 ± 0.031 [7.92 ± 0.787]	0.032 [0.813]
FA007	1.55 ± 0.062 [39.37 ± 1.57]	0.295 ± 0.031 [7.49 ± 0.787]	0.032 [0.813]
FA10A	1.75 ± 0.062 [44.45 ± 1.57]	0.295 ± 0.031 [7.49 ± 0.787]	0.032 [0.813]
FA010	1.78 ± 0.062 [45.21 ± 1.57]	0.375 ± 0.031 [9.53 ± 0.787]	0.040 [1.02]

TECHNICAL SPECIFICATIONS

PARAMETER	UNIT	FA RESISTOR CHARACTERISTICS
Temperature Coefficient	ppm/°C	± 30 for 10 Ω and above; ± 50 for 1.0 Ω to 9.9 Ω; ± 90 for 0.5 Ω to 0.99 Ω
Terminal Strength	lb	5 min (FA3/4 and FA01A) and 10 min for all others
Dielectric Withstanding Voltage	V _{AC}	500 for FA01A and smaller; 1000 for FA002 and larger
Operating Temperature Range	°C	Characteristic U = - 65 to + 250, Characteristic V = - 65 to + 350
Maximum Working Voltage	V	(P × R) ^{1/2}

MATERIAL SPECIFICATIONS

Element: Copper-nickel alloy or nickel-chrome alloy, depending on resistance value

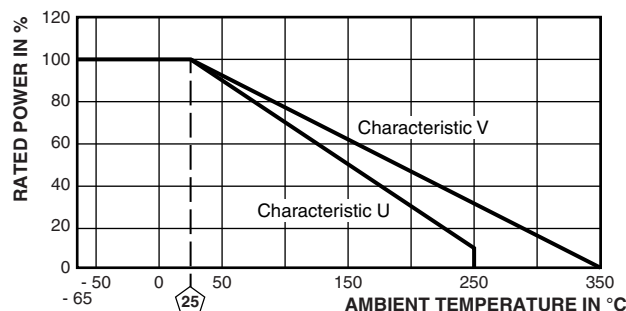
Core: Ceramic: Steatite or alumina, depending on physical size

Coating: Special high temperature silicone

Standard Terminals: Tinned copper clad steel

End Caps: Stainless steel

Part Marking: CENTRAL, model, value, tolerance, date code

DERATING

PERFORMANCE

TEST	CONDITIONS OF TEST	TEST LIMITS	
		(CHARACTERISTIC U)	(CHARACTERISTIC V)
Dielectric Withstanding Voltage	500 V _{RMS} 1 min for FA01A and smaller; 1000 V _{RMS} 1 min for all others	± (0.1 % + 0.05 Ω) ΔR	± (0.1 % + 0.05 Ω) ΔR
High Frequency Vibration	Frequency varied 10 Hz to 2000 Hz, 20 g peak, 2 directions 6 h each	± (0.1 % + 0.05 Ω) ΔR	± (0.2 % + 0.05 Ω) ΔR
High Temperature Exposure	250 h at + 250 °C for U Characteristic, + 350 °C for V Characteristic	± (0.5 % + 0.05 Ω) ΔR	± (4.0 % + 0.05 Ω) ΔR
Load Life	2000 h at 25 °C at rated power, 1.5 h "ON", 0.5 h "OFF"	± (0.5 % + 0.05 Ω) ΔR	± (3.0 % + 0.05 Ω) ΔR
Low Temperature Storage	- 65 °C for 24 h	± (0.2 % + 0.05 Ω) ΔR	± (2.0 % + 0.05 Ω) ΔR
Moisture Resistance	MIL-STD-202 Method 106, 7b not applicable	± (0.2 % + 0.05 Ω) ΔR	± (2.0 % + 0.05 Ω) ΔR
Shock, Specified Pulse	MIL-STD-202 Method 213, 100 g's for 6 ms, 10 shocks	± (0.1 % + 0.05 Ω) ΔR	± (0.2 % + 0.05 Ω) ΔR
Thermal Shock	Rated power applied until thermally stable, then 15 min at - 55 °C	± (0.2 % + 0.05 Ω) ΔR	± (2.0 % + 0.05 Ω) ΔR
Short Time Overload	5 x rated power (3.70 W smaller), 10 x rated power (4 W and larger) for 5 s	± (0.2 % + 0.05 Ω) ΔR	± (2.0 % + 0.05 Ω) ΔR
Terminal Strength	Pull test 5 s to 10 s, 5 lb (FA3/4 and FA01A), 10 lb for all others; torsion test - 3 alternating directions, 360° each	± (0.1 % + 0.05 Ω) ΔR	± (1.0 % + 0.05 Ω) ΔR



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А