

Features

- Built-in active PFC
- Efficiency up to 88%
- Isolated output 3kVAC / 1 minute
- SCP, OLP protection
- Operating temperature range -20°C to +60°C
- Universal input 90-264VAC / 120VDC-370VDC

Regulated Converter



RACG100

100 Watt Single Output



EN60950 certified
 CAN/CSA-C22.2 No. 60950 certified
 UL No. 60950 certified
 EN55032 compliant
 EN55024 compliant

Description

These industrial grade power supplies have been designed to give many years of trouble-free life. Despite their low cost, they use high grade electrolytic capacitors and are certified to heavy industry performance levels, working reliably over an extended temperature and world-wide input voltage range. The RACG series are more compact than the standard industry size, yet offer higher performance with full output protection (SCP, OLP), active power factor correction and improved input surge, hold-up time and efficiency ratings. The power supplies can be mounted horizontally or vertically and are fully certified to CE, UL and Class B EMC standards. Typical uses are industrial, commercial and high reliability applications. The RACG series come with a 3 year warranty.

Selection Guide

| Part Number | Input Voltage Range [VAC] | Input Current max. [A] | nom. Output Voltage [VDC] | Adj. Output Voltage ⁽¹⁾ [VDC] | Output Current max. [A] | Efficiency typ. ⁽²⁾ [%] |
|-------------|---------------------------|------------------------|---------------------------|--|-------------------------|------------------------------------|
| RACG100-05S | 90-264 | 1.5 | 5 | 3.3-5.5 | 20 | 84 |
| RACG100-12S | 90-264 | 1.5 | 12 | 10-15 | 8.5 | 87 |
| RACG100-24S | 90-264 | 1.5 | 24 | 21-27 | 4.5 | 88 |
| RACG100-48S | 90-264 | 1.5 | 48 | 43.2-52.8 | 2.2 | 88 |

Notes:

- Note1: For detail information please refer to graph on page PA-2
 Note2: Efficiency is tested at 230VAC and full load at +25°C ambient

Model Numbering



Ordering Examples:

| | | | |
|-------------|----------|--------|---------------|
| RACG100-12S | 100 Watt | 12Vout | Single Output |
| RACG100-48S | 100 Watt | 48Vout | Single Output |

Specifications (measured at Ta= 25°C, nom. Vin (115/230VAC), full load and after warm-up)

| BASIC CHARACTERISTICS | | | | | |
|------------------------------------|---------------------|------------------|-----------------|--------------|------------------|
| Parameter | Condition | | Min. | Typ. | Max. |
| Input Voltage Range ⁽³⁾ | nom. Vin = 230VDC | | 90VAC 120VDC | | 264VAC 370VDC |
| Inrush Current | cold start at +25°C | 115VAC 230VAC | | | 30A 50A |
| No load Power Consumption | | | | 3W | |
| Input Frequency Range | | | 47Hz | | 63Hz |
| Minimum Load | | | | 0% | |
| Power Factor | 115VAC 230VAC | | | 0.98 0.93 | |
| Set-up Time | 115VAC 230VAC | | | | 4s 2s |
| Hold-up Time | 230VAC | | | 20ms | |

continued on next page

Specifications (measured at Ta= 25°C, nominal input voltage (115/230VAC), full load and after warm-up)

BASIC CHARACTERISTICS



| Parameter | Condition | | Min. | Typ. | Max. |
|--|--------------|---------------|------|----------|------|
| Output Voltage Adjustability | | | | ±10% | |
| Output Ripple and Noise ⁽⁴⁾ | 0°C to +60°C | all | | 150mVp-p | |
| | -20°C to 0°C | 5, 12, 24Vout | | 150mVp-p | |
| | | 48Vout | | 200mVp-p | |

Notes:


Note3: The products were submitted for safety files at AC-Input operation

Note4: Measured @ 20MHz Bandwidth with a 0.1µF parallel capacitor

Efficiency vs. Load

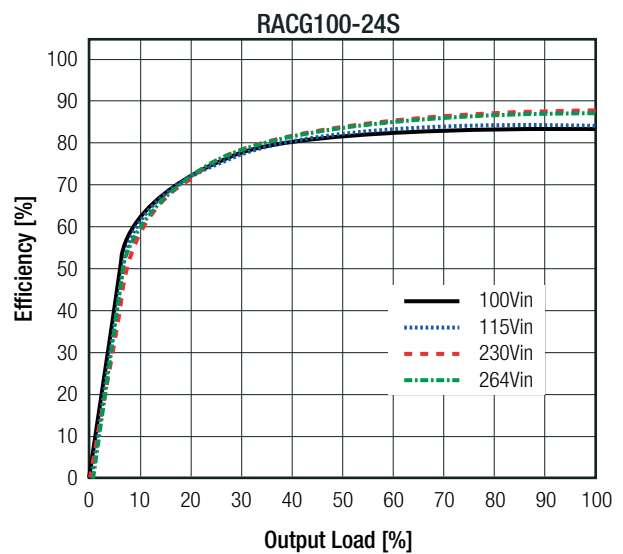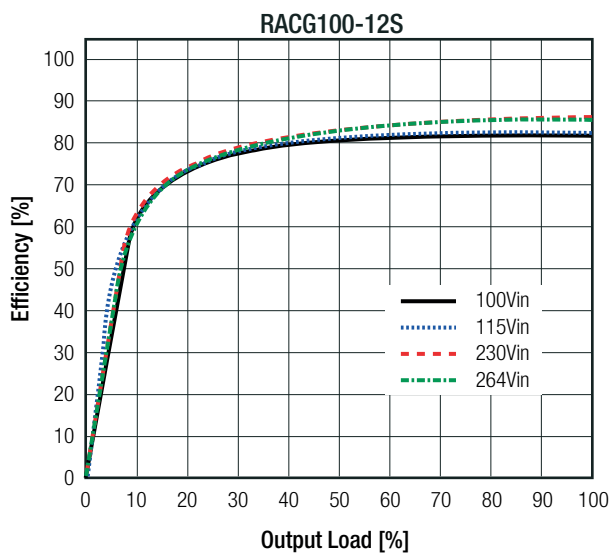

Output Voltage Adjustability Derating

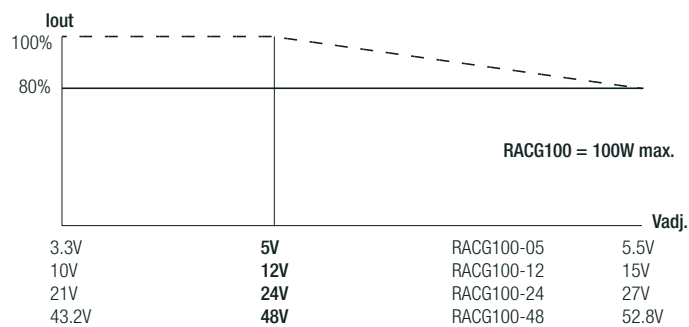

REGULATIONS

| Parameter | Condition | Value |
|-----------------|----------------------------------|------------|
| Output Accuracy | 5Vout, 12Vout | ±2.0% max. |
| | 24Vout, 48Vout | ±1.0% max. |
| Line Regulation | low line to high line, full load | ±0.5% max. |
| Load Regulation | 5Vout, 12Vout | 2.0% max. |
| | 24Vout, 48Vout | 1.0% max. |

Specifications (measured at Ta= 25°C, nom. Vin (115/230VAC), full load and after warm-up)

PROTECTIONS

| Parameter | Type | Value | |
|--------------------------------|---------------------|---|---------|
| Input Fuse ⁽⁵⁾ | internal | T5A, slow blow | |
| Short Circuit Protection (SCP) | | continuous, hiccup and auto recovery | |
| Over Load Protection (OLP) | | 110% - 150% of rated output voltage, continuous, hiccup and auto recovery | |
| Isolation Voltage | tested for 1 minute | I/P to O/P | 3kVAC |
| | | I/P to case | 1.5kVAC |
| | | O/P to case | 500VAC |
| Isolation Resistance | | 100MΩ min. | |
| Leakage Current | I/P to O/P | 0.25mA max. | |
| | I/P to case | 3.5mA max. | |


Notes:

Note5: Refer to local safety regulations if input over-current protection is also required

ENVIRONMENTAL

| Parameter | Condition | Value |
|-----------------------------|--|-----------------------------|
| Operating Temperature Range | full load | -20°C to +40°C |
| | refer to derating graph | -20°C to +60°C |
| Temperature Coefficient | | 0.03%/K |
| Moisture Protection | | conformally coated PCB |
| Operating Altitude | | 5000m |
| Operating Humidity | non-condensing | 20% - 90% RH max. |
| MTBF | according to MIL-HDBK-217F, G.B. +25°C | 200 x 10 ³ hours |

Derating Graph

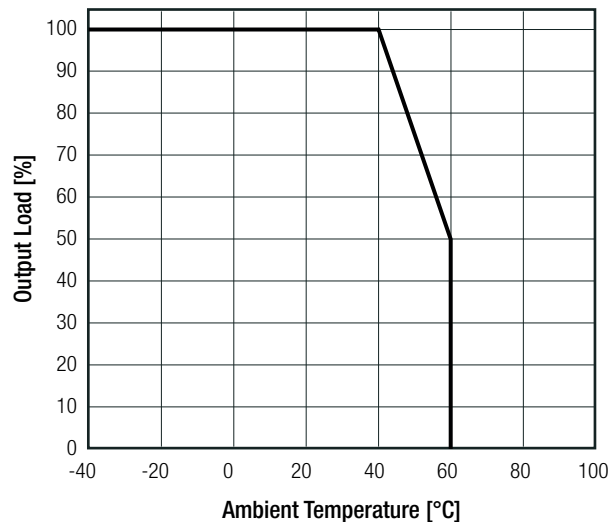

SAFETY AND CERTIFICATIONS

| Certificate Type (Safety) | Report / File Number | Standard |
|---|----------------------|---|
| Information Technology Equipment, General Requirements for Safety | E196683 | CAN/CSA-C22.2 No. 60950-1 UL No. 60950-1 |
| Information Technology Equipment, General Requirements for Safety | | EN60950-1:2006 + A2:2013 |
| EAC Safety of Low Voltage Equipment | RU-AT.49.09571 | TP TC 004/2011 |
| RoHS2 | | RoHS-2011/65/EU + AM-2015/863 |

continued on next page



Specifications (measured at Ta= 25°C, nom. Vin (115/230VAC), full load and after warm-up)

| EMC Compliance | Condition | Standard / Criterion |
|---|-----------|------------------------|
| Electromagnetic compatibility of multimedia equipment – Emission Requirements | | EN55032:2015; Class B |
| Information technology equipment - Immunity characteristics - Limits and methods of measurement | | EN55024:2010 + A1:2015 |
| Electromagnetic compatibility of multimedia equipment – Emission Requirements | | EN61000-3-2:2014 |
| Limits of Voltage Fluctuations & Flicker | | EN61000-3-3:2013 |

DIMENSION AND PHYSICAL CHARACTERISTICS

| Parameter | Type | Value |
|-------------------|------|-----------------------|
| Material | case | aluminium |
| Dimension (LxWxH) | | 129.0 x 98.0 x 38.0mm |
| Weight | | 432g typ. |

Dimension Drawing (mm)

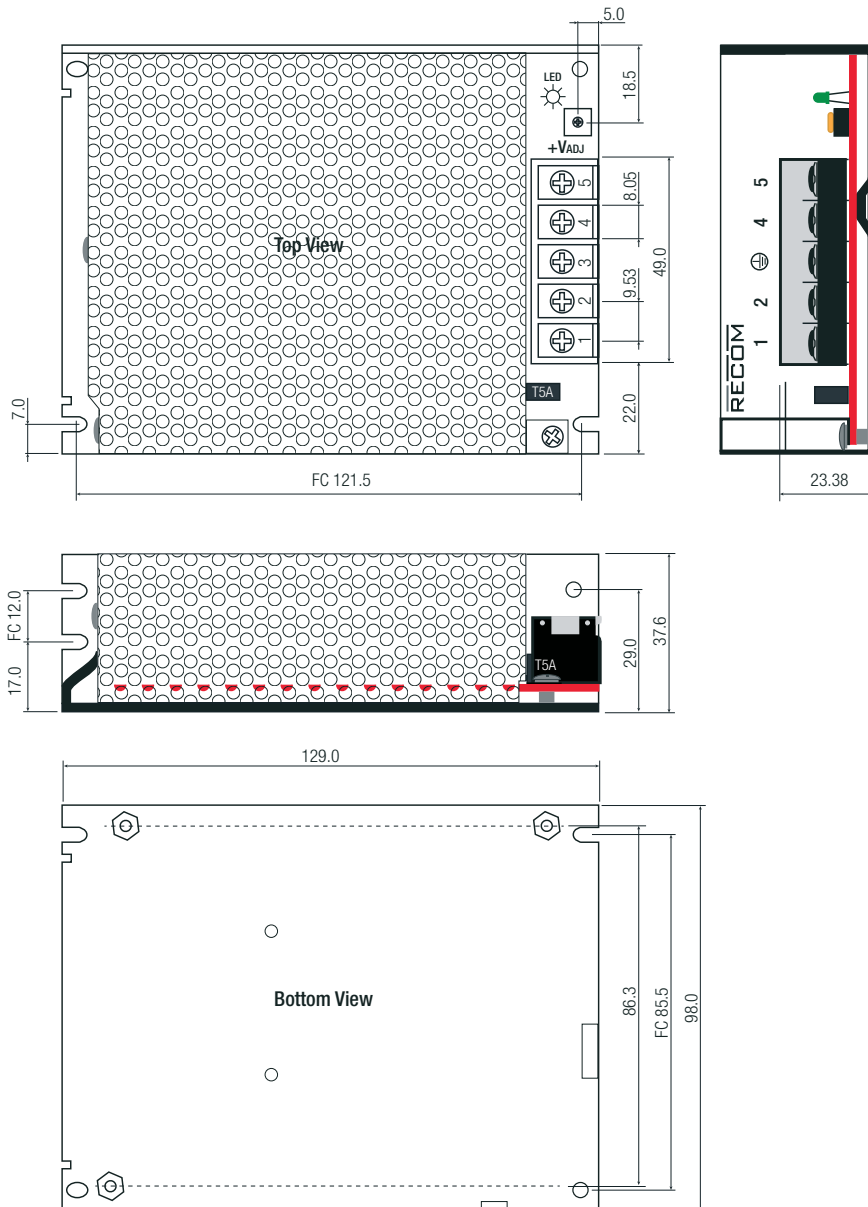

Pin Connections

| Pin # | Single |
|-------|------------|
| 1 | VAC in (L) |
| 2 | VAC in (N) |
| 3 | GND |
| 4 | -Vout |
| 5 | +Vout |

FC: fixing center

Tolerance: xx.x= ±0.5mm

xx.xx= ±0.35mm

Wire diameter: 0.75 to 3.0mm²

Specifications (measured at Ta= 25°C, nom. Vin (115/230VAC), full load and after warm-up)

| PACKAGING INFORMATION | | |
|-----------------------------|----------------|------------------------|
| Parameter | Type | Value |
| Packaging Dimension (LxWxH) | cardboard box | 138.0 x 100.0 x 45.0mm |
| Packaging Quantity | | 1pcs |
| Storage Temperature Range | | -30°C to +85°C |
| Storage Humidity | non-condensing | 10% - 90% RH max. |

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А