

ConnectPort® X4 Family

Customizable Commercial-Grade 3G/4G Routing Gateways

Remote M2M device networking gateways designed for commercial grade and rugged outdoor applications.



Overview

ConnectPort X4 customizable 2G/3G/4G Gobi cellular/WiMAX M2M routing gateways offer a variety of LAN/WAN interface options for end-to-end networking of remote devices. The gateways include comprehensive IP protocols and IPsec VPN support for high-end routing and security. The easy DIA/Python development environment enables custom applications to run locally while interfacing across cellular/WiMAX networks for WAN connectivity to a centralized server.

ConnectPort X4 gateways feature a compact commercial grade enclosure or an optional outdoors IP66/NEMA 4X enclosure with Class 1, Division 2 rating for more rugged applications. Interface options include Ethernet, serial and ZigBee/RF for flexible connectivity to virtually any remote device.

All ConnectPort X gateways feature an end-to-end development environment using comprehensive Digi ESP™ IDE and DIA/Python programming languages. Device Cloud by Etherios™ add secure, scalable cloud based management and web services integration for a complete remote asset platform.

Related Products and Services



Device Cloud Solutions



Dev Kits



Adapters



Network Extenders




Sensors



Digi ESP

Application Highlight

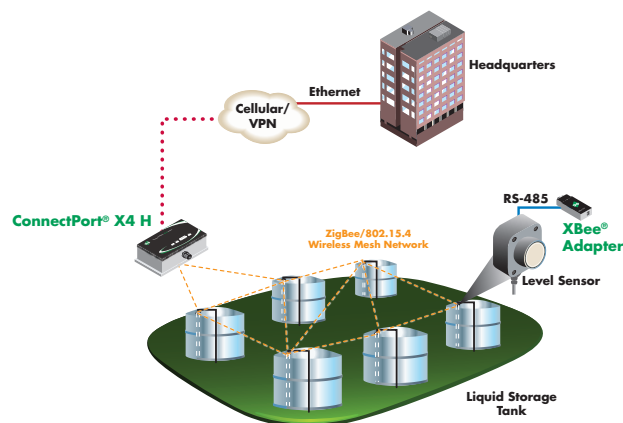

Features/Benefits

- WAN connectivity via 2G/3G/4G Gobi GSM/CDMA/WiMAX networks
- Flexible interfaces: ZigBee/802.15.4, software selectable RS-232/422/485 serial and USB with optional Wi-Fi and 2 AIO/2 DIO
- Small commercial grade enclosure or NEMA 4X/IP66 case with Class 1, Division 2 certifications
- Full routing/IP filtering plus IPsec/SSL VPNs with DES, 3DES or AES encryption
- Easy development environment via DIA and Python scripting as part of Digi ESP IDE
- Support for Modbus/Modbus TCP
- Device Cloud support for secure, scalable access to an unlimited number of remote assets



Specifications		ConnectPort® X4	ConnectPort® X4 IA	ConnectPort® X4 H
Wireless Interfaces				
WWAN**				
GSM/CDMA Gobi HSPA+ (U8)	HSPA+/EV-DO 800/850/900/1700 (AWS)/1900/2100 MHz Gobi with Rx Diversity			
Edge (E1)	GPRS/Edge 850/900/1800/1900 MHz			
CDMA 1xRTT (Bx)	1xRTT 800/1900 MHz			
WiMAX (Yx)	WiMAX (802.16e-2005); 2.3-2.7 GHz (WF3A Profile); Wave2; S-OFDMA MIMO; QPSK, 16 QAM, 64 QAM; 5/10 MHz bandwidth UL/DL			N/A
Connector	1 or 2 x SMA (Center pin - on device: female; on antenna: male)			1 x SMA (Center pin - on device: female; on antenna: male)
SIM Slots	2 or 0 (CDMA variants)			1
SIM Security	SIM slot cover plate			Internal SIM slot
RF				
Standard	ZigBee (2.4 GHz), DigiMesh (2.4 GHz or 900 MHz), 802.15.4 or 868			
Connector	1 x RP-SMA (Center pin - on device: male; on antenna: female)			
Wi-Fi				
Standard	802.11b/g			N/A
Modes	Ad-hoc & AP Client Modes; Access Point Mode not supported			N/A
Connector	1 x RP-SMA (Center pin - on device: male; on antenna: female)			N/A
Other				
Satellite	N/A			
GPS	N/A			
Wired Interfaces				
Serial				
Ports	1			
Standard	RS-232	RS-232/422/485 (Software selectable)		
DTE/DCE	DTE			
Signal Support	TXD, RXD, RTS, CTS, DTR, DSR and DCD			
Flow Control	Hardware and software flow control			
COM Port Redirector	RealPort®			
Throughput	Up to 230 Kbps			
Connector	DB9 Male			Screw-down terminal block
Ethernet				
Ports	1			
Standard	IEEE 802.3			
Physical Layer	10/100Base-T			
Data Rate	10/100 Mbps (auto-sensing)			
Mode	Full or Half duplex (auto-sensing)			
Interface	Auto MDI/MDIX			
Connector	RJ-45			

Specifications		ConnectPort® X4	ConnectPort® X4 IA	ConnectPort® X4 H
Wired Interfaces (Continued)				
I/O				
Ports	N/A		2 analog and 2 digital	
Connector	N/A		Screw-down terminal block	
USB				
Ports	1			
Standard	USB 1.1			
Signaling	Full-speed			
Connector	Type A			
Other				
Sensor	N/A	1 sensor port for use with Watchport® sensors	N/A	
Software/Management				
Management (Cloud-based)	Device Manager			
Management (Local)	Web Interface via HTTP/HTTPS, Password access control, IP service port control; CLI via serial port, Telnet, Python scripting; Digi SureLink™ "always-on" connection			
Security	SSL tunnels, SSHv2, FIPS 197 (IPsec, HTTPS)			
Network Protocols	UDP/TCP, DHCP, SNMPv1/v2			
VPN	IPsec with IKE/ISAKMP; Multiple tunnel support; DES, 3DES and up to 256-bit AES encryption; VPN pass-through, GRE forwarding; Simple Certificate Enrollment Protocol (SCEP) for X.509 certificate			
Routing	NAT, NAT-T (NAT traversal) VPN tunneling, Port forwarding, VPN/GRE pass-through; Access control lists (IP filtering), IP pass-through, Virtual Router Redundancy Protocol (VRRP) per RFC 3768			
Industrial Protocol Support	Modbus bridge enables Modbus serial to Modbus/TCP conversion; Integrated Python code allows gateway to act as Modbus client/master or Modbus server/slave; Functions like an Ethernet to serial bridge, but uses XBee to transport serial data; Handles unique timing issues per Modbus protocol rules; Uses Modbus Unit ID to look up IP or mesh MAC address.			
Real-Time Clock	Yes			
Memory	16 MB Flash, 32 MB RAM			
Power				
Input	6-30 VDC		100-240 VAC	
Consumption	Idle: 1.5 W, Max: 10.4 W		Approx. 15 W	
Protection	4 kV burst (EFT) per-4-4, 2 kV surge per EN61000-4		2 kV burst (EFT) (with included power supply)	
Connector	Locking barrel	Compression terminal block		Pigtail AC power cord
DC Power Cord*	Available upon request	N/A		N/A
AC Power Supply*	12 VDC power supply for 0° C to 40° C (32° F to 104° F) included; Extended temperature power supply available separately	N/A		Internal
Battery Backup	N/A			

Specifications		ConnectPort® X4	ConnectPort® X4 IA	ConnectPort® X4 H
Physical				
Dimensions (L x W x H)	5.25 in x 3.35 in x 1.00 in (13.33 cm x 8.50 cm x 2.54 cm)		9.50 in x 6.25 in x 3.75 in (240 mm x 160 mm x 95 mm)	
Weight	0.44 lb (0.20 kg)		3.10 lb (1.41 kg)	
Status LEDs	Ethernet status, Power, Cellular link/activity, Signal strength (4 bars), XBee link/activity, Wi-Fi link/activity		Ethernet status, Power, Cellular link/activity, Signal strength (5 bars), XBee link/activity	
Enclosure Material	Industrial (metal)		NEMA 4X	
Enclosure Rating	N/A		IP66	
Mounting	Wall-mount bracket sold separately	DIN rail bracket included	4x mounting feet on the unit's flange	
Environmental				
Operating Temperature ***	-30° C to +75° C (-22 F to +167 F)			
Storage Temperature	-40 to +85C			
Relative Humidity	5% to 95% (non-condensing)		N/A (enclosure is water-tight)	
Ethernet Isolation	1500VAC min per IEEE 802.3/ANSI X3.263			
Serial Port Protection (ESD)	+15 kV Air Gap and +8 kV contact discharge per IEC 1000-4-2			
Hazardous (Class 1 Div 2)	No	Yes	No	
Conformal Coating	N/A			
Approvals				
GSM/UMTS	PTCRB, NAPRD.03, GCF-CC, R&TTE, EN 301 511			
CDMA/EV-DO	CDG, TIA/EIA-690, TIA/EIA-98-E			
Cellular Carriers	Certified by most major carriers. See www.digi.com for current listing.			
Safety	UL 60950, CSA 22.2 No. 60950, EN60950; Class 1 Div 2 (IA model only)			
Emissions/Immunity	CE, FCC Part 15 (Class A), AS/NZS CISPR 22, EN55024, EN55022, Class A			
Warranty				
Product Warranty	5 years			

* Optional hardware

** Transfer rates are network operator dependent

*** Reduced cellular performance may occur above +60° C. Standard Temperature power supplies may reduce temperature range.

Visit www.digi.com for part numbers.

DIGI SERVICE AND SUPPORT - You can purchase with confidence knowing that Digi is here to support you with expert technical support and a strong five-year warranty. www.digi.com/support

91001460
D1/413

**Digi International
Worldwide HQ**

877-912-3444
952-912-3444

**Digi International
France**

+33-1-55-61-98-98
www.digi.fr

**Digi International
Japan**

+81-3-5428-0261
www.digi-intl.co.jp

**Digi International
India**

+91-80-4287-9887

**Digi International
Singapore**

+65-6213-5380

**Digi International
China**

+86-21-5150-6898
www.digi.cn

BUY ONLINE • www.digi.com

© 2008-2013 Digi International Inc.

All rights reserved. Digi, Digi International, Etherios, the Digi logo, the Device Cloud by Etherios logo, ConnectPort, Digi ESP, DigiMesh, Device Cloud by Etherio, and XBee are trademarks or registered trademarks of Digi International Inc. in the United States and other countries worldwide. All other trademarks are the property of their respective owners. All information provided is subject to change without notice.

info@digi.com



Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А