

## KAI-0330 Imager Board User's Manual



**ON Semiconductor®**

<http://onsemi.com>

### Description

The KAI-0330 Imager Evaluation Board, referred to in this document as the Imager Board, is designed to be used as part of a two-board set, used in conjunction with a Timing Generator Board. ON Semiconductor offers an Imager Board / Timing Generator Board package that has been designed and configured to operate with the KAI-0330 Image Sensors.

The Timing Generator Board generates the timing signals necessary to operate the CCD, and provides the power required by the Imager Board. The timing signals, in LVDS format, and the power, are provided to the Imager Board via the interface connector (J3). In addition, the Timing Generator Board performs the processing and digitization of the analog video output of the Imager Board.

The KAI-0330 Imager Board has been designed to operate the KAI-0330 with the specified performance at up to 30 MHz pixel clocking rate and nominal operating conditions. (See the KAI-0330 performance specifications for details).

## EVAL BOARD USER'S MANUAL

### IMAGER BOARD INPUT REQUIREMENTS

**Table 1. POWER REQUIREMENTS**

Power Supplies	Minimum	Typical	Maximum	Units
+5 V_MTR Supply	4.9	5	5.1	V
		100		mA
-5 V_MTR Supply	-5.1	-5	-4.9	V
		50		mA
VPLUS Supply	18	20	21	V
		250		mA
VMINUS Supply	-21	-20	-18	V
		250		mA

**Table 2. SIGNAL LEVEL REQUIREMENTS**

Input Signals (LVDS)	V <sub>min</sub>	V <sub>threshold</sub>	V <sub>max</sub>	Units	Comments
H1A (±)	0	±0.1	2.4	V	H1A clock
H1B (±)	0	±0.1	2.4	V	H1B clock
H2A (±)	0	±0.1	2.4	V	H2 clock
H2B (±)	0	±0.1	2.4	V	(Not Used)
R (±)	0	±0.1	2.4	V	Reset clock
V1 (±)	0	±0.1	2.4	V	V1 clock
V2 (±)	0	±0.1	2.4	V	V2 clock
V3RD (±)	0	±0.1	2.4	V	Vertical clock 3 <sup>rd</sup> -level signal
VES (±)	0	±0.1	2.4	V	Electronic Shutter signal
FDG (±)	0	±0.1	2.4	V	Fast Dump Gate signal
V2B (±)	0	±0.1	2.4	V	(Not Used)

## KAI-0330 IMAGER BOARD ARCHITECTURE OVERVIEW

The following sections describe the functional blocks of the KAI-0330 Imager Board (See Figure 1).

### Power Filtering and Regulation

Power is supplied to the Imager Board via the J3 interface connector. The power supplies are de-coupled and filtered with ferrite beads and capacitors to suppress noise. Voltage regulators are used to create the +15 V and -15 V supplies from the VPLUS and VMINUS supplies.

### LVDS Receivers / TTL Buffers

LVDS timing signals are input to the Imager Board via the J3 interface connector. These signals are shifted to TTL levels before being sent to the CCD clock drivers.

### Reset Clock One-Shot

The pulse width of the RESET\_CCD clock is set by a programmable One-Shot. The One-Shot can be configured to provide a RESET\_CCD clock signal with a pulse width from 5 ns to 15 ns (See section Reset Clock Pulse Width).

### CCD Pixel-Rate Clock Drivers (H1, H2 & Reset Clocks)

The pixel rate CCD clock drivers utilize two fast switching transistors that are designed to translate TTL-level input clock signals to the voltage levels required by the CCD. The high and low voltage levels of the CCD clocks are set by voltage dividers feeding into operational amplifiers configured as voltage followers. The current source is a high current (up to 600 mA) transistor.

### CCD VCLK Drivers

The vertical clock (VCLK) drivers consist of MOSFET driver IC's. These drivers are designed to translate the TTL-level clock signals to the voltage levels required by the CCD. The high and low voltage rails of the vertical clocks are generated from the output of the positive and negative voltage regulators. The voltage level is set by a voltage divider and an operational amplifier configured as a voltage follower. The current source is a high current (up to 600 mA) transistor. The mid-level voltage is set by a voltage regulator and a diode to be several tenths of a volt above AGND. The

third level of the V1\_CCD clock (V3RD) is AC-coupled onto the mid-level voltage once per frame to transfer the charge from the photodiodes to the vertical CCDs.

### CCD FDG Driver

The Fast Dump Gate (FDG) driver is a transistor that will switch the voltage on the FDG pin of the CCD from -5 V to +5 V during Fast Dump Gate operation. When not in operation, or when the Fast Dump Gate feature is not being utilized, the FDG pin of the CCD is held at -5 V.

### VES Circuit

The quiescent CCD substrate voltage (V<sub>SUB</sub>) is set via a potentiometer. For electronic shutter operation, the VES signal drives a transistor amplifier which AC-couples the voltage difference between the VPLUS and VMINUS supplies onto the Substrate voltage. This creates the necessary potential to clear all charge from the photodiodes, thereby acting as an electronic shutter to control exposure.

### CCD Bias Voltages

The bias voltages are set by voltage dividers. The bias voltages are de-coupled at the CCD pin.

### CCD Image Sensor

This evaluation board supports the KAI-0330 Image Sensor.

### Emitter-Follower

The VOUT\_CCD signals are buffered using a bipolar junction transistor in the emitter-follower configuration. This circuit also provides the necessary current sink for the CCD output circuit.

### Line Drivers

The buffered VOUT\_CCD signals are AC-coupled and driven from the Imager Board by operational amplifiers in a non-inverting configuration. The operational amplifiers are configured to have a gain of 2, to correctly drive 75 Ω video coaxial cabling from the SMB connectors (see SMB Connectors J1 AND J2).

# EVBUM2261/D

## KAI-0330 OPERATIONAL SETTINGS

The Imager board is configured to operate the KAI-0330 under the following operating conditions:

**Table 3. BIAS VOLTAGES**

Description	Symbol	Setting	Units	Notes
Output Amplifier Supply	VDD	15	V	
Reset Drain	VRD	9	V	
Output Amplifier Return	VSS	0	V	
Ground, P-Well	GND	0	V	
Substrate	VSUB	10	V	VSUB is adjustable via R56
Fast Dump Gate	FDG	-5	V	Held at -5 V when the FDG Option disabled
P-WELL	WELL	0	V	

**Table 4. CLOCK VOLTAGES**

Description	Symbol	Low	Mid	High	Units	Notes
Phase 1 Horizontal Clock	H1A_CCD	-7		3	V	
Phase 1 Horizontal Clock	H1B_CCD	-7		3	V	
Phase 2 Horizontal Clock	H2_CCD	-7		3	V	
Phase 1 Vertical Clock	V1_CCD	-9.5	0.2	9	V	
Phase 2 Vertical Clock	V2_CCD	-9.5	0.2	9	V	
Reset Clock	RESET_CCD	-6		0	V	R- is adjustable via R28
Fast Dump Gate Clock	FDG_CCD	-5		5	V	

### Reset Clock Pulse Width

The pulse width of RESET\_CCD is set by configuring P[2..0], the inputs to the programmable one-shot. P[2..0]

can be tied high or low to achieve the desired pulse width by populating the resistors R33-38 accordingly.

**Table 5. RESET CLOCK PULSE WIDTH**

Pulse Width	P0	P1	P2	R33	R34	R35	R36	R37	R38	Notes
15 ns	0	0	0	OUT	OUT	OUT	IN	IN	IN	
5 ns	1	0	0	OUT	OUT	IN	IN	IN	OUT	Default Setting
7.5 ns	0	1	0	OUT	IN	OUT	IN	OUT	IN	
10 ns	1	1	0	OUT	IN	IN	IN	OUT	OUT	
12.5 ns	0	0	1	IN	OUT	OUT	OUT	IN	IN	
15 ns	1	0	1	IN	OUT	IN	OUT	IN	OUT	
15 ns	0	1	1	IN	IN	OUT	OUT	OUT	IN	
15 ns	1	1	1	IN	IN	IN	OUT	OUT	OUT	

BLOCK DIAGRAM AND PERFORMANCE DATA

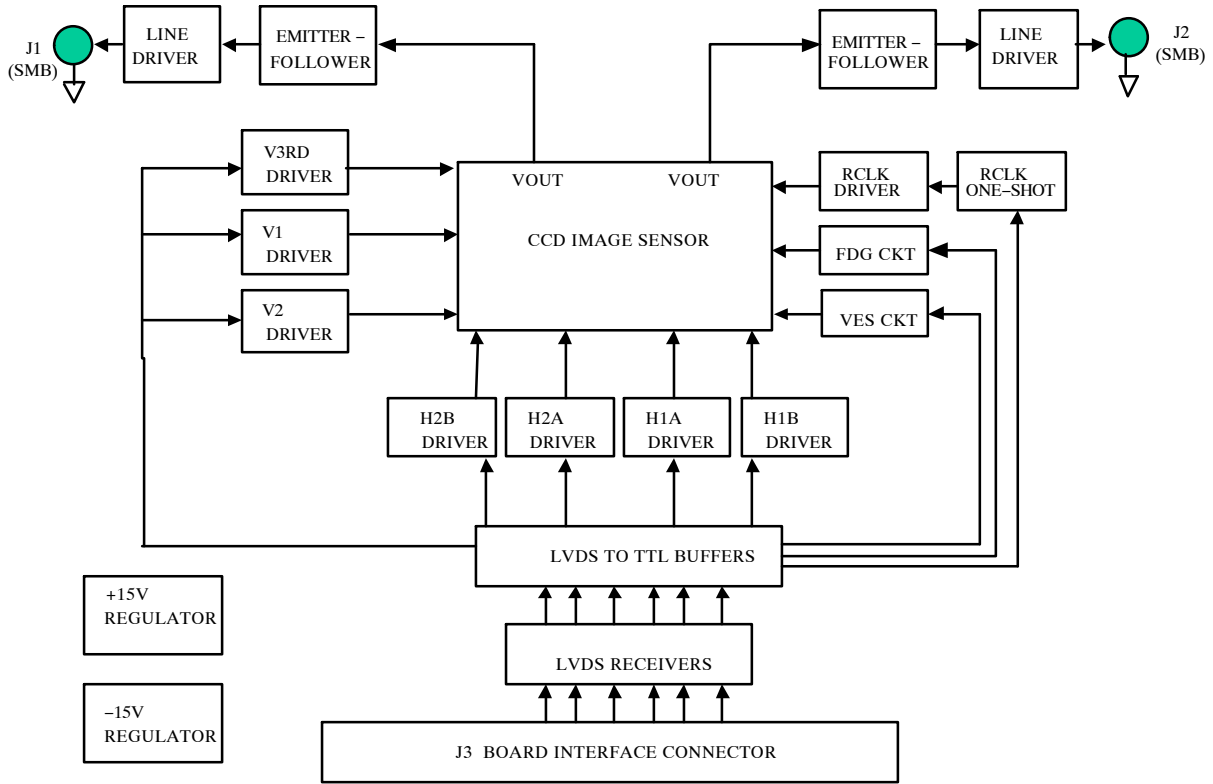


Figure 1. KAI-0330 Imager Board Block Diagram

LINEARITY

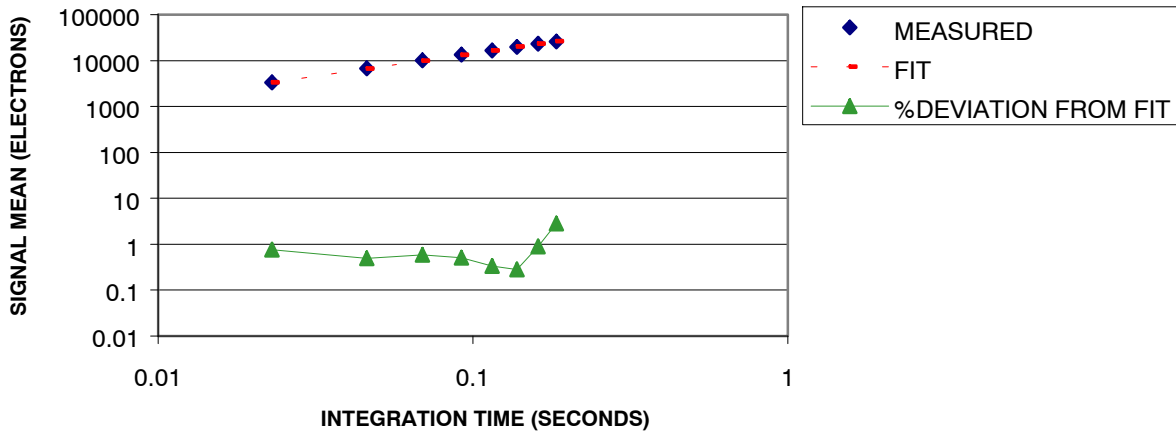


Figure 2. Measured Performance at 20 MHz – Linearity

Photon Transfer

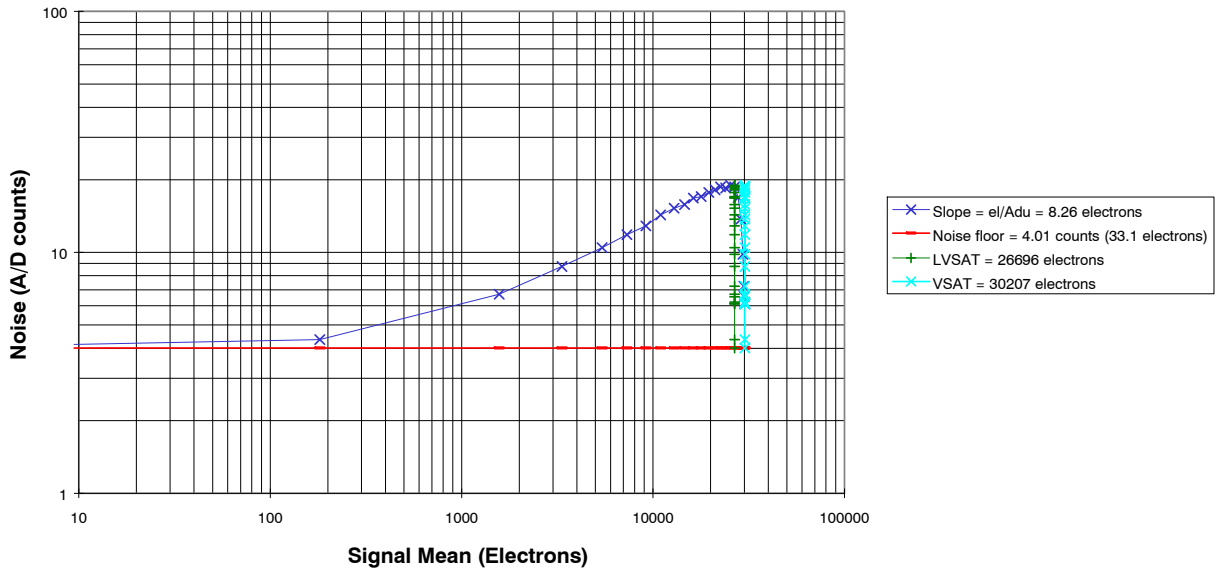


Figure 3. Measured Performance at 20 MHz – Dynamic Range and Noise Floor

MULTI-FRAME INTEGRATION LINEARITY

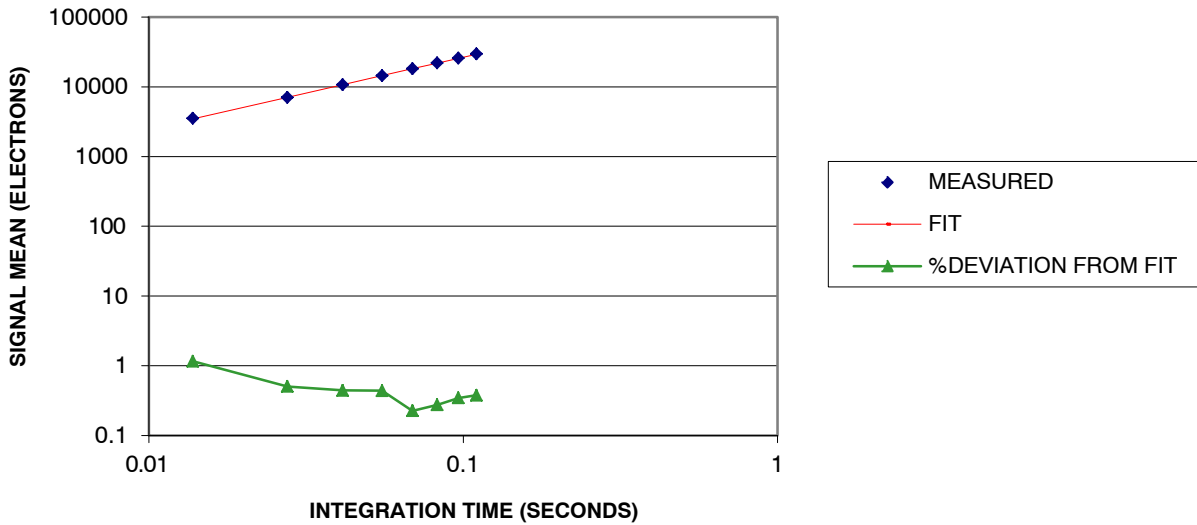


Figure 4. Measured Performance at 30 MHz – Linearity

Photon Transfer

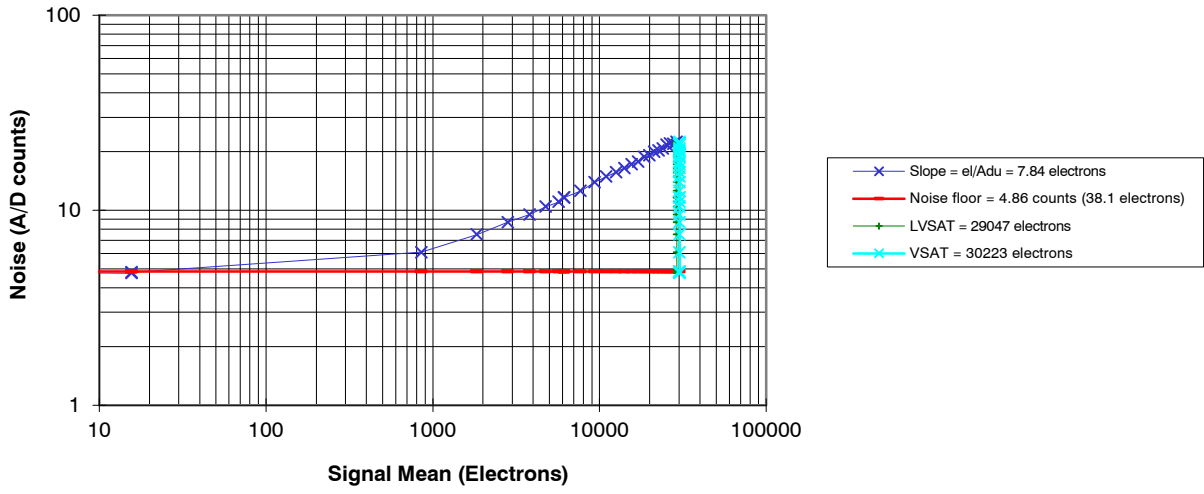


Figure 5. Measured Performance at 30 MHz – Dynamic Range and Noise Floor

# EVBUM2261/D

## CONNECTOR ASSIGNMENTS AND PINOUTS

### SMB Connectors J1 and J2

The emitter-follower buffered CCD\_VOUT signals are driven from the Imager Board via the SMB connector J1 and J2. Coaxial cable with a characteristic impedance of 75  $\Omega$

should be used to connect the imager board to the Timing Generator Board to match the series and terminating resistors used on these boards.

**Table 6. J3 INTERFACE CONNECTOR PIN ASSIGNMENTS**

Pin	Signal	Pin	Signal
1	N.C.	2	N.C.
3	AGND	4	AGND
5	VES+	6	VES-
7	AGND	8	AGND
9	FDG+	10	FDG-
11	AGND	12	AGND
13	V3RD+	14	V3RD-
15	AGND	16	AGND
17	V2B+	18	V2B-
19	AGND	20	AGND
21	V2+	22	V2-
23	AGND	24	AGND
25	V1+	26	V1-
27	AGND	28	AGND
29	R+	30	R-
31	AGND	32	AGND
33	H2B+	34	H2B-
35	AGND	36	AGND
37	H2A+	38	H2A-
39	AGND	40	AGND
41	H1B+	42	H1B-
43	AGND	44	AGND
45	H1A+	46	H1A-
47	N.C.	48	N.C.
49	AGND	50	AGND
51	N.C.	52	N.C.
53	VMINUS_MTR	54	VMINUS_MTR
55	N.C.	56	N.C.
57	AGND	58	AGND
59	N.C.	60	N.C.
61	-5 V_MTR	62	-5 V_MTR
63	N.C.	64	N.C.
65	AGND	66	AGND
67	N.C.	68	N.C.
69	+5 V_MTR	70	+5 V_MTR
71	N.C.	72	N.C.
73	AGND	74	AGND
75	N.C.	76	N.C.
77	VPLUS_MTR	78	VPLUS_MTR
79	N.C.	80	N.C.

## Warnings and Advisories

ON Semiconductor is not responsible for customer damage to the Imager Board or Imager Board electronics. The customer assumes responsibility and care must be taken when probing, modifying, or integrating the ON Semiconductor Evaluation Board Kits.

When programming the Timing Board, the Imager Board must be disconnected from the Timing Board before power is applied. If the Imager Board is connected to the Timing Board during the reprogramming of the Altera PLD, damage to the Imager Board will occur.


Purchasers of an Evaluation Board Kit may, at their discretion, make changes to the Timing Generator Board firmware. ON Semiconductor can only support firmware developed by, and supplied by, ON Semiconductor. Changes to the firmware are at the risk of the customer.

## Ordering Information

Please address all inquiries and purchase orders to:

Truesense Imaging, Inc.  
1964 Lake Avenue  
Rochester, New York 14615  
Phone: (585) 784-5500  
E-mail: [info@truesenseimaging.com](mailto:info@truesenseimaging.com)

ON Semiconductor reserves the right to change any information contained herein without notice. All information furnished by ON Semiconductor is believed to be accurate.

ON Semiconductor and the  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries. SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
Phone: 81-3-5817-1050

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)

**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative



Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А