



# NGTG12N60TF1G


## N-Channel IGBT 600V, 12A, V<sub>CE(sat)</sub>;1.4V TO-3PF-3L

ON Semiconductor®

<http://onsemi.com>

### Features

- V<sub>CE(sat)</sub>=1.4V typ. (I<sub>C</sub>=12A, V<sub>GE</sub>=15V)
- Low switching loss in higher frequency applications
- Enhancement type
- 5μs short circuit capability
- Adoption of full isolation type package



TO-3PF-3L

### Applications

- Power factor correction of white goods appliance
- General purpose inverter

### Specifications

**Absolute Maximum Ratings** at T<sub>a</sub> = 25°C, Unless otherwise specified

Parameter	Symbol	Conditions	Ratings	Unit	
Collector to Emitter Voltage	V <sub>CES</sub>		600	V	
Gate to Emitter Voltage	V <sub>GES</sub>		±20	V	
Collector Current (DC)	I <sub>C</sub> *1	Limited by T <sub>jmax</sub>	@ T <sub>c</sub> =25°C *2	24	A
			@ T <sub>c</sub> =100°C *2	12	A
Collector Current (Pulse)	I <sub>CP</sub>	Pulse width Limited by T <sub>jmax</sub> (Ref:ASO graph)	88	A	
Allowable Power Dissipation	P <sub>D</sub>	T <sub>c</sub> =25°C (Our ideal heat dissipation condition) *2	54	W	
Junction Temperature	T <sub>j</sub>		150	°C	
Storage Temperature	T <sub>stg</sub>		- 55 to +150	°C	

Note : \*1 Collector Current is calculated from the following formula.

$$I_C(T_c) = \frac{T_{jmax} - T_c}{R_{th(j-c)} \times V_{CE(sat)} \max(T_{jmax}, I_C(T_c))}$$

\*2 Our condition is radiation from backside.

The method is applying silicone grease to the backside of the device and attaching the device to water-cooled radiator made of aluminium.

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

**Electrical Characteristics** at T<sub>a</sub> = 25°C, Unless otherwise specified

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Collector to Emitter Breakdown Voltage	V <sub>(BR)CES</sub>	I <sub>C</sub> =500μA, V <sub>GE</sub> =0V	600			V
Collector to Emitter Cut off Current	I <sub>CES</sub>	V <sub>CE</sub> =600V, V <sub>GE</sub> =0V	T <sub>c</sub> =25°C		10	μA
			T <sub>c</sub> =125°C		1	mA
Gate to Emitter Leakage Current	I <sub>GES</sub>	V <sub>GE</sub> =±20V, V <sub>CE</sub> =0V			±100	nA
Gate to Emitter Threshold Voltage	V <sub>GE(th)</sub>	V <sub>CE</sub> =20V, I <sub>C</sub> =250μA	4.5		6.5	V
Collector to Emitter Saturation Voltage	V <sub>CE(sat)</sub>	V <sub>GE</sub> =15V, I <sub>C</sub> =12A	T <sub>c</sub> =25°C	1.4	1.6	V
			T <sub>c</sub> =125°C	1.6		V
Input Capacitance	C <sub>ies</sub>			2000		pF
Output Capacitance	C <sub>oes</sub>	V <sub>CE</sub> =20V, f=1MHz		60		pF
Reverse Transfer Capacitance	C <sub>res</sub>			50		pF

Continued on next page.

### ORDERING INFORMATION

See detailed ordering and shipping information on page 7 of this data sheet.

# NGTG12N60TF1G









Continued from preceding page.

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Turn-ON Delay Time	$t_{d(on)}$	$V_{CC}=300V, I_C=15A$ $R_G=30\Omega, L=200\mu H$ $V_{GE}=0V/15V$ $V_{clamp}=400V$ See Fig.1, See Fig.2		55		ns
Rise Time	$t_r$			30		ns
Turn-ON Time	$t_{on}$			330		ns
Turn-OFF Delay Time	$t_{d(off)}$			200		ns
Fall Time	$t_f$			110		ns
Turn-OFF Time	$t_{off}$			350		ns
Total Gate Charge	$Q_g$	$V_{CE} =300V, V_{GE}=15V, I_C=15A$		84		nC
Gate to Emitter Charge	$Q_{ge}$			16		nC
Gate to Collector "Miller" Charge	$Q_{gc}$			37		nC








## Thermal Characteristics at $T_a = 25^\circ C$ , Unless otherwise specified

Parameter	Symbol	Conditions	Ratings	Unit
Thermal Resistance (junction- Case)	$R_{th(j-c)}$	$T_c=25^\circ C$ (our ideal heat dissipation condition)*2	2.33	$^\circ C / W$
Thermal Resistance (junction- atmosphere)	$R_{th(j-a)}$		47.5	$^\circ C / W$

# NGTG12N60TF1G

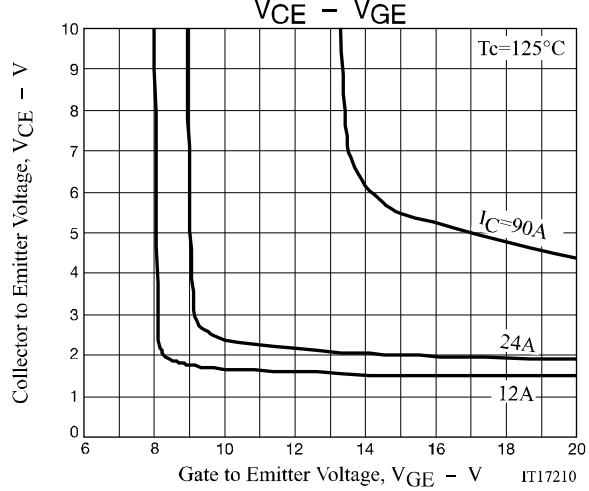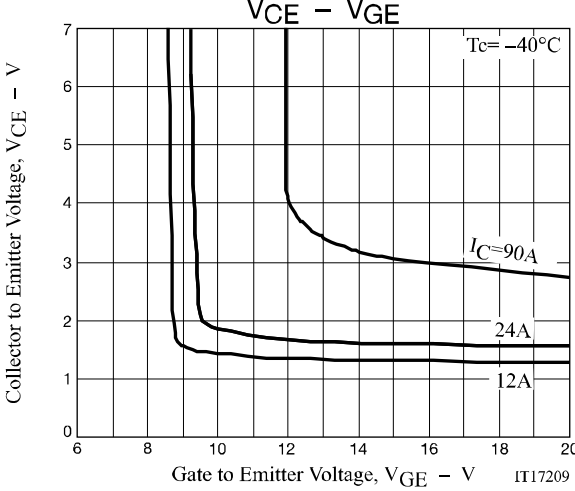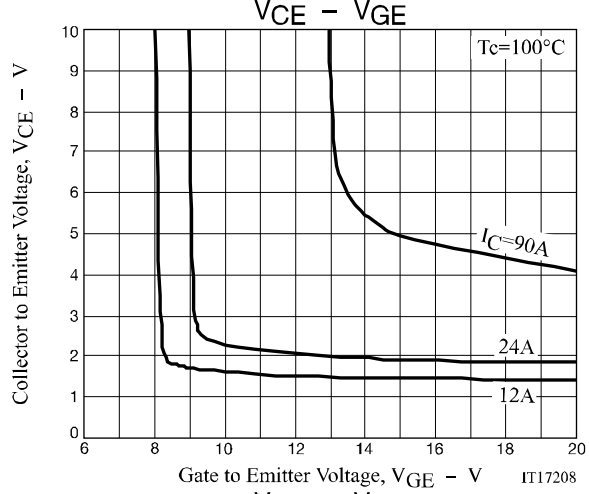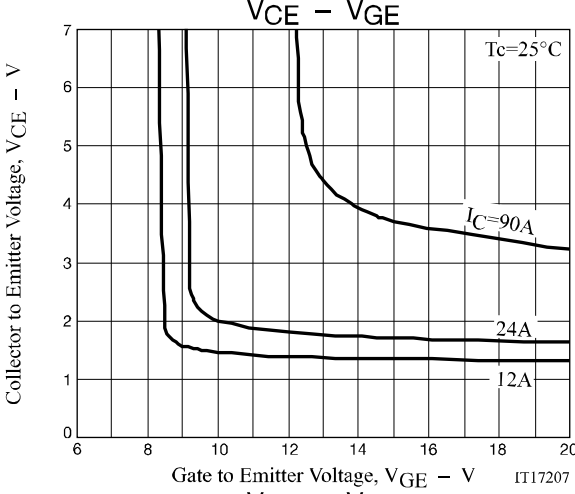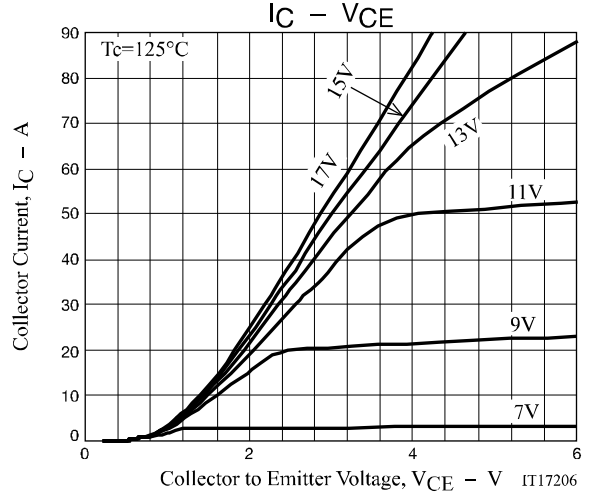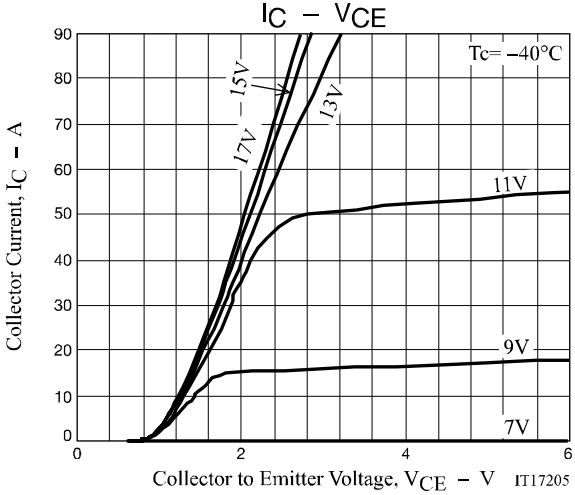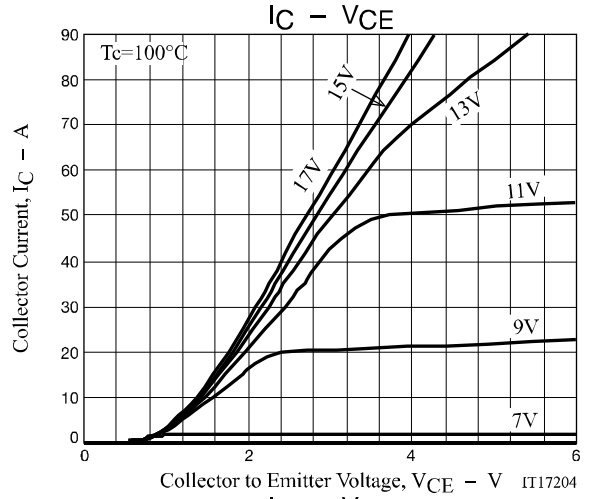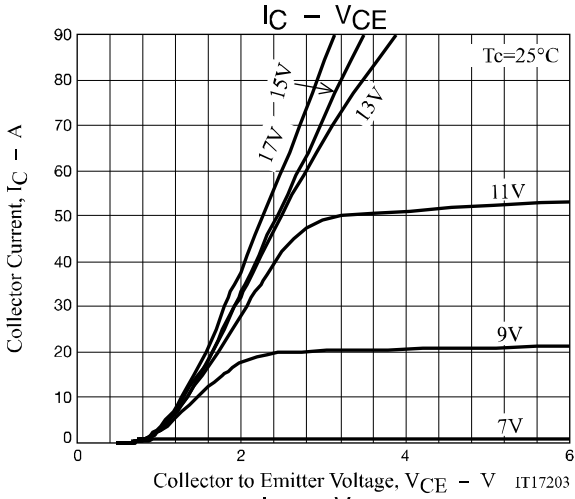


# NGTG12N60TF1G

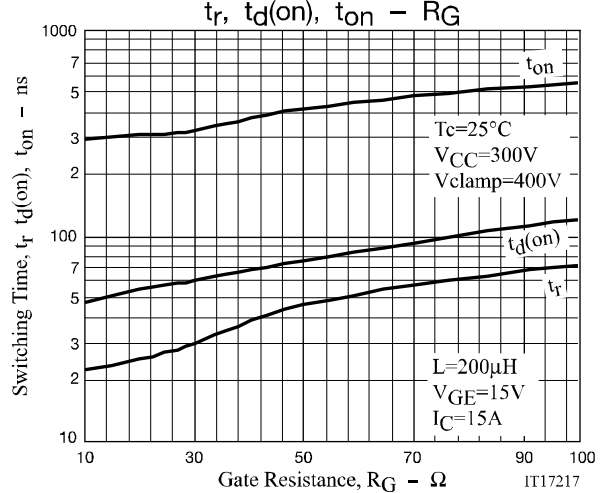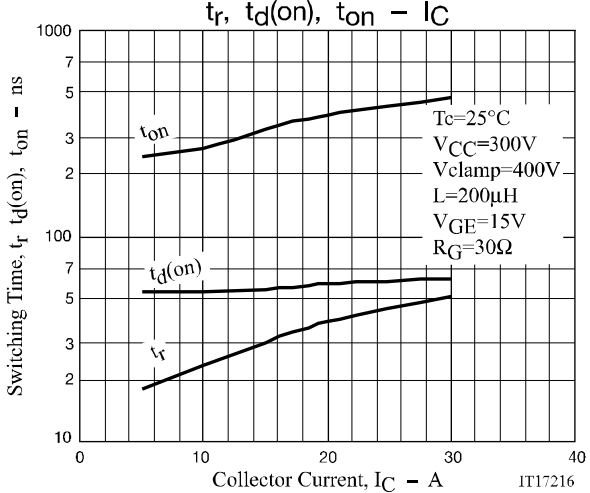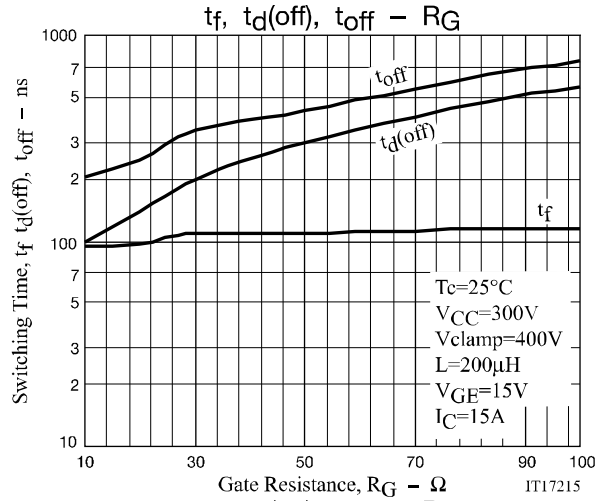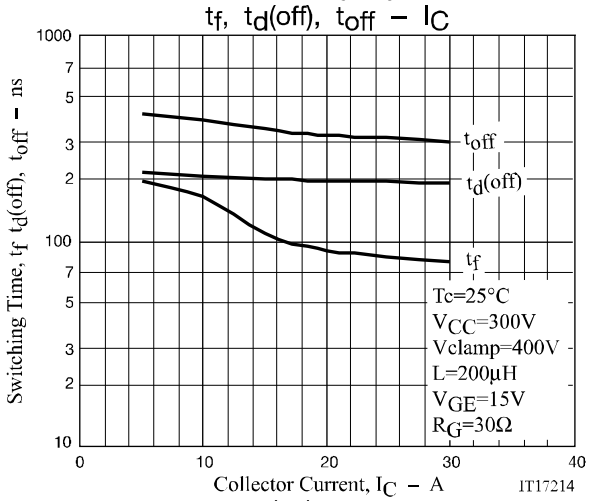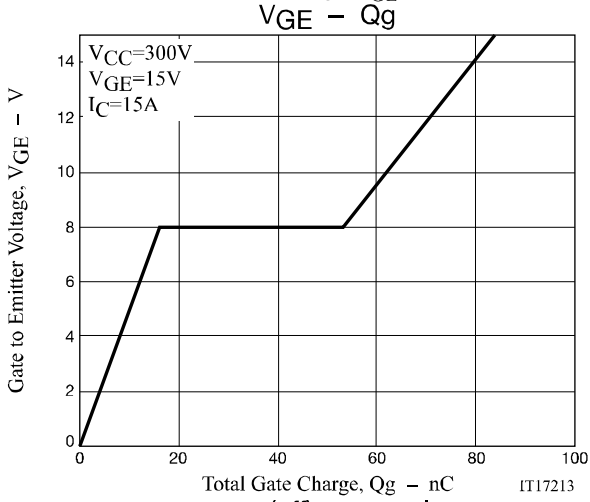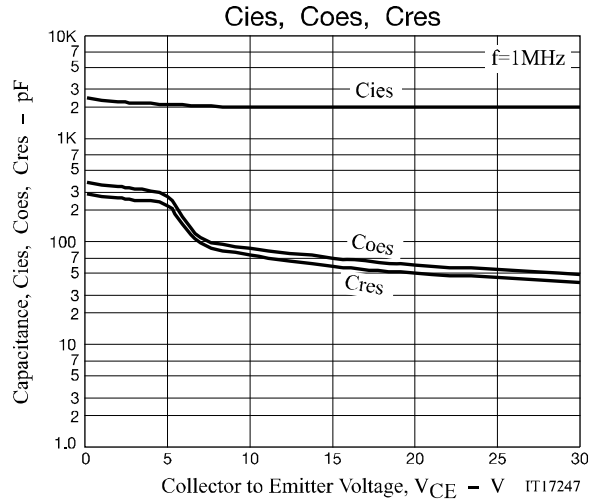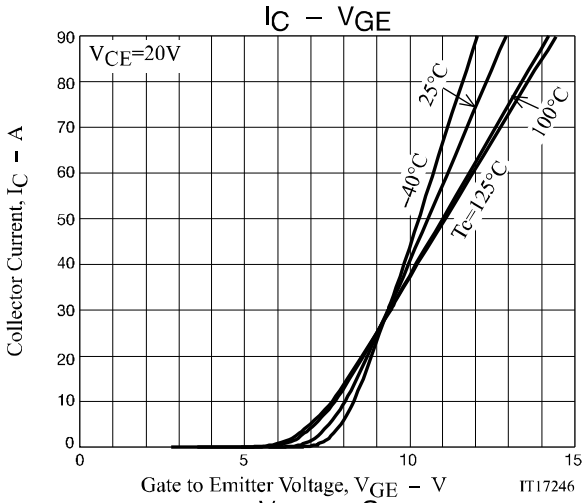


# NGTG12N60TF1G


### Forward Bias A S O

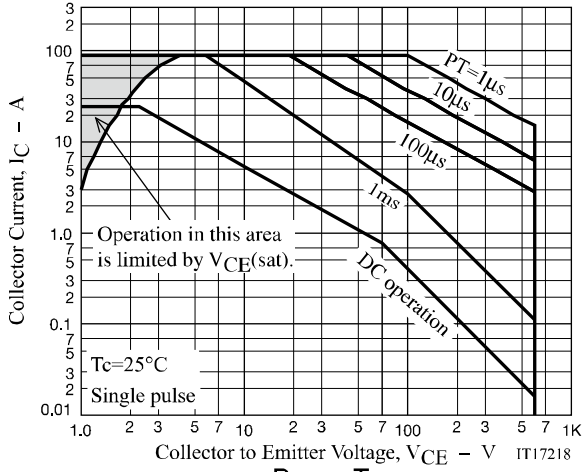


### Reverse Bias A S O

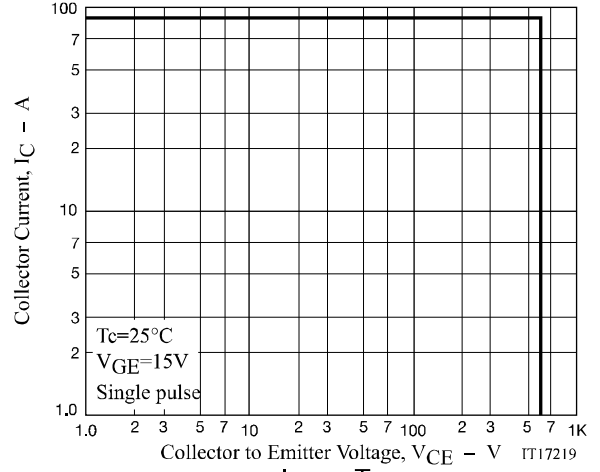

### $P_D - T_c$

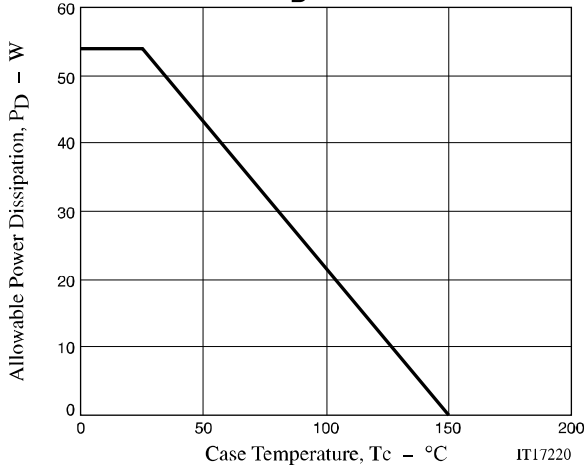

### $I_C - T_c$

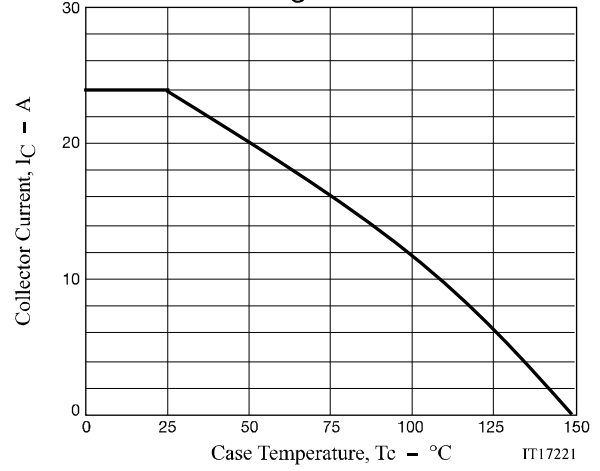

# NGTG12N60TF1G

## Package Dimensions

NGTG12N60TF1G

### TO-3PF-3L

CASE 340AH


ISSUE 0

Unit : mm

1: Gate

2: Collector


3: Emitter

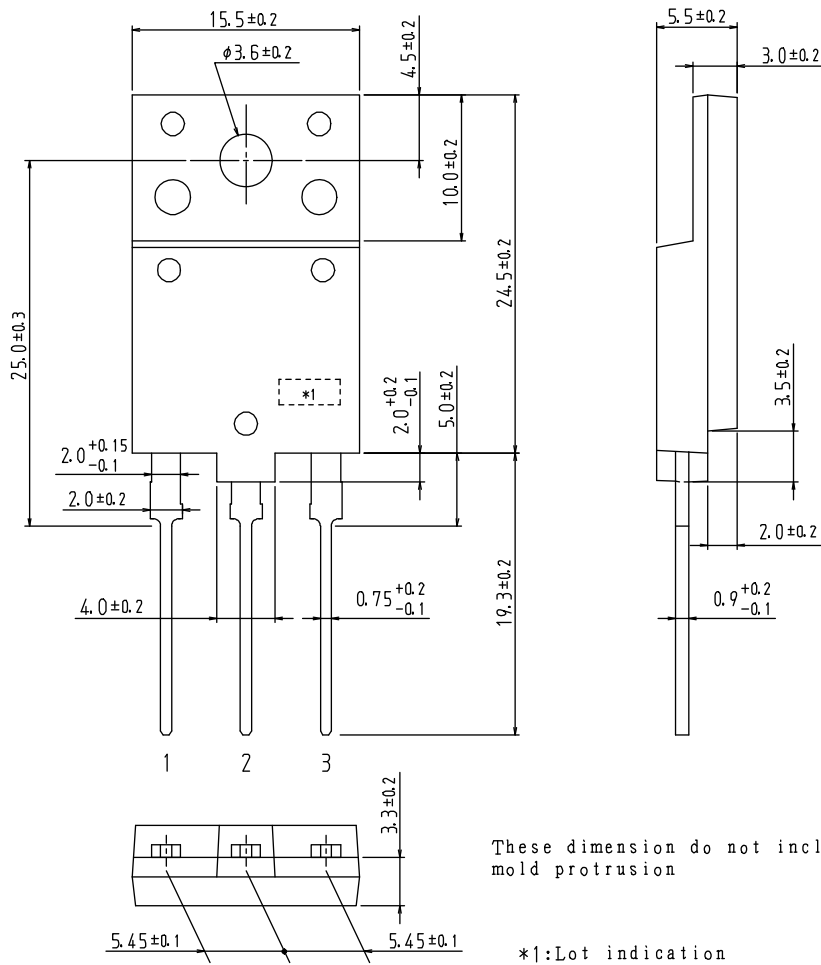

These dimension do not include mold protrusion

\*1: Lot indication

## Electrical Connection




# NGTG12N60TF1G


## Ordering & Package Information

Device	Package	Shipping	note
NGTG12N60TF1G	TO-3PF-3L SC-94	30 pcs. / tube	Pb-Free


## Marking



**Fig.1 Switching Time Test Circuit**

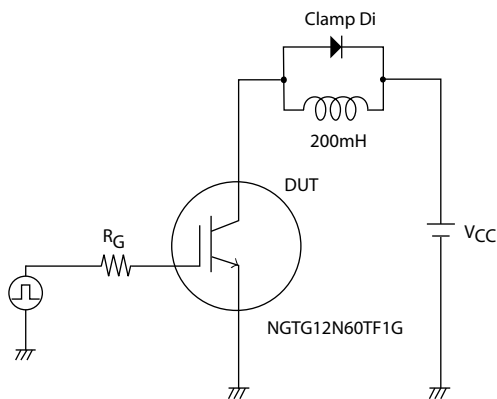

**Fig.2 Timing Chart**

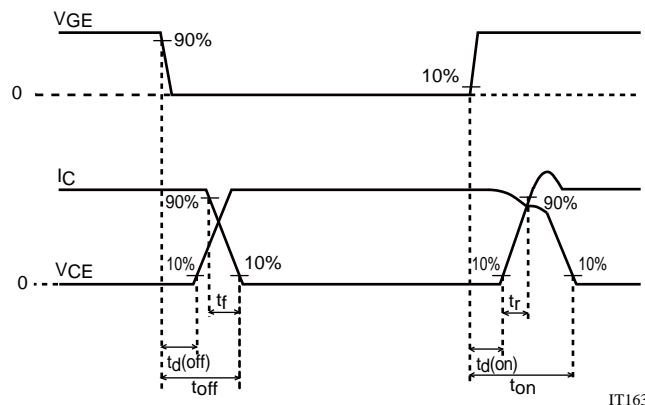

IT16383

ON Semiconductor and the ON logo are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А