

Cubic, Single-pole 10A Power Relay

- Ideal for a wide variety of applications such as home appliances, OA equipments, vending machines, etc.
- Ambient Operating Temperature 85°C
- UL class-B coil insulation for standard model.
- UL, CSA, EN standards approved and conforms to Electrical Appliance and Material Safety Law (300 V max.).



RoHS Compliant

Model Number Legend

G5LE-□□□
1 2 3

- Number of Poles**
1: 1-pole
- Contact Form**
None: SPDT (1c)
A: SPST-NO (1a)
- Enclosure rating**
None: Flux protection
4: Fully sealed

Application Examples

- Home appliances
- OA equipments
- Vending machines

Ordering Information

Terminal Shape	Enclosure rating		Flux protection		Fully sealed		Minimum packing unit
	Classification	Contact form	Model	Rated coil voltage	Model	Rated coil voltage	
PCB terminals	Standard	SPDT (1c)	G5LE-1	5 VDC	G5LE-14	5 VDC	100 pcs/tray
				12 VDC		12 VDC	
				24 VDC		24 VDC	
		SPST-NO (1a)	G5LE-1A	5 VDC	G5LE-1A4	5 VDC	
				12 VDC		12 VDC	
				24 VDC		24 VDC	

Note. When ordering, add the rated coil voltage to the model number.

Example: G5LE-1 DC5 Rated coil voltage

However, the notation of the coil voltage on the product case as well as on the packing will be marked as □□ VDC.

Ratings

Coil

Rated voltage	Rated current (mA)	Coil resistance (Ω)	Must operate voltage (V)	Must release voltage (V)	Max. voltage (V)	Power consumption (mW)
			% of rated voltage			
5 VDC	79.4	63	75% max.	10% min.	170% at 23°C	Approx. 400
12 VDC	33.3	360				
24 VDC	16.7	1.440				

Note 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.

2. The operating characteristics are measured at a coil temperature of 23°C.

3. The "Max. voltage" is the maximum voltage that can be applied to the relay coil.

Contacts

Item	Load	Resistive load	Inductive load (cosφ = 0.4)
Contact type	Single		
Contact material	Ag-alloy (Cd free)		
Rated load	10 A at 120 VAC; 8 A at 30 VDC		
Rated carry current	10 A		
Max. switching voltage	250 VAC, 125 VDC (30 VDC when UL/CSA standard is applied)		
Max. switching current	10 A		
			5 A

Characteristics

Contact resistance *1	100 mΩ max.	
Operate time	10 ms max.	
Release time	5 ms max.	
Insulation resistance *2	100 MΩ min.	
Dielectric strength	Between coil and contacts	2,000 VAC, 50/60 Hz for 1 min
	Between contacts of the same polarity	750 VAC, 50/60 Hz for 1 min
Impulse withstand voltage	between coil and contacts	4,500 V (1.2×50 μs)
Vibration resistance	Destruction	10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude)
	Malfunction	10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude)
Shock resistance	Destruction	1,000 m/s ²
	Malfunction	100 m/s ²
Durability	Mechanical	10,000,000 operations min. (at 18,000 operations/hr)
	Electrical	100,000 operations min. (at 1,800 operations/hr)
Failure rate (P level) (reference value) *3	100 mA at 5 VDC	
Ambient operating temperature	-25°C to 85°C (with no icing or condensation)	
Ambient operating humidity	35% to 85%	
Weight	Approx. 12 g	

Note. The data given above are initial values


*1. Measurement conditions: 5 VDC, 1 A, voltage drop method.

*2. Measurement conditions: The insulation resistance was measured with a 500 VDC megohmmeter at the same locations as the dielectric strength was measured.


*3. This value was measured at a switching frequency of 120 operations/min.

■Engineering Data


●Maximum Switching Capacity

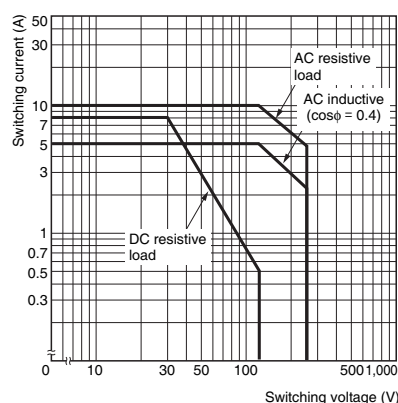

●Durability

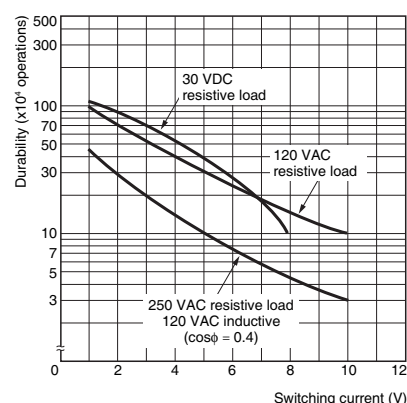


● Ambient Temperature vs. Maximum Coil Voltage

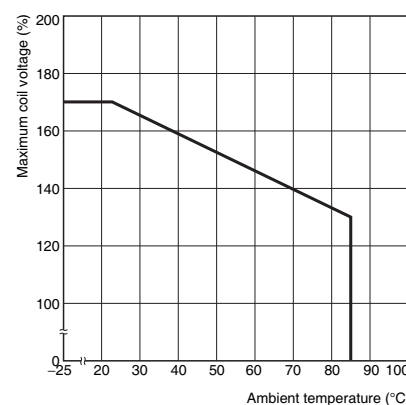

Note. The maximum coil voltage refers to the maximum value in a varying range of operating power voltage, not a continuous voltage.

●Shock Malfunction

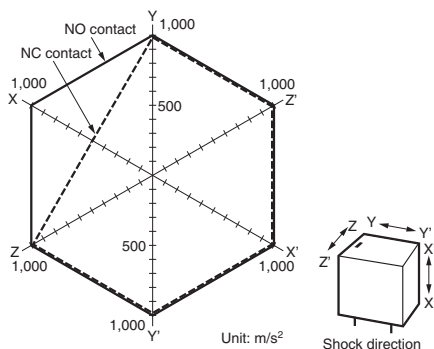



Number of Relays:5 pcs

Test Conditions: Shock was applied 3 times in each direction with and without excitation and the level at which the shock caused malfunction was measured.



Rating: 100 m/s²

■ Dimensions


G5LE-1 (SPDT contact)
G5LE-1A (SPST-NO contact)

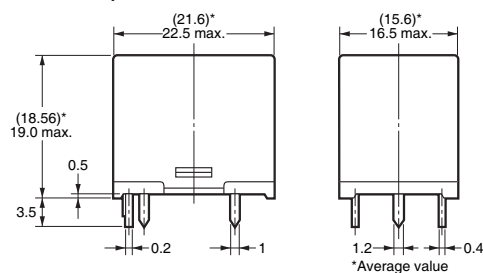




G5LE-14 (SPDT contact)
G5LE-1A4 (SPST-NO contact)

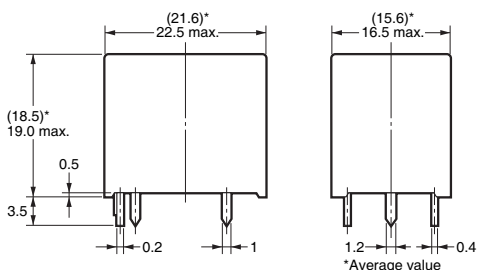

PCB Mounting Holes
(Bottom View)
Tolerance: ± 0.1 mm unless
specified



**Terminal Arrangement/
Internal Connections**
(Bottom View)



Note. Orientation marks are indicated as follows:  

■Approved Standards

UL Recognized:  (File No. E41643)

Model	Contact form	Coil ratings	Contact ratings	Number of test operations
G5LE	SPDT-NO (1a) SPDT (1c)	5 to 24 VDC	10 A, 250 VAC (general use) at 40°C 8 A, 30 VDC (resistive load) at 40°C	6,000
			TV-3 (N.O only) 40°C	25,000

CSA Certified:  (File No. LR31928)

Model	Contact form	Coil ratings	Contact ratings	Number of test operations
G5LE	SPDT-NO (1a) SPDT (1c)	5 to 24 VDC	10 A, 250 VAC (general use) at 40°C 8 A, 30 VDC (resistive load) at 40°C	6,000
			TV-3 (N.O only) 40°C	25,000

VDE EN/IEC Certified:  (Certificate No. 6850)

Model	Contact form	Coil ratings	Contact ratings	Number of test operations
G5LE	SPDT-NO (1a) SPDT (1c)	5, 12, 24 VDC	10 A, 250 VAC (cosφ = 1) 85°C	50,000

TÜV EN/IEC Certified:  (Certificate No. R50158258)

Model	Contact form	Coil ratings	Contact ratings	Number of test operations
G5LE	SPDT-NO (1a) SPDT (1c)	5, 12, 24 VDC	2.5 A, 250 VAC (cosφ = 0.4) 85°C	100,000
			10 A, 250 VAC (resistive load) at 85°C	50,000
			8 A, 30 VAC (resistive load) at 40°C	100,000

■Precautions

- Please refer to “PCB Relays Common Precautions” for correct use.



G
5
L
E

• Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
• Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Omron:

[G5LE-1-DC5](#) [G5LE-14-DC24](#) [G5LE-14-DC12](#) [G5LE-1A4-DC6](#) [G5LE-1A4-DC9](#) [G5LE-1A4-DC5](#) [G5LE-1-DC12](#)
[G5LE-1-DC24](#) [G5LE-14-DC5](#) [G5LE-14-DC6](#) [G5LE-1A4-DC12](#) [G5LE-1A4-DC24](#) [G5LE-1A-DC24](#) [G5LE-1-E-36-DC12](#)
[G5LE-1-E-DC12](#) [G5LE-1A-E-DC5](#) [G5LE-1A-E-DC24](#) [G5LE-1-E-36-DC24](#) [G5LE-1-E-36-DC5](#) [G5LE-1A-E-DC12](#)
[G5LE-1-E-DC24](#) [G5LE-1-E-DC5](#) [G5LE-1-DC3](#) [G5LE-1 DC18](#) [G5LE-14 DC18](#) [G5LE-14-36 DC12](#) [G5LE-14-36 DC24](#)
[G5LE-14-36 DC9](#) [G5LE-14-7 DC12](#) [G5LE-14-AP3 DC18](#) [G5LE-14-AP3 DC5](#) [G5LE-14-AP3 DC6](#) [G5LE-14-AP3-36](#)
[DC24](#) [G5LE-14-ASI-36 DC18](#) [G5LE-14-ASI-36 DC24](#) [G5LE-14-CF DC12](#) [G5LE-14-CF DC24](#) [G5LE-14-CF DC9](#)
[G5LE-1A DC18](#) [G5LE-1A4 DC18](#) [G5LE-1A4-CF DC12](#) [G5LE-1A4-CF DC24](#) [G5LE-1A4-CF DC48](#) [G5LE-1A4-CF DC9](#)
[G5LE-1A4-VD DC12](#) [G5LE-1A4-VD DC9](#) [G5LE-1A-CF DC12](#) [G5LE-1A-CF DC18](#) [G5LE-1A-CF DC5](#) [G5LE-1A-CF](#)
[DC9](#) [G5LE-1-CF DC12](#) [G5LE-14-AP3-DC12](#) [G5LE-14-AP3-DC24](#) [G5LE-1-36 DC5](#) [G5LE-14-36 DC5](#) [G5LE-14-36](#)
[DC60](#) [G5LE-14-AP3 DC48](#) [G5LE-14-AP3-36 DC12](#) [G5LE-1A-E-36 DC24](#) [G5LE-1A-E-36 DC5](#) [G5LE-1A-S DC24](#)
[G5LE-1-ASI-60 DC24](#) [G5LE-1-ASI-CF DC5](#) [G5LE-1-ASI-VD DC24](#) [G5LE-1A-VD DC12](#) [G5LE-1-S DC24](#) [G5LE-1-VD](#)
[DC12](#) [G5LE-1-VD DC24](#) [G5LE-1 DC48](#) [G5LE-1 DC6](#) [G5LE-1 DC9](#) [G5LE-14 DC3](#) [G5LE-14 DC48](#) [G5LE-14-ASI](#)
[DC24](#) [G5LE-14-ASI DC3](#) [G5LE-14-ASI DC48](#) [G5LE-14-ASI DC5](#) [G5LE-14-ASI DC6](#) [G5LE-14-ASI DC9](#) [G5LE-1A](#)
[DC12](#) [G5LE-1A DC3](#) [G5LE-1A DC5](#) [G5LE-1A DC6](#) [G5LE-1A4 DC3](#) [G5LE-1A4 DC48](#) [G5LE-1A4-ASI DC12](#) [G5LE-](#)
[1A4-ASI DC24](#) [G5LE-1A4-ASI DC3](#) [G5LE-1A4-ASI DC6](#) [G5LE-1A-ASI DC12](#) [G5LE-1A-ASI DC24](#) [G5LE-1A-ASI DC3](#)
[G5LE-1A-ASI DC5](#) [G5LE-1-ASI DC24](#) [G5LE-1-ASI DC3](#) [G5LE-1-ASI DC48](#) [G5LE-1-ASI DC5](#) [G5LE-1-ASI DC6](#)
[G5LE-1-ASI DC9](#) [G5LE-1-CF DC5](#)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А