



## Property of Lite-On Only

### Features

- \* Package in 8mm tape on 7" diameter reels.
- \* Compatible with automatic placement equipment.
- \* Compatible with infrared and vapor phase reflow solder process.
- \* EIA STD package.
- \* I.C. compatible.
- \* Meet green product and Pb-free(According to RoHS)



### Package Dimensions

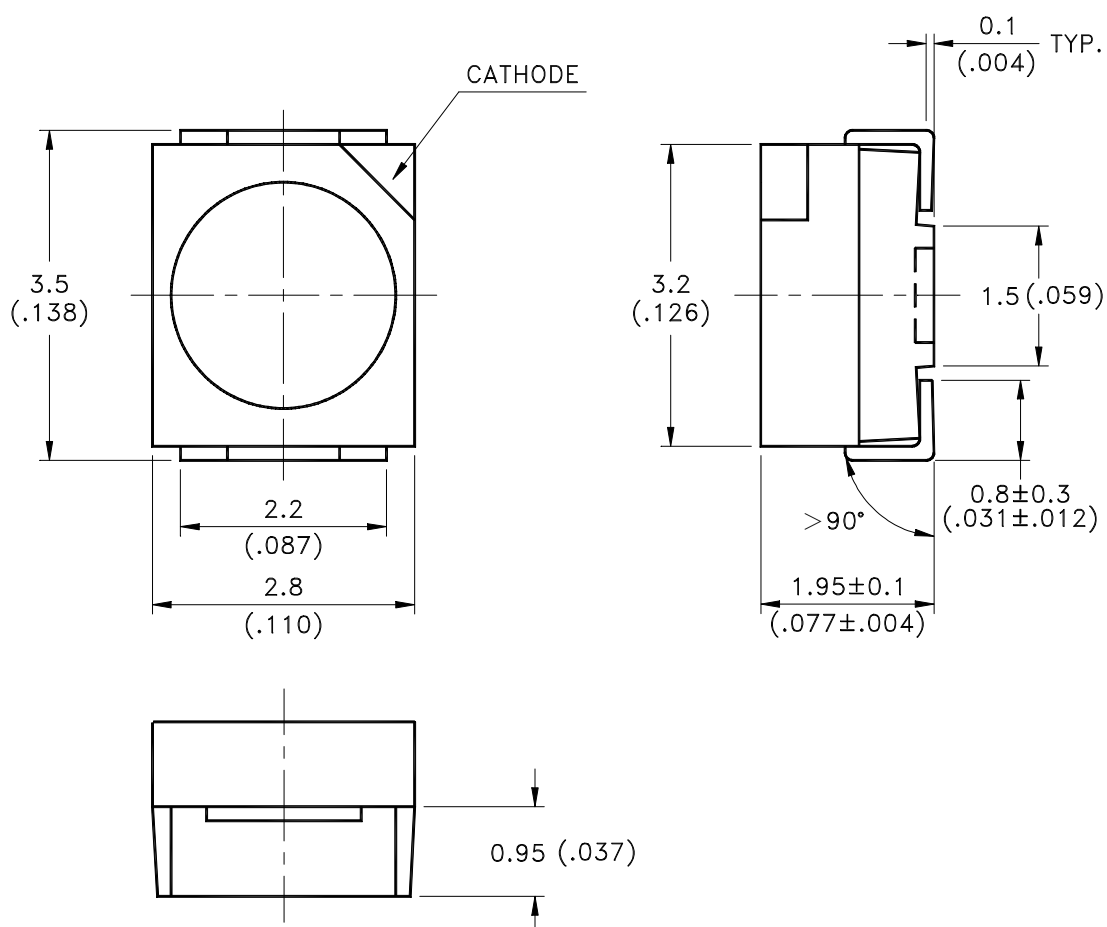

| Part No.     | Lens Color | Source Color |
|--------------|------------|--------------|
| LTW-670DS-EL | Yellow     | InGaN White  |

#### Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.2$  mm (.008") unless otherwise noted.


## Property of Lite-On Only

### Absolute Maximum Ratings at Ta=25°C

| Parameter                                                    | LTW-670DS-EL        | Unit |
|--------------------------------------------------------------|---------------------|------|
| Power Dissipation                                            | 120                 | mW   |
| Peak Forward Current<br>(1/10 Duty Cycle, 0.1ms Pulse Width) | 100                 | mA   |
| DC Forward Current                                           | 30                  | mA   |
| Reverse Voltage                                              | 5                   | V    |
| Operating Temperature Range                                  | -30°C to + 85°C     |      |
| Storage Temperature Range                                    | -40°C to + 100°C    |      |
| Wave Soldering Condition                                     | 260°C For 5 Seconds |      |

Suggest IR Reflow Condition :

### IR-Reflow Soldering Profile for lead free soldering (Acc. to J-STD-020B)

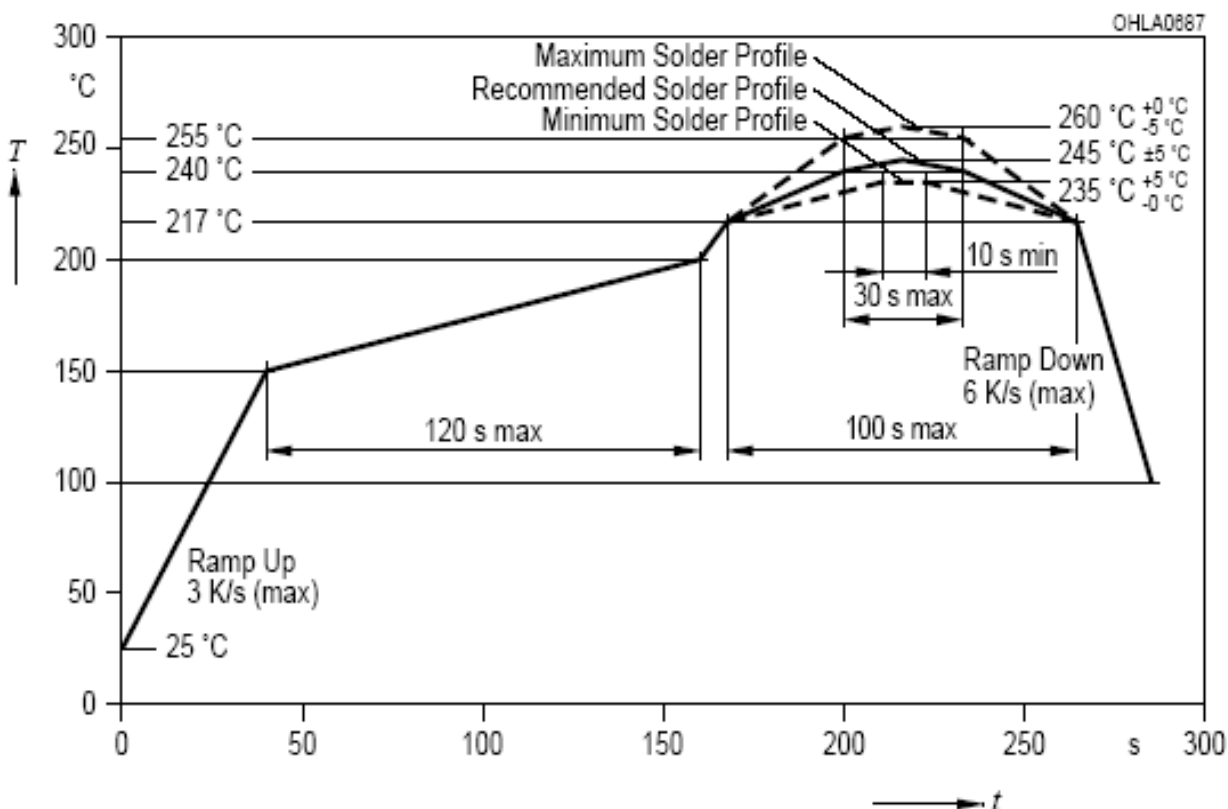

## Property of Lite-On Only

### Electrical Optical Characteristics At Ta=25°C

| Parameter                | Symbol          | Part No.<br>LTW- | Min. | Typ. | Max. | Unit          | Test Condition                            |
|--------------------------|-----------------|------------------|------|------|------|---------------|-------------------------------------------|
| Luminous Intensity       | $I_V$           | 670DS-EL         | 1120 | 1400 | 2240 | mcd           | $I_F = 20\text{mA}$<br>Note 1, 2, 5       |
| Luminous Flux            | $\Phi_V$        | 670DS-EL         |      | 3700 |      | mlm           | $I_F = 20\text{mA}$<br>Note 1, 2, 5       |
| Viewing Angle            | $2\theta_{1/2}$ | 670DS-EL         |      | 120  |      | deg           | Fig.6                                     |
| Chromaticity Coordinates | x               | 670DS-EL         |      | 0.31 |      |               | $I_F = 20\text{mA}$<br>Note 3, 5<br>Fig.1 |
|                          | y               |                  |      | 0.30 |      |               |                                           |
| Forward Voltage          | $V_F$           | 670DS-EL         | 3.0  |      | 3.6  | V             | $I_F = 20\text{mA}$                       |
| Reverse Current          | $I_R$           | 670DS-EL         |      |      | 10   | $\mu\text{A}$ | $V_R = 5\text{V}$                         |

Note : 1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.

2. Iv classification code is marked on each packing bag.

3. The chromaticity coordinates (x, y) is derived from the 1931 CIE chromaticity diagram.

4. Caution in ESD:

Static Electricity and surge damages the LED. It is recommended using a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

5. CAS140B is the test standard for the chromaticity coordinates (x, y) & IV.

## Property of Lite-On Only

### Bin Code List

| V <sub>F</sub> Spec. Table |                                            |      |
|----------------------------|--------------------------------------------|------|
| VF Bin                     | Forward Voltage (V) at $I_F = 20\text{mA}$ |      |
|                            | Min.                                       | Max. |
| V1                         | 3.0                                        | 3.2  |
| V2                         | 3.2                                        | 3.4  |
| V3                         | 3.4                                        | 3.6  |

Tolerance on each Forward Voltage bin is +/-0.10 volt

| IV Spec. Table |                                                 |      |
|----------------|-------------------------------------------------|------|
| IV Bin         | Luminous Intensity (mcd) at $I_F = 20\text{mA}$ |      |
|                | Min.                                            | Max. |
| W              | 1120                                            | 1400 |
| W1             | 1400                                            | 1800 |
| X1             | 1800                                            | 2240 |

Tolerance on each Luminous Intensity bin is +/- 15%.


| Hue Spec. Table |                                         |       |       |       |       |
|-----------------|-----------------------------------------|-------|-------|-------|-------|
| Hue Bin         | Color bin limits at $I_F = 20\text{mA}$ |       |       |       |       |
|                 | CIE 1931 Chromaticity coordinates       |       |       |       |       |
| A0              | x                                       | 0.314 | 0.318 | 0.307 | 0.302 |
|                 | y                                       | 0.282 | 0.290 | 0.298 | 0.291 |
| A1              | x                                       | 0.318 | 0.322 | 0.311 | 0.307 |
|                 | y                                       | 0.290 | 0.296 | 0.305 | 0.298 |
| A2              | x                                       | 0.322 | 0.326 | 0.315 | 0.311 |
|                 | y                                       | 0.296 | 0.303 | 0.311 | 0.305 |
| A3              | x                                       | 0.326 | 0.330 | 0.319 | 0.315 |
|                 | y                                       | 0.303 | 0.309 | 0.317 | 0.311 |
| A4              | x                                       | 0.330 | 0.334 | 0.323 | 0.319 |
|                 | y                                       | 0.309 | 0.315 | 0.323 | 0.317 |
| A5              | x                                       | 0.334 | 0.339 | 0.327 | 0.323 |
|                 | y                                       | 0.315 | 0.322 | 0.331 | 0.323 |

Tolerance on each Hue (x, y) bin is +/- 0.01

## Property of Lite-On Only

| Hue Spec. Table |                                         |       |       |       |       |
|-----------------|-----------------------------------------|-------|-------|-------|-------|
| Hue Bin         | Color bin limits at $I_F = 20\text{mA}$ |       |       |       |       |
|                 | CIE 1931 Chromaticity coordinates       |       |       |       |       |
| B0              | x                                       | 0.302 | 0.307 | 0.296 | 0.291 |
|                 | y                                       | 0.291 | 0.298 | 0.307 | 0.300 |
| B1              | x                                       | 0.307 | 0.311 | 0.300 | 0.296 |
|                 | y                                       | 0.298 | 0.305 | 0.313 | 0.307 |
| B2              | x                                       | 0.311 | 0.315 | 0.304 | 0.300 |
|                 | y                                       | 0.305 | 0.311 | 0.319 | 0.313 |
| B3              | x                                       | 0.315 | 0.319 | 0.308 | 0.304 |
|                 | y                                       | 0.311 | 0.317 | 0.326 | 0.319 |
| B4              | x                                       | 0.319 | 0.323 | 0.312 | 0.308 |
|                 | y                                       | 0.317 | 0.323 | 0.331 | 0.326 |
| B5              | x                                       | 0.323 | 0.327 | 0.317 | 0.312 |
|                 | y                                       | 0.323 | 0.331 | 0.340 | 0.331 |

Tolerance on each Hue (x, y) bin is +/- 0.01

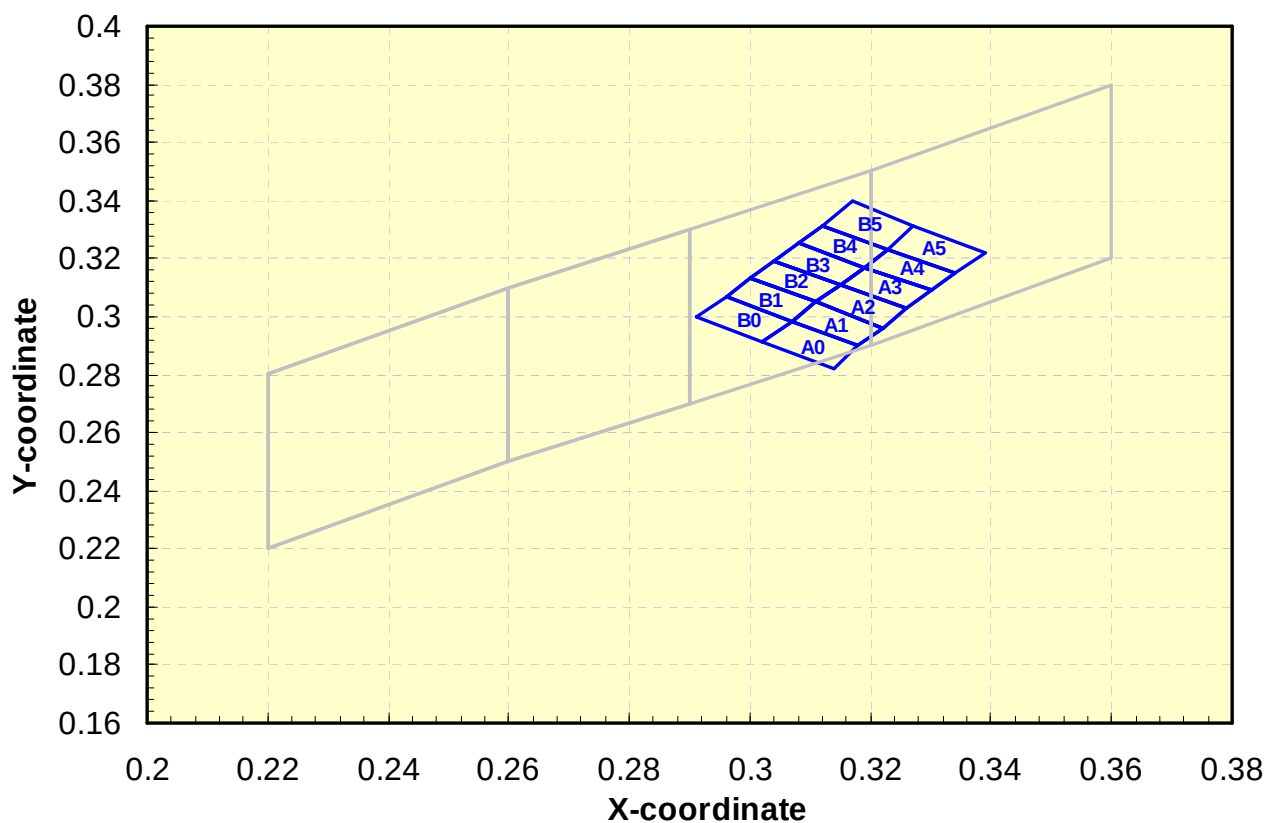

## Typical Electrical / Optical Characteristics Curves (25°C Ambient Temperature Unless Otherwise Noted)

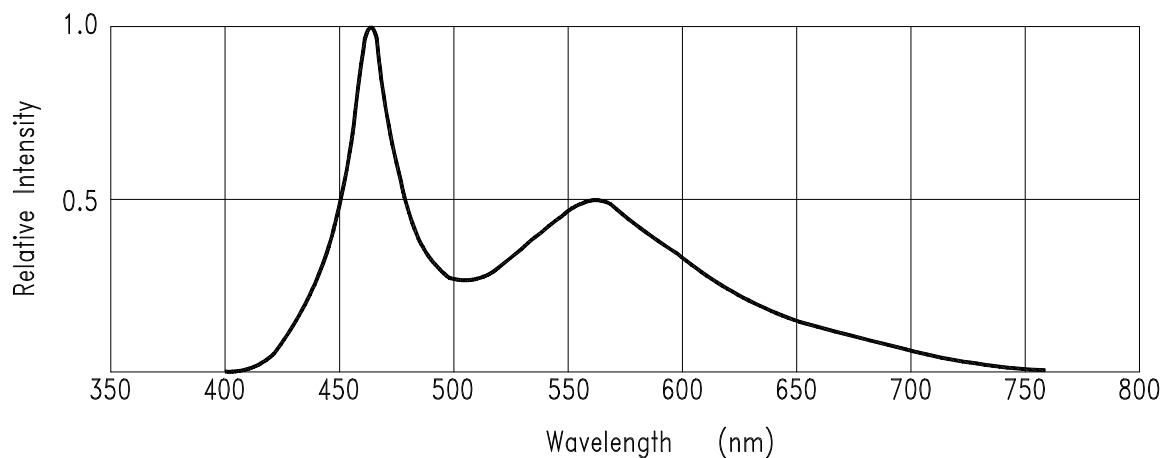


Fig.1 RELATIVE INTENSITY VS. WAVELENGTH




Fig.2 Forward Current vs.  
Forward Voltage




Fig.3 Forward Current  
Derating Curve

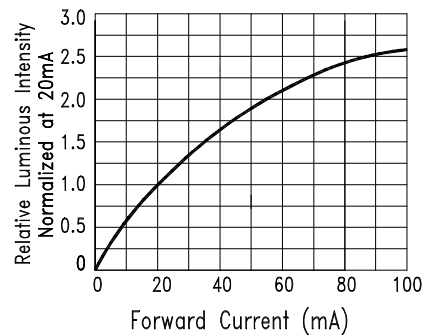


Fig.4 Relative Luminous Intensity  
vs. Forward Current

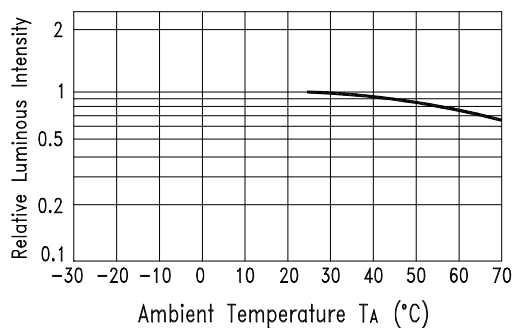


Fig.5 Luminous Intensity vs.  
Ambient Temperature




Fig.6 Spatial Distribution

## User Guide

### Cleaning


Do not use unspecified chemical liquid to clean LED they could harm the package.

If cleaning is necessary, immerse the LED in ethyl alcohol or isopropyl alcohol at normal temperature for less than one minute.


### Recommend Printed Circuit Board Attachment Pad

Infrared / vapor phase

Reflow Soldering

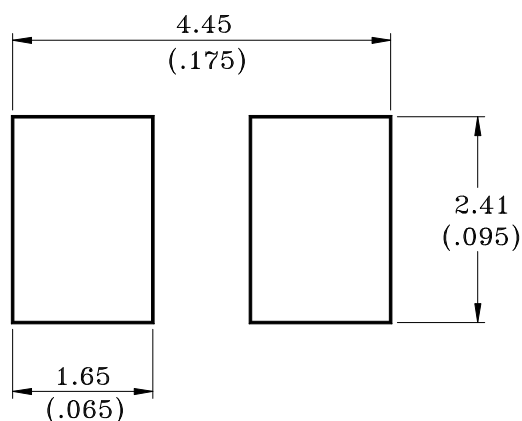


### Package Dimensions of Tape

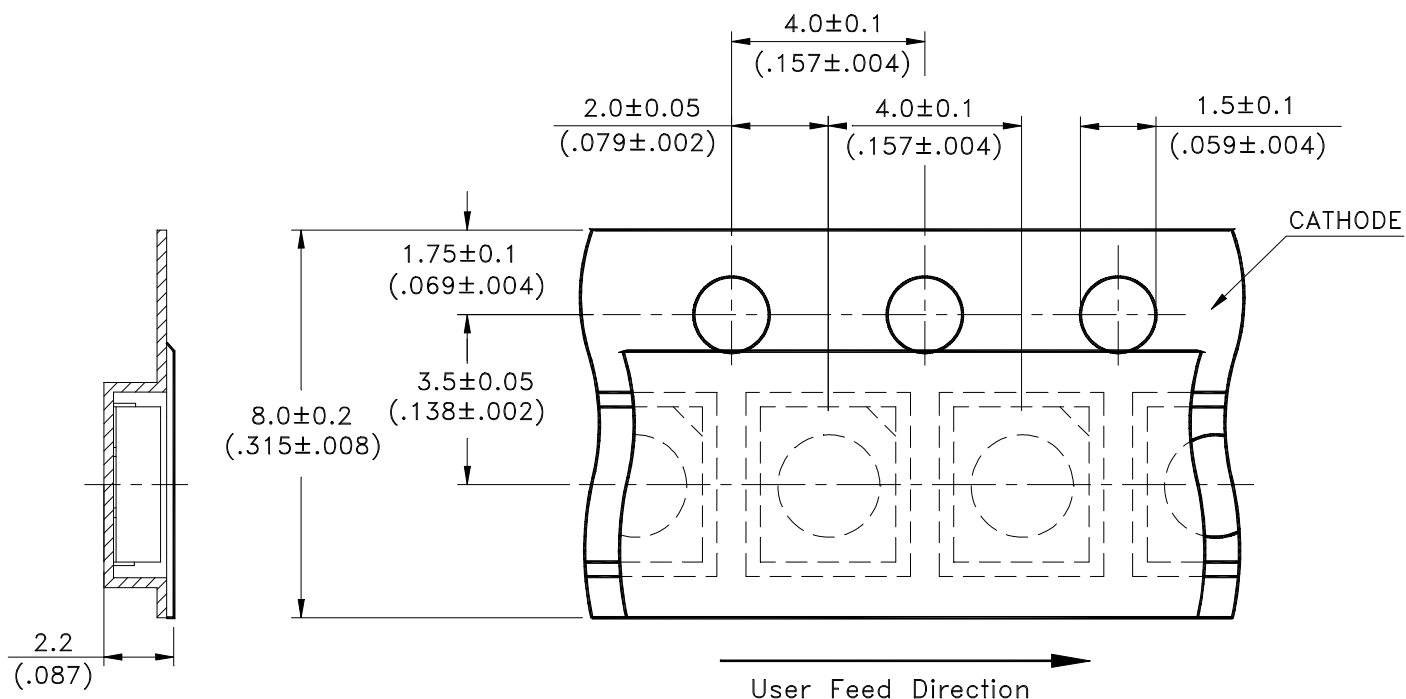

Note:

1. All dimensions are in millimeters (inches).

## Package Dimensions of Reel

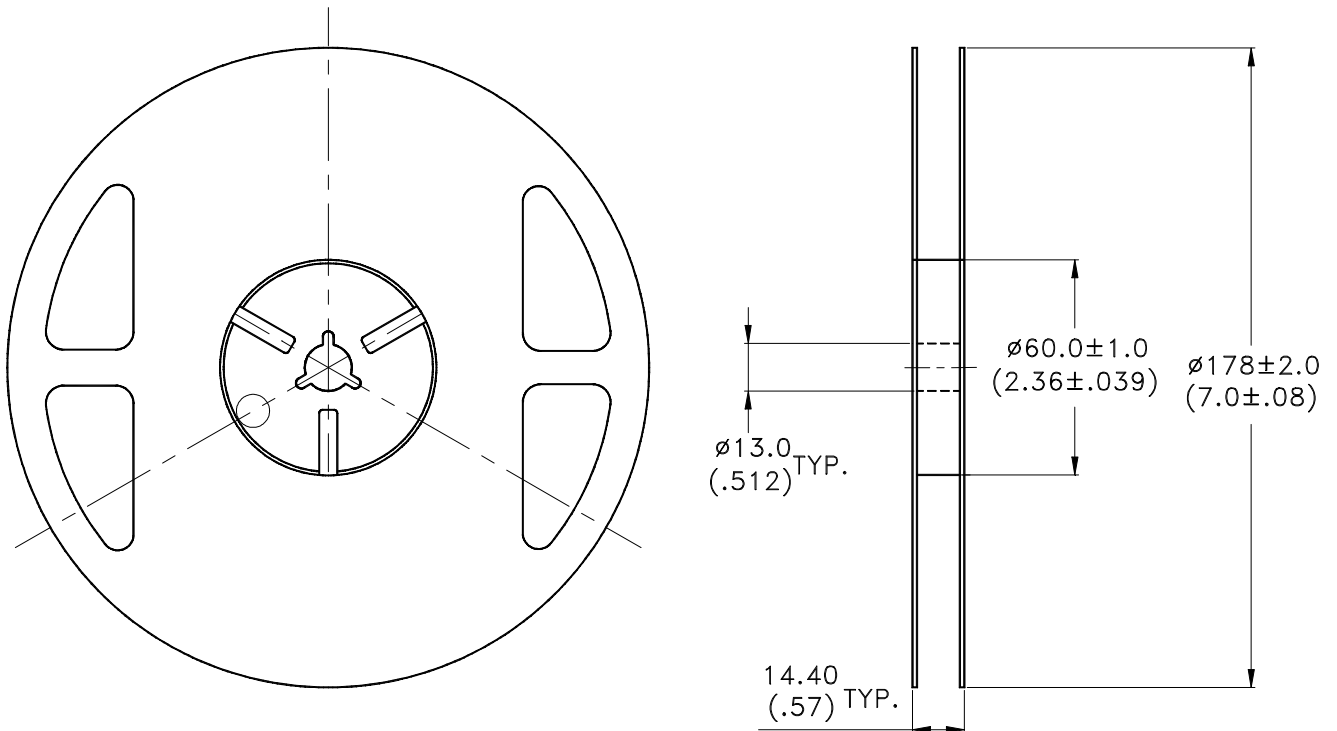

### Notes:

1. Empty component pockets sealed with top cover tape.
2. 7 inch reel-2000 pieces per reel.
3. Minimum packing quantity is 500 pieces for remainders.
4. The maximum number of consecutive missing lamps is two.
5. In accordance with EIA-481-1-B specifications.



## CAUTIONS

### 1. Application

The LEDs described here are intended to be used for ordinary electronic equipment (such as office equipment, communication equipment and household applications). Consult Liteon's Sales in advance for information on applications in which exceptional reliability is required, particularly when the failure or malfunction of the LEDs may directly jeopardize life or health (such as in aviation, transportation, traffic control equipment, medical and life support systems and safety devices).

### 2. Storage

This product is qualified as Moisture sensitive Level 3 per JEDEC J-STD-020 Precaution when handling this moisture sensitive product is important to ensure the reliability of the product.

The package is sealed:

The LEDs should be stored at 30°C or less and 90%RH or less. And the LEDs are limited to use within one year, while the LEDs is packed in moisture-proof package with the desiccants inside.

The package is opened:

The LEDs should be stored at 30°C or less and 60%RH or less. Moreover, the LEDs are limited to solder process within 168hrs. If the Humidity Indicator shows the pink color in 10% even higher or exceed the storage limiting time since opened, that we recommended to baking LEDs at 60°C at least 48hrs. To seal the remainder LEDs return to package, it's recommended to be with workable desiccants in original package.

### 3. Cleaning

Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED if necessary.

### 4. Soldering


Recommended soldering conditions:

| Reflow soldering |               | Wave Soldering |              | Soldering iron |                 |
|------------------|---------------|----------------|--------------|----------------|-----------------|
| Pre-heat         | 120~150°C     | Pre-heat       | 100°C Max.   | Temperature    | 300°C Max.      |
| Pre-heat time    | 120 sec. Max. | Pre-heat time  | 60 sec. Max. | Soldering time | 3 sec. Max.     |
| Soldering Temp.  | 260°C Max.    | Solder wave    | 260°C Max.   |                | (one time only) |
| Soldering time   | 30 sec. Max.  | Soldering time | 10 sec. Max. |                |                 |

### 5. Drive Method


An LED is a current-operated device. In order to ensure intensity uniformity on multiple LEDs connected in parallel in an application, it is recommended that a current limiting resistor be incorporated in the drive circuit, in series with each LED as shown in Circuit A below.

**Circuit model A**



(A) Recommended circuit.

**Circuit model B**



(B) The brightness of each LED might appear different due to the differences in the I-V characteristics of those LEDs.

## 6. ESD (Electrostatic Discharge)

Static Electricity or power surge will damage the LED.

Suggestions to prevent ESD damage:

- Use of a conductive wrist band or anti-electrostatic glove when handling these LEDs.
- All devices, equipment, and machinery must be properly grounded.
- Work tables, storage racks, etc. should be properly grounded.

Use ion blower to neutralize the static charge which might have built up on surface of the LED's plastic lens as a result of friction between LEDs during storage and handling.

ESD-damaged LEDs will exhibit abnormal characteristics such as high reverse leakage current, low forward voltage, or "no light up" at low currents.

To verify for ESD damage, check for "light up" and Vf of the suspect LEDs at low currents.

The Vf of "good" LEDs should be  $>2.0V@0.1mA$  for InGaN product and  $>1.4V@0.1mA$  for AlInGaP product.

## 7. Reliability Test

| Classification     | Test Item                              | Test Condition                                                                                                                                                                                                                                                                                                                                                   | Reference Standard                                                                                |
|--------------------|----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| Endurance Test     | Operation Life                         | Ta= Under Room Temperature As Per Data Sheet<br>Maximum Rating<br>*Test Time= 1000HRS (-24HRS,+72HRS)*@20mA.                                                                                                                                                                                                                                                     | MIL-STD-750D:1026<br>MIL-STD-883D:1005<br>JIS C 7021:B-1                                          |
|                    | High Temperature High Humidity Storage | IR-Reflow In-Board, 2 Times<br>Ta= $65\pm5^{\circ}C$ , RH= 90~95%<br>*Test Time= 240HRS $\pm$ 2HRS                                                                                                                                                                                                                                                               | MIL-STD-202F:103B<br>JIS C 7021:B-11                                                              |
|                    | High Temperature Storage               | Ta= $105\pm5^{\circ}C$<br>*Test Time= 1000HRS (-24HRS,+72HRS)                                                                                                                                                                                                                                                                                                    | MIL-STD-883D:1008<br>JIS C 7021:B-10                                                              |
|                    | Low Temperature Storage                | Ta= $-55\pm5^{\circ}C$<br>*Test Time=1000HRS (-24HRS,+72H RS)                                                                                                                                                                                                                                                                                                    | JIS C 7021:B-12                                                                                   |
| Environmental Test | Temperature Cycling                    | $105^{\circ}C \sim 25^{\circ}C \sim -55^{\circ}C \sim 25^{\circ}C$<br>30mins 5mins 30mins 5mins<br>10 Cycles                                                                                                                                                                                                                                                     | MIL-STD-202F:107D<br>MIL-STD-750D:1051<br>MIL-STD-883D:1010<br>JIS C 7021:A-4                     |
|                    | Thermal Shock                          | IR-Reflow In-Board, 2 Times<br>$85 \pm 5^{\circ}C \sim -40^{\circ}C \pm 5^{\circ}C$<br>10mins 10mins 100 Cycles                                                                                                                                                                                                                                                  | MIL-STD-202F:107D<br>MIL-STD-750D:1051<br>MIL-STD-883D:1011                                       |
|                    | IR-Reflow                              | Ramp-up rate( $217^{\circ}C$ to Peak) $+3^{\circ}C$ / second max<br>Temp. maintain at $175(\pm 25)^{\circ}C$ 180 seconds max<br>Temp. maintain above $217^{\circ}C$ 60-150 seconds<br>Peak temperature range $260^{\circ}C +0/-5^{\circ}C$<br>Time within $5^{\circ}C$ of actual Peak Temperature (tp) 20-40 seconds<br>Ramp-down rate $+6^{\circ}C$ /second max | MIL-STD-750D:2031.2<br>J-STD-020B                                                                 |
|                    | Solderability                          | T.sol= $235 \pm 5^{\circ}C$<br>Immersion time $2\pm 0.5$ sec<br>Immersion rate $25\pm 2.5$ mm/sec<br>Coverage $\geq 95\%$ of the dipped surface                                                                                                                                                                                                                  | MIL-STD-202F:208D<br>MIL-STD-750D:2026<br>MIL-STD-883D:2003<br>IEC 68 Part 2-20<br>JIS C 7021:A-2 |

### 8. Others

The appearance and specifications of the product may be modified for improvement without prior notice.

### 9. Quality Guarantee

LiteOn guarantee DPPM level of function failure is smaller and equal to 50 DPPM.

(Based on 100k usage)

### 10. Suggested Checking List

#### Training and Certification

1. Everyone working in a static-safe area is ESD-certified?
2. Training records kept and re-certification dates monitored?

#### Static-Safe Workstation & Work Areas

1. Static-safe workstation or work-areas have ESD signs?
2. All surfaces and objects at all static-safe workstation and within 1 ft measure less than 100V?
3. All ionizer activated, positioned towards the units?
4. Each work surface mats grounding is good?

#### Personnel Grounding

1. Every person (including visitors) handling ESD sensitive (ESDS) items wear wrist strap, heel strap or conductive shoes with conductive flooring?
2. If conductive footwear used, conductive flooring also present where operator stand or walk?
3. Garments, hairs or anything closer than 1 ft to ESD items measure less than 100V\*?
4. Every wrist strap or heel strap/conductive shoes checked daily and result recorded for all DLs?
5. All wrist strap or heel strap checkers calibration up to date?

Note: \*50V for Blue LED.

#### Device Handling

1. Every ESDS items identified by EIA-471 labels on item or packaging?
2. All ESDS items completely inside properly closed static-shielding containers when not at static-safe workstation?
3. No static charge generators (e.g. plastics) inside shielding containers with ESDS items?
4. All flexible conductive and dissipative package materials inspected before reuse or recycle?

#### Others

1. Audit result reported to entity ESD control coordinator?
2. Corrective action from previous audits completed?
3. Are audit records complete and on file?

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А