



N-Channel Enhancement-Mode Vertical DMOS FETs

Features

- ▶ Free from secondary breakdown
- ▶ Low power drive requirement
- ▶ Ease of paralleling
- ▶ Low C_{ISS} and fast switching speeds
- ▶ Excellent thermal stability
- ▶ Integral source-drain diode
- ▶ High input impedance and high gain

Applications

- ▶ Motor controls
- ▶ Converters
- ▶ Amplifiers
- ▶ Switches
- ▶ Power supply circuits
- ▶ Drivers (relays, hammers, solenoids, lamps, memories, displays, bipolar transistors, etc.)

Ordering Information

| Part Number | Package Option | Packing |
|-----------------|----------------------|-----------|
| VN3205N3-G | 3-Lead TO-92 | 1000/Bag |
| VN3205N3-G P002 | 3-Lead TO-92 | 2000/Reel |
| VN3205N3-G P003 | | |
| VN3205N3-G P005 | | |
| VN3205N3-G P013 | | |
| VN3205N3-G P014 | | |
| VN3205N8-G | | |
| VN3205NW | Die in wafer form | --- |
| VN3205NJ | Die on adhesive tape | --- |
| VN3205ND | Die in waffle pack | --- |

For packaged products, -G indicates package is RoHS compliant ('Green').
 TO-92 taping specifications and winding styles per EIA-468 Standard.
 Devices in Wafer / Die form are RoHS compliant ('Green').
 Refer to Die Specification VF32 for layout and dimensions.

Absolute Maximum Ratings

| Parameter | Value |
|-----------------------------------|-----------------------------------|
| Drain-to-source voltage | BV_{DSS} |
| Drain-to-gate voltage | BV_{DGS} |
| Gate-to-source voltage | $\pm 20V$ |
| Operating and storage temperature | $-55^{\circ}C$ to $+150^{\circ}C$ |

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these conditions is not implied. Continuous operation of the device at the absolute rating level may affect device reliability. All voltages are referenced to device ground.

Typical Thermal Resistance

| Package | θ_{ja} |
|--------------------------|---------------|
| 3-Lead TO-92 | 132°C/W |
| 3-Lead TO-243AA (SOT-89) | 133°C/W |

General Description


This enhancement-mode (normally-off) transistor utilizes a vertical DMOS structure and Supertex's well-proven silicon-gate manufacturing process. This combination produces a device with the power handling capabilities of bipolar transistors and with the high input impedance and positive temperature coefficient inherent in MOS devices. Characteristic of all MOS structures, this device is free from thermal runaway and thermally induced secondary breakdown.

Supertex's vertical DMOS FETs are ideally suited to a wide range of switching and amplifying applications where high breakdown voltage, high input impedance, low input capacitance, and fast switching speeds are desired.

Product Summary

| BV_{DSS}/BV_{DGS} (V) | $R_{DS(ON)}$ (max) (Ω) | $V_{GS(th)}$ (max) (V) |
|----------------------------|------------------------------------|---------------------------|
| 50 | 0.3 | 2.4 |

Pin Configuration

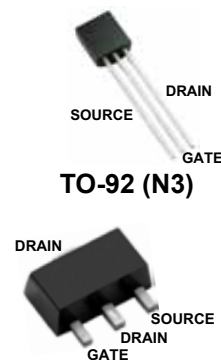

TO-243AA (SOT-89) (N8)

Product Marking



YY = Year Sealed
 WW = Week Sealed
 _____ = "Green" Packaging

Package may or may not include the following marks: Si or

TO-92 (N3)



W = Code for week sealed
 _____ = "Green" Packaging

Package may or may not include the following marks: Si or

TO-243AA (SOT-89) (N8)

Thermal Characteristics

| Package | I_D (continuous)* (A) | I_D (pulsed) (A) | Power Dissipation @ $T_c = 25^\circ\text{C}$ (W) | I_{DR}^\dagger (A) | I_{DRM} (A) |
|----------|----------------------------|-----------------------|---|----------------------|---------------|
| TO-92 | 1.2 | 8.0 | 1.0 | 1.2 | 8.0 |
| TO-243AA | 1.5 | 8.0 | 1.6 ($T_A = 25^\circ$) | 1.5 | 8.0 |

Notes:

* I_D (continuous) is limited by max rated T_j , $T_a = 25^\circ\text{C}$.

† Total for package.

‡ Mounted on FR5 board, 25mm x 25mm x 1.57mm.


Electrical Characteristics ($T_j = 25^\circ\text{C}$ unless otherwise specified)

| Sym | Parameter | Min | Typ | Max | Units | Conditions | |
|---------------------|--|----------|------|------|---------------|---|------------------------------|
| BV_{DSS} | Drain-to-Source breakdown voltage | 50 | - | - | V | $V_{GS} = 0V, I_D = 10mA$ | |
| $V_{GS(th)}$ | Gate threshold voltage | 0.8 | - | 2.4 | V | $V_{GS} = V_{DS}, I_D = 10mA$ | |
| $\Delta V_{GS(th)}$ | Change in $V_{GS(th)}$ with temperature | - | -4.3 | -5.5 | mV/°C | $V_{GS} = V_{DS}, I_D = 10mA$ | |
| I_{GSS} | Gate body leakage current | - | 1.0 | 100 | nA | $V_{GS} = \pm 20V, V_{DS} = 0V$ | |
| I_{DSS} | Zero Gate voltage drain current | - | - | 10 | μA | $V_{GS} = 0V, V_{DS} = \text{Max Rating}$ | |
| | | - | - | 1.0 | mA | $V_{DS} = 0.8 \text{ Max Rating}, V_{GS} = 0V, T_A = 125^\circ\text{C}$ | |
| $I_{D(ON)}$ | ON-state Drain current | 3.0 | 14 | - | A | $V_{GS} = 10V, V_{DS} = 5.0V$ | |
| $R_{DS(ON)}$ | Static Drain-to-Source ON-state resistance | TO-92 | - | - | 0.45 | Ω | $V_{GS} = 4.5V, I_D = 1.5A$ |
| | | TO-243AA | - | - | 0.45 | | $V_{GS} = 4.5V, I_D = 0.75A$ |
| | | TO-92 | - | - | 0.3 | | $V_{GS} = 10V, I_D = 3.0A$ |
| | | TO-243AA | - | - | 0.3 | | $V_{GS} = 10V, I_D = 1.5A$ |
| $\Delta R_{DS(ON)}$ | Change in $R_{DS(ON)}$ with temperature | - | 0.85 | 1.2 | %/°C | $V_{GS} = 10V, I_D = 3.0A$ | |
| G_{FS} | Forward transconductance | 1.0 | 1.5 | - | mho | $V_{DS} = 25V, I_D = 2.0A$ | |
| C_{ISS} | Input capacitance | - | 220 | 300 | pF | $V_{GS} = 0V,$ $V_{DS} = 25V,$ $f = 1.0MHz$ | |
| C_{OSS} | Common Source output capacitance | - | 70 | 120 | | | |
| C_{RSS} | Reverse transfer capacitance | - | 20 | 30 | | | |
| $t_{d(ON)}$ | Turn-on delay time | - | - | 10 | ns | $V_{DD} = 25V,$ $I_D = 2.0A,$ $R_{GEN} = 10\Omega$ | |
| t_r | Rise time | - | - | 15 | | | |
| $t_{d(OFF)}$ | Turn-off delay time | - | - | 25 | | | |
| t_f | Fall time | - | - | 25 | | | |
| V_{SD} | Diode forward voltage drop | - | - | 1.6 | V | $V_{GS} = 0V, I_{SD} = 1.5A$ | |
| t_{rr} | Reverse recovery time | - | 300 | - | ns | $V_{GS} = 0V, I_{SD} = 1.0A$ | |







Notes:

- All D.C. parameters 100% tested at 25°C unless otherwise stated. (Pulse test: 300 μs pulse, 2% duty cycle.)
- All A.C. parameters sample tested.







Switching Waveforms and Test Circuit

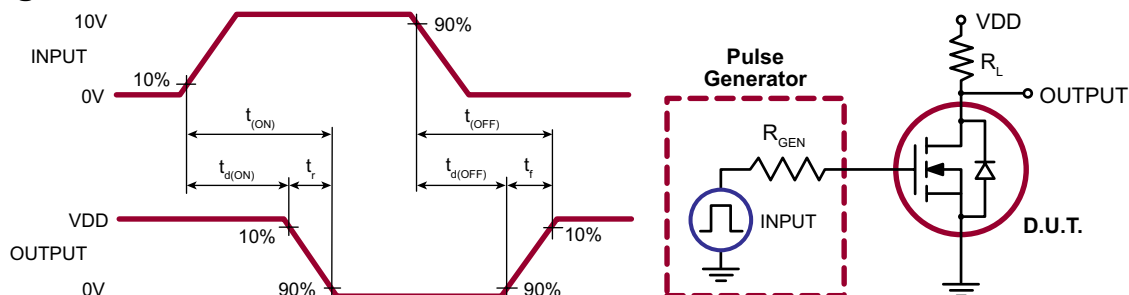

Typical Performance Curves

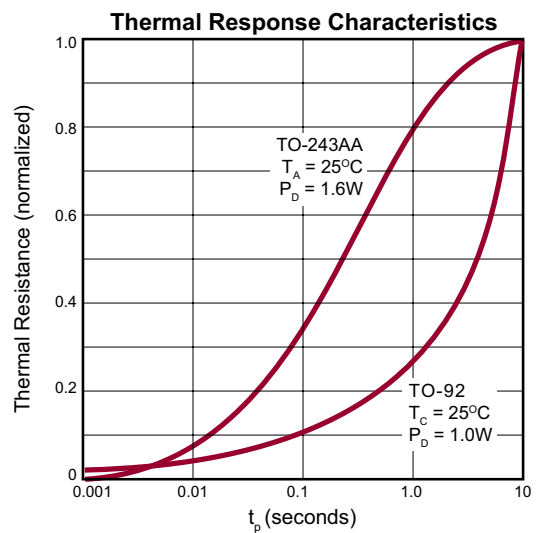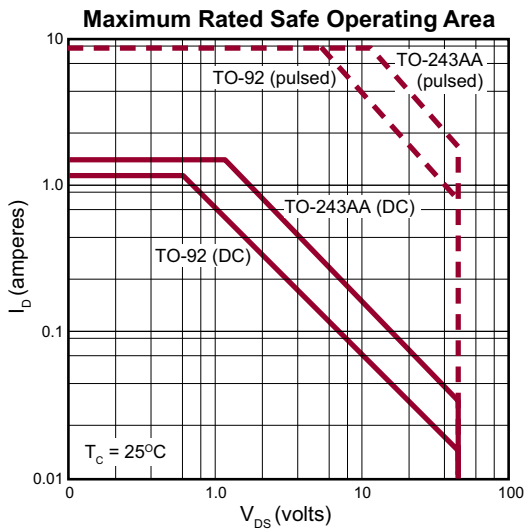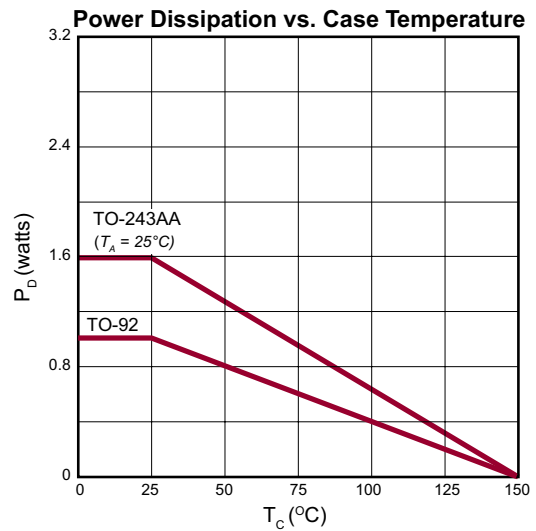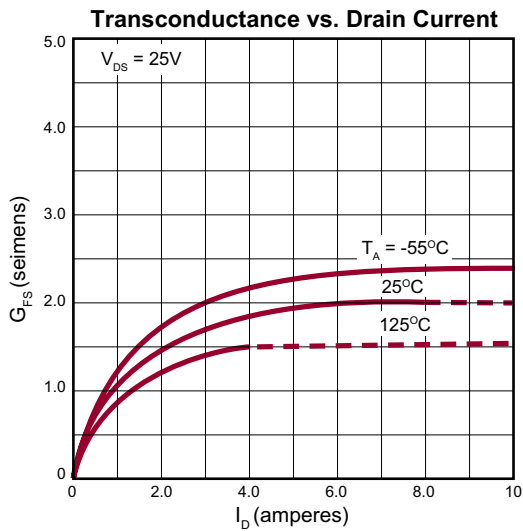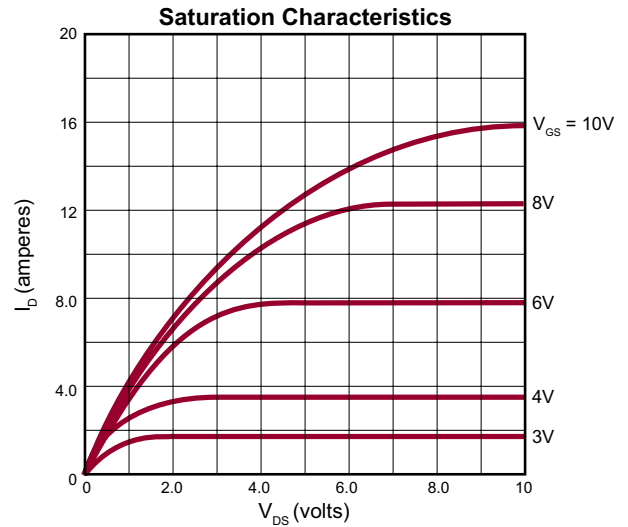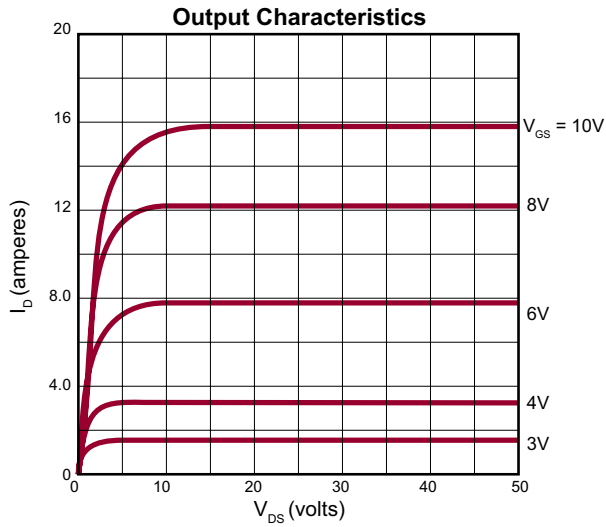


Typical Performance Curves (cont.)

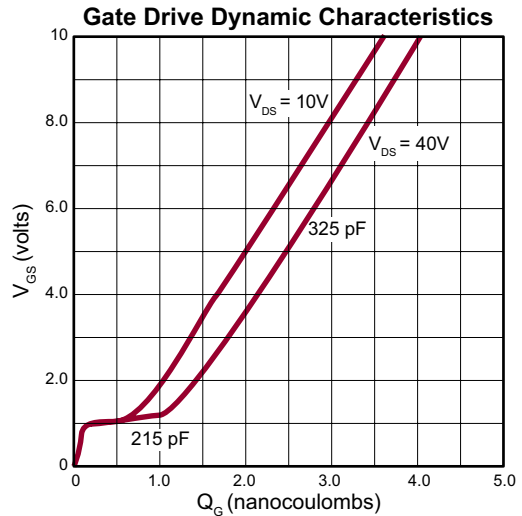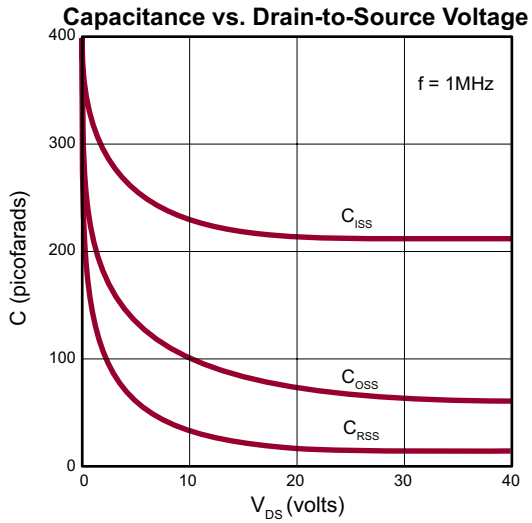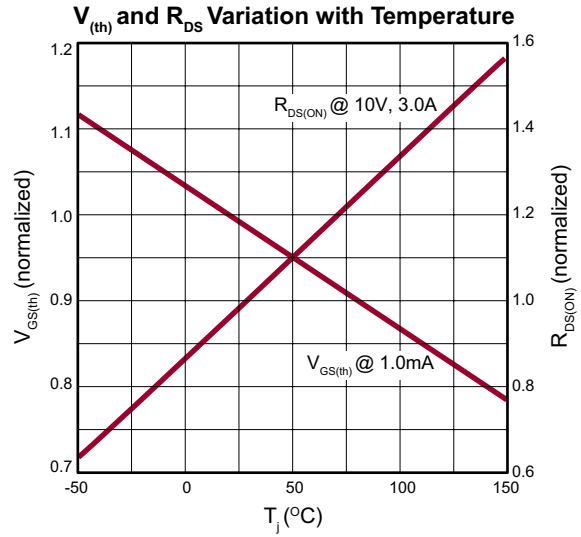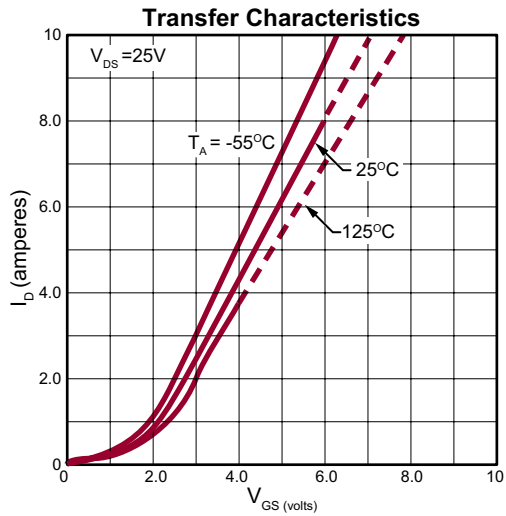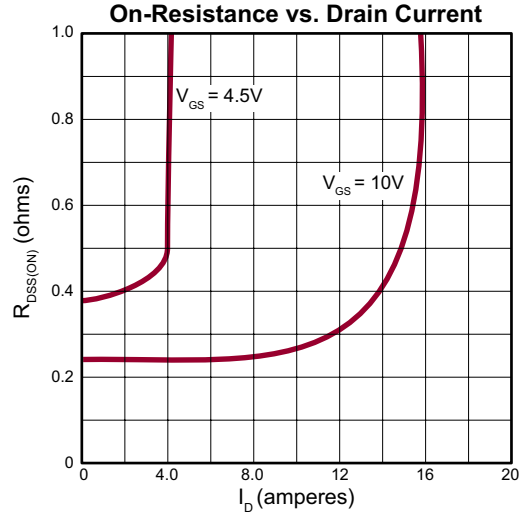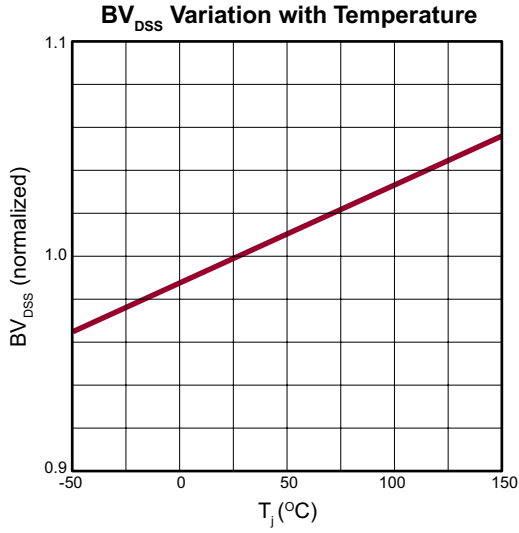


3-Lead TO-92 Package Outline (N3)



Front View

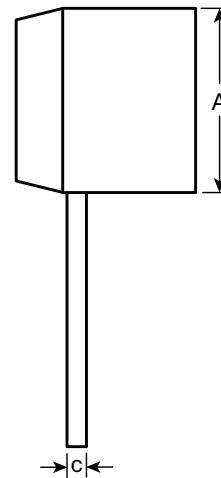

Side View

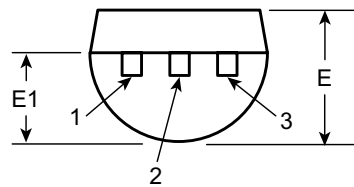

Bottom View

| Symbol | | A | b | c | D | E | E1 | e | e1 | L |
|------------------------|-----|------|-------------------|-------------------|------|------|------|------|------|-------|
| Dimensions (inches) | MIN | .170 | .014 [†] | .014 [†] | .175 | .125 | .080 | .095 | .045 | .500 |
| | NOM | - | - | - | - | - | - | - | - | - |
| | MAX | .210 | .022 [†] | .022 [†] | .205 | .165 | .105 | .105 | .055 | .610* |

JEDEC Registration TO-92.


* This dimension is not specified in the JEDEC drawing.

† This dimension differs from the JEDEC drawing.

Drawings not to scale.

Supertex Doc.#: DSPD-3TO92N3, Version E041009.

3-Lead TO-243AA (SOT-89) Package Outline (N8)

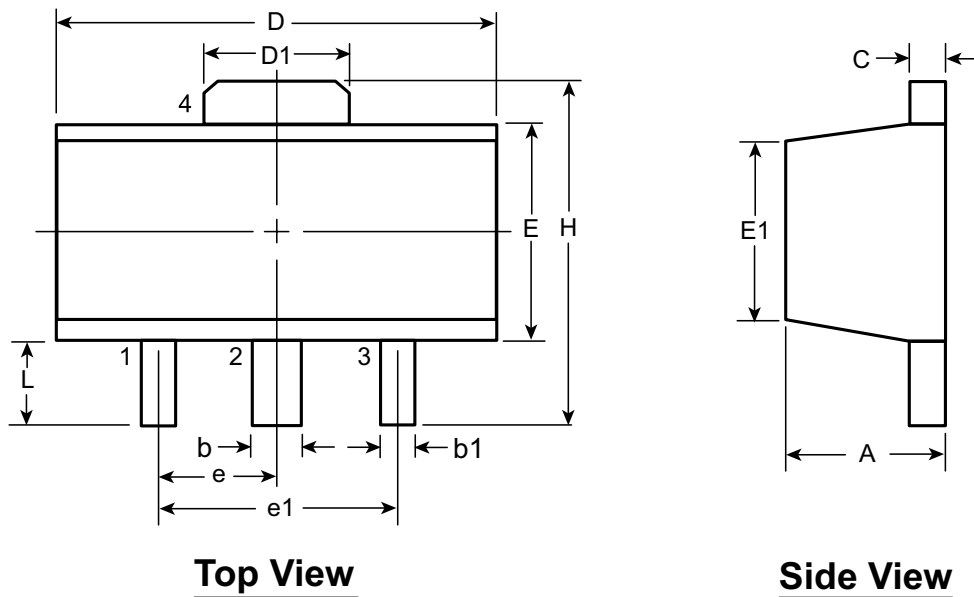

| Symbol | | A | b | b1 | C | D | D1 | E | E1 | e | e1 | H | L |
|--------------------|-----|------|------|------|------|------|------|------|-------------------|-------------|-------------|------|-------------------|
| Dimensions (mm) | MIN | 1.40 | 0.44 | 0.36 | 0.35 | 4.40 | 1.62 | 2.29 | 2.00 [†] | 1.50 BSC | 3.00 BSC | 3.94 | 0.73 [†] |
| | NOM | - | - | - | - | - | - | - | - | | | - | - |
| | MAX | 1.60 | 0.56 | 0.48 | 0.44 | 4.60 | 1.83 | 2.60 | 2.29 | | | 4.25 | 1.20 |

JEDEC Registration TO-243, Variation AA, Issue C, July 1986.

[†] This dimension differs from the JEDEC drawing

Drawings not to scale.

Supertex Doc. #: DSPD-3TO243AAN8, Version F111010.

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information go to <http://www.supertex.com/packaging.html>.)

Supertex inc. does not recommend the use of its products in life support applications, and will not knowingly sell them for use in such applications unless it receives an adequate "product liability indemnification insurance agreement." **Supertex inc.** does not assume responsibility for use of devices described, and limits its liability to the replacement of the devices determined defective due to workmanship. No responsibility is assumed for possible omissions and inaccuracies. Circuitry and specifications are subject to change without notice. For the latest product specifications refer to the **Supertex inc.** (website: <http://www.supertex.com>)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А