



## MICROPOWER VOLTAGE SUPERVISOR RESET ACTIVE LOW

- ULTRA LOW POWER CONSUMPTION :  
12µA maximum
- PRECISION RESET THRESHOLD
- THRESHOLD VOLTAGE:  
4.33V typ. FOR TS831-5  
4.50V typ. FOR TS831-4  
2.71V typ. FOR TS831-3
- GUARANTEED RESET OPERATION FOR  
V<sub>CC</sub> DOWN TO 1V
- OPEN DRAIN OUTPUT COMPARATOR
- FAST RESPONSE TIME : 20µs FOR A 10mV  
OVERDRIVE
- INTERNAL BUILT-IN HYSTERESIS
- PIN TO PIN COMPATIBLE WITH MC33064  
AND MC33164

### DESCRIPTION

The TS831 is an ultra low power integrated circuit incorporating a high stability band-gap voltage reference and a comparator with an open drain output.

The threshold voltage is set at 4.33V for TS831-5, 4.5V for TS831-4 and 2.71V for TS831-3 by internal thermally matched resistors.

The comparator exhibits a 20µs response (with 10mV overdrive) and has an open drain output active when input voltage is lower than the threshold. An internal hysteresis, 100mV for TS831-4 / TS831-5 and 60mV for TS831-3, increases the comparator's noise margin and prevents false reset operation.

### APPLICATION


- Power-on reset generator for microcontroller
- Power failure detector

### ORDER CODE


| Part Number | Temperature Range | Package |   |   |
|-------------|-------------------|---------|---|---|
|             |                   | D       | Z | P |
| TS831-5I    | -40, +125°C       | •       | • | • |
| TS831-4I    |                   | •       | • | • |
| TS831-3I    |                   | •       | • | • |

Z= TO92 Plastic package

D = Small Outline Package (SO) - also available in Tape & Reel (DT)  
P = Thin Shrink Small Outline Package (TSSOP) - only available  
in Tape & Reel (PT)

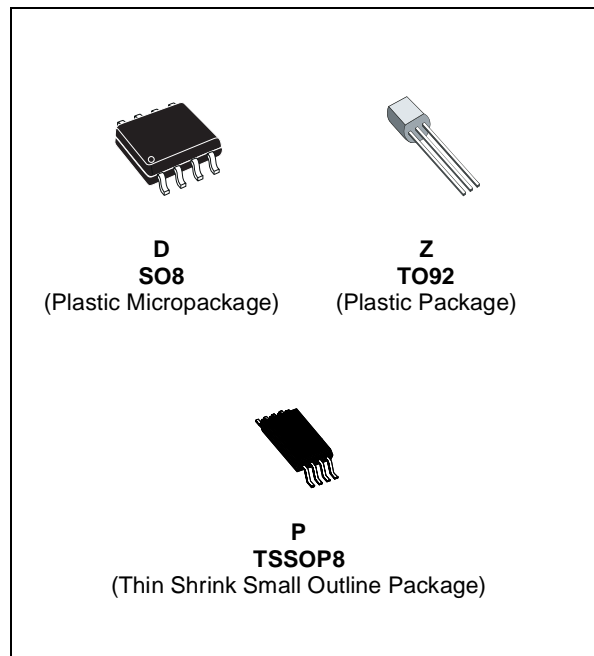

### PIN CONNECTIONS (top view)

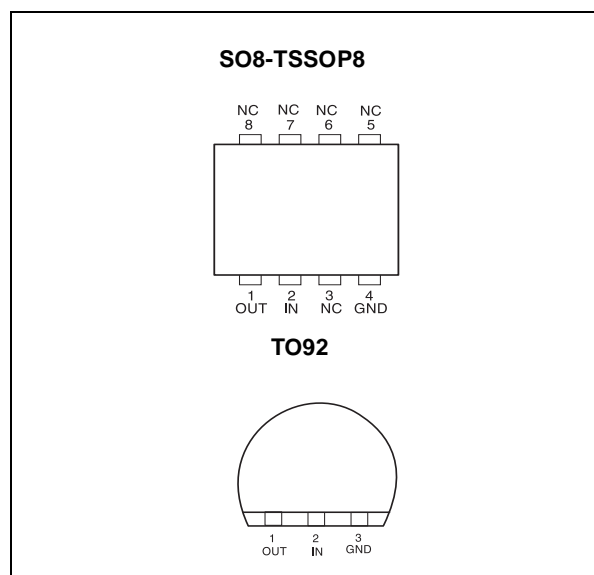

**ABSOLUTE MAXIMUM RATINGS**

| Symbol           | Parameter   | Value                         | Unit |
|------------------|---|-------------------------------|------|
| V <sub>CC</sub>  | Supply Voltage <sup>1)</sup>                              | 7                             | V    |
| V <sub>OUT</sub> | Output Voltage  | -0.3 to V <sub>CC</sub> + 0.3 | V    |
| I <sub>OUT</sub> | Output Sink Current<br>TS831-5 and TS831-4<br>TS831-3     | 20<br>5                       | mA   |
| P <sub>D</sub>   | Power Dissipation <sup>2)</sup><br>TO92<br>SO8<br>TSSOP8  | 625<br>700<br>625             | mW   |
| I <sub>F</sub>   | Clamp Diode Forward Current, pin 1 to pin 2 <sup>3)</sup> | 100                           | mA   |
| T <sub>STG</sub> | Storage Temperature                                       | -65 to +150                   | °C   |

1. All voltages values, except differential voltage are with respect to network ground terminal.

2. T<sub>j</sub> = 150°C, T<sub>amb</sub> = 25°C with R<sub>thja</sub> = 200°C/W for TO-92 package  
R<sub>thja</sub> = 175°C/W for SO8 package  
R<sub>thja</sub> = 200°C/W for TSSOP8 package

3. Maximum package power dissipation limits must be observed.

**OPERATING CONDITIONS**

| Symbol            | Parameter                            | Value       | Unit |
|-------------------|--------------------------------------|-------------|------|
| V <sub>CC</sub>   | Supply Voltage                       | 1 to 5.5    | V    |
| T <sub>OPER</sub> | Operating Free Air Temperature Range | -40 to +125 | °C   |

**TS831-5**

**ELECTRICAL CHARACTERISTICS** T<sub>amb</sub> = 25°C (unless otherwise specified)

| Symbol           | Parameter  | Min.         | Typ. | Max.                | Unit |
|------------------|--|--------------|------|---------------------|------|
| V <sub>THI</sub> | Threshold Voltage with V <sub>CC</sub> Increasing<br>-40°C ≤ T <sub>amb</sub> ≤ +85°C<br>-40°C ≤ T <sub>amb</sub> ≤ +125°C                       | 4.11<br>4.11 | 4.33 | 4.46<br>4.50        | V    |
| V <sub>THD</sub> | Threshold Voltage with V <sub>CC</sub> Decreasing<br>-40°C ≤ T <sub>amb</sub> ≤ +85°C<br>-40°C ≤ T <sub>amb</sub> ≤ +125°C                       | 4.10<br>4.06 | 4.21 | 4.46<br>4.46        | V    |
| V <sub>HYS</sub> | Hysteresis Voltage   | 50           | 100  | 200                 | mV   |
| I <sub>CC</sub>  | Current Consumption<br>V <sub>CC</sub> = 5V  |              |      | 12                  | µA   |
| V <sub>OL</sub>  | Low Level Output Voltage<br>-40°C ≤ T <sub>amb</sub> ≤ +85°C<br>-40°C ≤ T <sub>amb</sub> ≤ +125°C<br>V <sub>CC</sub> = 4V, I <sub>OL</sub> = 8mA |              | 450  | 800<br>1000<br>1300 | mV   |
| I <sub>OH</sub>  | High Level Output Current<br>-40°C ≤ T <sub>amb</sub> ≤ +125°C<br>V <sub>CC</sub> = 5V   |              | 2    | 100<br>1000         | nA   |
| T <sub>PHL</sub> | Response Time High to Low<br>R <sub>L</sub> = 10kΩ, C <sub>L</sub> = 15pF, V <sub>CC</sub> = V <sub>THD</sub> -10mV                              |              | 20   |                     | µs   |

**Note :** Limits are 100% production tested at 25°C. Limits over temperature are guaranteed through correlation and by design.

**TS831-4****ELECTRICAL CHARACTERISTICS** Tamb = 25°C (unless otherwise specified)

| Symbol           | Parameter   | Min.         | Typ. | Max.                | Unit |
|------------------|---|--------------|------|---------------------|------|
| V <sub>THI</sub> | Threshold Voltage with V <sub>CC</sub> Increasing<br>-40°C ≤ Tamb ≤ +85°C<br>-40°C ≤ Tamb ≤ +125°C                    | 4.18<br>4.18 | 4.50 | 4.66<br>4.70        | V    |
| V <sub>THD</sub> | Threshold Voltage with V <sub>CC</sub> Decreasing<br>-40°C ≤ Tamb ≤ +85°C<br>-40°C ≤ Tamb ≤ +125°C                    | 4.17<br>4.13 | 4.40 | 4.66<br>4.66        | V    |
| V <sub>HYS</sub> | Hysteresis Voltage  | 50           | 100  | 200                 | mV   |
| I <sub>CC</sub>  | Current Consumption V <sub>CC</sub> = 5V  |              |      | 12                  | μA   |
| V <sub>OL</sub>  | Low Level Output Voltage V <sub>CC</sub> = 4V, I <sub>OL</sub> = 8mA<br>-40°C ≤ Tamb ≤ +85°C<br>-40°C ≤ Tamb ≤ +125°C |              | 450  | 800<br>1000<br>1300 | mV   |
| I <sub>OH</sub>  | High Level Output Current V <sub>CC</sub> = 5V<br>-40°C ≤ Tamb ≤ +125°C   |              | 2    | 100<br>1000         | nA   |
| T <sub>PHL</sub> | Response Time High to Low<br>R <sub>L</sub> = 10kΩ, C <sub>L</sub> = 15pF, V <sub>CC</sub> = V <sub>THD</sub> -10mV   |              | 20   |                     | μs   |


Note : Limits are 100% production tested at 25°C. Limits over temperature are guaranteed through correlation and by design.

**TS831-3****ELECTRICAL CHARACTERISTICS** Tamb = 25°C (unless otherwise specified)


| Symbol           | Parameter   | Min. | Typ. | Max.        | Unit |
|------------------|---|------|------|-------------|------|
| V <sub>THI</sub> | Threshold Voltage with V <sub>CC</sub> Increasing<br>-40°C ≤ Tamb ≤ +125°C  | 2.55 | 2.71 | 2.8         | V    |
| V <sub>THD</sub> | Threshold Voltage with V <sub>CC</sub> Decreasing<br>-40°C ≤ Tamb ≤ +125°C  | 2.55 | 2.65 | 2.8         | V    |
| V <sub>HYS</sub> | Hysteresis Voltage  | 30   | 60   | 100         | mV   |
| I <sub>CC</sub>  | Current Consumption V <sub>CC</sub> = 3V  |      |      | 12          | μA   |
| V <sub>OL</sub>  | Low Level Output Voltage V <sub>CC</sub> = 2.4V, I <sub>OL</sub> = 1mA<br>-40°C ≤ Tamb ≤ +125°C                     |      | 140  | 400<br>500  | mV   |
| I <sub>OH</sub>  | High Level Output Current V <sub>CC</sub> = 3V<br>-40°C ≤ Tamb ≤ +125°C   |      | 2    | 100<br>1000 | nA   |
| T <sub>PHL</sub> | Response Time High to Low<br>R <sub>L</sub> = 10kΩ, C <sub>L</sub> = 15pF, V <sub>CC</sub> = V <sub>THD</sub> -10mV |      | 20   |             | μs   |

Note : Limits are 100% production tested at 25°C. Limits over temperature are guaranteed through correlation and by design.


EQUIVALENT SCHEMATIC DIAGRAM

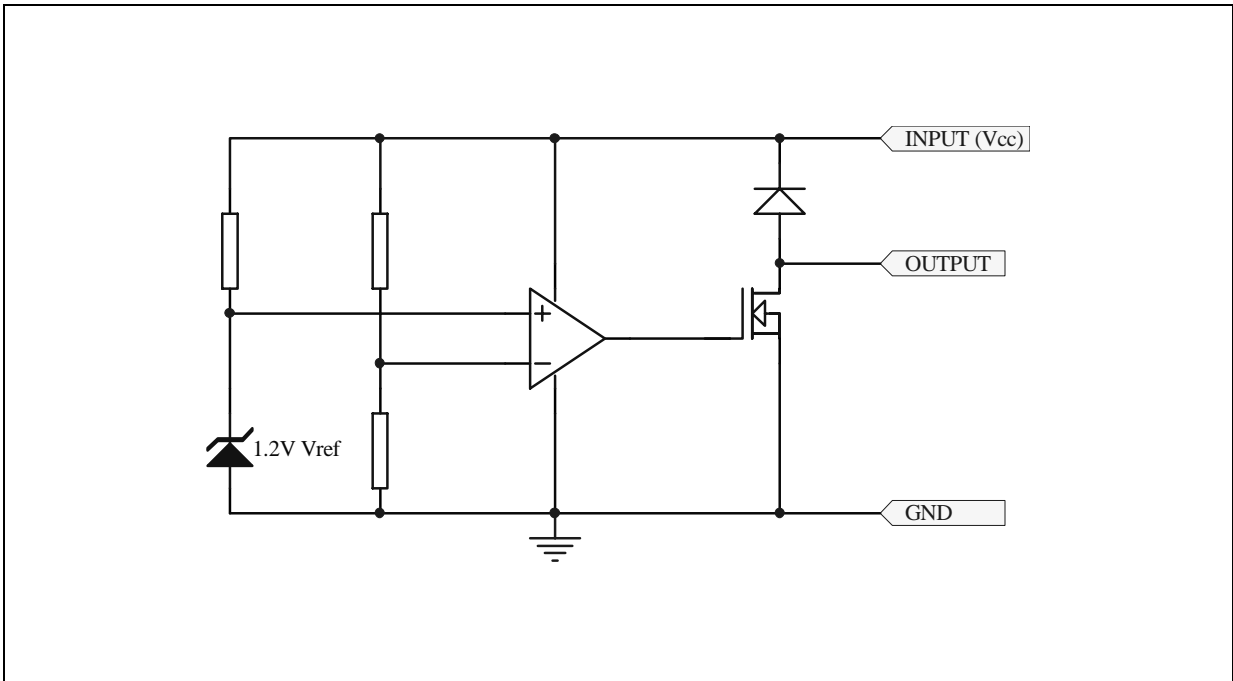


TIMING DIAGRAM

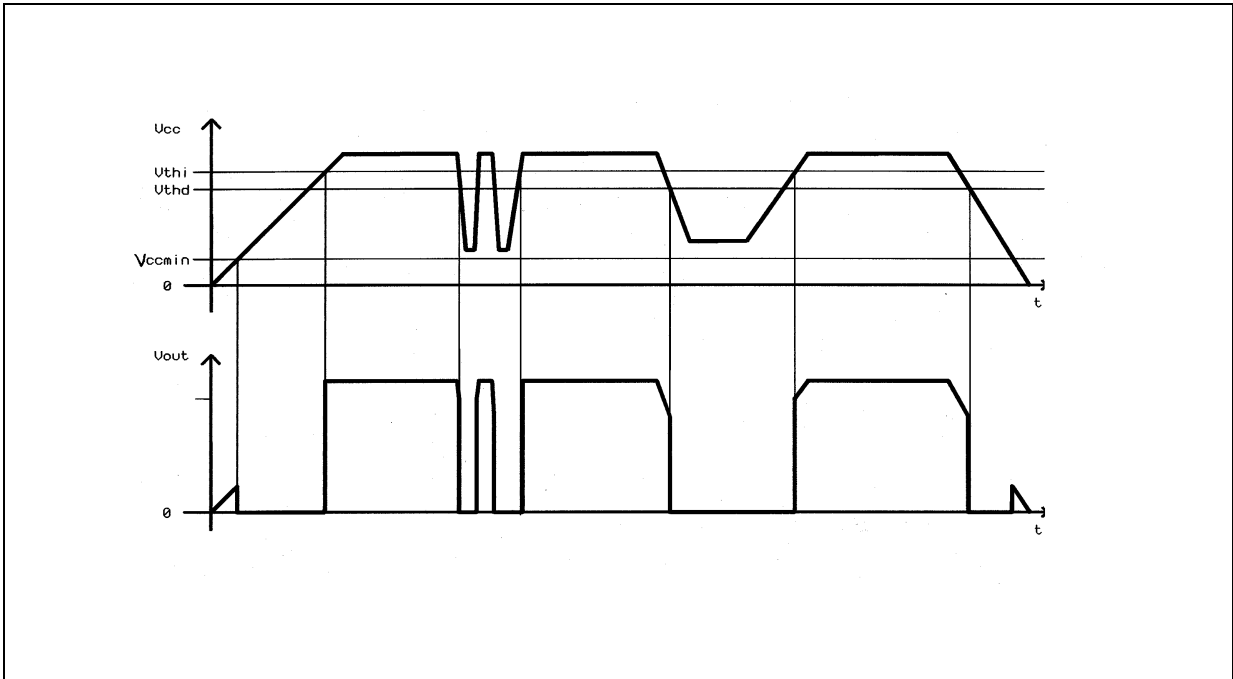


Output voltage versus Vcc

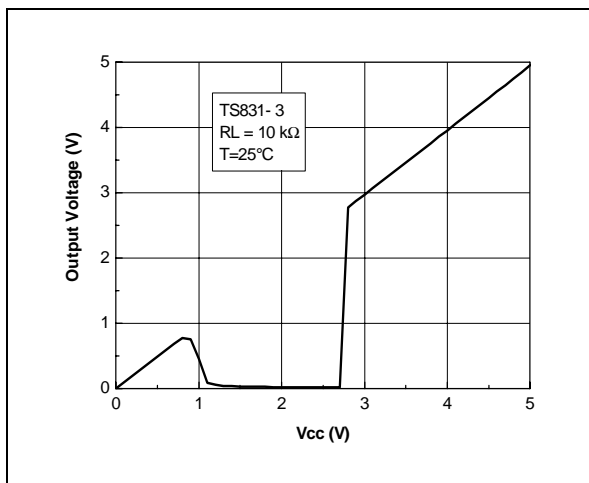


Reset output voltage versus Vcc

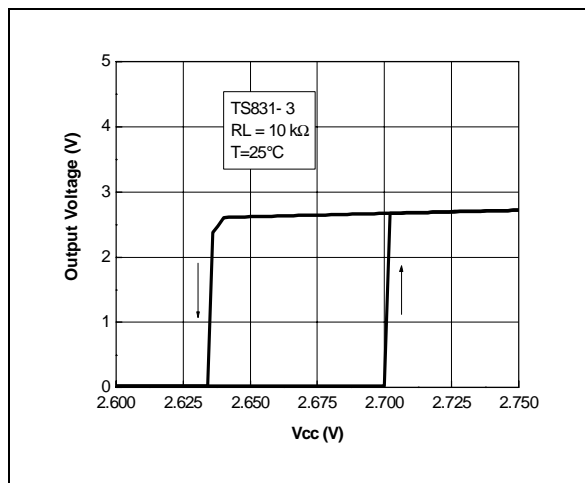


Output voltage versus Vcc

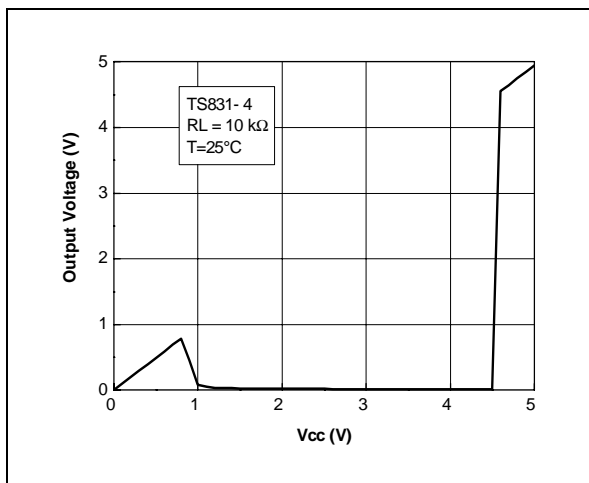


Reset output voltage versus Vcc

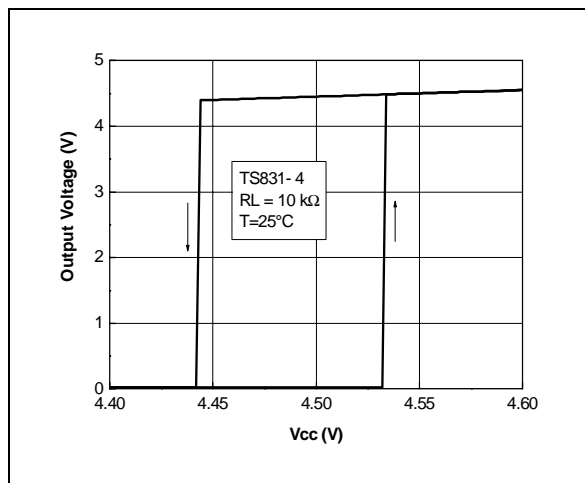


Output voltage versus Vcc

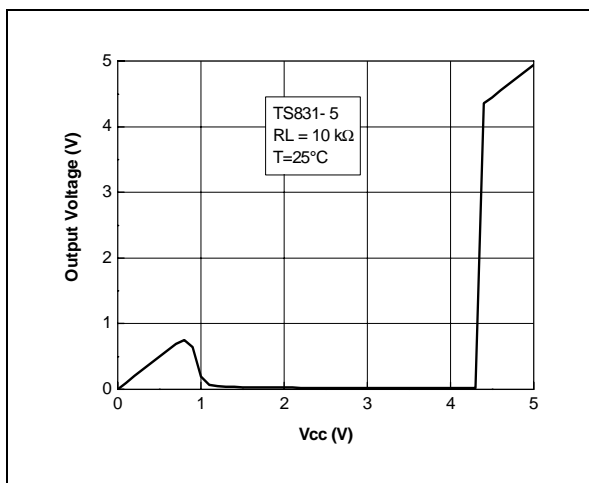


Reset output voltage versus Vcc

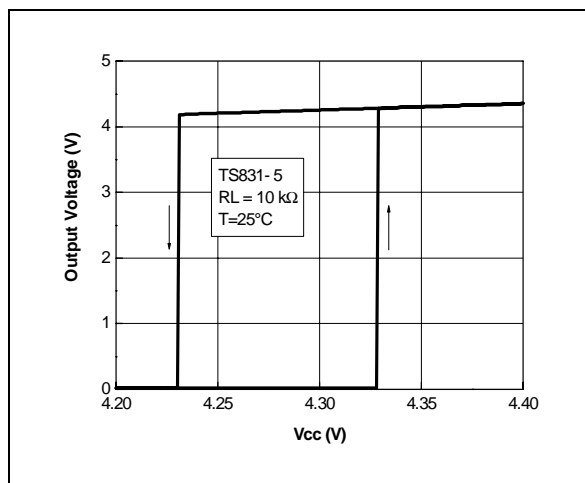


$V_{THI}$  versus temperature

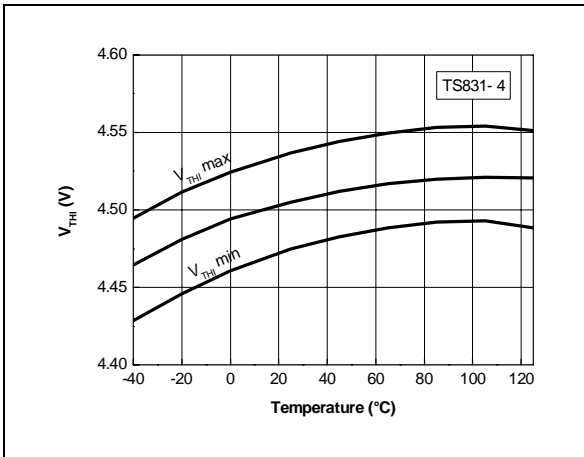


$V_{THD}$  versus temperature

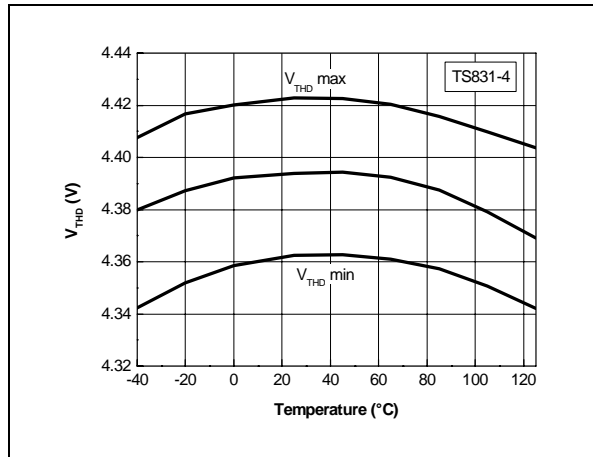


Hysteresis voltage versus temperature

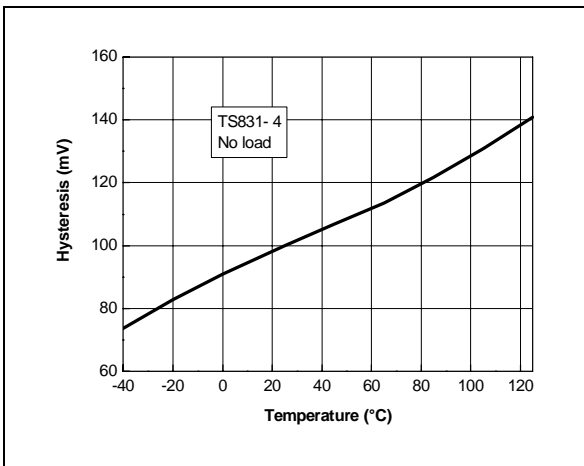


Supply current versus temperature

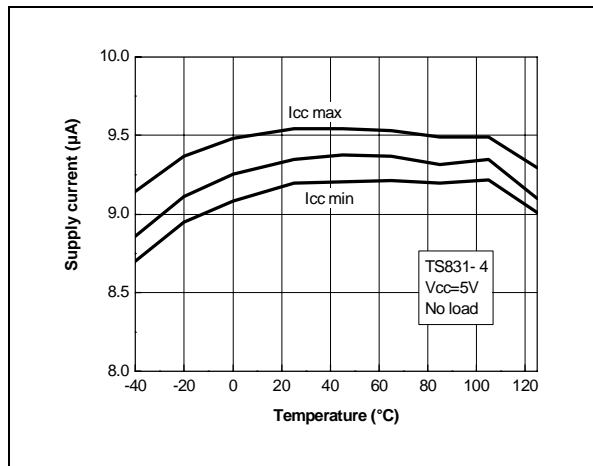


Supply current vs  $V_{CC}$  & temperature

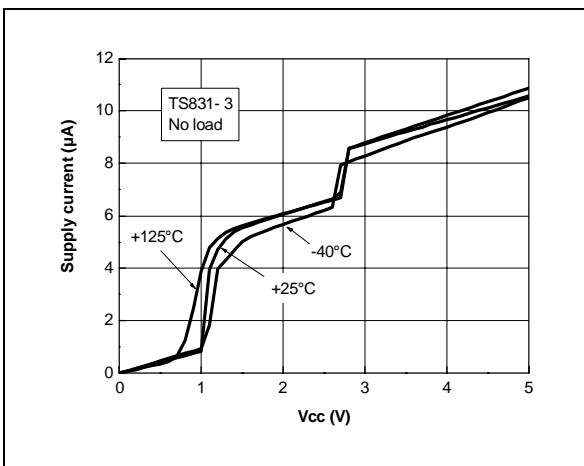


Voltage output low vs  $I_{SINK}$  & temperature

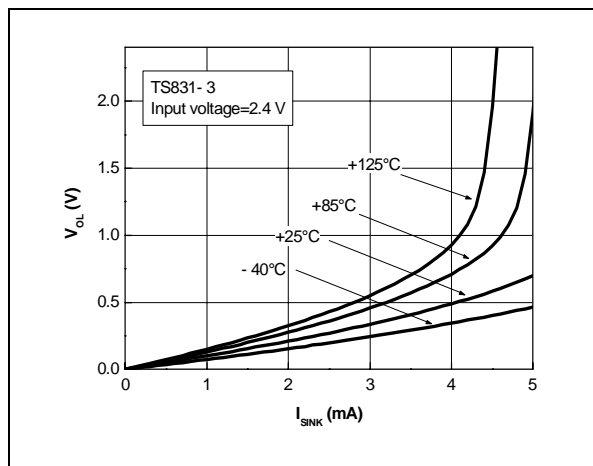


Supply current vs Vcc & temperature

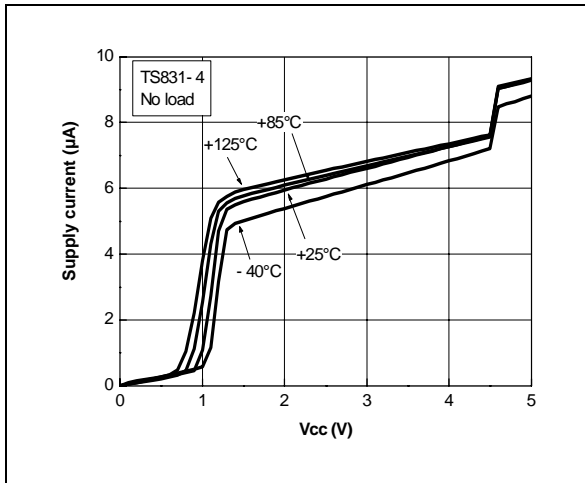


Voltage output low vs Isink & temperature

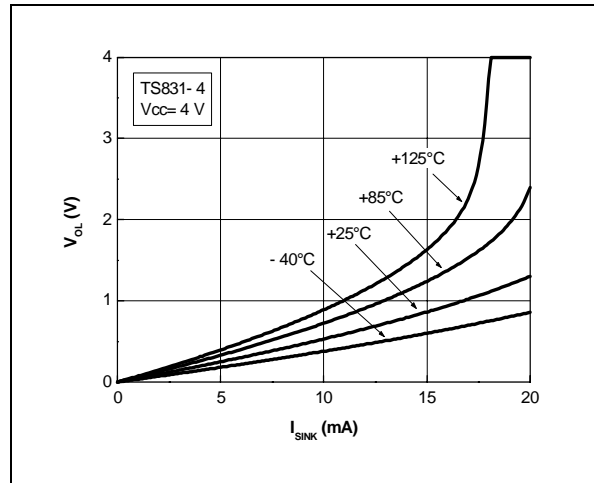


Supply current vs Vcc & temperature

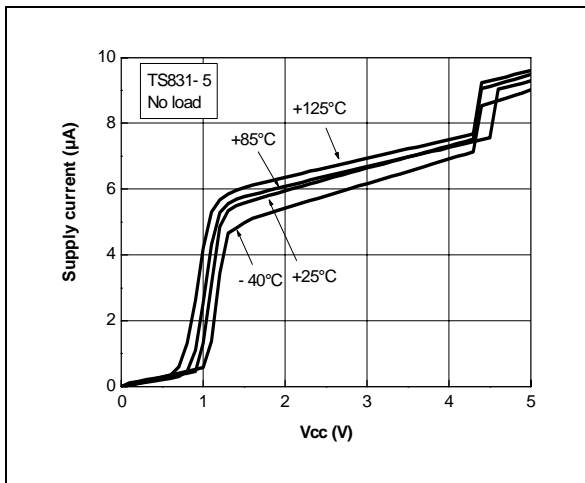


Voltage output low vs Isink & temperature

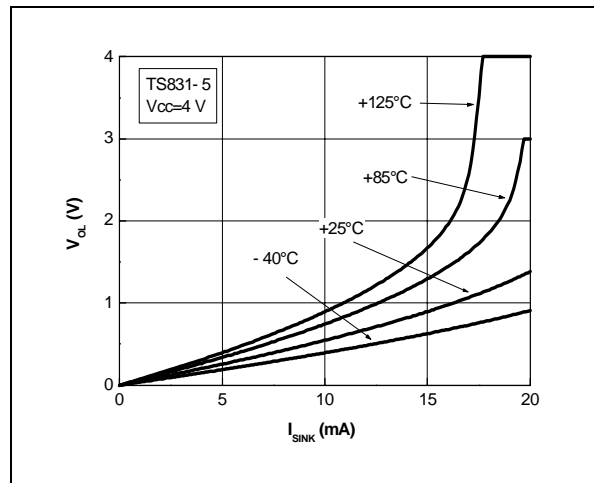


Clamp diode forward current versus voltage

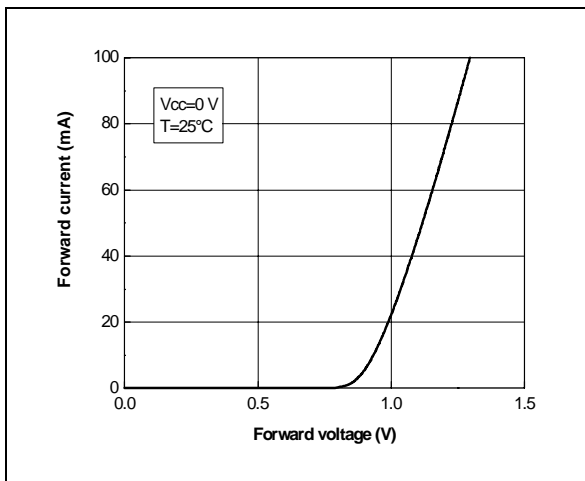

Response time

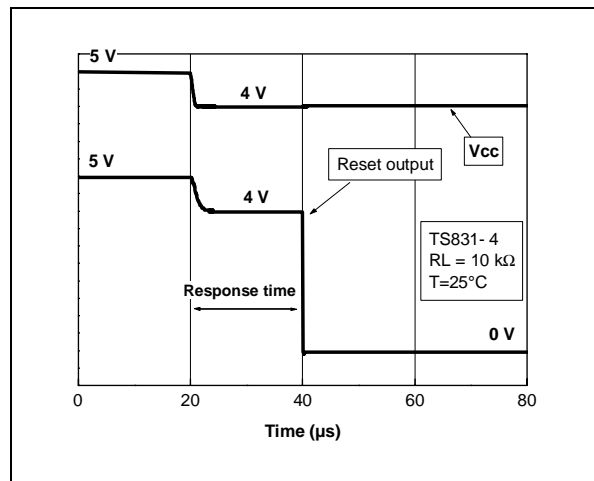


**Basic configuration**

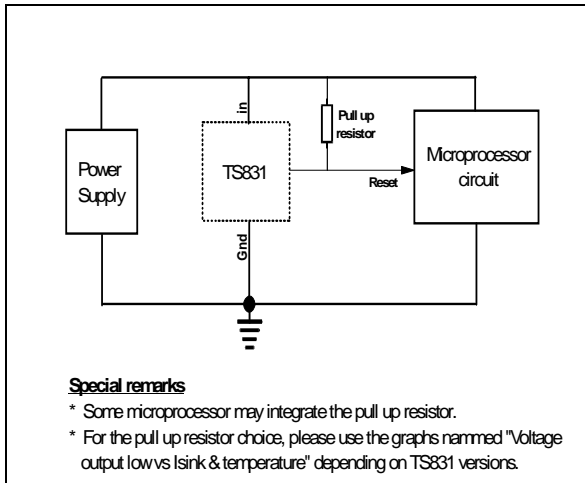




**PACKAGE MECHANICAL DATA**  
**8 PINS - PLASTIC MICROPACKAGE (SO)**

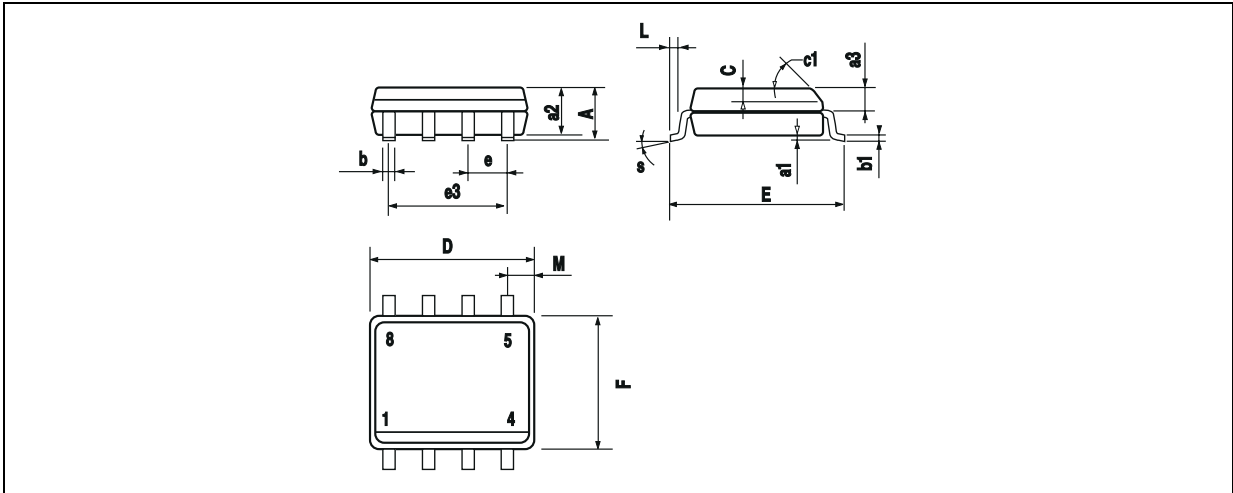


| Dim. | Millimeters |      |      | Inches |       |       |
|------|-------------|------|------|--------|-------|-------|
|      | Min.        | Typ. | Max. | Min.   | Typ.  | Max.  |
| A    |             |      | 1.75 |        |       | 0.069 |
| a1   | 0.1         |      | 0.25 | 0.004  |       | 0.010 |
| a2   |             |      | 1.65 |        |       | 0.065 |
| a3   | 0.65        |      | 0.85 | 0.026  |       | 0.033 |
| b    | 0.35        |      | 0.48 | 0.014  |       | 0.019 |
| b1   | 0.19        |      | 0.25 | 0.007  |       | 0.010 |
| C    | 0.25        |      | 0.5  | 0.010  |       | 0.020 |
| c1   | 45° (typ.)  |      |      |        |       |       |
| D    | 4.8         |      | 5.0  | 0.189  |       | 0.197 |
| E    | 5.8         |      | 6.2  | 0.228  |       | 0.244 |
| e    |             | 1.27 |      |        | 0.050 |       |
| e3   |             | 3.81 |      |        | 0.150 |       |
| F    | 3.8         |      | 4.0  | 0.150  |       | 0.157 |
| L    | 0.4         |      | 1.27 | 0.016  |       | 0.050 |
| M    |             |      | 0.6  |        |       | 0.024 |
| S    | 8° (max.)   |      |      |        |       |       |

**PACKAGE MECHANICAL DATA**  
**3 PINS - PLASTIC PACKAGE TO92**

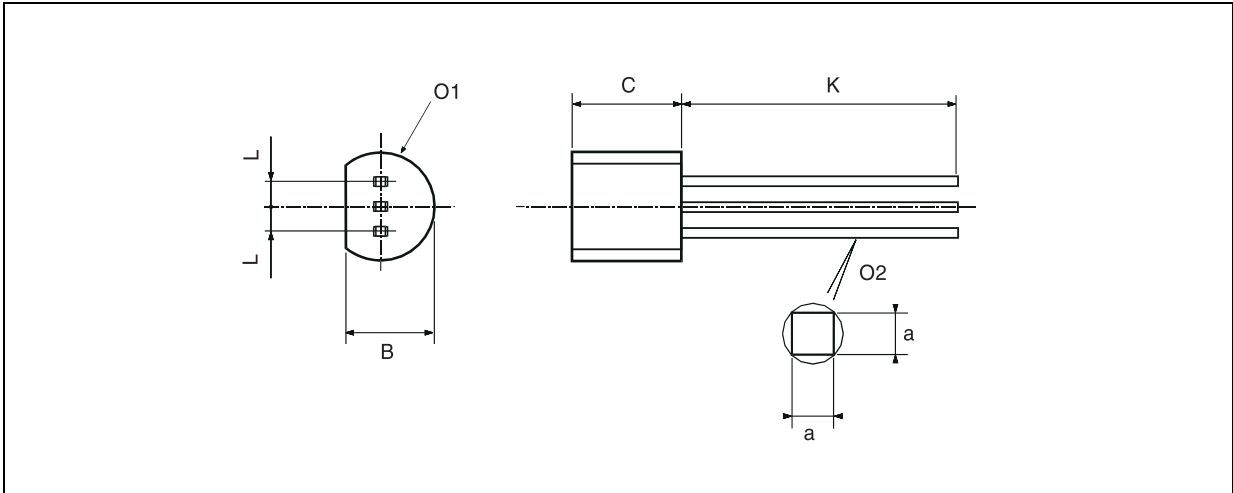

| Dim. | Millimeters |      |       | Inches |        |        |
|------|-------------|------|-------|--------|--------|--------|
|      | Min.        | Typ. | Max.  | Min.   | Typ.   | Max.   |
| L    |             | 1.27 |       |        | 0.05   |        |
| B    | 3.2         | 3.7  | 4.2   | 0.126  | 0.1457 | 0.1654 |
| O1   | 4.45        | 5.00 | 5.2   | 0.1752 | 0.1969 | 0.2047 |
| C    | 4.58        | 5.03 | 5.33  | 0.1803 | 0.198  | 0.2098 |
| K    | 12.7        |      |       | 0.5    |        |        |
| O2   | 0.407       | 0.5  | 0.508 | 0.016  | 0.0197 | 0.02   |
| a    | 0.35        |      |       | 0.0138 |        |        |

**PACKAGE MECHANICAL DATA**  
**8 PINS - THIN SHRINK SMALL OUTLINE PACKAGE**

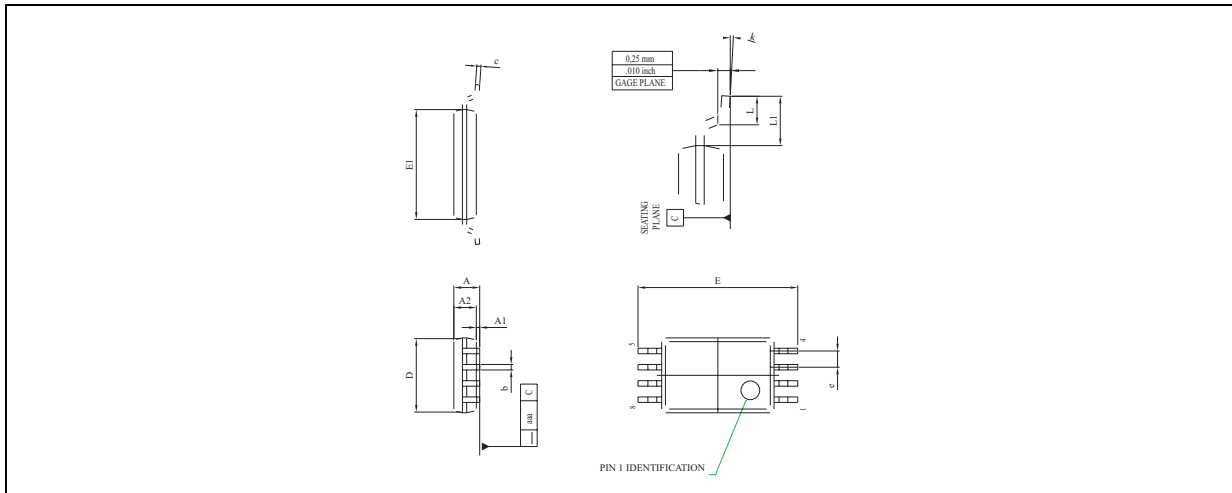

| Dim. | Millimeters |      |      | Inches |        |       |
|------|-------------|------|------|--------|--------|-------|
|      | Min.        | Typ. | Max. | Min.   | Typ.   | Max.  |
| A    |             |      | 1.20 |        |        | 0.05  |
| A1   | 0.05        |      | 0.15 | 0.01   |        | 0.006 |
| A2   | 0.80        | 1.00 | 1.05 | 0.031  | 0.039  | 0.041 |
| b    | 0.19        |      | 0.30 | 0.007  |        | 0.15  |
| c    | 0.09        |      | 0.20 | 0.003  |        | 0.012 |
| D    | 2.90        | 3.00 | 3.10 | 0.114  | 0.118  | 0.122 |
| E    |             | 6.40 |      |        | 0.252  |       |
| E1   | 4.30        | 4.40 | 4.50 | 0.169  | 0.173  | 0.177 |
| e    |             | 0.65 |      |        | 0.025  |       |
| k    | 0°          |      | 8°   | 0°     |        | 8°    |
| l    | 0.50        | 0.60 | 0.75 | 0.09   | 0.0236 | 0.030 |

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a registered trademark of STMicroelectronics

© 2001 STMicroelectronics - Printed in Italy - All Rights Reserved  
**STMicroelectronics GROUP OF COMPANIES**

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia - Malta - Morocco  
 Singapore - Spain - Sweden - Switzerland - United Kingdom

© <http://www.st.com>



Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».



## JONHON

«**JONHON**» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«**FORSTAR**» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А