

THIS DRAWING IS UNPUBLISHED.







RELEASED FOR PUBLICATION

© COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC
DWDIST
—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A2	ECR-12-012115	26OCT12	EL	WK

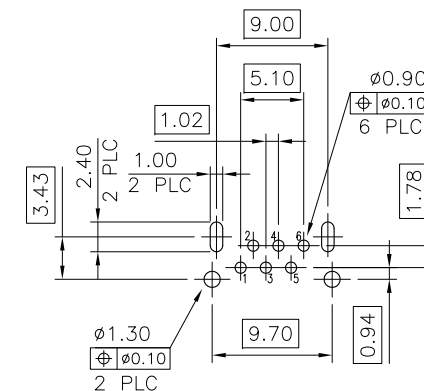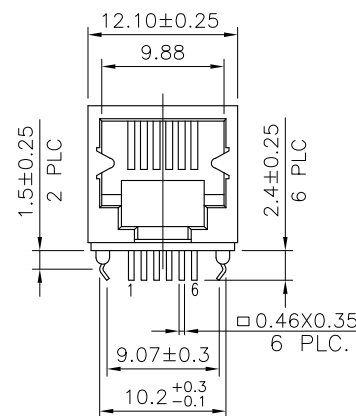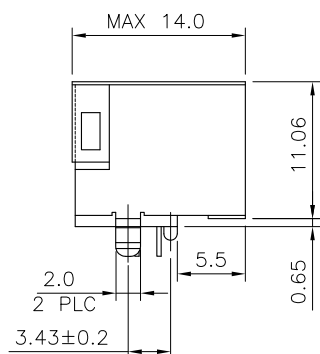

RECOMMENDED PCB LAYOUT (THICKNESS: 1.6mm)
DIMENSION TOLERANCE: 1 PLC: ±0.1 2PLC: ±0.05

NOTE:

- MATERIAL:
HOUSING: PA46 WITH 30% GF, UL94 V-0, BLACK COLOR.
CONTACTS: PHOSPHOR BRONZE.
SHIELD: BRASS.
- FINISH:
CONTACTS: (SEE TABLE) GOLD PLATED ON CONTACT AREA, GOLD FLASH ON SOLDER TAIL, WITH ENTIRE CONTACT UNDERPLATED 1.27μm [50μ"] MIN. NICKEL.
SHIELD: 0.51μm [20μ"] MIN. NICKEL PLATED.
- WAVE SOLDER CAPABLE TO 265°C PER 109-202, CONDITION B.

4. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE	6P2C	REEL	1.27μm [50μ"]	2-1734723-8
			0.762μm [30μ"]	2-1734723-7
			0.381μm [15μ"]	2-1734723-6
			0.152μm [6μ"]	2-1734723-5
OBSOLETE	6P2C	TRAY	1.27μm [50μ"]	2-1734723-4
			0.762μm [30μ"]	2-1734723-3
			0.381μm [15μ"]	2-1734723-2
			0.152μm [6μ"]	2-1734723-1
OBSOLETE	6P6C	REEL	1.27μm [50μ"]	-1734723-8
			0.762μm [30μ"]	-1734723-7
			0.381μm [15μ"]	1734723-6
			0.152μm [6μ"]	-1734723-5
OBSOLETE	6P6C	TRAY	1.27μm [50μ"]	-1734723-4
			0.762μm [30μ"]	-1734723-3
			0.381μm [15μ"]	-1734723-2
			0.152μm [6μ"]	1734723-1
	RJ11	PACKAGE	MIN. GOLD THICKNESS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN A. WU 10MAR2008

CHK S. HOU 10MAR2008

APVD W. KODAMA 10MAR2008

PRODUCT SPEC
108-57527

APPLICATION SPEC

WEIGHT 3 GRAMS

CUSTOMER DRAWING



TE Connectivity

MODULAR JACK, RJ11,
SINGLE, DIP TYPE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	—	©=1734723	—

SCALE — SHEET 1 OF 5 REV A2

THIS DRAWING IS UNPUBLISHED.







RELEASED FOR PUBLICATION

© COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC
DWDIST
—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			

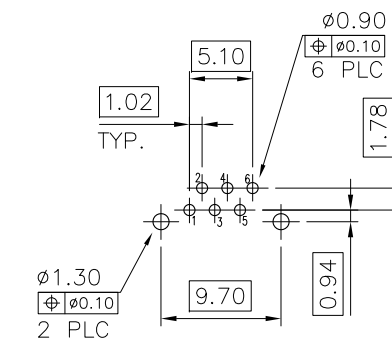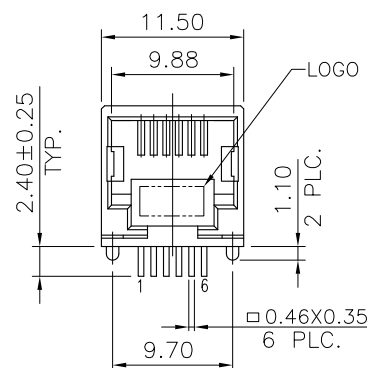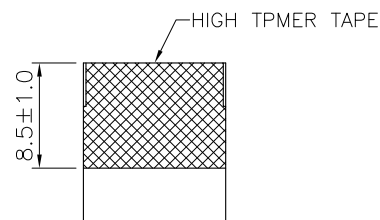


RECOMMENDED PCB LAYOUT (THICKNESS: 1.6mm)
DIMENSION TOLERANCE: 1 PLC: ±0.1 2PLC: ±0.05

NOTE:

- MATERIAL:
HOUSING: PA46 WITH 30% GF, UL94 V-0, BLACK COLOR.
CONTACTS: PHOSPHOR BRONZE.
SHIELD: BRASS.
- FINISH:
CONTACTS: (SEE TABLE) GOLD PLATED ON CONTACT AREA, GOLD FLASH ON SOLDER TAIL, WITH ENTIRE CONTACT UNDERPLATED 1.27µm [50µ"] MIN. NICKEL.
- WAVE SOLDER CAPABLE TO 265°C PER 109-202, CONDITION B.

4. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE	6P6C	REEL	1.27µm [50µ"]	1-1734723-8
			0.762µm [30µ"]	1-1734723-7
			0.381µm [15µ"]	1-1734723-6
			0.152µm [6µ"]	1-1734723-5
OBSOLETE	6P6C	TRAY	1.27µm [50µ"]	1-1734723-4
			0.762µm [30µ"]	1-1734723-3
			0.381µm [15µ"]	1-1734723-2
			0.152µm [6µ"]	1-1734723-1
	RJ11	PACKAGE	MIN. GOLD THICKNESS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A. WU 10MAR2008	 TE Connectivity	
DIMENSIONS: MM		CHK S. HOU 10MAR2008		
		APVD W. KODAMA 10MAR2008		
		PRODUCT SPEC 108-57527		
MATERIAL SEE NOTE		APPLICATION SPEC —	NAME MODULAR JACK, RJ11, SINGLE, DIP TYPE	
FINISH SEE NOTE		WEIGHT 2.5 GRAMS	SIZE A3	CAGE CODE —
		CUSTOMER DRAWING	DRAWING NO C=1734723	RESTRICTED TO —
		SCALE —	SHEET 2 OF 5	REV A2

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION



COPYRIGHT

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

DW

—

P

LTR




DESCRIPTION

DATE




DWN

APVD

SEE SHEET 1.

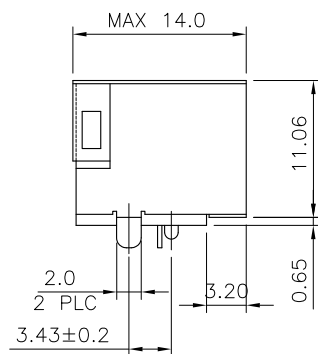

LOGO

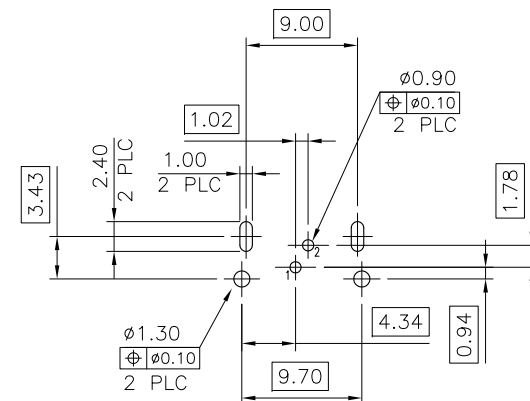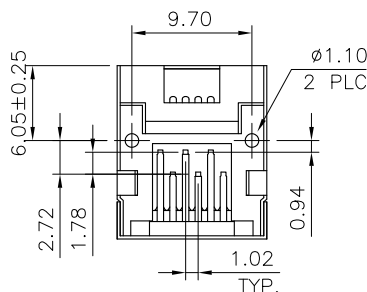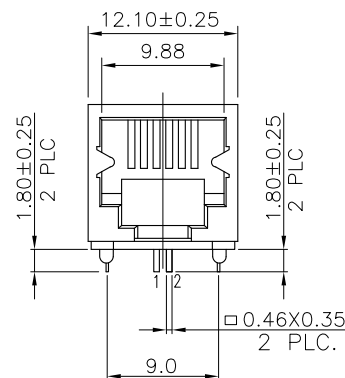

RECOMMENDED PCB LAYOUT (THICKNESS: 1.6mm)

DIMENSION TOLERANCE: 1 PLC: ±0.1 2PLC: ±0.05

NOTE:

- MATERIAL:
HOUSING: PA46 WITH 30% GF, UL94 V-0, BLACK COLOR.
CONTACTS: PHOSPHOR BRONZE.
SHIELD: BRASS.
- FINISH:
CONTACTS: (SEE TABLE) GOLD PLATED ON CONTACT AREA, GOLD FLASH ON SOLDER TAIL, WITH ENTIRE CONTACT UNDERPLATED 1.27μm [50μ"] MIN. NICKEL.
SHIELD: 0.51μm [20μ"] MIN. NICKEL PLATED.
- WAVE SOLDER CAPABLE TO 265°C PER TE TEST SPEC. 109-202, CONDITION B.

OBSOLETE	6P2C	REEL	1.27μm [50μ"]	4-1734723-8
			0.762μm [30μ"]	4-1734723-7
			0.381μm [15μ"]	4-1734723-6
			0.152μm [6μ"]	4-1734723-5
OBSOLETE		TRAY	1.27μm [50μ"]	4-1734723-4
			0.762μm [30μ"]	4-1734723-3
			0.381μm [15μ"]	4-1734723-2
			0.152μm [6μ"]	4-1734723-1
	RJ11	PACKAGE	MIN. GOLD THICKNESS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN A. WU 10MAR2008

CHK S. HOU 10MAR2008

APVD W. KODAMA 10MAR2008

PRODUCT SPEC 108-57527

APPLICATION SPEC

WEIGHT 3 GRAMS

CUSTOMER DRAWING



TE Connectivity

NAME

MODULAR JACK, RJ11,
SINGLE, DIP TYPE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

-

C=1734723

-

SCALE

-

SHEET

3 OF 5

REV

A2

DIMENSIONS:

MM



MATERIAL

SEE NOTE

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± 0.50
1 PLC	± 0.30
2 PLC	± 0.20
3 PLC	± 0.10
4 PLC	± 0.10
ANGLES	± - ± -

FINISH

SEE NOTE







4

3

2


1

LOC	DIST	REVISIONS					
DW	—	P	LTR	DESCRIPTION	DATE	DWN	APVD
				SEE SHEET 1.			

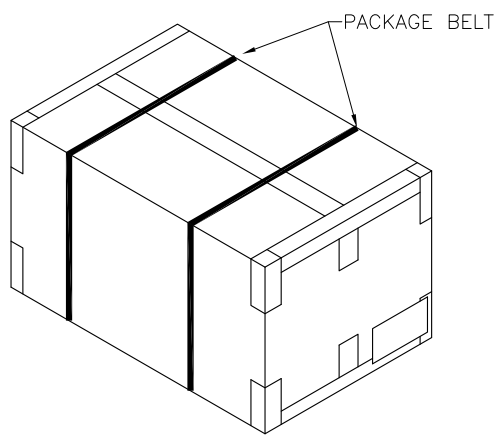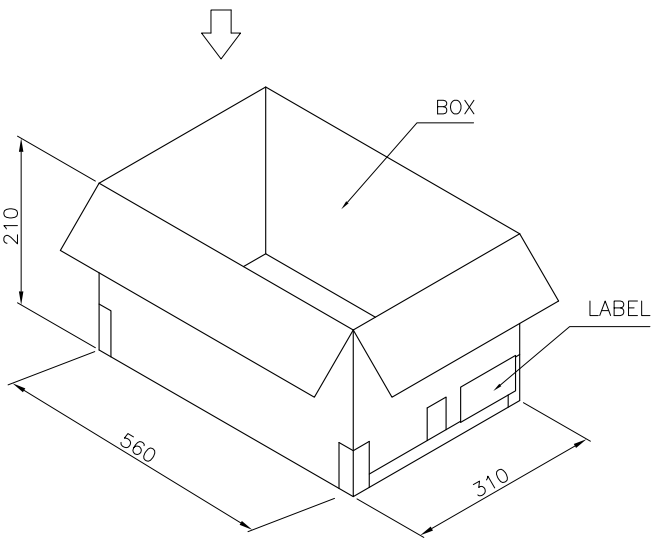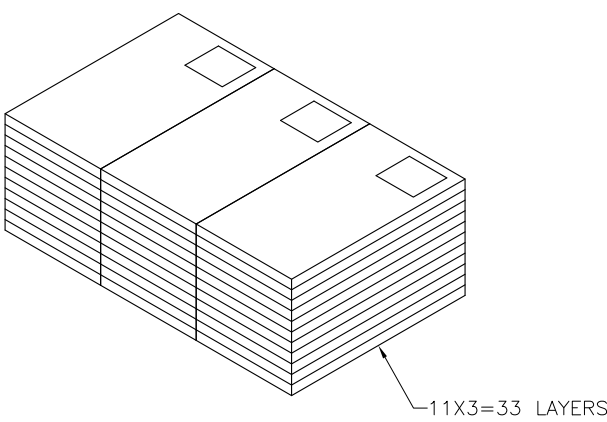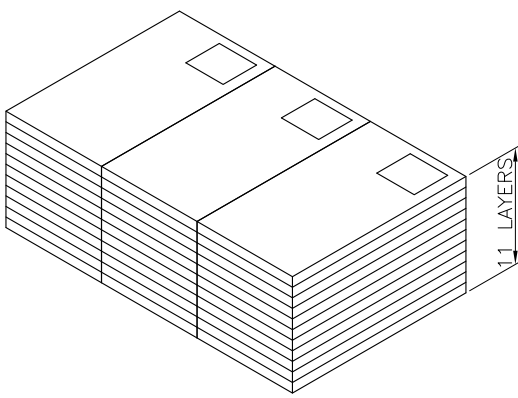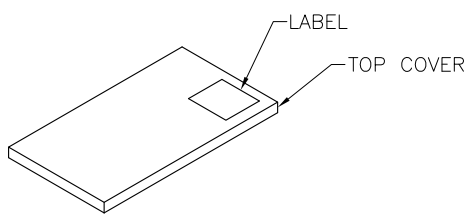

13.2 Kg	3960	120	1734723-1
GROSS WEIGHT	TOTAL	PCS/TRAY	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A. WU 10MAR2008	TE Connectivity	
DIMENSIONS: MM		CHK S. HOU 10MAR2008		
		APVD W. KODAMA 10MAR2008		
		PRODUCT SPEC		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	NAME MODULAR JACK, RJ11, SINGLE, DIP TYPE	
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		WEIGHT		
MATERIAL		FINISH	SIZE A3	CAGE CODE -
			DRAWING NO C=1734723	RESTRICTED TO -
CUSTOMER DRAWING			SCALE -	SHEET 4 of 5
			REV A2	

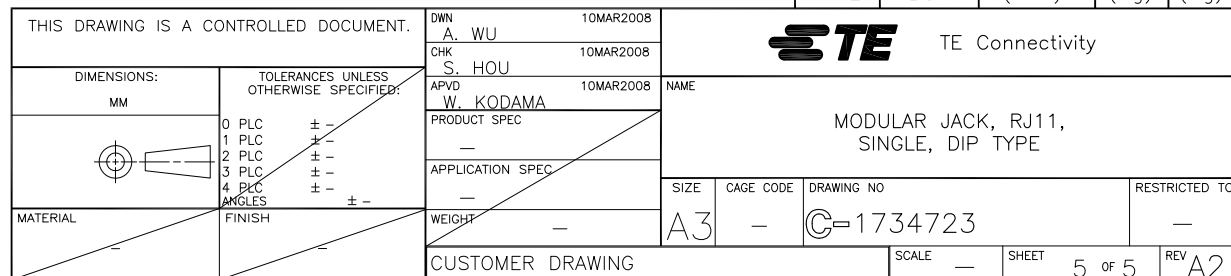

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А