

Description

Single pole compact high performance thermal circuit breaker with tease-free, trip-free, snap action mechanism and push/pull on/off manual actuation (M-type TO CBE to EN 60934). An indicator band on the push button clearly shows the tripped/off position. Threadneck panel mounted in tracked vehicle and aircraft/general purpose versions, with optional auxiliary contacts.

Typical applications

Extra low voltage wiring systems on all types of vehicles for land, sea and air, battery powered machines, process control.

Ordering information

Type No.	482	single pole thermal circuit breaker
Mounting	G	threadneck panel mounting
Threadneck design	1	M 12x1 nickel plated
	2	M 12x1 black
Hardware - washer for threadneck	0	without hardware
	1	corrugated washer 12/15, fitted
Hardware - hex nut for threadneck	0	without hardware
	1	hex nut M12x1 nickel plated
	2	hex nut M12x1 black
Terminal design (main terminals)	K1	screw terminals with metric thread M4
Characteristic curve	M1	thermal 1.15-1.4 I _N
Terminal screws	A	flat head screw M4x6, ISO 1580, fitted
	F	Phillips screw M4x6 (ISO 7045), bulk shipped
	Z	without
Terminal washers	0	without lock washer
	1	lock washer DIN 137-B4, fitted
	6	lock washer DIN 137-B4, bulk shipped
Auxiliary contact	S0	without auxiliary contacts
	S1	with auxiliary contact (NC)
Current ratings	0.1...50 A	
482 - G 1 1 1 - K1 M1 - A 1 S1 - 10 A ordering example		


Please be informed that we have minimum ordering quantities to be observed.

Preferred types

Preferred types	Standard current ratings (A)													
	1	3	5	6	8	10	15	20	25	30	35	40	50	
482-G111-K1M1-A1S0-	x	x	x	x	x	x	x	x	x	x	x	x	x	
482-G212-K1M1-A1S0-	x		x			x	x	x	x	x	x	x	x	

Approvals

Authority	Standard	Rated voltage	Current ratings
UL	UL 1077	DC 72 V	0.1 A...50 A
CSA	C22.2 No 235	DC 72 V	0.1 A...50 A
Bw	VG 95345, part 21	DC 28 V	0.5 A...50 A

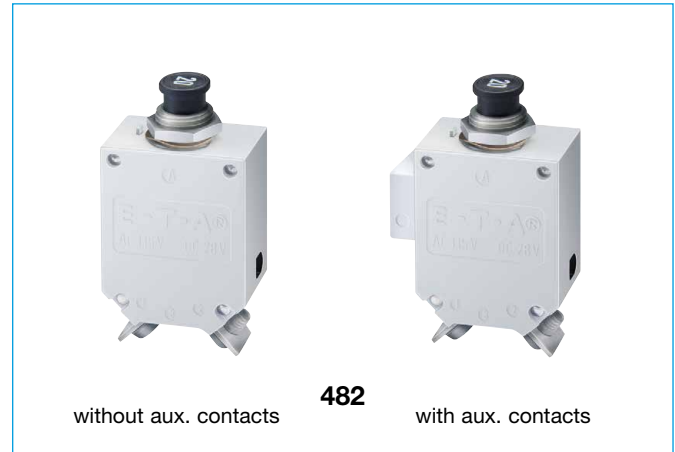

Technical data

For further details please see: www.e-t-a.de/ti_e

Voltage rating	AC 115 V (400 Hz); DC 28 V AC 230 (50/60 Hz) to special order		
Current rating range	0.1...50 A		
Auxiliary circuit	0.5 A, DC 28 V		
Typical life	10,000 operations mechanical 5,000 operations at I _N		
Ambient temperature	-55...+75 °C (-67...+167 °F)		
Insulation co-ordination (IEC 60664 and 60664A)	rated impulse withstand voltage 1.5 kV	pollution degree 3	
Dielectric strength (IEC 60664 and 60664A)	test voltage AC 1,500 V AC 1,500 V		
operating area main to aux. circuit			
Insulation resistance	> 100 MΩ (DC 500 V)		
Interrupting capacity I _{cn}	0.1...2.5 A 3...3.5 A 4...7 A 7.5...50 A 35...50 A	15 x I _N 250 A DC / 150 A AC 500 A 6,000 A DC / 1,000 A AC with auxiliary contact: 3,000 A DC / 1,000 A AC	
Interrupting capacity (UL 1077)	I _N 0.1...50 A	U _N DC 72 V	5,000 A
Degree of protection (IEC 60529/DIN 40050)	operating area IP40 terminal area IP00		
Vibration	10 g (55-2000 Hz), ± 0.76 mm (10-55 Hz) to VG 95210, sheet 19/IEC 60068-2-6, test Fc		
Shock	50 g (11 ms) to VG 95210, sheet 28/IEC 60068-2-27, test Ea		
Corrosion	48 hours at 5 % salt mist to VG 95210, sheet 2/IEC 60068-2-11, test Ka		
Humidity	240 hours at 95 % RH to VG 95210, sheet 7/IEC 60068-2-3, test C		
Explosion	to VG 95210, sheet 10/MIL-STD-202, meth. 109		
Mass	approx. 43 g without auxiliary contact approx. 46 g with auxiliary contact		

Previous ordering codes:

482-N-MS = 482-G111-K1M1-A1S0-...A

482-MS = 482-G212-K1M1-A1S0-...A

Current rating (A)	Volt drop (mV)	Current rating (A)	Volt drop (mV)
0.1	16,000	5	350
0.2	8,000	7.5	230
0.5	3,000	10	< 200
0.8	2,000	15	< 200
1	1,500	20	< 200
1.2	1,200	25	< 200
1.5	1,000	30	< 200
1.8	850	35	< 200
2	800	40	< 200
2.5	700	45	< 200
3	600	50	< 200
4	430		

482-G111-K1M1-A1S0 (VG 95345 T21)

tightening torque max. 4 Nm

OFF 12.2 .480 6 ON .236 1.5 .059 max. 50 max. 1.97 max. 2.5 max. .098 17.9 .709 45° 6.35 .250 43.4 1.71 max. 48 max. 1.89

M12x1

screw ISO1580-M4x6 with lock washer DIN 137 B4 tightening torque max. 1.2 Nm

location pin current rating in A 2.7 .106 18 .709 9.5 .374 0.8 .031 31 max. 1.22 thickness 1.5 - 3 mm .059 - .118 in.

mounting holes ø10.6 .417 ø8.4 .331 min. 3 min. .118 black white lock washer min. 12.5^{+0.2} .492^{+0.08} ø12.5^{+0.2} 9.5^{+0.2} .374^{±0.08} min. ø3.2 min. .126

482-G111-K1M1-A1S1 (VG 95345 T21)

tightening torque max. 4 Nm

OFF 12.2 .480 6 ON .236 1.5 .059 max. 50 max. 1.97 max. 2.5 max. .098 17.9 .709 45° 6.35 .250 43.4 1.71 max. 48 max. 1.89

M12x1

screw ISO1580-M4x6 with lock washer DIN 137 B4 tightening torque max. 1.2 Nm

location pin current rating in A 2.7 .106 18 .709 9.5 .374 0.8 .031 31 max. 1.22 thickness 1.5 - 3 mm .059 - .118 in.

mounting holes ø10.6 .417 ø8.4 .331 min. 3 min. .118 black white lock washer min. 12.5^{+0.2} .492^{+0.08} ø12.5^{+0.2} 9.5^{+0.2} .374^{±0.08} min. ø3.2 min. .126


The technical drawings show the following dimensions and specifications:

- Top View:**
 - Overall width: 12.2 in. (max. 1.97 in. for the main body, 1.5 in. for the mounting holes).
 - Overall height: 6.35 in. (max. 1.89 in. for the main body, 1.71 in. for the mounting holes).
 - Mounting holes: 4 holes, 1.71 in. apart.
 - Location pin: 1.5 in. diameter, 1.71 in. height.
 - Mounting holes: 1.71 in. diameter, 1.71 in. height.
 - Mounting holes: 1.71 in. diameter, 1.71 in. height.
 - Mounting holes: 1.71 in. diameter, 1.71 in. height.
- Side View:**
 - Overall height: 12.2 in. (max. 1.97 in. for the main body, 1.5 in. for the mounting holes).
 - Mounting holes: 1.5 in. diameter, 1.71 in. height.
 - Mounting holes: 1.71 in. diameter, 1.71 in. height.
 - Mounting holes: 1.71 in. diameter, 1.71 in. height.
 - Mounting holes: 1.71 in. diameter, 1.71 in. height.
- Bottom View:**
 - Overall width: 12.2 in. (max. 1.97 in. for the main body, 1.5 in. for the mounting holes).
 - Overall height: 6.35 in. (max. 1.89 in. for the main body, 1.71 in. for the mounting holes).
 - Mounting holes: 4 holes, 1.71 in. apart.
 - Location pin: 1.5 in. diameter, 1.71 in. height.
 - Mounting holes: 1.71 in. diameter, 1.71 in. height.
 - Mounting holes: 1.71 in. diameter, 1.71 in. height.
 - Mounting holes: 1.71 in. diameter, 1.71 in. height.


This is a metric design and millimeter dimensions take precedence ($\frac{\text{mm}}{\text{inch}}$)

Typical time/current characteristics

0.1...2.5 A

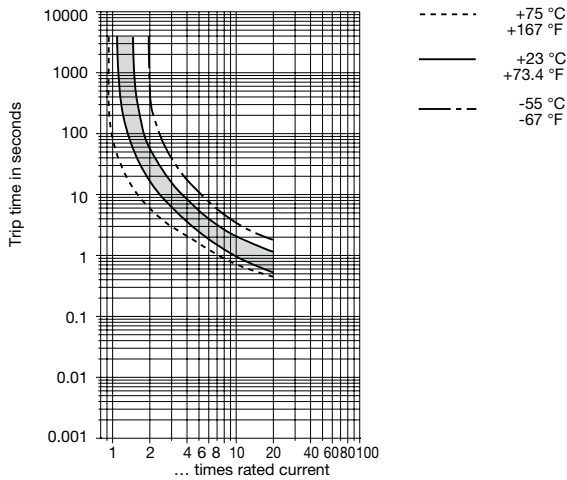

3...50 A

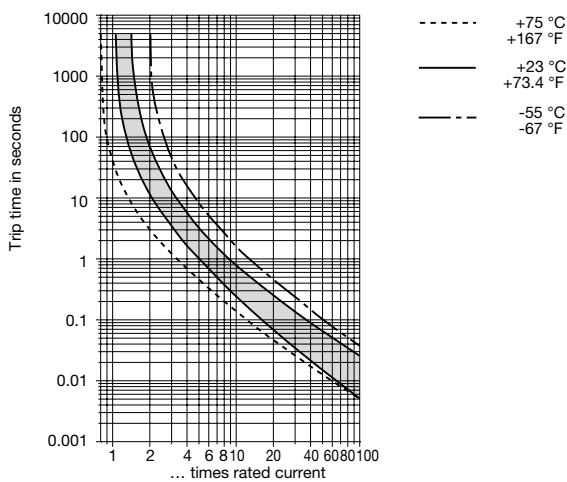


Accessories (approved to VG 95345, part 23)

Splash cover /hex nut assembly with O ring (IP66 and IP67)

X 200 801 08 nickel plated nut M12x1, transparent cover

X 200 801 03 matt black finish nut M12x1, black cover


X 200 801 12 with blackened nut and transparent cover



Splash cover black /hex nut assembly with O ring (IP54)

X 200 802 01 nickel plated nut M12x1


X 200 802 02 matt black finish nut M12x1



Actuator extension (black)

to be fitted on the push button

X 200 803 01



Accessories

Identification collar to be snapped on the push button


Y 307 004 01 black

Y 307 004 02 white

Y 307 004 03 red

Y 307 004 04 green


Y 307 004 05 blue

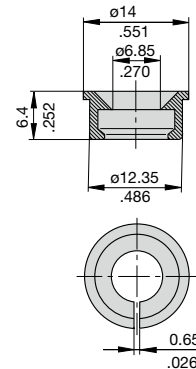

Lock out ring to block the push button in OFF position

Y 307 005 01 red

Y 307 005 02 black



This is a metric design and millimeter dimensions take precedence ($\frac{\text{mm}}{\text{inch}}$)

All dimensions without tolerances are for reference only. In the interest of improved design, performance and cost effectiveness the right to make changes in these specifications without notice is reserved. Product markings may not be exactly as the ordering codes. Errors and omissions excepted.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А