



## 500 mW GLASS AXIAL-LEAD ZENER DIODES

Screening in  
reference to  
MIL-PRF-19500  
available


### DESCRIPTION

The popular 1N5221B-1 thru 1N5281B-1 series of 0.5 watt Zener voltage regulators provides a selection from 2.4 to 200 volts in standard 5% or 10% tolerances as well as tighter tolerances identified by different suffix letters on the part number. These glass, axial-leaded DO-35 Zeners are also available in various up-screening levels by adding a prefix identifier as described in the "Part Nomenclature" section of this datasheet. Microsemi also offers numerous other Zener products to meet higher and lower power applications.

**Important:** For the latest information, visit our website <http://www.microsemi.com>.

### FEATURES

- JEDEC registered 1N5221 thru 1N5281 series.
- Voltage tolerances of 10%, 5%, 2%, and 1% available.
- Internal metallurgical bond.
- Up-screening in reference to MIL-PRF-19500 is available. (See [part nomenclature](#) for all available options.)
- RoHS compliant versions available (commercial grade only).



**DO-35 (DO-204AH)  
Package**

Also available in:

 **DO-213AA MELF**  
(surface mount)  
[1N5221BUR-1 thru](#)  
[1N5281BUR-1](#)

### APPLICATIONS / BENEFITS

- Regulates voltage over a broad operating current and temperature range.
- Extensive selection from 2.4 to 200 V.
- Flexible axial-lead mounting terminals.
- Non-sensitive to ESD (MIL-STD-750 method 1020).
- Minimal capacitance (see [Figure 2](#)).
- Inherently radiation hard per Microsemi "[MicroNote 050](#)".

### MAXIMUM RATINGS

| Parameters/Test Conditions                            | Symbol              | Value       | Unit                 |
|-------------------------------------------------------|---------------------|-------------|----------------------|
| Junction and Storage Temperature                      | $T_J$ and $T_{STG}$ | -65 to +175 | $^{\circ}\text{C}$   |
| Thermal Resistance Junction-to-Lead <sup>(1)</sup>    | $R_{\theta JL}$     | 250         | $^{\circ}\text{C/W}$ |
| Thermal Resistance Junction-to-Ambient <sup>(2)</sup> | $R_{\theta JA}$     | 310         | $^{\circ}\text{C/W}$ |
| Steady-State Power Dissipation <sup>(3)</sup>         | $P_D$               | 0.5         | W                    |
| Forward Voltage @ 200 mA                              | $V_F$               | 1.5         | V                    |
| Solder Temperature @ 10 s                             | $T_{SP}$            | 260         | $^{\circ}\text{C}$   |

- Notes:**
1. At 3/8 (10 mm) lead length from body.
  2. When mounted on FR4 PC board (1 oz Cu) with 4 mm<sup>2</sup> copper pads and track width 1 mm, length 25 mm.
  3. At  $T_L \leq 50^{\circ}\text{C}$  3/8 inch (10 mm) from body or 0.48 W at  $T_A \leq 25^{\circ}\text{C}$  when mounted on FR4 PC board as described for thermal resistance above (also see [Figure 1](#)).


**MSC – Lawrence**  
6 Lake Street,  
Lawrence, MA 01841  
Tel: 1-800-446-1158 or  
(978) 620-2600  
Fax: (978) 689-0803

**MSC – Ireland**  
Gort Road Business Park,  
Ennis, Co. Clare, Ireland  
Tel: +353 (0) 65 6840044  
Fax: +353 (0) 65 6822298

**Website:**  
[www.microsemi.com](http://www.microsemi.com)

**MECHANICAL and PACKAGING**

- CASE: Hermetically sealed axial-lead glass DO-35 (DO-204AH) package.
- TERMINALS: Tin-lead or RoHS compliant annealed matte-tin plating (commercial grade only) solderable per MIL-STD-750, method 2026.
- MARKING: Part number.
- POLARITY: Cathode indicated by band. Diode to be operated with the banded end positive with respect to the opposite end for Zener regulation.
- TAPE & REEL option: Standard per EIA-296 (add "TR" suffix to part number). Consult factory for quantities.
- WEIGHT: 0.2 grams.
- See [Package Dimensions](#) on last page.

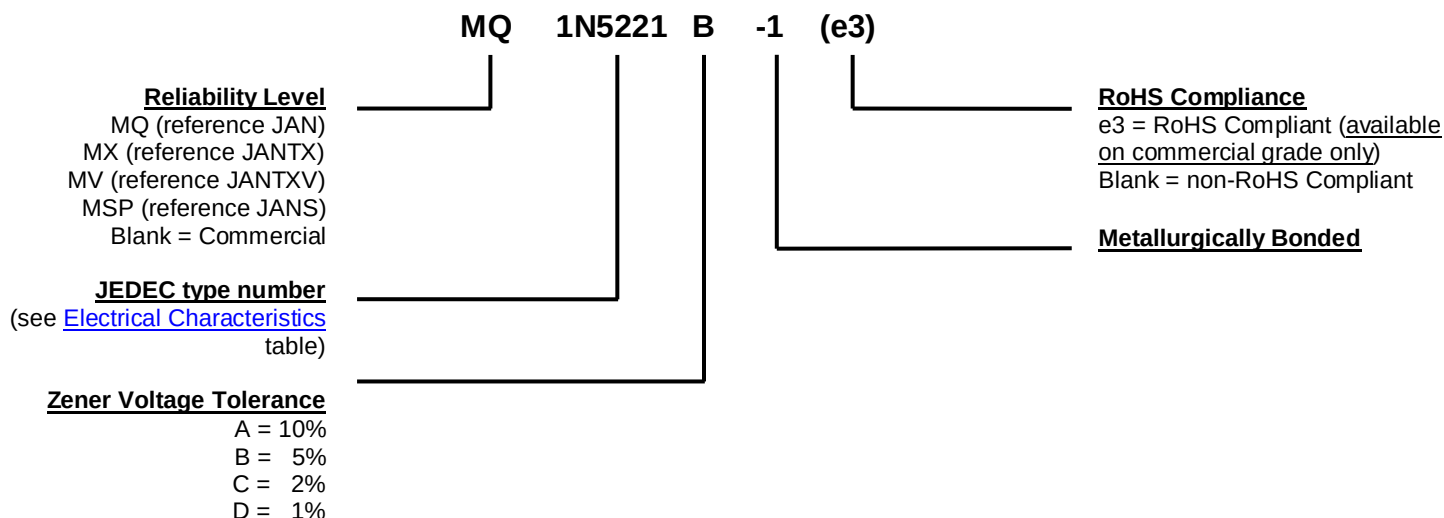**PART NOMENCLATURE**

**SYMBOLS & DEFINITIONS**

| Symbol                | Definition                                                                                                                                                                                                                                      |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $I_R$                 | Reverse Current: The maximum reverse (leakage) current that will flow at the specified voltage and temperature.                                                                                                                                 |
| $I_Z, I_{ZT}, I_{ZK}$ | Regulator Current: The dc regulator current ( $I_Z$ ), at a specified test point ( $I_{ZT}$ ), near breakdown knee ( $I_{ZK}$ ).                                                                                                                |
| $I_{ZM}$              | Maximum Regulator (Zener) Current: The maximum rated dc current for the specified power rating.                                                                                                                                                 |
| $T_{SP}$              | Temperature Solder Pad: The maximum solder temperature that can be safely applied to the terminal.                                                                                                                                              |
| $V_R$                 | Reverse Voltage: The reverse voltage dc value, no alternating component.                                                                                                                                                                        |
| $V_Z$                 | Zener Voltage: The Zener voltage the device will exhibit at a specified current ( $I_Z$ ) in its breakdown region.                                                                                                                              |
| $Z_{ZT}$ or $Z_{ZK}$  | Dynamic Impedance: The small signal impedance of the diode when biased to operate in its breakdown region at a specified rms current modulation (typically 10% of $I_{ZT}$ or $I_{ZK}$ ) and superimposed on $I_{ZT}$ or $I_{ZK}$ respectively. |

**ELECTRICAL CHARACTERISTICS @ 25 °C unless otherwise noted.\***

| JEDEC<br>Type No.<br>(Note 1) | Nominal<br>Zener<br>Voltage<br>V <sub>Z</sub> @ I <sub>ZT</sub> | Test<br>Current<br>I <sub>ZT</sub> | Max Zener Impedance<br>(Note 2)   |                                             | Max Reverse Leakage<br>Current |                  |      | Max Zener<br>Voltage<br>Temp. Coeff.<br>(Note 3) |
|-------------------------------|-----------------------------------------------------------------|------------------------------------|-----------------------------------|---------------------------------------------|--------------------------------|------------------|------|--------------------------------------------------|
|                               |                                                                 |                                    | Z <sub>ZT</sub> @ I <sub>ZT</sub> | Z <sub>ZK</sub> @ I <sub>ZK</sub> = 0.25 mA | I <sub>R</sub>                 | @ V <sub>R</sub> |      |                                                  |
|                               |                                                                 |                                    |                                   |                                             |                                | Volts            |      |                                                  |
|                               |                                                                 |                                    |                                   |                                             |                                | Ohms             | Ohms |                                                  |
| 1N5221B-1                     | 2.4                                                             | 20                                 | 30                                | 1200                                        | 100                            | 0.95             | 1.0  | -0.085                                           |
| 1N5222B-1                     | 2.5                                                             | 20                                 | 30                                | 1250                                        | 100                            | 0.95             | 1.0  | -0.085                                           |
| 1N5223B-1                     | 2.7                                                             | 20                                 | 30                                | 1300                                        | 75                             | 0.95             | 1.0  | -0.080                                           |
| 1N5224B-1                     | 2.8                                                             | 20                                 | 30                                | 1400                                        | 75                             | 0.95             | 1.0  | -0.080                                           |
| 1N5225B-1                     | 3.0                                                             | 20                                 | 29                                | 1600                                        | 50                             | 0.95             | 1.0  | -0.075                                           |
| 1N5226B-1                     | 3.3                                                             | 20                                 | 28                                | 1600                                        | 25                             | 0.95             | 1.0  | -0.070                                           |
| 1N5227B-1                     | 3.6                                                             | 20                                 | 24                                | 1700                                        | 15                             | 0.95             | 1.0  | -0.065                                           |
| 1N5228B-1                     | 3.9                                                             | 20                                 | 23                                | 1900                                        | 10                             | 0.95             | 1.0  | -0.060                                           |
| 1N5229B-1                     | 4.3                                                             | 20                                 | 22                                | 2000                                        | 5.0                            | 0.95             | 1.0  | +/-0.055                                         |
| 1N5230B-1                     | 4.7                                                             | 20                                 | 19                                | 1900                                        | 50                             | 1.9              | 2.0  | +/-0.030                                         |
| 1N5231B-1                     | 5.1                                                             | 20                                 | 17                                | 1600                                        | 5.0                            | 1.9              | 2.0  | +/-0.030                                         |
| 1N5232B-1                     | 5.6                                                             | 20                                 | 11                                | 1600                                        | 5.0                            | 2.9              | 3.0  | +0.038                                           |
| 1N5233B-1                     | 6.0                                                             | 20                                 | 7.0                               | 1600                                        | 5.0                            | 3.3              | 3.5  | +0.038                                           |
| 1N5234B-1                     | 6.2                                                             | 20                                 | 7.0                               | 1000                                        | 5.0                            | 3.8              | 4.0  | +0.045                                           |
| 1N5235B-1                     | 6.8                                                             | 20                                 | 5.0                               | 750                                         | 3.0                            | 4.8              | 5.0  | +0.050                                           |
| 1N5236B-1                     | 7.5                                                             | 20                                 | 6.0                               | 500                                         | 3.0                            | 5.7              | 6.0  | +0.058                                           |
| 1N5237B-1                     | 8.2                                                             | 20                                 | 8.0                               | 500                                         | 3.0                            | 6.2              | 6.5  | +0.062                                           |
| 1N5238B-1                     | 8.7                                                             | 20                                 | 8.0                               | 600                                         | 3.0                            | 6.2              | 6.5  | +0.065                                           |
| 1N5239B-1                     | 9.1                                                             | 20                                 | 10                                | 600                                         | 3.0                            | 6.7              | 7.0  | +0.068                                           |
| 1N5240B-1                     | 10                                                              | 20                                 | 17                                | 600                                         | 3.0                            | 7.6              | 8.0  | +0.075                                           |
| 1N5241B-1                     | 11                                                              | 20                                 | 22                                | 600                                         | 2.0                            | 8.0              | 8.4  | +0.076                                           |
| 1N5242B-1                     | 12                                                              | 20                                 | 30                                | 600                                         | 1.0                            | 8.7              | 9.1  | +0.077                                           |
| 1N5243B-1                     | 13                                                              | 9.5                                | 13                                | 600                                         | 0.5                            | 9.4              | 9.9  | +0.079                                           |
| 1N5244B-1                     | 14                                                              | 9.0                                | 15                                | 600                                         | 0.1                            | 9.5              | 10   | +0.082                                           |
| 1N5245B-1                     | 15                                                              | 8.5                                | 16                                | 600                                         | 0.1                            | 10.5             | 11   | +0.082                                           |
| 1N5246B-1                     | 16                                                              | 7.8                                | 17                                | 600                                         | 0.1                            | 11.4             | 12   | +0.083                                           |
| 1N5247B-1                     | 17                                                              | 7.4                                | 19                                | 600                                         | 0.1                            | 12.4             | 13   | +0.084                                           |
| 1N5248B-1                     | 18                                                              | 7.0                                | 21                                | 600                                         | 0.1                            | 13.3             | 14   | +0.085                                           |
| 1N5249B-1                     | 19                                                              | 6.6                                | 23                                | 600                                         | 0.1                            | 13.3             | 14   | +0.086                                           |
| 1N5250B-1                     | 20                                                              | 6.2                                | 25                                | 600                                         | 0.1                            | 14.3             | 15   | +0.086                                           |
| 1N5251B-1                     | 22                                                              | 5.6                                | 29                                | 600                                         | 0.1                            | 16.2             | 17   | +0.087                                           |
| 1N5252B-1                     | 24                                                              | 5.2                                | 33                                | 600                                         | 0.1                            | 17.1             | 18   | +0.088                                           |
| 1N5253B-1                     | 25                                                              | 5.0                                | 35                                | 600                                         | 0.1                            | 18.1             | 19   | +0.089                                           |
| 1N5254B-1                     | 27                                                              | 4.6                                | 41                                | 600                                         | 0.1                            | 20               | 21   | +0.090                                           |
| 1N5255B-1                     | 28                                                              | 4.5                                | 44                                | 600                                         | 0.1                            | 20               | 21   | +0.091                                           |
| 1N5256B-1                     | 30                                                              | 4.2                                | 49                                | 600                                         | 0.1                            | 22               | 23   | +0.091                                           |
| 1N5257B-1                     | 33                                                              | 3.8                                | 58                                | 700                                         | 0.1                            | 24               | 25   | +0.092                                           |
| 1N5258B-1                     | 36                                                              | 3.4                                | 70                                | 700                                         | 0.1                            | 26               | 27   | +0.093                                           |
| 1N5259B-1                     | 39                                                              | 3.2                                | 80                                | 800                                         | 0.1                            | 29               | 30   | +0.094                                           |
| 1N5260B-1                     | 43                                                              | 3.0                                | 93                                | 900                                         | 0.1                            | 31               | 33   | +0.095                                           |
| 1N5261B-1                     | 47                                                              | 2.7                                | 105                               | 1000                                        | 0.1                            | 34               | 36   | +0.095                                           |
| 1N5262B-1                     | 51                                                              | 2.5                                | 125                               | 1100                                        | 0.1                            | 37               | 39   | +0.096                                           |
| 1N5263B-1                     | 56                                                              | 2.2                                | 150                               | 1300                                        | 0.1                            | 41               | 43   | +0.096                                           |
| 1N5264B-1                     | 60                                                              | 2.1                                | 170                               | 1400                                        | 0.1                            | 44               | 46   | +0.097                                           |
| 1N5265B-1                     | 62                                                              | 2.0                                | 185                               | 1400                                        | 0.1                            | 45               | 47   | +0.097                                           |
| 1N5266B-1                     | 68                                                              | 1.8                                | 230                               | 1600                                        | 0.1                            | 49               | 52   | +0.097                                           |
| 1N5267B-1                     | 75                                                              | 1.7                                | 270                               | 1700                                        | 0.1                            | 53               | 56   | +0.098                                           |
| 1N5268B-1                     | 82                                                              | 1.5                                | 330                               | 2000                                        | 0.1                            | 59               | 62   | +0.098                                           |
| 1N5269B-1                     | 87                                                              | 1.4                                | 370                               | 2200                                        | 0.1                            | 65               | 68   | +0.099                                           |
| 1N5270B-1                     | 91                                                              | 1.4                                | 400                               | 2300                                        | 0.1                            | 66               | 69   | +0.099                                           |
| 1N5271B-1                     | 100                                                             | 1.3                                | 500                               | 2600                                        | 0.1                            | 72               | 76   | +0.110                                           |
| 1N5272B-1                     | 110                                                             | 1.1                                | 750                               | 3000                                        | 0.1                            | 80               | 84   | +0.110                                           |
| 1N5273B-1                     | 120                                                             | 1.0                                | 900                               | 4000                                        | 0.1                            | 86               | 91   | +0.110                                           |
| 1N5274B-1                     | 130                                                             | 0.95                               | 1100                              | 4500                                        | 0.1                            | 94               | 99   | +0.110                                           |
| 1N5275B-1                     | 140                                                             | 0.90                               | 1300                              | 4500                                        | 0.1                            | 101              | 106  | +0.110                                           |
| 1N5276B-1                     | 150                                                             | 0.85                               | 1500                              | 5000                                        | 0.1                            | 108              | 114  | +0.110                                           |
| 1N5277B-1                     | 160                                                             | 0.80                               | 1700                              | 5500                                        | 0.1                            | 116              | 122  | +0.110                                           |
| 1N5278B-1                     | 170                                                             | 0.74                               | 1900                              | 5500                                        | 0.1                            | 123              | 129  | +0.110                                           |
| 1N5279B-1                     | 180                                                             | 0.68                               | 2200                              | 6000                                        | 0.1                            | 130              | 137  | +0.110                                           |
| 1N5280B-1                     | 190                                                             | 0.66                               | 2400                              | 6500                                        | 0.1                            | 137              | 144  | +0.110                                           |
| 1N5281B-1                     | 200                                                             | 0.65                               | 2500                              | 7000                                        | 0.1                            | 144              | 152  | +0.110                                           |

\*JEDEC registered data. JEDEC type numbers listed indicate a tolerance of +/- 5%. Devices with guaranteed limits on all six parameters are indicated by suffix A for +/- 10% tolerance and suffix B for +/- 5% tolerance. Also available with suffix C or D which indicates 2% and 1% tolerance respectively.

**NOTES:**

1. The electrical characteristics are measured after allowing the device to stabilize for 20 seconds when mounted with a 3/8" (10 mm) minimum lead length from the case.
2. The Zener impedance is derived from the 60 Hz ac voltage that results when an ac current having an rms value equal to 10% of the dc Zener current ( $I_{ZT}$  or  $I_{ZK}$ ) is superimposed on  $I_{ZT}$  or  $I_{ZK}$ . Zener impedance is measured at two points to ensure a sharp knee on the breakdown curve, thereby eliminating unstable units. Also see "MicroNote 202" for variation in dynamic impedance with different operating currents.
3. Temperature coefficient ( $\alpha_{VZ}$ ). Test conditions for temperature coefficient are as follows:
  - a.  $I_{ZT} = 20 \text{ mA}$ ,  $T_1 = 25^\circ\text{C}$ ,  $T_2 = 125^\circ\text{C}$  (1N5221A, B thru 1N5242A, B).
  - b.  $I_{ZT} = \text{Rated } I_{ZT}$ ,  $T_1 = 25^\circ\text{C}$ ,  $T_2 = 125^\circ\text{C}$  (1N5243A, B thru 1N5281A, B).

(Device to be temperature stabilized with current applied prior to reading breakdown voltage at the specified ambient temp.)

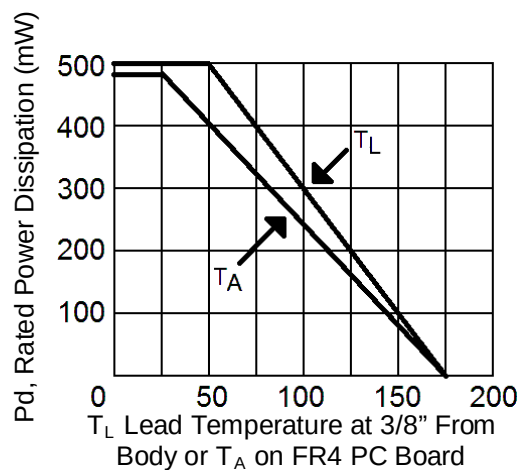
**GRAPHS**


**FIGURE 1**  
**POWER DERATING CURVE**

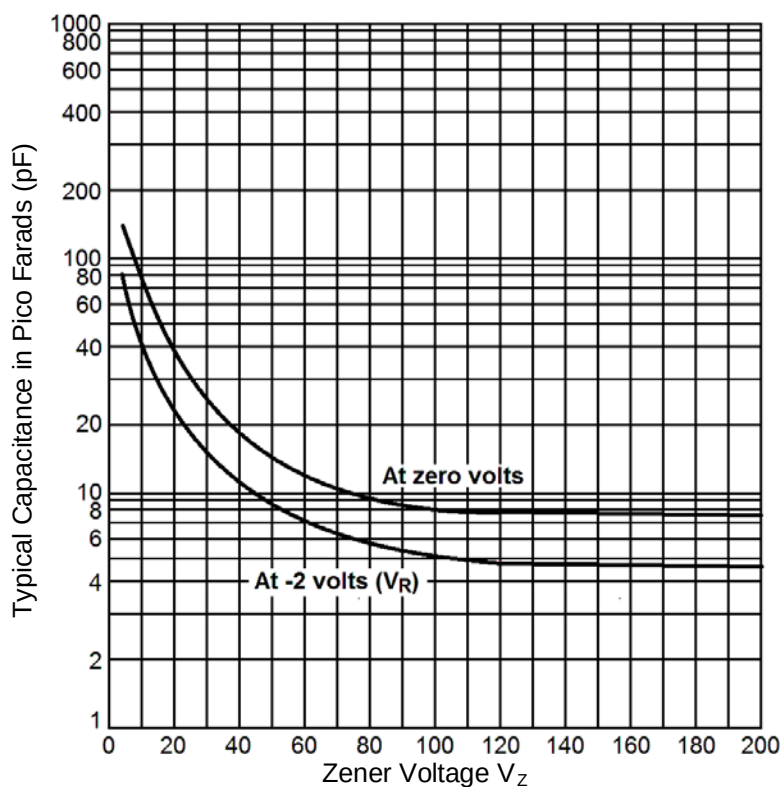
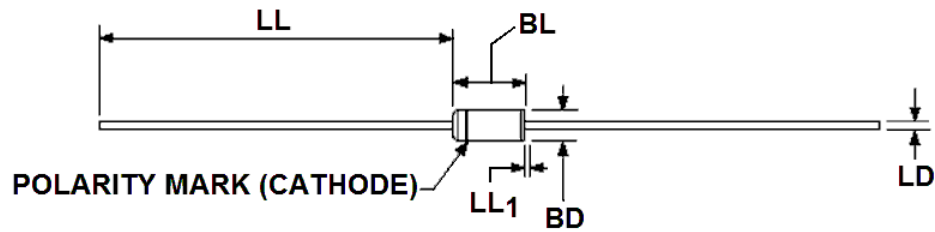


**FIGURE 2**  
**CAPACITANCE vs. ZENER VOLTAGE (TYPICAL)**

**PACKAGE DIMENSIONS**


| Ltr             | Dimensions |       |             |       | Notes |
|-----------------|------------|-------|-------------|-------|-------|
|                 | Inch       |       | Millimeters |       |       |
|                 | Min        | Max   | Min         | Max   |       |
| BD              | .055       | .090  | 1.40        | 2.29  | 3     |
| BL              | .120       | .200  | 3.05        | 5.08  | 3     |
| LD              | .018       | .022  | 0.46        | 0.56  |       |
| LL              | 1.000      | 1.500 | 25.40       | 38.10 |       |
| LL <sub>1</sub> |            | .050  |             | 1.27  | 4     |

**NOTES:**

1. Dimensions are in inch.
2. Millimeters are given for general information only.
3. Package contour optional within BD and length BL. Heat slugs, if any, shall be included within this cylinder but shall not be subject to minimum limit of BD. The BL dimension shall include the entire body including slugs.
4. Within this zone lead, diameter may vary to allow for lead finishes and irregularities other than heat slugs.
5. In accordance with ASME Y14.5M, diameters are equivalent to  $\Phi$ x symbology.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Microchip:

[CDLL5269A/TR](#) [CDLL5229A/TR](#) [CDLL5234A/TR](#) [CDLL5235A/TR](#) [CDLL5260/TR](#) [CDLL5259/TR](#) [CDLL5250B/TR](#)  
[CDLL5239B/TR](#) [CDLL5246/TR](#) [CDLL5229B/TR](#) [CDLL5230A/TR](#) [CDLL5261A/TR](#) [CDLL5249B/TR](#) [CDLL5258A/TR](#)  
[CDLL5225A/TR](#) [CDLL5259A/TR](#) [CDLL5260Be3](#) [CDLL5273B/TR](#) [CDLL5226A/TR](#) [CDLL5272B/TR](#) [CDLL5267A/TR](#)  
[CDLL5254A/TR](#) [CDLL5266A/TR](#) [CDLL5228B/TR](#) [CDLL5250A/TR](#) [CDLL5258B/TR](#) [CDLL5224/TR](#) [CDLL5245B/TR](#)  
[CDLL5260B/TR](#) [CDLL5281B/TR](#) [CDLL5238B/TR](#) [CDLL5237B/TR](#) [CDLL5257/TR](#) [CDLL5264A/TR](#) [CDLL5255A/TR](#)  
[CDLL5223A/TR](#) [CDLL5258/TR](#) [CDLL5236A/TR](#) [CDLL5244/TR](#) [CDLL5270A/TR](#) [CDLL5225Be3](#) [CDLL5237/TR](#)  
[CDLL5277B/TR](#) [CDLL5248A/TR](#) [CDLL5262B/TR](#) [CDLL5226B/TR](#) [CDLL5221A/TR](#) [CDLL5274B/TR](#) [CDLL5227/TR](#)  
[CDLL5221/TR](#) [CDLL5247A/TR](#) [CDLL5257B/TR](#) [CDLL5263A/TR](#) [CDLL5232A/TR](#) [CDLL5231A/TR](#) [CDLL5259C](#)  
[CDLL5269/TR](#) [CDLL5268/TR](#) [CDLL5243B/TR](#) [CDLL5276B/TR](#) [CDLL5243/TR](#) [CDLL5237A/TR](#) [CDLL5240/TR](#)  
[CDLL5249/TR](#) [CDLL5263/TR](#) [CDLL5232/TR](#) [CDLL5246A/TR](#) [CDLL5239/TR](#) [CDLL5255B/TR](#) [CDLL5238/TR](#)  
[CDLL5256/TR](#) [CDLL5234/TR](#) [CDLL5265A/TR](#) [CDLL5271/TR](#) [CDLL5272/TR](#) [CDLL5253A/TR](#) [CDLL5242B/TR](#)  
[CDLL5261B/TR](#) [CDLL5262A/TR](#) [CDLL5241/TR](#) [CDLL5233A/TR](#) [CDLL5246Be3/TR](#) [CDLL5235/TR](#) [CDLL5230B/TR](#)  
[CDLL5245/TR](#) [CDLL5248B/TR](#) [CDLL5242/TR](#) [CDLL5272Be3](#) [CDLL5227B/TR](#) [CDLL5263B/TR](#) [CDLL5268A/TR](#)  
[CDLL5224A/TR](#) [CDLL5269B/TR](#) [CDLL5231/TR](#) [CDLL5247B/TR](#) [CDLL5255/TR](#) [CDLL5252B/TR](#) [CDLL5250/TR](#)  
[CDLL5280B/TR](#) [CDLL5245A/TR](#)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А