Description

The LM2902/LM2904 series amplifiers consist of four and two independent high-gain operational amplifiers with very low input offset voltage specification. They have been designed to operate from a single power supply over a wide range of voltages; however operation from split power supplies is also possible. They offer low power supply current independent of the magnitude of the power supply voltage.

The LM2902/LM2904 series are characterized for operation from -40℃ to +125℃ and the dual devices are available in SO-8, MSOP-8, TSSOP-8 and the quad devices available in SO-14 and TSSOP-14 with industry standard pin-outs. Both use green mold compound as standard.

Features

- Wide Power Supply Voltage Range:
  - Single Supply: 3V to 36V
  - Dual Supplies: ±1.5V to ±18V
- Very Low Supply Current Drain
  - LM2904 500µA – Independent of Supply Voltage
  - LM2902 700µA – Independent of Supply Voltage
- Low Input Bias Current: 20nA
- Low Input Offset Voltage:
  - A Version: 1mV Typ
  - Non-A Version: 2mV Typ
- Large DC Voltage Gain: 100dB
- Wide Bandwidth (Unity Gain): 700kHz (Temperature Compensated)
- Internally Compensated with Unity Gain
- Input Common-Mode Voltage Range Includes Ground
- Differential Input Voltage Range Equal to the Power Supply Voltage
- Large Output Voltage Swing: 0V to V_{CC} -1.5V
- SO-8, MSOP-8, TSSOP-8 (Duals) and SO-14, TSSOP-14 (Quads) Packages Available
- **Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)**
- **Halogen and Antimony Free. "Green" Device (Note 3)**
- **An Automotive-Compliant Part is Available Under Separate Datasheet (LM2902Q_LM2904Q)**

Pin Assignments

(Top View)

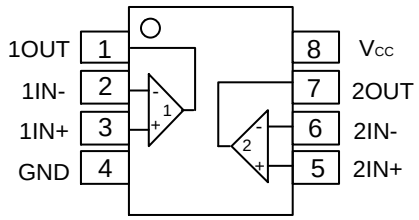

SO-8/TSSOP-8/MSOP-8

LM2904/LM2904A

(Top View)

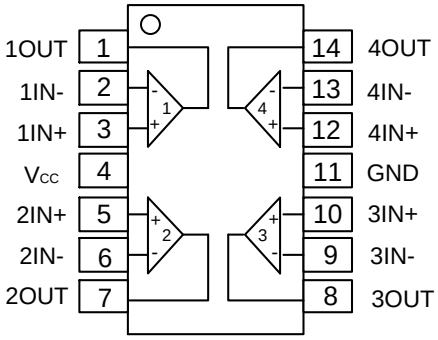

SO-14/TSSOP-14

LM2902/LM2902A

Notes:
1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.
2. See https://www.diodes.com/quality/lead-free/ for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.

© Diodes Incorporated

Functional Block Diagram

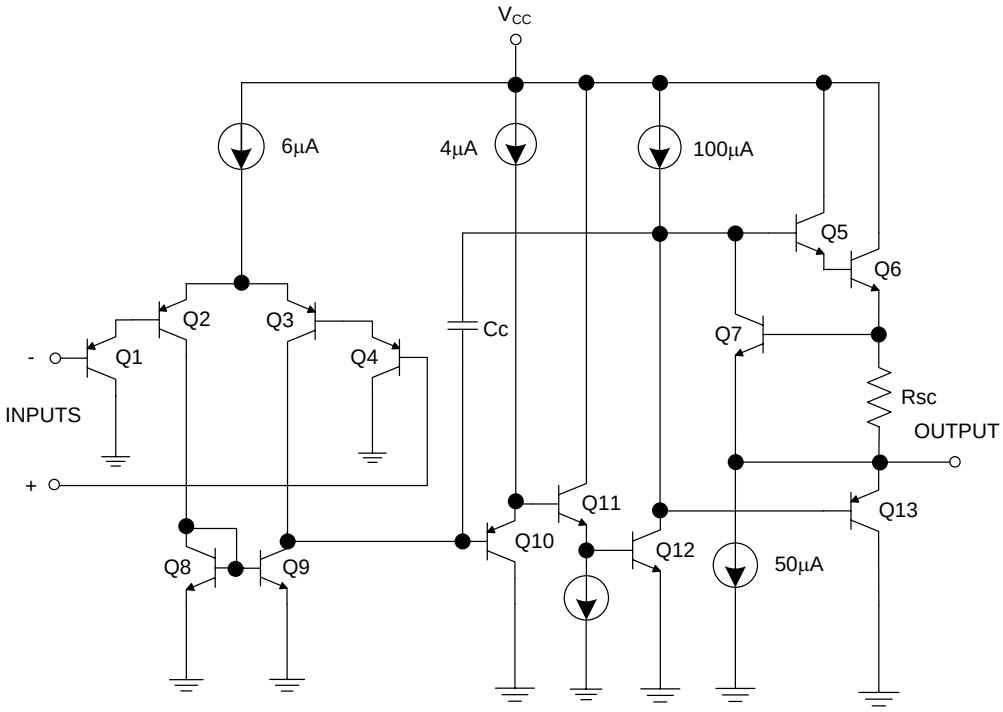

Each Amplifier

Pin Descriptions

LM2902, LM2902A		
Pin Name	**Pin Number**	**Function**
1OUT	1	Channel 1 Output
1IN-	2	Channel 1 Inverting Input
1IN+	3	Channel 1 Non-Inverting Input
V_{CC}	4	Chip Supply Voltage
2IN+	5	Channel 2 Non-Inverting Input
2IN-	6	Channel 2 Inverting Input
2OUT	7	Channel 2 Output
3OUT	8	Channel 3 Output
3IN-	9	Channel 3 Inverting Input
3IN+	10	Channel 3 Non-Inverting Input
GND	11	Ground
4IN+	12	Channel 4 Non-Inverting Input
4IN-	13	Channel 4 Inverting Input
4OUT	14	Channel 4 Output
LM2904, LM2904A		
1OUT	1	Channel 1 Output
1IN-	2	Channel 1 Inverting Input
1IN+	3	Channel 1 Non-Inverting Input
GND	4	Ground
2IN+	5	Channel 2 Non-Inverting Input
2IN-	6	Channel 2 Inverting Input
2OUT	7	Channel 2 Output
V_{CC}	8	Chip Supply Voltage

© Diodes Incorporated

Absolute Maximum Ratings (Note 4) (@T_A = +25°C, unless otherwise specified.)

Symbol	Parameter		Rating	Unit
V_{CC}	Supply Voltage		±18 or 36	V
V_{ID}	Differential Input Voltage		36	V
V_{IN}	Input Voltage		-0.3 to +36	V
θ_{JA}	Package Thermal Impedance (Note 5)	SO-8	TBD	°C/W
		MSOP-8	TBD	
		TSSOP-8	TBD	
		SO-14	TBD	
		TSSOP-14	TBD	
θ_{JC}	Package Thermal Impedance (Note 6)	SO-8	TBD	°C/W
		MSOP-8	TBD	
		TSSOP-8	TBD	
		SO-14	TBD	
		TSSOP-14	TBD	
—	Output Short-Circuit to GND (One Amplifier) (Note 7)	V_{CC} ≤ 15V and T_A = +25℃	Continuous	—
T_A	Operating Temperature Range		-40 to +125	°C
T_J	Operating Junction Temperature		+150	°C
T_{ST}	Storage Temperature Range		-65 to +150	°C
ESD	Human Body Mode ESD Protection (Note 8)		300	V
	Machine Mode ESD Protection		150	

Notes:
4. Stresses beyond those listed under absolute maximum ratings may cause permanent damage to the device. These are stress ratings only; functional operation of the device at these or any other conditions beyond those indicated under recommended operating conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
5. Maximum power dissipation is a function of $T_{J(max)}$, θ_{JA}, and T_A. The maximum allowable power dissipation at any allowable ambient temperature is $P_D = (T_{J(max)} - T_A)/\theta_{JA}$. Operating at the absolute maximum T_J of +150°C can affect reliability.
6. Maximum power dissipation is a function of $T_{J(max)}$, θ_{JC}, and T_A. The maximum allowable power dissipation at any allowable ambient temperature is $P_D = (T_{J(max)} - T_A)/\theta_{JA}$. Operating at the absolute maximum T_J of +150°C can affect reliability.
7. Short circuits from outputs to V_{CC} or ground can cause excessive heating and eventual destruction.
8. Human body model, 1.5kΩ in series with 100pF.

© Diodes Incorporated

Electrical Characteristics (Notes 12 & 13) (@ V_{CC} = +5.0V, T_A = +25°C, unless otherwise specified.)

LM2902, LM2902A									
Parameter		**Conditions**			**T_A**	**Min**	**Typ**	**Max**	**Unit**
V_{IO}	Input Offset Voltage	V_{IC} = V_{CMR} Min, V_O = 1.4V, V_{CC} = 5V to Max, R_S = 0Ω	Non-A Device		T_A = +25°C	—	2	7	mV
					Full Range	—	—	10	
			A-Suffix Device		T_A = +25°C	—	1	2	
					Full Range	—	—	4	
$\Delta V_{IO}/\Delta T$	Input Offset Voltage Temperature Drift	R_S = 0Ω			Full Range	—	7	—	µV/°C
I_B	Input Bias Current	I_{IN+} or I_{IN-} with OUT in Linear Range, V_{CMR} = 0V (Note 9)			T_A = +25°C	—	-20	-200	nA
					Full Range	—	—	-500	
I_{IO}	Input Offset Current	I_{IN+} - I_{IN-}, V_{CM} = 0V			T_A = +25°C	—	2	50	nA
					Full Range	—	—	150	
$\Delta I_{IO}/\Delta T$	Input Offset Current Temperature Drift	—			Full Range	—	10	—	pA/°C
V_{CMR}	Input Common-Mode Voltage Range	V_{CC} = 30V (Note 10)			T_A = +25°C	0 to V_{CC} -1.5	—	—	V
					Full Range	0 to V_{CC} -2.0	—	—	
I_{CC}	Supply Current (Four Amplifiers)	V_O = 0.5V_{CC}, No Load	V_{CC} = 30V		Full Range	—	1.0	3.0	mA
		V_O = 0.5V_{CC}, No Load	V_{CC} = 5V		Full Range	—	0.7	1.2	
A_V	Voltage Gain	V_{CC} = 15V, V_{OUT} = 1V to 11V, R_L ≥ 2kΩ			T_A = +25°C	25	100	—	V/mV
					Full Range	15	—	—	
CMRR	Common Mode Rejection Ratio	DC, V_{CMR} = 0V to V_{CC}-1.5V			T_A = +25°C	60	70	—	dB
PSRR	Power Supply Rejection Ratio	V_{CC} = 5V to 30V			T_A = +25°C	70	100	—	dB
—	Amplifier to Amplifier Coupling	f = 1kHz to 20kHz (Input Referred) (Note 11)			T_A = +25°C	—	-120	—	dB
I_{SINK}	Output Current	Sink	V_{IN}^- = 1V, V_{IN}^+ = 0V, V_{CC} = 15V, V_O = 200mV		T_A = +25°C	12	50	—	µA
			V_{IN}^- = 1V, V_{IN}^+ = 0V, V_{CC} = 15V, V_O = 15V		T_A = +25°C	10	20	—	mA
					Full Range	5	—	—	
I_{SOURCE}		Source	V_{IN}^+ = 1V, V_{IN}^- = 0V, V_{CC} = 15V, V_O = 0V		T_A = +25°C	-20	-40	-60	
					Full Range	-10	—	—	
I_{SC}	Short-Circuit to Ground	V_{CC} = 5V, GND = -5V, V_O = 0V			T_A = +25°C	—	±40	±60	mA
V_{OH}	High-Level Output Voltage Swing	R_L = 10kΩ			T_A = +25°C	—	V_{CC}-1.5	—	V
		V_{CC} = 30V	R_L = 2kΩ		Full Range	26	—	—	
			R_L ≥ 10kΩ			27	28	—	
V_{OL}	Low-Level Output Voltage Swing	R_L ≦ 10kΩ			Full Range	—	5	20	mV

AC Electrical Characteristics (Notes 12 & 13) (@ V_{CC} = ±15.0V, T_A = +25°C, unless otherwise specified.)

LM2902, LM2902A				
Parameter		**Conditions**	**Typ**	**Unit**
SR	Slew Rate at Unity Gain	R_L = 1MΩ, C_L = 30pF, V_I = ±10V	0.3	V/µs
B1	Unity Gain Bandwidth	R_L = 1MΩ, C_L = 20pF	0.7	MHz
Vn	Equivalent Input Noise Voltage	R_S = 100Ω, V_I = 0V, f = 1kHz	40	nV/√Hz

Notes:
9. The direction of the input current is out of the IC due to the PNP input stage. This current is essentially constant, independent of the state of the output so no loading change exists on the input lines.
10. The input common-mode voltage of either input signal voltage should not be allowed to go negative by more than 0.3V (@ +25°C). The upper end of the common-mode voltage range is V_{CC} -1.5V (@ +25°C), but either or both inputs can go to +36V without damage, independent of the magnitude of V_{CC}.
11. Due to proximity of external components, insure that coupling is not originating via stray capacitance between these external parts. This typically can be detected as this type of capacitance increases at higher frequencies.
12. Typical values are all at T_A = +25°C conditions and represent the most likely parametric norm as determined at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration. The typical values are not tested and are not guaranteed on shipped production material.
13. All limits are guaranteed by testing or statistical analysis. Limits over the full temperature are guaranteed by design, but not tested in production.

© Diodes Incorporated

Electrical Characteristics (Cont.) (Notes 12 & 13) (@ V_{CC} = +5.0V, T_A = +25°C, unless otherwise specified.)

LM2904, LM2904A									
Parameter			**Conditions**			**T_A**	**Min**	**Typ**	**Max**	**Unit**
V_{IO}	Input Offset Voltage		$V_{IC} = V_{CMR}$ Min, V_O = 1.4V, V_{CC} = 5V to Max, R_S = 0Ω	Non-A Device		T_A = +25°C	—	2	7	mV
						Full Range	—	—	10	
				A-Suffix Device		T_A = +25°C	—	1	2	
						Full Range	—	—	4	
$\Delta V_{IO}/\Delta T$	Input Offset Voltage Temperature Drift		R_S = 0Ω			Full Range	—	7	—	µV/°C
I_B	Input Bias Current		I_{IN+} or I_{IN-} with OUT in Linear Range, V_{CMR} = 0V (Note 9)			T_A = +25°C	—	-20	-250	nA
						Full Range	—	—	-500	
I_{IO}	Input Offset Current		I_{IN+} - I_{IN-}, V_{CM} = 0V			T_A = +25°C	—	2	50	nA
						Full Range	—	—	150	
$\Delta I_{IO}/\Delta T$	Input Offset Current Temperature Drift		—			Full Range	—	10	—	pA/°C
V_{CMR}	Input Common-Mode Voltage Range		V_{CC} = 30V (Note 10)			T_A = +25°C	0 to V_{CC} -1.5	—	—	V
						Full Range	0 to V_{CC} -2.0	—	—	
I_{CC}	Supply Current (Two Amplifiers)		V_O = 0.5V_{CC}, No Load	V_{CC} = 30V		Full Range	—	0.7	2.0	mA
			V_O = 0.5V_{CC}, No Load	V_{CC} = 5V		Full Range	—	0.5	1.2	
A_V	Voltage Gain		V_{CC} = 15V, V_{OUT} = 1V to 11V, R_L ≥ 2kΩ			T_A = +25°C	25	100	—	V/mV
						Full Range	15	—	—	
CMRR	Common Mode Rejection Ratio		DC, V_{CMR} = 0V to V_{CC}-1.5V			T_A = +25°C	60	70	—	dB
PSRR	Power Supply Rejection Ratio		V_{CC} = 5V to 30V			T_A = +25°C	70	100	—	dB
—	Amplifier to Amplifier Coupling		f = 1kHz to 20kHz (Note 11)			T_A = +25°C	—	120	—	dB
I_{SINK}	Output Current	Sink	V_{IN}^- = 1V, V_{IN}^+ = 0V, V_{CC} = 15V, V_O = 200mV			T_A = +25°C	12	50	—	µA
			V_{IN}^- = 1V, V_{IN}^+ = 0V, V_{CC} = 15V, V_O = 15V			T_A = +25°C	10	20	—	mA
						Full Range	5	—	—	
I_{SOURCE}		Source	V_{IN}^+ = 1V, V_{IN}^- = 0V, V_{CC} = 15V, V_O = 0V			T_A = +25°C	-20	-40	-60	
						Full Range	-10	—	—	
I_{SC}	Short-Circuit to Ground		V_{CC} = 5V, GND = -5V, V_O = 0V			T_A = +25°C	—	±40	±60	mA
V_{OH}	High-Level Output Voltage Swing		R_L = 10kΩ			T_A = +25°C	V_{CC}-1.5	—	—	V
			V_{CC} = 30V	R_L = 2kΩ		Full Range	26	—	—	
				R_L ≥ 10kΩ			27	28	—	
V_{OL}	Low-Lever Output Voltage Swing		R_L ≦ 10kΩ			Full Range	—	5	20	mV

AC Electrical Characteristics (Notes 12 & 13) (@ V_{CC} = ±15.0V, T_A = +25°C, unless otherwise specified.)

LM2904, LM2904A				
Parameter		**Conditions**	**Typ**	**Unit**
SR	Slew Rate at Unity Gain	R_L = 1MΩ, C_L = 30pF, V_I = ±10V	0.3	V/µs
B1	Unity Gain Bandwidth	R_L = 1MΩ, C_L = 20pF	0.7	MHz
Vn	Equivalent Input Noise Voltage	R_S = 100Ω, V_I = 0V, f = 1kHz	40	nV/√Hz

Notes:
9. The direction of the input current is out of the IC due to the PNP input stage. This current is essentially constant, independent of the state of the output so no loading change exists on the input lines.
10. The input common-mode voltage of either input signal voltage should not be allowed to go negative by more than 0.3V (@ +25°C). The upper end of the common-mode voltage range is V_{CC} -1.5V (@ +25°C), but either or both inputs can go to +36V without damage, independent of the magnitude of V_{CC}.
11. Due to proximity of external components, insure that coupling is not originating via stray capacitance between these external parts. This typically can be detected as this type of capacitance increases at higher frequencies.
12. Typical values are all at T_A = +25°C conditions and represent the most likely parametric norm as determined at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration. The typical values are not tested and are not guaranteed on shipped production material.
13. All limits are guaranteed by testing or statistical analysis. Limits over the full temperature are guaranteed by design, but not tested in production.

© Diodes Incorporated

Performance Characteristics

Input Voltage Range

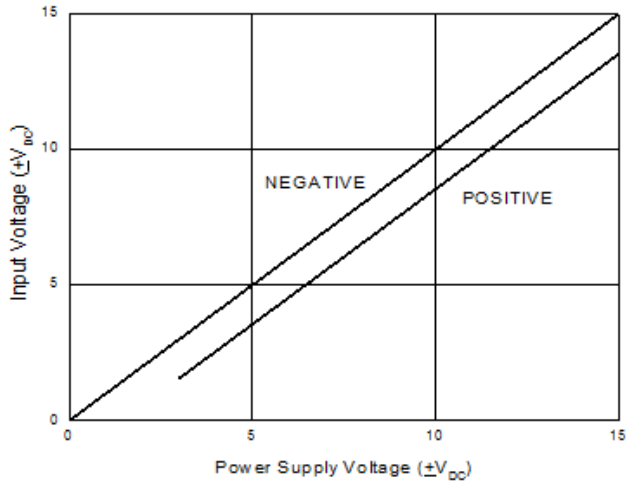

Input Current

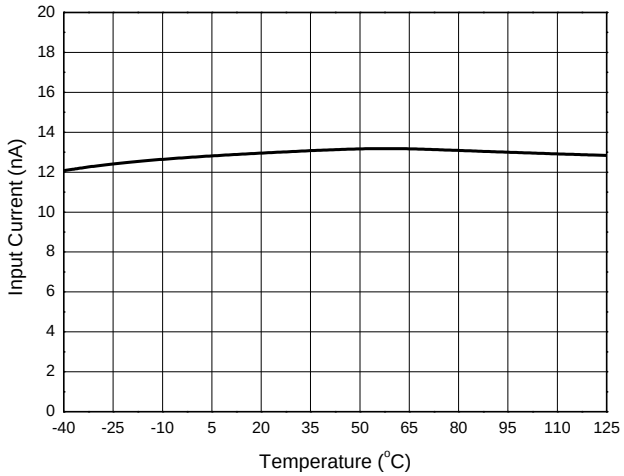

Supply Current vs. Supply Voltage (LM2904/LM2904A)

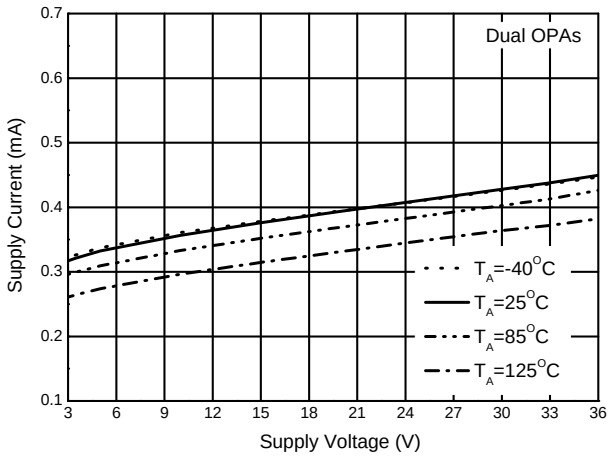

Supply Current vs. Supply Voltage (LM2902/LM2902A)

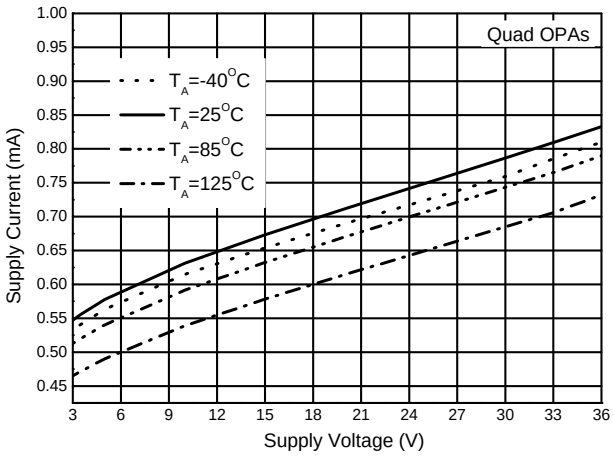

Supply Current vs. Temperature (LM2904/LM2904A)

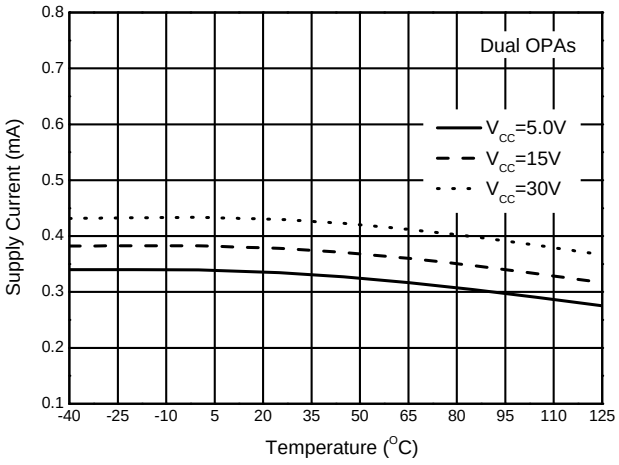

Supply Current vs. Temperature (LM2902/LM2902A)

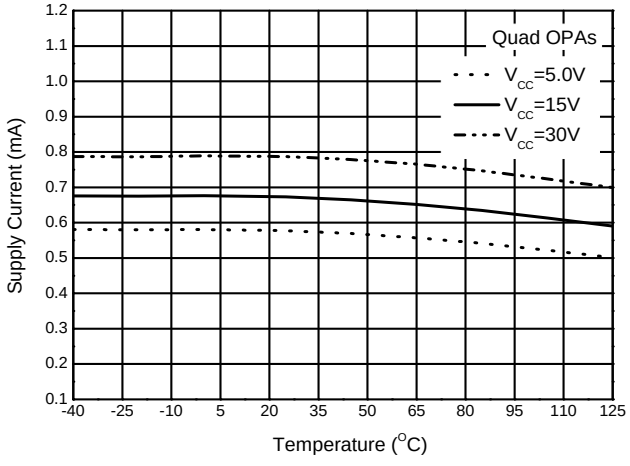

© Diodes Incorporated

Performance Characteristics (Cont.)

Voltage Gain

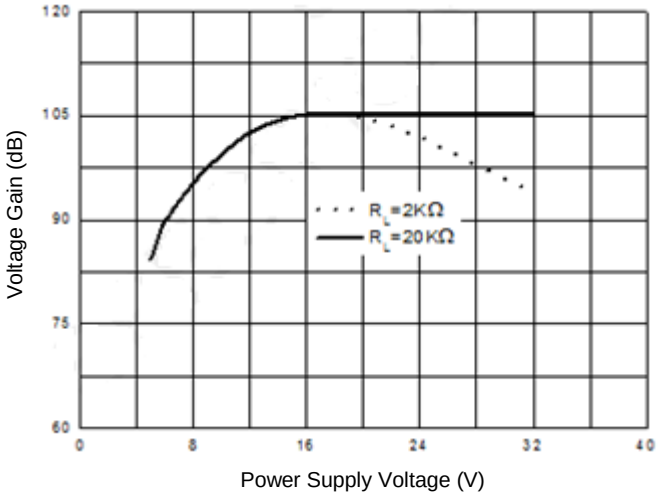

Open Loop Frequency Response

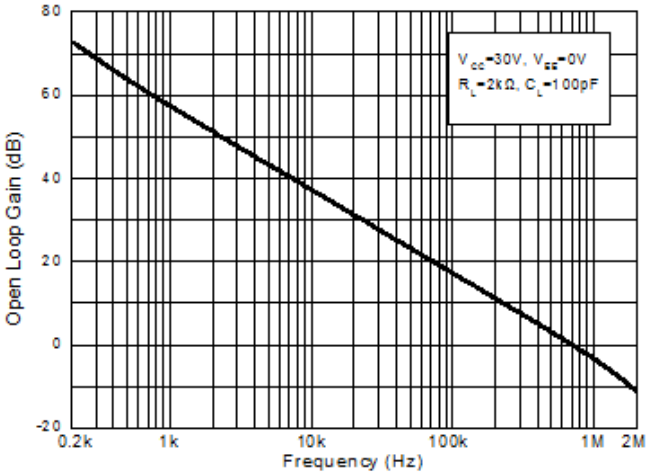

Large Signal Frequency Response

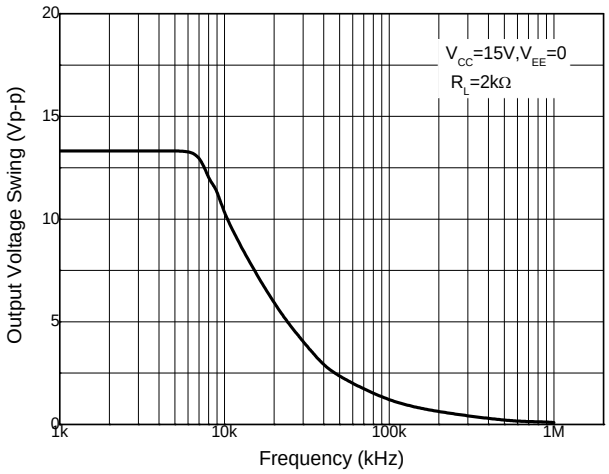

Current Limit

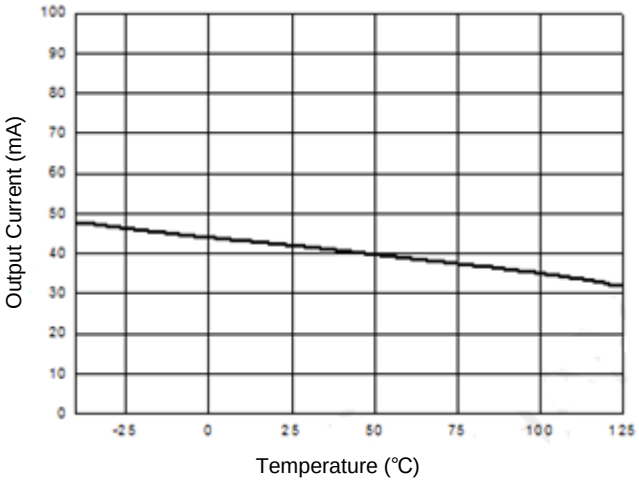

Output Characteristics: Current Sourcing

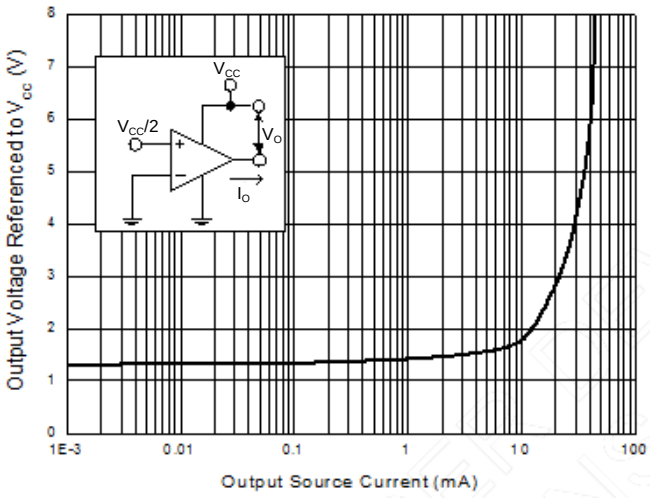

Output Characteristics: Current Sinking

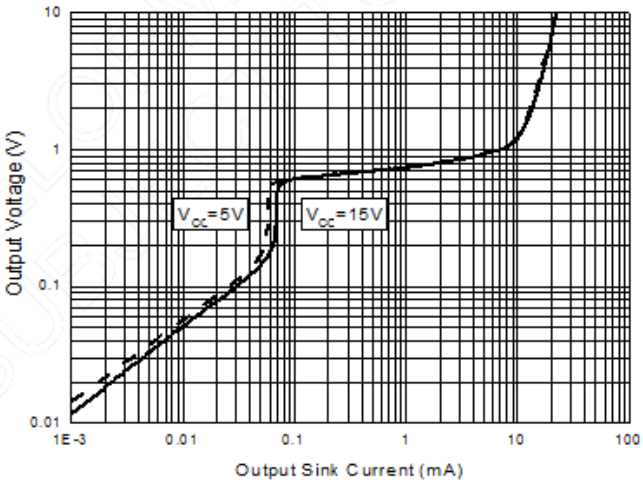

© Diodes Incorporated

Performance Characteristics (Cont.)

Voltage Follower Pulse Response

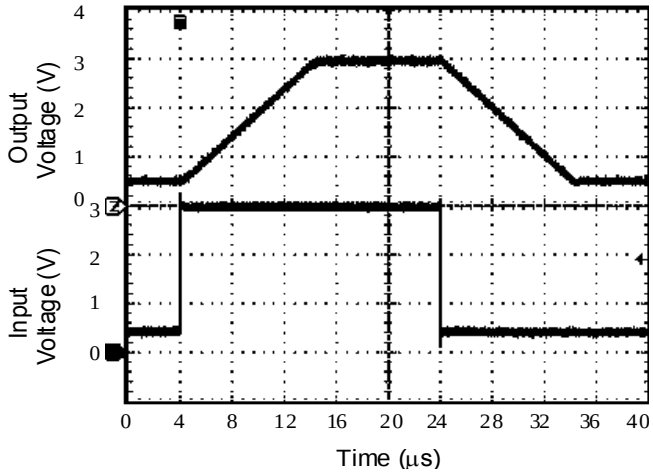

Voltage Follower Pulse Response (Small Signal)

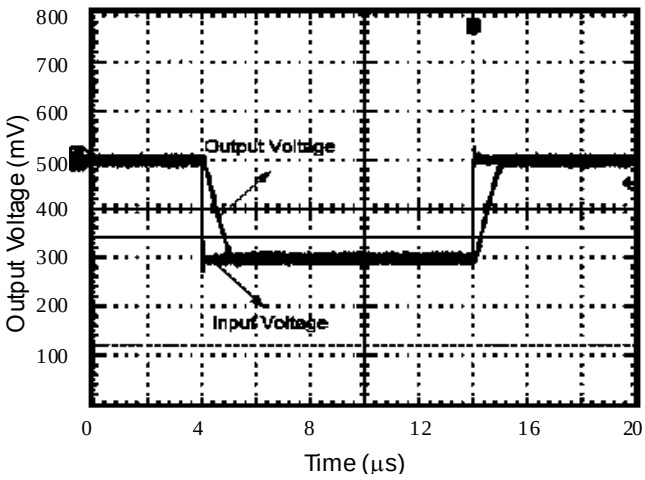

© Diodes Incorporated

Application Information

General Information

The LM2902/LM2904 series are op amps which operate with only a single power supply voltage, have true-differential inputs, and remain in the linear mode with an input common-mode voltage of $0V_{DC}$. These amplifiers operate over a wide range of power supply voltage with little change in performance characteristics. At +25°C amplifier operation is possible down to a minimum supply voltage of $2.3V_{DC}$.

Precautions should be taken to insure that the power supply for the integrated circuit never becomes reversed in polarity or that the unit is not inadvertently installed backwards in a test socket as an unlimited current surge through the resulting forward diode within the IC could cause fusing of the internal conductors and result in a destroyed unit.

Large differential input voltages can be easily accommodated and, as input differential voltage protection diodes are not needed, no large input currents result from large differential input voltages. The differential input voltage may be larger than V^+ without damaging the device. Protection should be provided to prevent the input voltages from going negative more than $-0.3V_{DC}$ (@ +25°C). An input clamp diode with a resistor to the IC input terminal can be used.

To reduce the power supply current drain, the amplifiers have a Class A output stage for small signal levels which converts to Class B in a large signal mode. These allow the amplifiers to both source and sink large output currents. Therefore both NPN and PNP external current boost transistors can be used to extend the power capability of the basic amplifiers. The output voltage needs to raise approximately 1 diode drop above ground to bias the on-chip vertical PNP transistor for output current sinking applications.

For AC applications, where the load is capacitive coupled to the output of the amplifier, a resistor should be used, from the output of the amplifier to ground to increase the Class A bias current and prevent crossover distortion. Where the load is directly coupled, as in DC applications, there is no crossover distortion.

Capacitive loads which are applied directly to the output of the amplifier reduce the loop stability margin. Values of 50pF can be accommodated using the worst-case non-inverting unity gain connection. Large closed loop gains or resistive isolation should be used if larger load capacitance must be driven by the amplifier.

The bias network of the LM2902/LM2904 series establishes a quiescent current which is independent of the magnitude of the power supply voltage over the range of $3V_{DC}$ to $30V_{DC}$.

Output short circuits either to ground or to the positive power supply should be of short time duration. Units can be destroyed, not as a result of the short circuit current causing metal fusing, but rather due to the large increase in IC chip dissipation which will cause eventual failure due to excessive function temperatures. Putting direct short-circuits on more than one amplifier at a time will increase the total IC power dissipation to destructive levels, if not properly protected with external dissipation limiting resistors in series with the output leads of the amplifiers. The larger value of output source current which is available at +25°C provides a larger output current capability at elevated temperatures (see Performance Characteristics) than a standard IC op amp.

The circuits presented in the section on typical applications emphasize operation on only a single power supply voltage. If complementary power supplies are available, all of the standard op amp circuits can be used. In general, introducing a pseudo-ground (a bias voltage reference of $V_{CC}/2$) will allow operation above and below this value in single power supply systems. Many application circuits are shown which take advantage of the wide input common-mode voltage range which includes ground. In most cases, input biasing is not required and input voltages which range to ground can easily be accommodated.

© Diodes Incorporated

Application Information (Cont.)

Power Supply Bypassing and Layout

The LM2902/LM2904 operate both single supply voltage range 3V to 36V or dual supply voltage ±1.5V to ±18V.

As with any operation amplifier, proper supply bypassing is critical for low noise performance and high power supply rejection. For single supply operation system, a minimum 0.1μF bypass capacitor should be recommended to place as close as possible between the V_{CC} Pin and GND. For dual supply operation, both the positive supply pin and negative supply pin should be bypassed to ground with a separate 0.1μF ceramic capacitor. 2.2μF tantalum capacitor can be added for better performance. Keep the length of leads and traces that connect capacitors between the LM2902/LM2904 power supply pin and ground as short as possible.

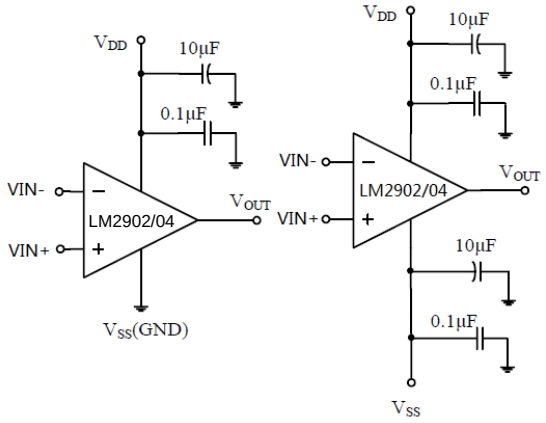

Amplifier with Bypass Capacitors

Ordering Information (Note 14)

LM290X X XXX - 13

Channel	Grade	Package	Packing
2: Quad 4: Dual	Blank : Normal A : Low V_{IO}	T14 : TSSOP-14 S14 : SO-14 S : SO-8 M8: MSOP-8 TH: TSSOP-8	13 : Tape & Reel

Part Number	Package Code	Packaging	13" Tape and Reel	
			Quantity	Part Number Suffix
LM2902T14-13	T14	TSSOP-14	2,500/Tape & Reel	-13
LM2902AT14-13	T14	TSSOP-14	2,500/Tape & Reel	-13
LM2902S14-13	S14	SO-14	2,500/Tape & Reel	-13
LM2902AS14-13	S14	SO-14	2,500/Tape & Reel	-13
LM2904S-13	S	SO-8	2,500/Tape & Reel	-13
LM2904AS-13	S	SO-8	2,500/Tape & Reel	-13
LM2904AM8-13	M8	MSOP-8	2,500/Tape & Reel	-13
LM2904M8-13	M8	MSOP-8	2,500/Tape & Reel	-13
LM2904ATH-13	TH	TSSOP-8	2,500/Tape & Reel	-13
LM2904TH-13	TH	TSSOP-8	2,500/Tape & Reel	-13

Note: 14. For packaging details, go to our website at https://www.diodes.com/design/support/packaging/diodes-packaging/.

© Diodes Incorporated

Marking Information

(1) TSSOP-14 and SO-14

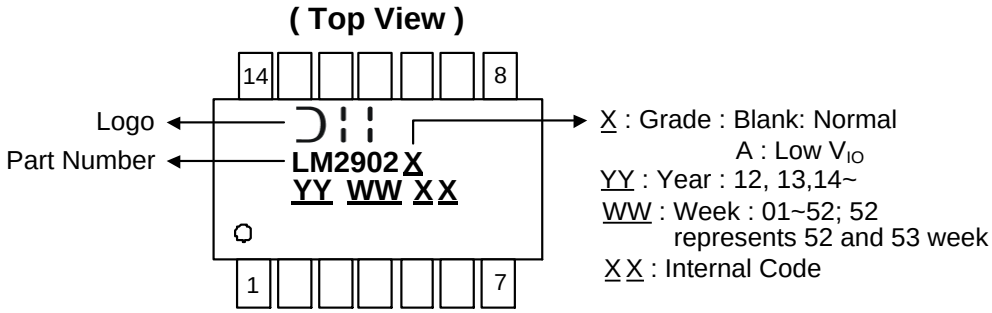

(2) SO-8

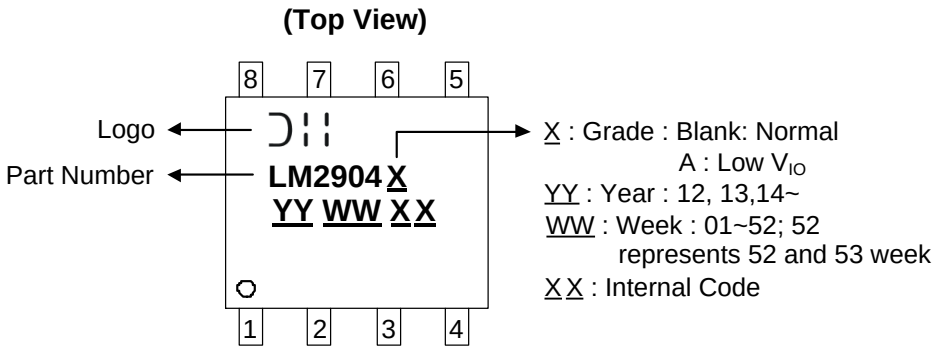

(3) MSOP-8 and TSSOP-8

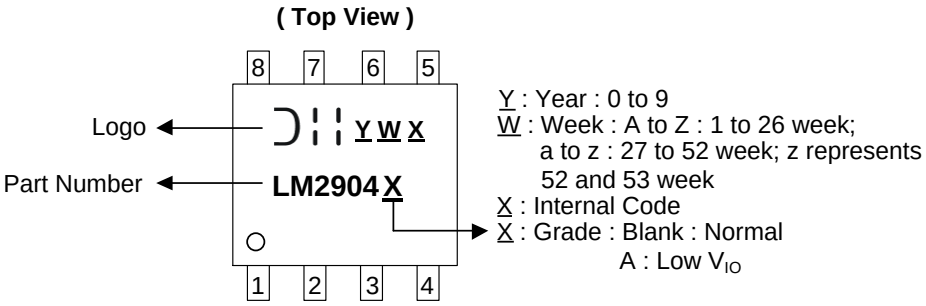

© Diodes Incorporated

Package Outline Dimensions

Please see http://www.diodes.com/package-outlines.html for the latest version.

(1) Package Type: SO-8

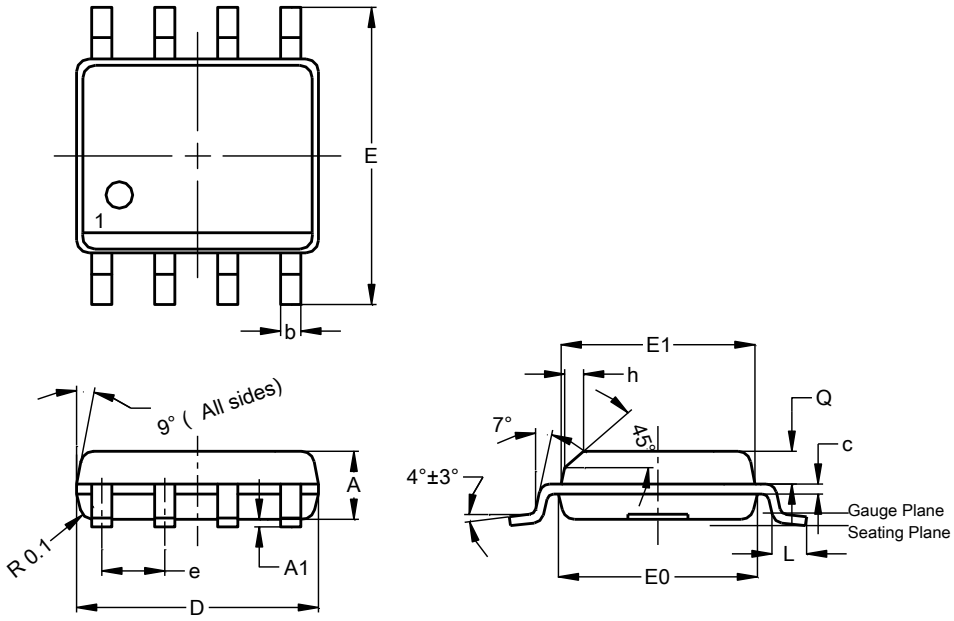

SO-8			
Dim	**Min**	**Max**	**Typ**
A	1.40	1.50	1.45
A1	0.10	0.20	0.15
b	0.30	0.50	0.40
c	0.15	0.25	0.20
D	4.85	4.95	4.90
E	5.90	6.10	6.00
E1	3.80	3.90	3.85
E0	3.85	3.95	3.90
e	--	--	1.27
h	-	--	0.35
L	0.62	0.82	0.72
Q	0.60	0.70	0.65
All Dimensions in mm			

(2) Package Type: TSSOP-8

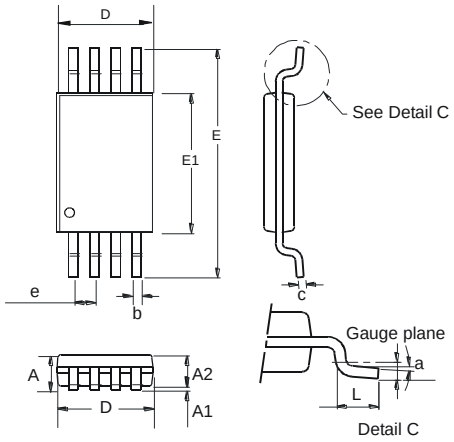

TSSOP-8			
Dim	**Min**	**Max**	**Typ**
a	0.09	–	–
A	–	1.20	–
A1	0.05	0.15	–
A2	0.825	1.025	0.925
b	0.19	0.30	–
c	0.09	0.20	–
D	2.90	3.10	3.025
e	–	–	0.65
E	–	–	6.40
E1	4.30	4.50	4.425
L	0.45	0.75	0.60
All Dimensions in mm			

© Diodes Incorporated

Package Outline Dimensions (Cont.)

Please see http://www.diodes.com/package-outlines.html for the latest version.

(3) Package Type:MSOP-8

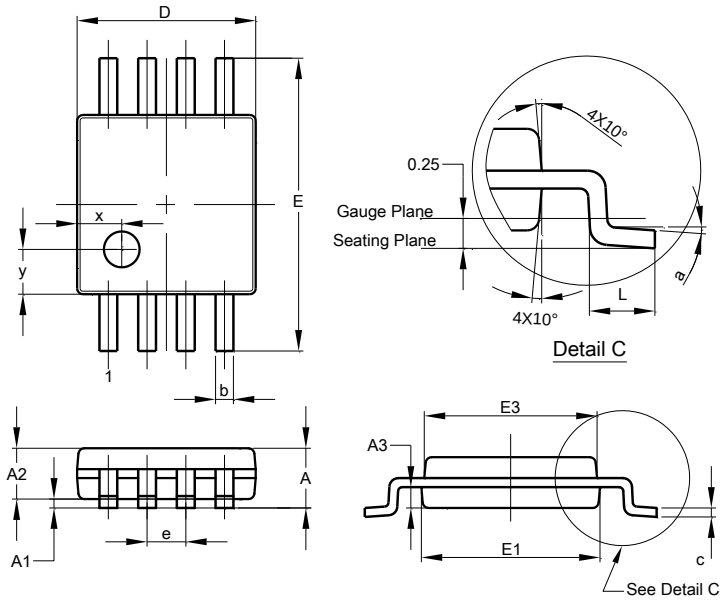

MSOP-8			
Dim	**Min**	**Max**	**Typ**
A	-	1.10	-
A1	0.05	0.15	0.10
A2	0.75	0.95	0.86
A3	0.29	0.49	0.39
b	0.22	0.38	0.30
c	0.08	0.23	0.15
D	2.90	3.10	3.00
E	4.70	5.10	4.90
E1	2.90	3.10	3.00
E3	2.85	3.05	2.95
e	-	-	0.65
L	0.40	0.80	0.60
a	0°	8°	4°
x	-	-	0.750
y	-	-	0.750
All Dimensions in mm			

(4) Package Type: SO-14

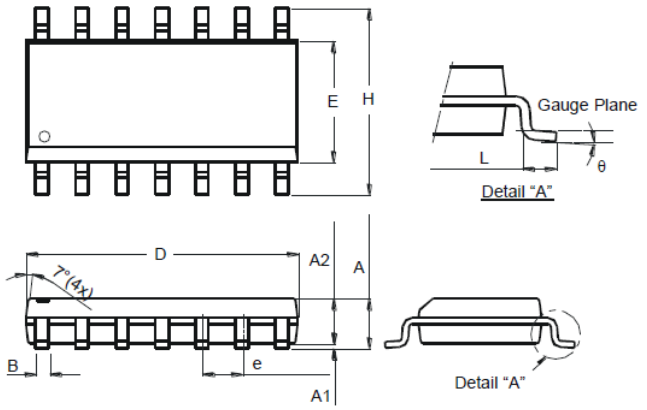

SO-14		
Dim	**Min**	**Max**
A	1.47	1.73
A1	0.10	0.25
A2	1.45 Typ	
B	0.33	0.51
D	8.53	8.74
E	3.80	3.99
e	1.27 Typ	
H	5.80	6.20
L	0.38	1.27
θ	0°	8°
All Dimensions in mm		

(5) Package Type: TSSOP-14

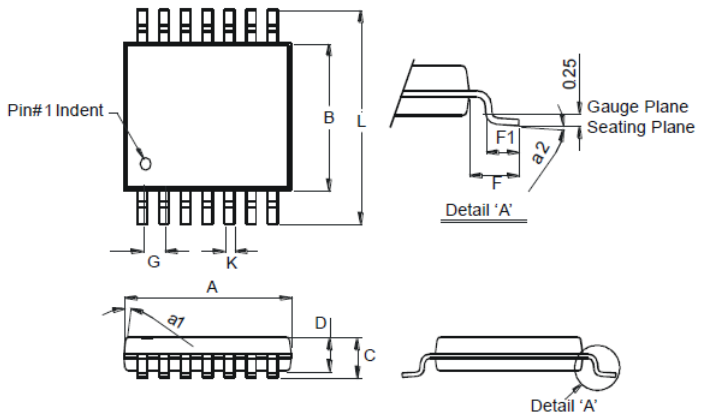

TSSOP-14		
Dim	**Min**	**Max**
a1	7° (4X)	
a2	0°	8°
A	4.9	5.10
B	4.30	4.50
C	-	1.2
D	0.8	1.05
F	1.00 Typ	
F1	0.45	0.75
G	0.65 Typ	
K	0.19	0.30
L	6.40 Typ	
All Dimensions in mm		

© Diodes Incorporated

Suggested Pad Layout

Please see http://www.diodes.com/package-outlines.html for the latest version.

(1) Package Type: SO-8

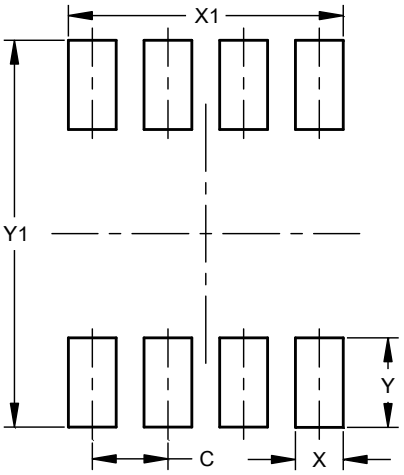

Dimensions	Value (in mm)
C	1.27
X	0.802
X1	4.612
Y	1.505
Y1	6.50

(2) Package Type: TSSOP-8



Dimensions	Value (in mm)
X	0.45
Y	1.78
C1	7.72
C2	0.65
C3	4.16
G	0.20

(3) Package Type:MSOP-8

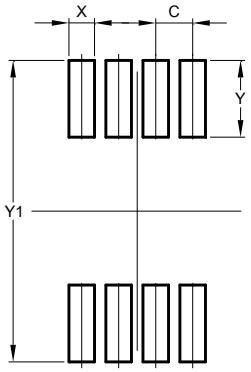

Dimensions	Value (in mm)
C	0.650
X	0.450
Y	1.350
Y1	5.300

© Diodes Incorporated

Suggested Pad Layout (Cont.)

Please see http://www.diodes.com/package-outlines.html for the latest version.

(4) Package Type: SO-14

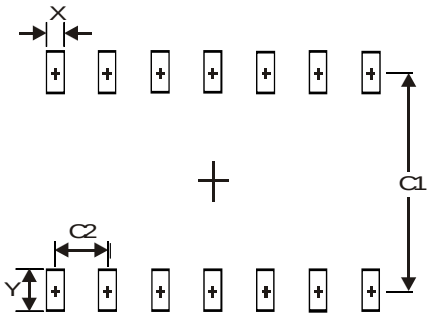

Dimensions	Value (in mm)
X	0.60
Y	1.50
C1	5.4
C2	1.27

(5) Package Type: TSSOP-14

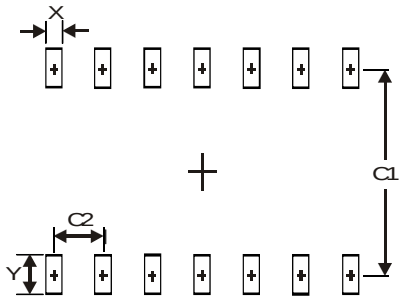

Dimensions	Value (in mm)
X	0.45
Y	1.45
C1	5.9
C2	0.65

© Diodes Incorporated

IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

A. Life support devices or systems are devices or systems which:

1. are intended to implant into the body, or
2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.

B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2018, Diodes Incorporated

www.diodes.com

OCEAN CHIPS
Океан Электроники
Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».

AVIC JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).

FORSTAR®

Телефон: 8 (812) 309-75-97 (многоканальный)
Факс: 8 (812) 320-03-32
Электронная почта: ocean@oceanchips.ru
Web: http://oceanchips.ru/
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А