
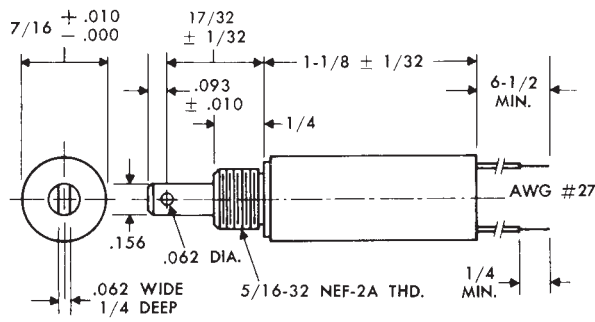
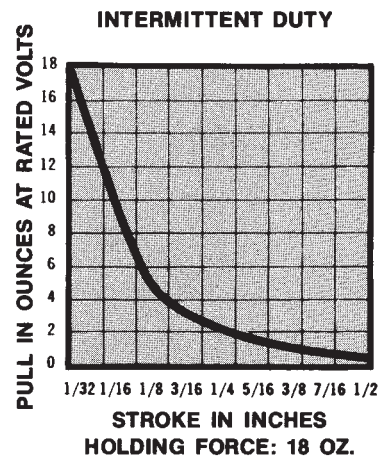




Notes:

1. Solenoid shown in energized position.
2. .250 Plunger configuration shown supplied for spring return only.
3. Largest size thread that may be threaded on push rod #0.
4. Push force approximately 90% of pull forces shown.

Type C7-18

Specifications		Standard Coils		
Size	7/16" Diameter x 1 1/8" Long (From Mounting Surface)	Nominal Volts (D.C.)	Resistance (OHMS $\pm 10\%$) at 25°C	
Weight	1/2 Oz. Max.		Continuous Duty	Intermittent Duty
Mounting	5/16-32 Threaded Bushing (Nut and Lockwasher Supplied)	6	18	3.6
Dielectric Strength	500 VRMS	12	72	14.4
Insulation Material	Class "A" (105° C)	24	288	58.0
Life Expectancy	10 Million Cycles at Rated Load	110	6613	1323.0
Nominal Coil Power	Continuous Duty—2 Watts Intermittent Duty (10%)—10 Watts (One Minute Max. on Time)	Other Coils and Duty Cycles Available Upon Request		

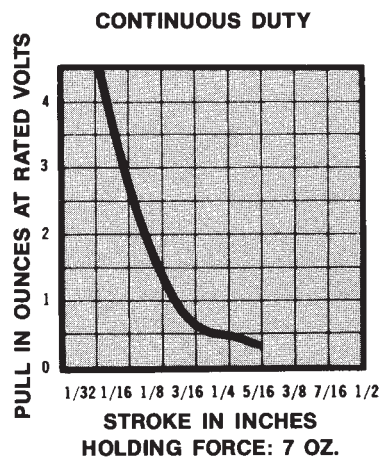

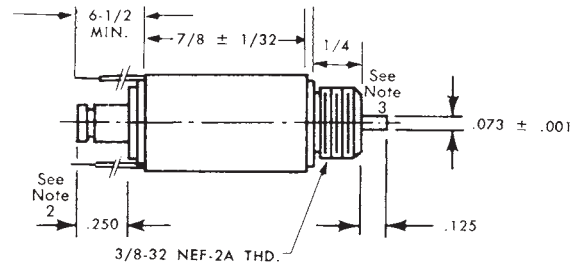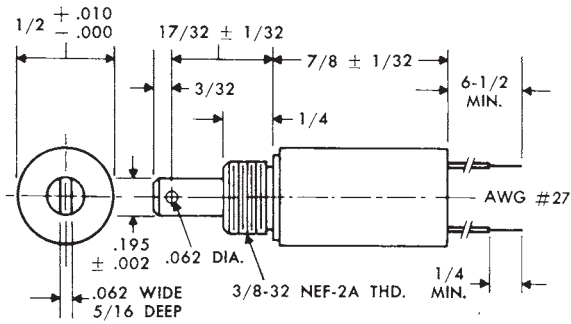**Notes:**



1. Solenoid shown in energized position.
2. .250 Plunger configuration shown supplied for spring return only.
3. Largest size thread that may be threaded on push rod #1.
4. Push force approximately 90% of pull forces shown.



Type C8-14**Specifications**

Size	1/2" Diameter x 7/8" Long (From Mounting Surface)
Weight	1 Oz. Max.
Mounting	3/8-32 Threaded Bushing (Nut and Lockwasher Supplied)
Dielectric Strength	500 VRMS
Insulation Material	Class "A" (105° C)
Life Expectancy	10 Million Cycles at Rated Load
Nominal Coil Power	Continuous Duty—2.4 Watts Intermittent Duty (10%)—7 Watts (One Minute Max. on Time)

Standard Coils

Nominal Volts (D.C.)	Resistance (OHMS $\pm 10\%$) at 25°C	
	Continuous Duty	Intermittent Duty
6	15	5.0
12	60	20.6
24	240	82.0
110	5510	1890.0
Other Coils and Duty Cycles Available Upon Request		

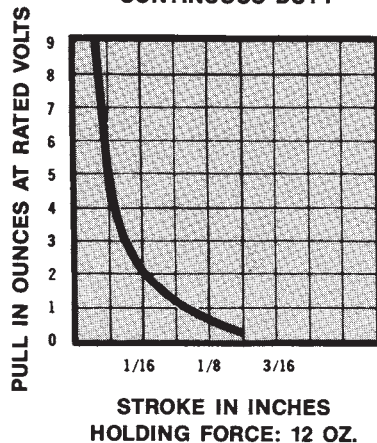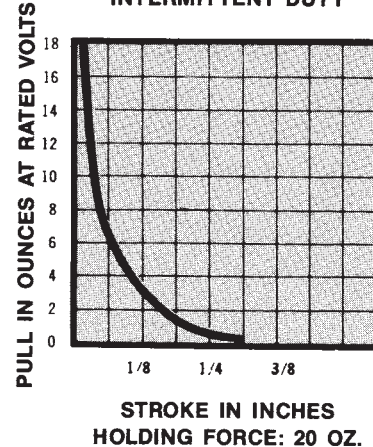CONTINUOUS DUTY**INTERMITTENT DUTY**

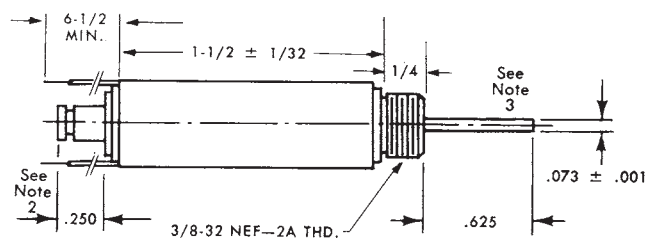
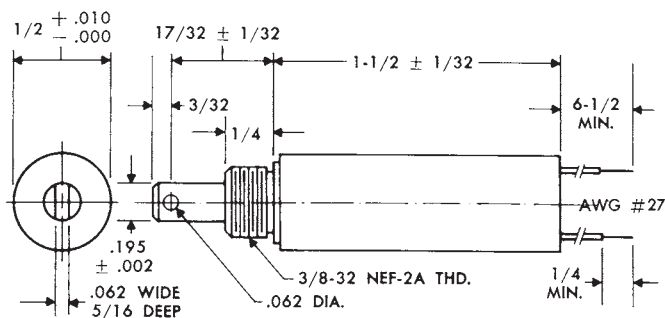



Notes:

1. Solenoid shown in energized position.
2. .250 Plunger configuration shown supplied for spring return only.
3. Largest size thread that may be threaded on push rod #1.
4. Push force approximately 90% of pull forces shown.

Type C8-24

Specifications		Standard Coils		
Size	½" Diameter x 1½" Long (From Mounting Surface)	Nominal Volts (D.C.)	Resistance (OHMS ± 10%) at 25°C	
Weight	1½ Oz. Max.		Continuous Duty	Intermittent Duty
Mounting	⅜-32 Threaded Bushing (Nut and Lockwasher Supplied)	6	10.3	2.4
Dielectric Strength	500 VRMS	12	41.0	9.6
Insulation Material	Class "A" (105° C)	24	165.0	38.5
Life Expectancy	10 Million Cycles at Rated Load	110	3780.0	882.0
Nominal Coil Power	Continuous Duty—3.5 Watts Intermittent Duty (10%)—15 Watts (One Minute Max. on Time)	Other Coils and Duty Cycles Available Upon Request		

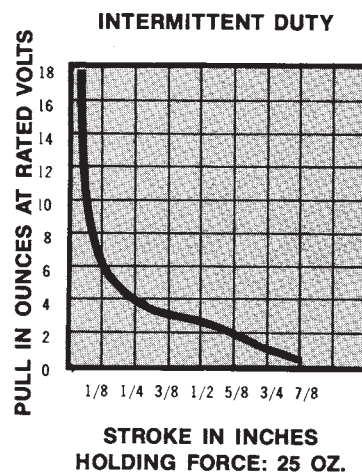
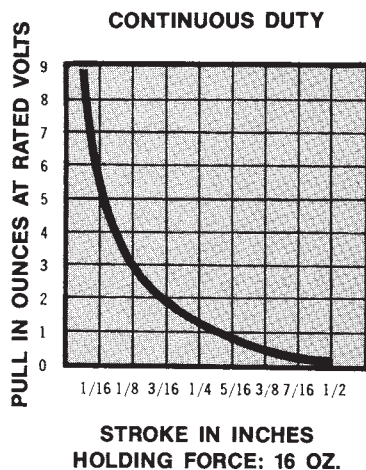


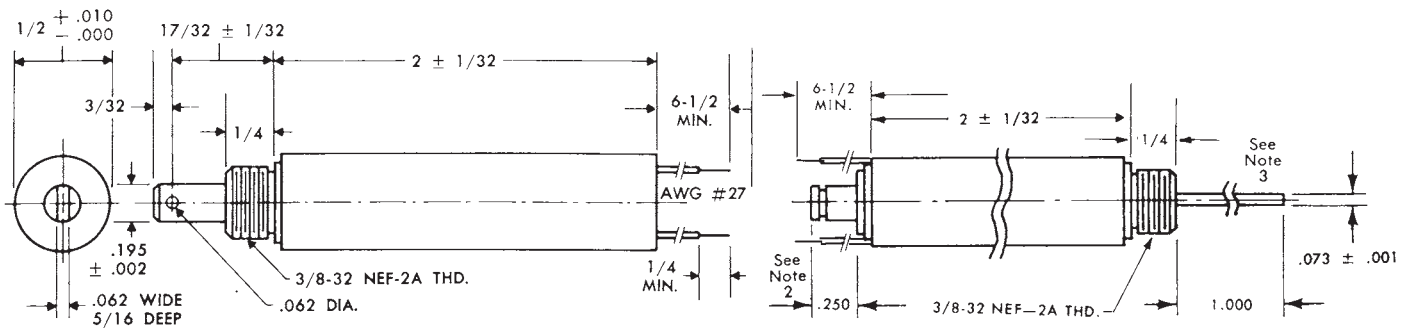
**Notes:**

1. Solenoid shown in energized position.
2. .250 Plunger configuration shown supplied for spring return only.
3. Largest size thread that may be threaded on push rod #1.
4. Push force approximately 90% of pull forces shown.

Type C8-32

Specifications		Standard Coils		
Size	1/2" Diameter x 2" Long (From Mounting Surface)	Nominal Volts (D.C.)	Resistance (OHMS $\pm 10\%$) at 25°C	
Weight	2 Oz. Max.		Continuous Duty	Intermittent Duty
Mounting	3/8-32 Threaded Bushing (Nut and Lockwasher Supplied)	6	9	1.8
Dielectric Strength	500 VRMS	12	36	7.2
Insulation Material	Class "A" (105° C)	24	145	29.0
Life Expectancy	10 Million Cycles at Rated Load	110	3306	661.0
Nominal Coil Power	Continuous Duty—4 Watts Intermittent Duty (10%)—20 Watts (One Minute Max. on Time)	Other Coils and Duty Cycles Available Upon Request		

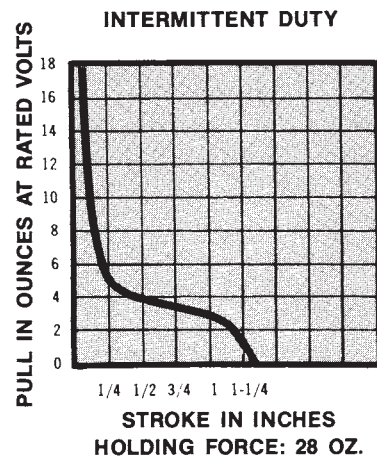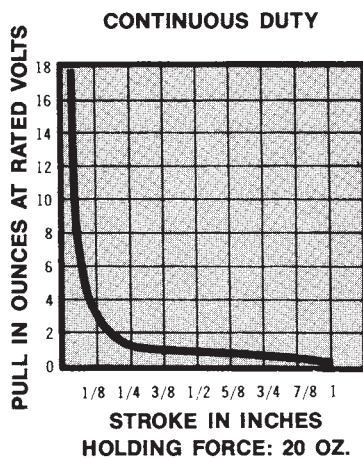


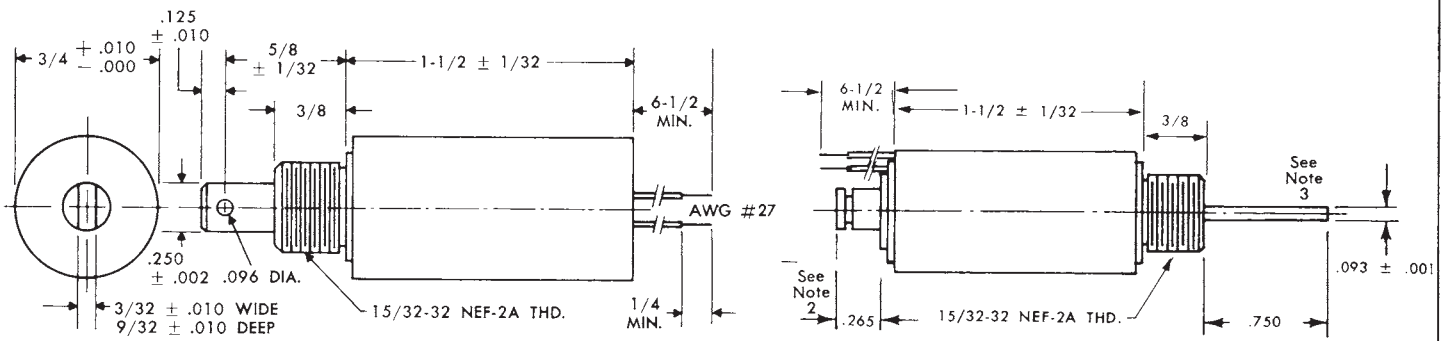



Notes:

1. Solenoid shown in energized position.
2. .265 Plunger configuration shown supplied for spring return only.
3. Largest size thread that may be threaded on push rod #3.
4. Push force approximately 90% of pull forces shown.

Type C12-24

Specifications		Standard Coils		
Size	3/4" Diameter x 1 1/2" Long (From Mounting Surface)	Nominal Volts (D.C.)	Resistance (OHMS ± 10%) at 25°C	
Weight	3 Oz. Max.		Continuous Duty	Intermittent Duty
Mounting	15/32-32 Threaded Bushing (Nut and Lockwasher Supplied)	6	10.3	1.6
Dielectric Strength	500 VRMS	12	41.0	6.5
Insulation Material	Class "A" (105° C)	24	165.0	26.0
Life Expectancy	10 Million Cycles at Rated Load	110	3780.0	600.0
Nominal Coil Power	Continuous Duty—3.5 Watts Intermittent Duty (10%)—22 Watts (One Minute Max. on Time)	Other Coils and Duty Cycles Available Upon Request		

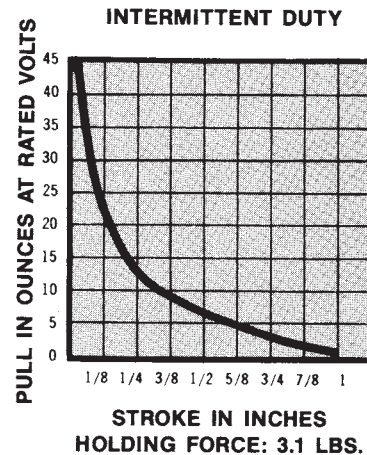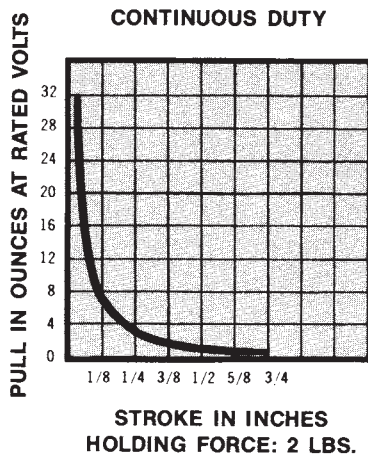


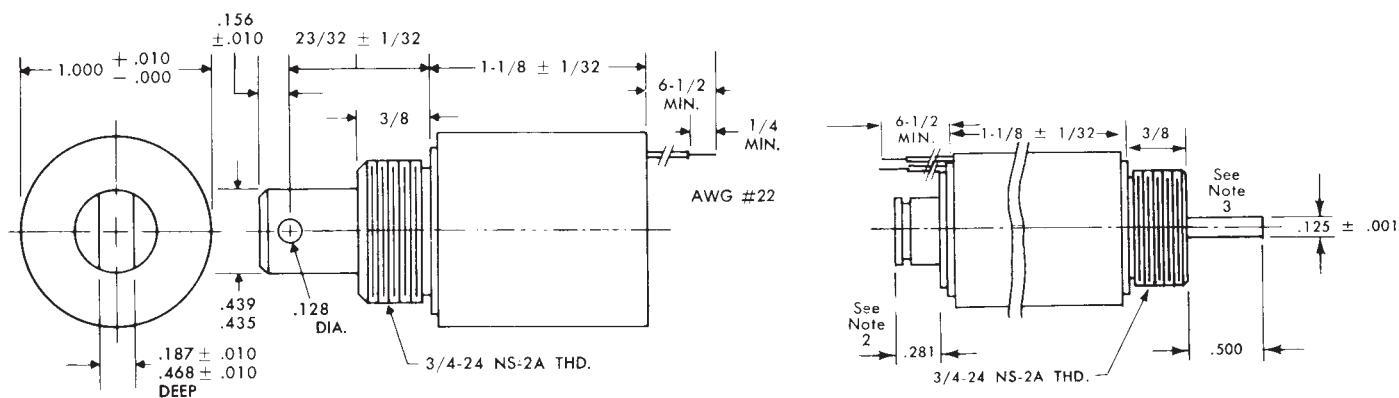



Notes:

1. Solenoid shown in energized position.
2. .281 Plunger configuration shown supplied for spring return only.
3. Largest size thread that may be threaded on push rod #5.
4. Push force approximately 90% of pull forces shown.

Type C16-18

Specifications		Standard Coils		
Size	1" Diameter x 1½" Long (From Mounting Surface)	Nominal Volts (D.C.)	Resistance (OHMS ± 10%) at 25°C	
Weight	4 Oz. Max.		Continuous Duty	Intermittent Duty
Mounting	¾-24 Threaded Bushing (Nut and Lockwasher Supplied)	6	9	1.9
Dielectric Strength	500 VRMS	12	36	7.6
Insulation Material	Class "A" (105° C)	24	144	30.0
Life Expectancy	10 Million Cycles at Rated Load	110	3306	696.0
Nominal Coil Power	Continuous Duty—4 Watts Intermittent Duty (10%)—19 Watts (One Minute Max. on Time)	Other Coils and Duty Cycles Available Upon Request		

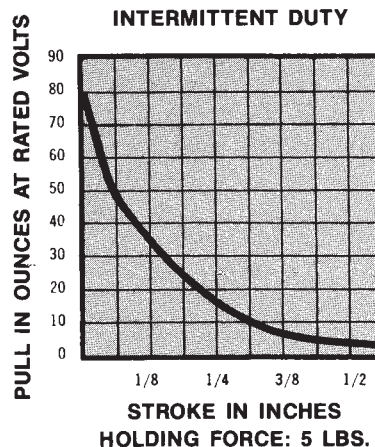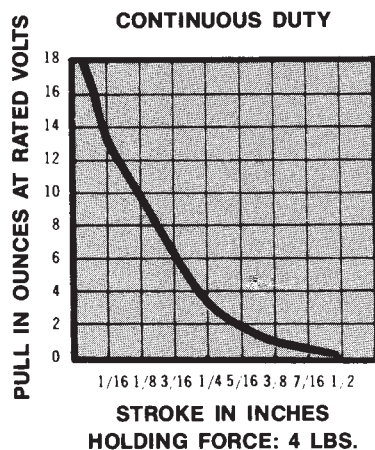


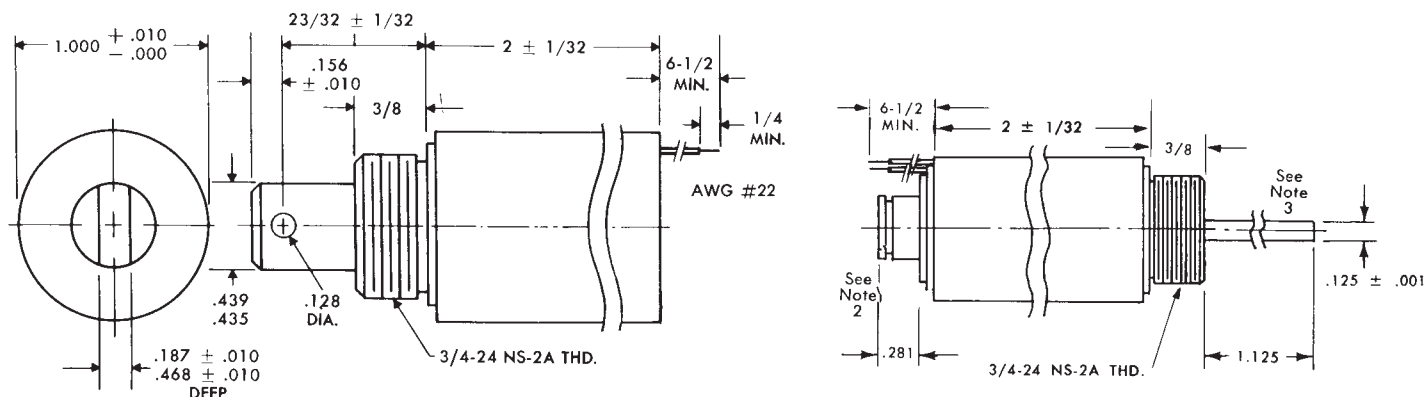



Notes:

1. Solenoid shown in energized position.
2. .281 Plunger configuration shown supplied for spring return only.
3. Largest size thread that may be threaded on push rod #5.
4. Push force approximately 90% of pull forces shown.

Type C16-32

Specifications		Standard Coils		
Size	1" Diameter x 2" Long (From Mounting Surface)	Nominal Volts (D.C.)	Resistance (OHMS ± 10%) at 25°C	
Weight	5½ Oz. Max.		Continuous Duty	Intermittent Duty
Mounting	¾-24 Threaded Bushing (Nut and Lockwasher Supplied)	6	6.5	.95
Dielectric Strength	500 VRMS	12	26.0	3.80
Insulation Material	Class "A" (105° C)	24	105.0	15.00
Life Expectancy	10 Million Cycles at Rated Load	110	2405	348.0
Nominal Coil Power	Continuous Duty—5.5 Watts Intermittent Duty (10%)—38 Watts (One Minute Max. on Time)	Other Coils and Duty Cycles Available Upon Request		

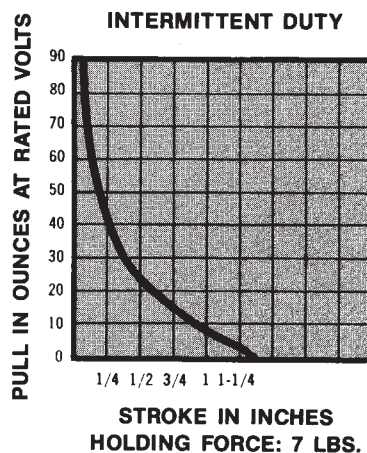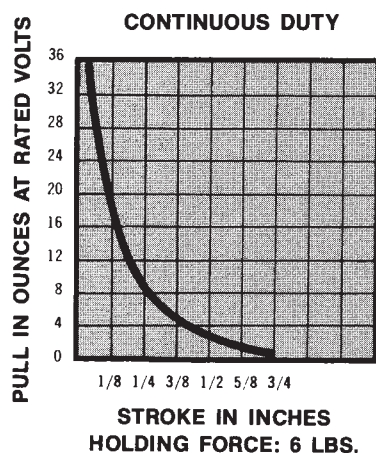

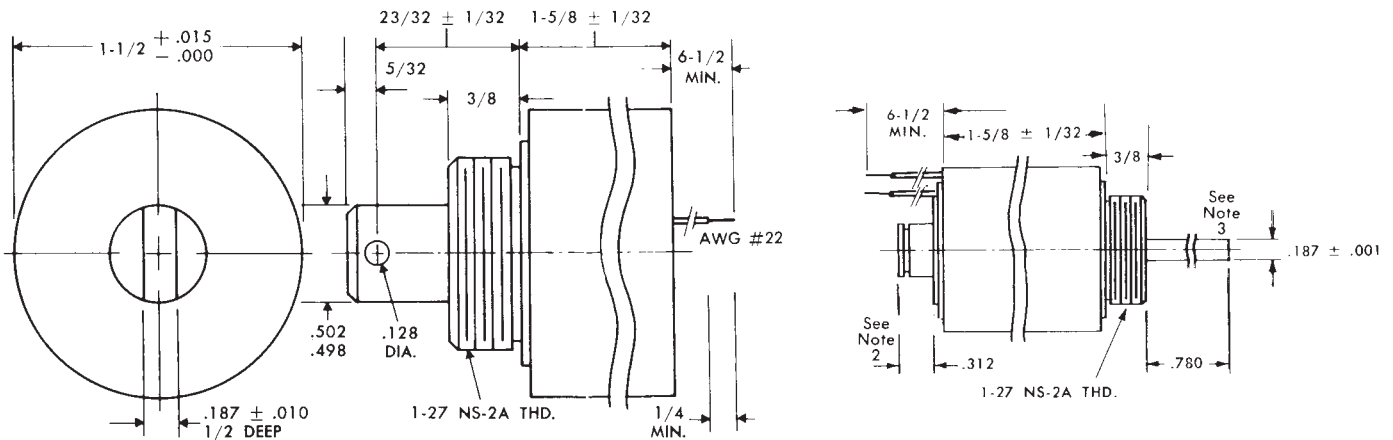**Notes:**

1. Solenoid shown in energized position.
2. .312 Plunger configuration shown supplied for spring return only.
3. Largest size thread that may be threaded on push rod #10.
4. Push force approximately 90% of pull forces shown.



Type C24-26**Specifications**



Size	1½" Diameter x 1⅝" Long (From Mounting Surface)
Weight	10 Oz. Max.
Mounting	1-27 Threaded Bushing (Nut and Lockwasher Supplied)
Dielectric Strength	500 VRMS
Insulation Material	Class "A" (105° C)
Life Expectancy	10 Million Cycles at Rated Load
Nominal Coil Power	Continuous Duty—7 Watts Intermittent Duty (10%)—40 Watts (One Minute Max. on Time)

Standard Coils

Nominal Volts (D.C.)	Resistance (OHMS $\pm 10\%$) at 25°C	
	Continuous Duty	Intermittent Duty
6	5.0	.9
12	20.6	3.6
24	82.0	14.0
110	1890.0	331.0

Other Coils and Duty Cycles
Available Upon Request

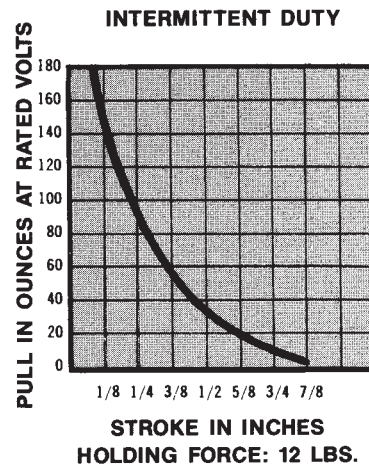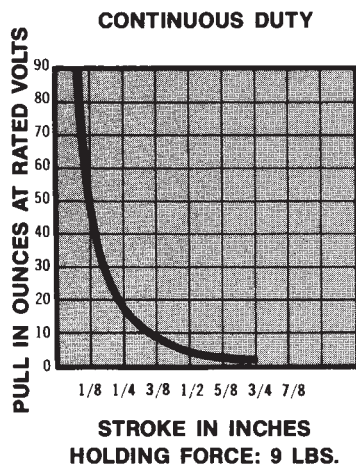

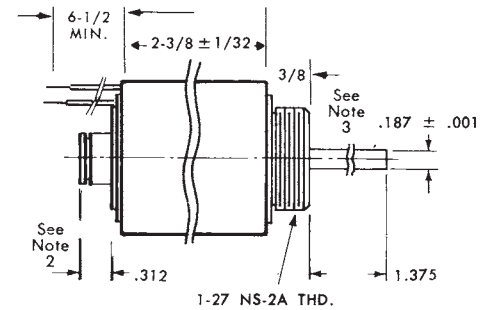
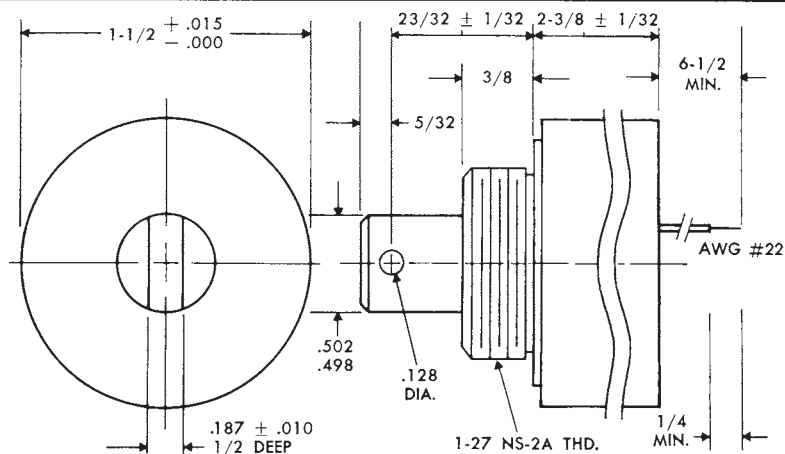


Notes:

1. Solenoid shown in energized position.
2. .312 Plunger configuration shown supplied for spring return only.
3. Largest size thread that may be threaded on push rod #10.
4. Push force approximately 90% of pull forces shown.

Type C24-38

Specifications		Standard Coils		
Size	1½" Diameter x 2¾" Long (From Mounting Surface)	Nominal Volts (D.C.)	Resistance (OHMS ± 10%) at 25°C	
Weight	18 Oz. Max.		Continuous Duty	Intermittent Duty
Mounting	1-27 Threaded Bushing (Nut and Lockwasher Supplied)	6	3.6	.6
Dielectric Strength	500 VRMS	12	14.5	2.4
Insulation Material	Class "A" (105° C)	24	58.0	9.6
Life Expectancy	10 Million Cycles at Rated Load	110	1323.0	220.0
Nominal Coil Power	Continuous Duty—10 Watts Intermittent Duty (10%)—60 Watts (One Minute Max. on Time)	Other Coils and Duty Cycles Available Upon Request		

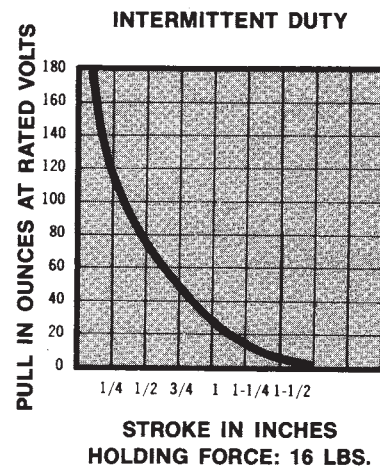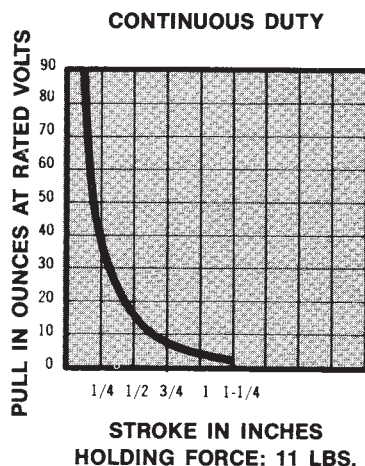

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А