

DWG. NO.

SA94843

# RBGT GROUNDING & RBMT MOUNTING TRACKS

THIS DRAWING IS A CONTROLLED DOCUMENT FOR SOURIAU USA, INC.  
IT IS SUBJECT TO CHANGE WITHOUT NOTIFICATION.  
CONTACT THE DOCUMENT CONTROL CENTER FOR THE LATEST REVISION.

PRO-E

THE INFORMATION CONTAINED IN THIS DRAWING IS CONFIDENTIAL AND MAY NOT BE  
DISCLOSED WITHOUT WRITTEN CONSENT FROM SOURIAU USA, INC.

SUPERSEDES: SE94843-5

| REV | DESCRIPTION           | BY<br>DATE      | CHKD<br>DATE    |
|-----|-----------------------|-----------------|-----------------|
| U   | REVISED PER ECN 12047 | RSK<br>10-09-13 | SDH<br>10-09-13 |
| T   | REVISED PER ECN 11710 | RSK<br>05-02-12 | SDH<br>05-02-12 |
| S   | REVISED PER ECN 11271 | VKP<br>11-15-10 | SDH<br>11-15-10 |
| R   | REVISED PER ECN 7622  | JRD<br>09-20-02 | SDH<br>09-20-02 |

DRAWING TITLE

**TRACKS, GROUNDING & MOUNTING**


LINEAR MEASURE:  INCH [mm]

CAT NO. **RBGT \_ & RBMT \_ (SEE TABLE, SHT. 2)**

THIRD ANGLE PROJECTION

CAGE NO.: 09922

SIZE: A



APPROVAL

|        |     |          |
|--------|-----|----------|
| DRAWN: | VKP | 11-15-10 |
| CHKD : | SDH | 11-15-10 |
| DSGN : | JDA | 10-13-92 |
| MFG :  | DH  | 11-15-10 |
| QC :   | DK  | 11-15-10 |

**CUSTOMER**

**SOURIAU**

DRAWING SCALE: 1:1  
DRAWING NO. REV

| No. OF PLACES | INCH [mm]     |
|---------------|---------------|
| ONE PLACE     | ±.1 [±3]      |
| TWO PLACES    | ±.02 [±0.5]   |
| THREE PLACES  | ±.010 [±0.25] |
| ANGLES ±1°    |               |

INTERPRET THIS DRAWING IN ACCORDANCE  
WITH ASME Y14.5M - 1994.

[www.souriau.com](http://www.souriau.com)

SA94843 U

1 OF 6

DWG. NO.  
SA94843

NOTES:

- 1. GROUNDING TRACK ACCOMMODATES PIN CONTACTS PER MIL-C-39029/1-101. WITH A WIRE RANGE OF 24-22-20 AWG. USE INSERTION/REMOVAL TOOL PER MIL-I-81969/14C-11.

MATERIAL:

- STRAIN RELIEF GROMMET: SILICONE RUBBER, COLOR RED
- GROMMET BONDING: EPOXY
- GROUNDING MODULE BODY: GLASS FORTIFIED THERMOPLASTIC UL94V-0. COLOR BLUE
- GROUNDING AND MOUNTING TRACKS: 6063-T6 ALUMINUM
- GROUNDING RIVETS: ALUMINUM ALLOY
- GROUNDING SOCKET CONTACTS: BERYLLIUM COPPER
- CONTACT RETENTION CLIPS: BERYLLIUM COPPER
- SOCKET CONTACT SLEEVES: THERMOPLASTIC, LIQUID CRYSTAL POLYMER
- TERMINAL IDENTIFICATION STRIP: THERMOPLASTIC, UL94V-0, COLOR WHITE
- PROTECTIVE COATING: POLYURETHANE, COLOR OPTIONAL

FINISH:

- GROUNDING AND MOUNTING TRACKS: CHROMATE CONVERSION COATING PER MIL-C-81706, CLASS 3, METHOD C, COLOR GOLD. (REF: ALODINE 1200)
- GROUNDING SOCKET CONTACTS: 50 MICROINCHES [1.27 MICRONS] MIN. NICKEL ALL OVER. PIN CONTACT CURRENT BEARING SURFACE OVER-PLATED WITH 50 MICROINCHES [1.27 MICRONS] MIN. HARD GOLD.

| DESCRIPTION TABLE   |                 |            |
|---------------------|-----------------|------------|
| SOURIAU CATALOG NO. | (O.A LENGTH)    | WEIGHT (g) |
| RBGT2               | 2.000 [50.80]   | 17.5       |
| RBGT4               | 4.000 [101.60]  | 35.0       |
| RBGT6               | 6.000 [152.40]  | 52.5       |
| RBGT8               | 8.000 [203.20]  | 70.0       |
| RBGT10              | 10.000 [254.00] | 87.5       |
| RBGT14              | 14.000 [355.60] | 122.5      |
| RBGT16              | 16.000 [406.40] | 140.0      |
| RBGT18              | 18.000 [457.20] | 157.5      |
| RBGT20              | 20.000 [508]    | 175.0      |
| RBGT22              | 22.000 [558.80] | 192.5      |
| RBGT26              | 26.000 [660.40] | 227.5      |
| RBGT28              | 28.000 [711.20] | 245.0      |
| RBGT34              | 34.000 [863.60] | 297.5      |
| RBGT38              | 38.000 [965.20] | 332.5      |
| RBMT2               | 2.000 [50.80]   | 6.25       |
| RBMT4               | 4.000 [101.60]  | 12.5       |
| RBMT6               | 6.000 [152.40]  | 18.75      |
| RBMT8               | 8.000 [203.20]  | 25.0       |
| RBMT10              | 10.000 [254.00] | 31.25      |
| RBMT14              | 14.000 [355.60] | 43.75      |
| RBMT16              | 16.000 [406.40] | 50.0       |
| RBMT18              | 18.000 [457.20] | 56.25      |
| RBMT20              | 20.000 [508]    | 62.5       |
| RBMT22              | 22.000 [558.80] | 68.75      |
| RBMT26              | 26.000 [660.40] | 81.25      |
| RBMT28              | 28.000 [711.20] | 87.5       |
| RBMT34              | 34.000 [863.60] | 106.25     |
| RBMT38              | 38.000 [965.20] | 118.75     |

|     |                             |         |           |
|-----|-----------------------------|---------|-----------|
| --- | ALL REV. RECORDED ON SHT. 1 | ---     | ---       |
| REV |                             | BY DATE | CHKD DATE |

|   |                |                     |  |
|---|----------------|---------------------|--|
| DRAWING TITLE   |                |                     |  |
| <b>TRACKS, GROUNDING &amp; MOUNTING</b>                       |                |                     |  |
| <b>RBGT _ &amp; RBMT _ (SEE TABLE, SHT. 2)</b>                |                |                     |  |
| CAT NO.   | SIZE: A        | DRAWN: VKP 11-15-10 |  |
| CAGE NO.: 09922   |                | CHKD : SDH 11-15-10 |  |
| <b>CUSTOMER</b>   | <b>SOURIAU</b> | DSGN : JDA 10-13-92 |  |
|   |                | MFG : DH 11-15-10   |  |
|   |                | QC : DK 11-15-10    |  |
|   |                | DRAWING SCALE: 1:1  |  |
|   |                | DRAWING NO. REV     |  |
| INTERPRET THIS DRAWING IN ACCORDANCE WITH ASME Y14.5M - 1994. |                | SA94843 U           |  |
| <a href="http://www.souriau.com">www.souriau.com</a>          |                | 2 OF 6              |  |

|                                       |               |           |
|---------------------------------------|---------------|-----------|
| LINEAR MEASURE:                       |               | INCH [mm] |
| THIRD ANGLE PROJECTION                |               |           |
| TOLERANCES UNLESS OTHERWISE SPECIFIED |               |           |
| No. OF PLACES                         | INCH [mm]     |           |
| ONE PLACE                             | ±.1 [±3]      |           |
| TWO PLACES                            | ±.02 [±0.5]   |           |
| THREE PLACES                          | ±.010 [±0.25] |           |
| ANGLES ±1°                            |               |           |

THIS DRAWING IS A CONTROLLED DOCUMENT FOR SOURIAU USA, INC. IT IS SUBJECT TO CHANGE WITHOUT NOTIFICATION. CONTACT THE DOCUMENT CONTROL CENTER FOR THE LATEST REVISION.

**PRO-E**

THE INFORMATION CONTAINED IN THIS DRAWING IS CONFIDENTIAL AND MAY NOT BE DISCLOSED WITHOUT WRITTEN CONSENT FROM SOURIAU USA, INC.

DWG. NO.

SA94843

# PERFORMANCE CHARACTERISTICS

**ELECTRICAL:**

**CONTACT RESISTANCE:** IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.16.  
 REF: MIL-STD-1344, METHOD 3004.  
 SIZE 16-20: 45 MILLIVOLTS MAX. AT 7.5A WITH 20 AWG SILVER PLATED WIRE.

**LOW LEVEL CONTACT RESISTANCE:** IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.17.  
 REF: MIL-STD-1344, METHOD 3002.  
 SIZE 16-20: .009 OHMS MAX. WITH 20 AWG SILVER PLATED WIRE.

**VOLTAGE STABILITY:** 4 MILLIVOLT MAX. DIFFERENCE BETWEEN RECORDED HIGHEST AND LOWEST POTENTIAL DROP VALUES IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.18.

**ENVIRONMENTAL:**

**FLUID IMMERSION:** ALL MATERIALS ARE RESISTANT TO BMS3-11 (SKYDROL LD-4) AND MIL-H-5606 HYDRAULIC FLUIDS, AND MIL-L-7808 AND MIL-L-23699 LUBRICATING OILS.

**HUMIDITY:** IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.10.  
 REF: MIL-STD-1344, METHOD 1002, TYPE II, (EXCEPT WITHOUT STEP 7b)

**SALT SPRAY:** 500 HOURS IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.12.  
 REF: MIL-STD-1344, METHOD 1001, TEST CONDITION C.

**VIBRATION (SINUSOIDAL):** IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.8.1.  
 REF: MIL-STD-202, METHOD 204, TEST CONDITION G.

**VIBRATION (RANDOM):** IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.8.2.  
 REF: MIL-STD-1344, METHOD 2005, TEST CONDITION VI. LETTER J.

**MECHANICAL (IMPACT) SHOCK:** IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.9.  
 REF: MIL-STD-1344, METHOD 2004, TEST CONDITION D.

**THERMAL SHOCK:** IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.5.  
 REF: MIL-STD-1344, METHOD 1003, TEST CONDITION A, (EXCEPT TEMPERATURE EXTREMES ARE -65°C TO +150°C [-85°F TO +302°F]).

**TEMPERATURE LIFE:** 150°C [302°F] FOR 1000 HOURS IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.13.


**OZONE:** IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.14.  
 REF: MIL-STD-1344, METHOD 1007.


|     |                             |         |           |
|-----|-----------------------------|---------|-----------|
| --- | ALL REV. RECORDED ON SHT. 1 | ---     | ---       |
| REV | DESCRIPTION                 | BY DATE | CHKD DATE |

DRAWING TITLE  
**TRACKS, GROUNDING & MOUNTING**

CAT NO. **RBGT \_ & RBMT \_ (SEE TABLE, SHT. 2)**

CAGE NO.: 09922 SIZE: A

|  <p>TOLERANCES UNLESS OTHERWISE SPECIFIED</p> <table border="1"> <tr> <th>No. OF PLACES</th> <th>INCH [mm]</th> </tr> <tr> <td>ONE PLACE</td> <td>±.1 [±3]</td> </tr> <tr> <td>TWO PLACES</td> <td>±.02 [±0.5]</td> </tr> <tr> <td>THREE PLACES</td> <td>±.010 [±0.25]</td> </tr> <tr> <td colspan="2">ANGLES ±1°</td> </tr> </table> | No. OF PLACES | INCH [mm]     | ONE PLACE | ±.1 [±3] | TWO PLACES | ±.02 [±0.5] | THREE PLACES | ±.010 [±0.25] | ANGLES ±1° |  | <p><b>CUSTOMER</b></p> <p><b>SOURIAU</b></p> <p>www.souriau.com</p> | <p>APPROVAL</p> <table border="1"> <tr> <td>DRAWN:</td> <td>VKP</td> <td>11-15-10</td> </tr> <tr> <td>CHKD :</td> <td>SDH</td> <td>11-15-10</td> </tr> <tr> <td>DSGN :</td> <td>JDA</td> <td>10-13-92</td> </tr> <tr> <td>MFG :</td> <td>DH</td> <td>11-15-10</td> </tr> <tr> <td>QC :</td> <td>DK</td> <td>11-15-10</td> </tr> </table> <p>DRAWING SCALE: 1:1</p> <table border="1"> <tr> <td>DRAWING NO.</td> <td>REV</td> </tr> <tr> <td>SA94843</td> <td>U</td> </tr> </table> <p>3 OF 6</p> | DRAWN: | VKP | 11-15-10 | CHKD : | SDH | 11-15-10 | DSGN : | JDA | 10-13-92 | MFG : | DH | 11-15-10 | QC : | DK | 11-15-10 | DRAWING NO. | REV | SA94843 | U |
|--|---------------|---------------|-----------|----------|------------|-------------|--------------|---------------|------------|--|---|--|--------|-----|----------|--------|-----|----------|--------|-----|----------|-------|----|----------|------|----|----------|-------------|-----|---------|---|
|  | No. OF PLACES | INCH [mm]     |           |          |            |             |              |               |            |  |   |  |        |     |          |        |     |          |        |     |          |       |    |          |      |    |          |             |     |         |   |
|  | ONE PLACE     | ±.1 [±3]      |           |          |            |             |              |               |            |  |   |  |        |     |          |        |     |          |        |     |          |       |    |          |      |    |          |             |     |         |   |
|  | TWO PLACES    | ±.02 [±0.5]   |           |          |            |             |              |               |            |  |   |  |        |     |          |        |     |          |        |     |          |       |    |          |      |    |          |             |     |         |   |
|  | THREE PLACES  | ±.010 [±0.25] |           |          |            |             |              |               |            |  |   |  |        |     |          |        |     |          |        |     |          |       |    |          |      |    |          |             |     |         |   |
| ANGLES ±1°   |               |               |           |          |            |             |              |               |            |  |   |  |        |     |          |        |     |          |        |     |          |       |    |          |      |    |          |             |     |         |   |
| DRAWN:   | VKP           | 11-15-10      |           |          |            |             |              |               |            |  |   |  |        |     |          |        |     |          |        |     |          |       |    |          |      |    |          |             |     |         |   |
| CHKD :   | SDH           | 11-15-10      |           |          |            |             |              |               |            |  |   |  |        |     |          |        |     |          |        |     |          |       |    |          |      |    |          |             |     |         |   |
| DSGN :   | JDA           | 10-13-92      |           |          |            |             |              |               |            |  |   |  |        |     |          |        |     |          |        |     |          |       |    |          |      |    |          |             |     |         |   |
| MFG :  | DH            | 11-15-10      |           |          |            |             |              |               |            |  |   |  |        |     |          |        |     |          |        |     |          |       |    |          |      |    |          |             |     |         |   |
| QC :   | DK            | 11-15-10      |           |          |            |             |              |               |            |  |   |  |        |     |          |        |     |          |        |     |          |       |    |          |      |    |          |             |     |         |   |
| DRAWING NO.  | REV           |               |           |          |            |             |              |               |            |  |   |  |        |     |          |        |     |          |        |     |          |       |    |          |      |    |          |             |     |         |   |
| SA94843  | U             |               |           |          |            |             |              |               |            |  |   |  |        |     |          |        |     |          |        |     |          |       |    |          |      |    |          |             |     |         |   |
| INTERPRET THIS DRAWING IN ACCORDANCE WITH ASME Y14.5M - 1994.  |               |               |           |          |            |             |              |               |            |  |   |  |        |     |          |        |     |          |        |     |          |       |    |          |      |    |          |             |     |         |   |

LINEAR MEASURE:  INCH [mm]

THIRD ANGLE PROJECTION

THIS DRAWING IS A CONTROLLED DOCUMENT FOR SOURIAU USA, INC. IT IS SUBJECT TO CHANGE WITHOUT NOTIFICATION. CONTACT THE DOCUMENT CONTROL CENTER FOR THE LATEST REVISION.

**PRO-E**

THE INFORMATION CONTAINED IN THIS DRAWING IS CONFIDENTIAL AND MAY NOT BE DISCLOSED WITHOUT WRITTEN CONSENT FROM SOURIAU USA, INC.

DWG. NO.


SA94843

# PERFORMANCE CHARACTERISTICS

**MECHANICAL:**

- MAGNETIC PERMEABILITY:** ALL MATERIALS DO NOT EXHIBIT A RELATIVE MAGNETIC PERMEABILITY OF GREATER THAN 2 IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.15. REF: MIL-STD-1344, METHOD 3006.
- MAINTENANCE AGING:** IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.3.
- CONTACT INSERTION/REMOVAL FORCE:** 10 LBS [44,4N] MAX. IN ACCORDANCE WITH MIL-T-81714, PARA.4.6.3
- CONTACT RETENTION:** 20 LBS [88,9N] MIN. IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.4. AXIAL DISPLACEMENT DOES NOT EXCEED .012 [0,30]. REF: MIL-STD-1344, METHOD 2007.
- PROBE DAMAGE:** IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.2.
- RETENTION SYSTEM FLUID IMMERSION:** IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.23.
- INTERNAL CONTACT DURABILITY:** 100 CYCLES OF MATING AND UNMATING TO DEPTH OF MECHANICAL AND ELECTRICAL ENGAGEMENT IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.19.
- OVERSIZE PIN CONTACT PROTECTION:** GROUNDING MODULE DESIGNED TO PREVENT ENTRANCE OF AN OVERSIZE TEST PIN OF Ø.070 [1,78] IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.20.
- CONTACT WALKOUT:** IN ACCORDANCE WITH MIL-T-81714, PARA. 4.6.22. REF: MIL-STD-1549.

SEE DRAWING SE94834 FOR  
FEEDBACK MODULE

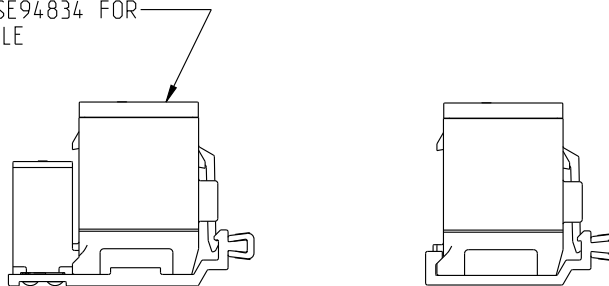

FEEDBACK MODULE INSTALLED IN  
GROUNDING AND MOUNTING TRACKS  
SCALE 1:1

|     |                             |         |           |
|-----|-----------------------------|---------|-----------|
| --- | ALL REV. RECORDED ON SHT. 1 | ---     | ---       |
| REV | DESCRIPTION                 | BY DATE | CHKD DATE |

|   |  |                |  |
|---|--|----------------|--|
| DRAWING TITLE   |  |                |  |
| <b>TRACKS, GROUNDING &amp; MOUNTING</b>                       |  |                |  |
| CAT NO. <b>RBGT _ &amp; RBMT _ (SEE TABLE, SHT. 2)</b>        |  |                |  |
| CAGE NO.: 09922   |  | SIZE: A        |  |
| <b>CUSTOMER</b>   |  | <b>SOURIAU</b> |  |
|   |  |                |  |
| INTERPRET THIS DRAWING IN ACCORDANCE WITH ASME Y14.5M - 1994. |  | APPROVAL       | DRAWN: VKP 11-15-10<br>CHKD : SDH 11-15-10<br>DSGN : JDA 10-13-92<br>MFG : DH 11-15-10<br>QC : DK 11-15-10<br>DRAWING SCALE: 1:1<br>DRAWING NO. SA94843<br>REV U |
|   |  | 4 OF 6         |  |

|                                       |               |           |
|---------------------------------------|---------------|-----------|
| LINEAR MEASURE:                       |               | INCH [mm] |
| THIRD ANGLE PROJECTION                |               |           |
|                                       |               |           |
| TOLERANCES UNLESS OTHERWISE SPECIFIED |               |           |
| No. OF PLACES                         | INCH [mm]     |           |
| ONE PLACE                             | ±.1 [±3]      |           |
| TWO PLACES                            | ±.02 [±0.5]   |           |
| THREE PLACES                          | ±.010 [±0.25] |           |
| ANGLES ±1°                            |               |           |

THIS DRAWING IS A CONTROLLED DOCUMENT FOR SOURIAU USA, INC. IT IS SUBJECT TO CHANGE WITHOUT NOTIFICATION. CONTACT THE DOCUMENT CONTROL CENTER FOR THE LATEST REVISION.

**PRO-E**

THE INFORMATION CONTAINED IN THIS DRAWING IS CONFIDENTIAL AND MAY NOT BE DISCLOSED WITHOUT WRITTEN CONSENT FROM SOURIAU USA, INC.

DWG. NO.

SA94843

THIS DRAWING IS A CONTROLLED DOCUMENT FOR SOURIAU USA, INC. IT IS SUBJECT TO CHANGE WITHOUT NOTIFICATION. CONTACT THE DOCUMENT CONTROL CENTER FOR THE LATEST REVISION.

PRO-E

THE INFORMATION CONTAINED IN THIS DRAWING IS CONFIDENTIAL AND MAY NOT BE DISCLOSED WITHOUT WRITTEN CONSENT FROM SOURIAU USA, INC.



|     |                             |         |           |
|-----|-----------------------------|---------|-----------|
| --- | ALL REV. RECORDED ON SHT. 1 | ---     | ---       |
| REV | DESCRIPTION                 | BY DATE | CHKD DATE |

DRAWING TITLE  
**TRACKS, GROUNDING & MOUNTING**

CAT NO. **RBGT** & **RBMT** (SEE TABLE, SHT. 2)

CAGE NO.: 09922 SIZE: A

|                                       |                  |
|---------------------------------------|------------------|
| LINEAR MEASURE:                       | <b>INCH</b> [mm] |
| THIRD ANGLE PROJECTION                |                  |
| TOLERANCES UNLESS OTHERWISE SPECIFIED |                  |
| No. OF PLACES                         | INCH [mm]        |
| ONE PLACE                             | ±.1 [±3]         |
| TWO PLACES                            | ±.02 [±0.5]      |
| THREE PLACES                          | ±.010 [±0.25]    |
| ANGLES ±1°                            |                  |

**CUSTOMER**

INTERPRET THIS DRAWING IN ACCORDANCE WITH ASME Y14.5M - 1994.

**SOURIAU**

www.souriau.com

|                     |            |          |
|---------------------|------------|----------|
| APPROVAL            | DRAWN: VKP | 11-15-10 |
|                     | CHKD : SDH | 11-15-10 |
|                     | DSGN : JDA | 10-13-92 |
|                     | MFG : DH   | 11-15-10 |
|                     | QC : DK    | 11-15-10 |
| DRAWING SCALE: 1:1  |            |          |
| DRAWING NO. SA94843 |            | REV U    |
| 5 OF 6              |            |          |

THIS DRAWING IS A CONTROLLED DOCUMENT FOR SOURIAU USA, INC. IT IS SUBJECT TO CHANGE WITHOUT NOTIFICATION. CONTACT THE DOCUMENT CONTROL CENTER FOR THE LATEST REVISION.

PRO-E

THIS DRAWING IS CONFIDENTIAL AND MAY NOT BE DISCLOSED WITHOUT WRITTEN CONSENT FROM SOURIAU USA, INC.

DWG. NO.  
SA94843



MOUNTING TRACK - CATALOG NO. RBMT4 SHOWN

DIMENSIONS, INK STAMPING, AND OTHER FEATURES ARE THE SAME AS THE GROUNDING TRACK EXCEPT AS SHOWN.

| SOURIAU CATALOG NO. | BOEING PART NO. | MOUNTING TRACK      |                 |                 | FEEDBACK MODULES ACCOMMODATED SEE DWG. SE94834 |
|---------------------|-----------------|---------------------|-----------------|-----------------|--|
|                     |                 | SOURIAU CATALOG NO. | BOEING PART NO. | ±.010 [0.25]    |  |
| RBGT2               | S280W 555-502   | RBMT2               | S280W 555-602   | 2.000 [50.80]   | 2  |
| RBGT4               | S280W 555-504   | RBMT4               | S280W 555-604   | 4.000 [101.60]  | 4  |
| RBGT6               | S280W 555-506   | RBMT6               | S280W 555-606   | 6.000 [152.40]  | 6  |
| RBGT8               | S280W 555-508   | RBMT8               | S280W 555-608   | 8.000 [203.20]  | 8  |
| RBGT10              | S280W 555-510   | RBMT10              | S280W 555-610   | 10.000 [254.00] | 10   |
| RBGT14              | S280W 555-514   | RBMT14              | S280W 555-614   | 14.000 [355.60] | 14   |
| RBGT16              | S280W 555-516   | RBMT16              | S280W 555-616   | 16.000 [406.40] | 16   |
| RBGT18              | S280W 555-518   | RBMT18              | S280W 555-618   | 18.000 [457.20] | 18   |
| RBGT20              | S280W 555-520   | RBMT20              | S280W 555-620   | 20.000 [508]    | 20   |
| RBGT22              | S280W 555-522   | RBMT22              | S280W 555-622   | 22.000 [558.80] | 22   |
| RBGT26              | S280W 555-526   | RBMT26              | S280W 555-626   | 26.000 [660.40] | 26   |
| RBGT28              | S280W 555-528   | RBMT28              | S280W 555-628   | 28.000 [711.20] | 28   |
| RBGT34              | S280W 555-534   | RBMT34              | S280W 555-634   | 34.000 [863.60] | 34   |
| RBGT38              | S280W 555-538   | RBMT38              | S280W 555-638   | 38.000 [965.20] | 38   |

|     |                             |         |           |
|-----|-----------------------------|---------|-----------|
| --- | ALL REV. RECORDED ON SHT. 1 | ---     | ---       |
| REV | ECN NUMBER                  | BY DATE | CHKD DATE |

DRAWING TITLE  
**TRACKS, GROUNDING & MOUNTING**

CAT NO. **RBGT \_ & RBMT \_ (SEE TABLE, SHT. 2)**

CAGE NO.: 09922      SIZE: A

**CUSTOMER**

INTERPRET THIS DRAWING IN ACCORDANCE WITH ASME Y14.5M - 1994.

**SOURIAU**

[www.souriau.com](http://www.souriau.com)

|        |     |          |
|--------|-----|----------|
| DRAWN: | VKP | 11-15-10 |
| CHKD : | SDH | 11-15-10 |
| DSGN : | JDA | 10-13-92 |
| MFG :  | DH  | 11-15-10 |
| QC :   | DK  | 11-15-10 |

|                    |     |
|--------------------|-----|
| DRAWING SCALE: 1:1 |     |
| DRAWING NO.        | REV |
| SA94843            | U   |

|        |  |
|--------|--|
| 6 OF 6 |  |
|--------|--|

LINEAR MEASURE: INCH INCH [mm]

THIRD ANGLE PROJECTION

TOLERANCES UNLESS OTHERWISE SPECIFIED

| No. OF PLACES | INCH [mm]     |
|---------------|---------------|
| ONE PLACE     | ±.1 [±3]      |
| TWO PLACES    | ±.02 [±0.5]   |
| THREE PLACES  | ±.010 [±0.25] |

ANGLES ±1°

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».



## JONHON

«**JONHON**» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«**FORSTAR**» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А