



# IEEE 802.3af/at-Compliant, Powered Device Interface Controllers with Integrated Power MOSFET

## General Description

The MAX5981 provides a complete interface for a powered device (PD) to comply with the IEEE® 802.3af/at standard in a power-over-ethernet (PoE) system. The MAX5981 provides the PD with a detection signature, classification signature, and an integrated isolation power switch with inrush current control. During the inrush period, the MAX5981 limits the current to less than 180mA before switching to the higher current limit (720mA to 880mA) when the isolation power MOSFET is fully enhanced. The device features an input UVLO with wide hysteresis and long deglitch time to compensate for twisted-pair cable resistive drop and to assure glitch-free transition during power-on/off conditions. The MAX5981 can withstand up to 100V at the input.

The MAX5981 supports a 2-Event classification method as specified in the IEEE 802.3at standard and provides a signal to indicate when probed by a Type 2 power sourcing equipment (PSE). The device detects the presence of a wall adapter power source connection and allows a smooth switch over from the PoE power source to the wall power adapter.

The MAX5981 also provides a power-good (PG) signal, two-step current limit and foldback, overtemperature protection, and di/dt limit. A sleep mode feature in the MAX5981 provides low power consumption while supporting Maintain Power Signature (MPS). An ultra-low-power sleep mode feature in the MAX5981 further reduces power consumption while still supporting MPS. The MAX5981 also features an LED driver that is automatically activated during sleep mode. During sleep mode, the LED driver sources a periodic current (I<sub>LED</sub>) at 250Hz (MAX5981A) or 15.625kHz (MAX5981B).

The MAX5981 is available in a 16-pin, 5mm x 5mm TQFN power package. The device is rated over the -40°C to +85°C extended temperature range.

## Features

- ◆ Sleep Mode and Ultra-Low Power
- ◆ IEEE 802.3af/at Compliant
- ◆ 2-Event Classification or an External Wall Adapter Indicator Output
- ◆ Simplified Wall Adapter Interface
- ◆ PoE Classification 0–5
- ◆ 100V Input Absolute Maximum Rating
- ◆ Inrush Current Limit of 180mA Maximum
- ◆ Current Limit During Normal Operation Between 720mA and 880mA
- ◆ Current Limit and Foldback
- ◆ Legacy UVLO at 36V
- ◆ LED Driver with Programmable LED Current
- ◆ Overtemperature Protection
- ◆ Thermally Enhanced, 5mm x 5mm, 16-Pin TQFN

## Applications

IEEE 802.3af/at Powered Devices  
 IP Phones, Wireless Access Nodes, IP Security Cameras  
 WiMAX™ Base Stations

## Ordering Information

| PART                 | TEMP RANGE     | PIN-PACKAGE | SLEEP MODE |
|----------------------|----------------|-------------|------------|
| <b>MAX5981A</b> ETE+ | -40°C to +85°C | 16 TQFN-EP* | Yes        |
| <b>MAX5981B</b> ETE+ | -40°C to +85°C | 16 TQFN-EP* | Yes        |

+Denotes a lead(Pb)-free/RoHS-compliant package.

\*EP = Exposed pad.

WiMAX is a trademark of WiMAX Forum.

IEEE is a registered service mark of the Institute of Electrical and Electronics Engineers, Inc.



# IEEE 802.3af/at-Compliant, Powered Device Interface Controllers with Integrated Power MOSFET

## ABSOLUTE MAXIMUM RATINGS

|                                                                                          |                |
|------------------------------------------------------------------------------------------|----------------|
| V <sub>DD</sub> to V <sub>SS</sub> .....                                                 | -0.3V to +100V |
| DET, RTN, WAD, PG, $\overline{2EC}$ to V <sub>SS</sub> .....                             | -0.3V to +100V |
| CLS, $\overline{SL}$ , $\overline{WK}$ , $\overline{ULP}$ , LED to V <sub>SS</sub> ..... | -0.3V to +6V   |
| Maximum Current on CLS (100ms maximum) .....                                             | 100mA          |
| Continuous Power Dissipation (T <sub>A</sub> = +70°C) (Note 1)                           |                |
| TQFN (derate 28.6mW/°C above +70°C)                                                      |                |
| Multilayer Board .....                                                                   | 2285.7mW       |

Package Thermal Resistance (Note 2)

|                                         |                 |
|-----------------------------------------|-----------------|
| $\theta_{JA}$ .....                     | 35°C/W          |
| $\theta_{JC}$ .....                     | 2.7°C/W         |
| Operating Temperature Range .....       | -40°C to +85°C  |
| Maximum Junction Temperature .....      | +150°C          |
| Storage Temperature Range .....         | -65°C to +150°C |
| Lead Temperature (soldering, 10s) ..... | +300°C          |
| Soldering Temperature .....             | +260°C          |

**Note 1:** Maximum power dissipation is obtained using JEDEC JESD51-5 and JESD51-7 specifications.

**Note 2:** Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a four-layer board. For detailed information on package thermal considerations, refer to [www.maxim-ic.com/thermal-tutorial](http://www.maxim-ic.com/thermal-tutorial).

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## ELECTRICAL CHARACTERISTICS

(V<sub>IN</sub> = (V<sub>DD</sub> - V<sub>SS</sub>) = 48V, R<sub>DET</sub> = 24.9k $\Omega$ , R<sub>CLS</sub> = 615 $\Omega$ , and R <sub>$\overline{SL}$</sub>  = 60.4k $\Omega$ . RTN, WAD, PG,  $\overline{2EC}$ ,  $\overline{WK}$ , and  $\overline{ULP}$  unconnected, all voltages are referenced to V<sub>SS</sub>, unless otherwise noted. T<sub>A</sub> = T<sub>J</sub> = -40°C to +85°C, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Note 3)

| PARAMETER                               | SYMBOL              | CONDITIONS                                                                                                    |                                   | MIN   | TYP   | MAX   | UNITS      |
|-----------------------------------------|---------------------|---------------------------------------------------------------------------------------------------------------|-----------------------------------|-------|-------|-------|------------|
| DETECTION MODE                          |                     |                                                                                                               |                                   |       |       |       |            |
| Input Offset Current                    | I <sub>OFFSET</sub> | V <sub>IN</sub> = 1.4V to 10.1V (Note 4)                                                                      |                                   | 10    |       |       | μA         |
| Effective Differential Input Resistance | dR                  | V <sub>IN</sub> = 1.4V up to 10.1V with 1V step, V <sub>DD</sub> = RTN = WAD = PG = $\overline{2EC}$ (Note 5) |                                   | 23.95 | 25.00 | 25.50 | kΩ         |
| CLASSIFICATION MODE                     |                     |                                                                                                               |                                   |       |       |       |            |
| Classification Disable Threshold        | V <sub>TH,CLS</sub> | V <sub>IN</sub> rising (Note 6)                                                                               |                                   | 22.0  | 22.8  | 23.6  | V          |
| Classification Stability Time           |                     |                                                                                                               |                                   | 0.2   |       |       | ms         |
| Classification Current                  | I <sub>CLASS</sub>  | V <sub>IN</sub> = 12.5V to 20.5V, V <sub>DD</sub> = RTN = WAD = PG = $\overline{2EC}$                         | Class 0, R <sub>CLS</sub> = 619Ω  | 0     | 3.96  |       | mA         |
|                                         |                     |                                                                                                               | Class 1, R <sub>CLS</sub> = 117Ω  | 9.12  | 11.88 |       |            |
|                                         |                     |                                                                                                               | Class 2, R <sub>CLS</sub> = 66.5Ω | 17.2  | 19.8  |       |            |
|                                         |                     |                                                                                                               | Class 3, R <sub>CLS</sub> = 43.7Ω | 26.3  | 29.7  |       |            |
|                                         |                     |                                                                                                               | Class 4, R <sub>CLS</sub> = 30.9Ω | 36.4  | 43.6  |       |            |
|                                         |                     |                                                                                                               | Class 5, R <sub>CLS</sub> = 21.3Ω | 52.7  | 63.3  |       |            |
| TYPE 2 (802.3at) CLASSIFICATION MODE    |                     |                                                                                                               |                                   |       |       |       |            |
| Mark Event Threshold                    | V <sub>THM</sub>    | V <sub>IN</sub> falling                                                                                       |                                   | 10.1  | 10.7  | 11.6  | V          |
| Hysteresis on Mark Event Threshold      |                     |                                                                                                               |                                   | 0.84  |       |       | V          |
| Mark Event Current                      | I <sub>MARK</sub>   | V <sub>IN</sub> falling to enter mark event, 5.2V ≤ V <sub>IN</sub> ≤ 10.1V                                   |                                   | 0.25  | 0.85  |       | mA         |
| Reset Event Threshold                   | V <sub>THR</sub>    | V <sub>IN</sub> falling                                                                                       |                                   | 2.8   | 4     | 5.2   | V          |
| POWER MODE                              |                     |                                                                                                               |                                   |       |       |       |            |
| V <sub>IN</sub> Supply Voltage Range    |                     |                                                                                                               |                                   | 60    |       |       | V          |
| V <sub>IN</sub> Supply Current          | I <sub>Q</sub>      |                                                                                                               |                                   | 0.27  |       |       | 0.55<br>mA |

# IEEE 802.3af/at-Compliant, Powered Device Interface Controllers with Integrated Power MOSFET

## ELECTRICAL CHARACTERISTICS (continued)

( $V_{IN} = (V_{DD} - V_{SS}) = 48V$ ,  $R_{DET} = 24.9k\Omega$ ,  $R_{CLS} = 615\Omega$ , and  $R_{SL} = 60.4k\Omega$ . RTN, WAD, PG,  $\overline{2EC}$ ,  $\overline{WK}$ , and  $\overline{ULP}$  unconnected, all voltages are referenced to  $V_{SS}$ , unless otherwise noted.  $T_A = T_J = -40^\circ C$  to  $+85^\circ C$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ .) (Note 3)

| PARAMETER                                            | SYMBOL           | CONDITIONS                                                                  | MIN  | TYP   | MAX  | UNITS    |
|------------------------------------------------------|------------------|-----------------------------------------------------------------------------|------|-------|------|----------|
| $V_{IN}$ Turn-On Voltage                             | $V_{ON}$         | $V_{IN}$ rising                                                             | 34.3 | 35.4  | 36.6 | V        |
| $V_{IN}$ Turn-Off Voltage                            | $V_{OFF}$        | $V_{IN}$ falling                                                            | 30   |       |      | V        |
| $V_{IN}$ Turn-On/-Off Hysteresis                     | $V_{HYST\_UVLO}$ | (Note 7)                                                                    | 4.2  |       |      | V        |
| $V_{IN}$ Deglitch Time                               | $t_{OFF\_DLY}$   | $V_{IN}$ falling from 40V to 20V (Note 8)                                   | 30   | 120   |      | $\mu s$  |
| Inrush to Operating Mode Delay                       | $t_{DELAY}$      | $t_{DELAY}$ = minimum PG current pulse width after entering into power mode | 87   | 96    | 105  | ms       |
| Isolation Power MOSFET On-Resistance                 | $R_{ON\_ISO}$    | $I_{RTN} = 600mA$ , $T_J = +25^\circ C$                                     |      | 0.5   | 0.7  | $\Omega$ |
|                                                      |                  | $T_J = +85^\circ C$                                                         |      | 0.65  | 1    |          |
|                                                      |                  | $T_J = +125^\circ C$                                                        |      | 0.8   |      |          |
| RTN Leakage Current                                  | $I_{RTN\_LKG}$   | $V_{RTN} = 12.5V$ to 30V                                                    |      |       | 10   | $\mu A$  |
| <b>CURRENT LIMIT</b>                                 |                  |                                                                             |      |       |      |          |
| Inrush Current Limit                                 | $I_{INRUSH}$     | During initial turn-on period, $V_{RTN} = 1.5V$                             | 90   | 135   | 180  | mA       |
| Current Limit During Normal Operation                | $I_{LIM}$        | After inrush completed, $V_{RTN} = 1V$                                      | 720  | 800   | 880  | mA       |
| Foldback Threshold                                   |                  | $V_{RTN}$ (Note 9)                                                          | 13   |       | 16.5 | V        |
| <b>LOGIC</b>                                         |                  |                                                                             |      |       |      |          |
| WAD Detection Threshold                              | $V_{WAD\_REF}$   | $V_{WAD}$ rising, $V_{IN} = 14V$ to 48V (referenced to RTN)                 | 8    | 9     | 10   | V        |
| WAD Detection Threshold Hysteresis                   |                  | $V_{WAD}$ falling, $V_{RTN} = 0V$ , $V_{SS}$ unconnected                    |      | 0.725 |      | V        |
| WAD Input Current                                    | $I_{WAD\_LKG}$   | $V_{WAD} = 10V$ (referenced to RTN)                                         |      |       | 3.5  | $\mu A$  |
| $\overline{2EC}$ Sink Current                        |                  | $V_{\overline{2EC}} = 3.5V$ (referenced to RTN), $V_{SS}$ disconnected      | 1    | 1.5   | 2.25 | mA       |
| $\overline{2EC}$ Off-Leakage Current                 |                  | $V_{\overline{2EC}} = 48V$                                                  |      |       | 1    | $\mu A$  |
| PG Sink Current                                      |                  | $V_{RTN} = 1.5V$ , $V_{PG} = 0.8V$ , during inrush period                   | 125  | 230   | 375  | $\mu A$  |
| PG Off-Leakage Current                               |                  | $V_{PG} = 60V$                                                              |      |       | 1    | $\mu A$  |
| <b>SLEEP MODE</b>                                    |                  |                                                                             |      |       |      |          |
| $\overline{WK}$ and $\overline{ULP}$ Logic Threshold | $V_{TH}$         | $V_{\overline{WK}}$ falling and $V_{\overline{ULP}}$ rising and falling     | 1.5  |       | 3    | V        |
| $\overline{SL}$ Logic Threshold                      |                  | Falling                                                                     | 0.75 | 0.8   | 0.85 | V        |
| $\overline{SL}$ Current                              |                  | $R_{SL} = 0\Omega$                                                          |      | 140   |      | $\mu A$  |
| LED Current Amplitude                                | $I_{LED}$        | $R_{SL} = 60.4k\Omega$ , $V_{LED} = 3.5V$                                   | 10   | 10.5  | 11.5 | mA       |
|                                                      |                  | $R_{SL} = 30.2k\Omega$ , $V_{LED} = 3.75V$                                  | 19.5 | 20.9  | 22.5 |          |
|                                                      |                  | $R_{SL} = 30.2k\Omega$ , $V_{LED} = 4V$                                     | 19   |       |      |          |

# IEEE 802.3af/at-Compliant, Powered Device Interface Controllers with Integrated Power MOSFET

## ELECTRICAL CHARACTERISTICS (continued)

( $V_{IN} = (V_{DD} - V_{SS}) = 48V$ ,  $R_{DET} = 24.9k\Omega$ ,  $R_{CLS} = 615\Omega$ , and  $R_{SL} = 60.4k\Omega$ .  $RTN$ ,  $WAD$ ,  $PG$ ,  $\overline{2EC}$ ,  $\overline{WK}$ , and  $\overline{ULP}$  unconnected, all voltages are referenced to  $V_{SS}$ , unless otherwise noted.  $T_A = T_J = -40^\circ C$  to  $+85^\circ C$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ .) (Note 3)

| PARAMETER                                 | SYMBOL     | CONDITIONS                              | MIN      | TYP  | MAX    | UNITS      |
|-------------------------------------------|------------|-----------------------------------------|----------|------|--------|------------|
| LED Current Programmable Range            |            |                                         | 10       |      | 20     | mA         |
| LED Current with Grounded $\overline{SL}$ |            | $V_{\overline{SL}} = 0V$                | 20.5     | 24.5 | 28.5   | mA         |
| LED Current Frequency                     | $f_{ILED}$ | Normal and ULP sleep mode               | MAX5981A |      | 250    | Hz         |
|                                           |            |                                         | MAX5981B |      | 15.625 | kHz        |
| LED Current Duty Cycle                    | $D_{ILED}$ | Normal and ULP sleep mode               |          | 25   |        | %          |
| $V_{DD}$ Current Amplitude                | $I_{VDD}$  | Normal sleep mode, $V_{LED} = 3.5V$     | 10       | 11   | 12     | mA         |
| Internal Current Duty Cycle               | $D_{IVDD}$ | Normal and $\overline{ULP}$ sleep modes |          | 75   |        | %          |
| Internal Current Enable Time              | $t_{MPS}$  | $\overline{ULP}$ sleep mode             | 76       | 84   | 92     | ms         |
| Internal Current Disable Time             | $t_{MPDO}$ | $\overline{ULP}$ sleep mode             | 205      | 228  | 250    | ms         |
| <b>THERMAL SHUTDOWN</b>                   |            |                                         |          |      |        |            |
| Thermal-Shutdown Threshold                | $T_{SD}$   | $T_J$ rising                            |          | +140 |        | $^\circ C$ |
| Thermal-Shutdown Hysteresis               |            | $T_J$ falling                           |          | 28   |        | $^\circ C$ |

**Note 3:** All devices are 100% production tested at  $T_A = +25^\circ C$ . Limits over temperature are guaranteed by design.

**Note 4:** The input offset current is illustrated in Figure 1.

**Note 5:** Effective differential input resistance is defined as the differential resistance between  $V_{DD}$  and  $V_{SS}$ . See Figure 1.

**Note 6:** Classification current is turned off whenever the device is in power mode.

**Note 7:** UVLO hysteresis is guaranteed by design, not production tested.

**Note 8:** A 20V glitch on input voltage, which takes  $V_{DD}$  below  $V_{ON}$  shorter than or equal to  $t_{OFF\_DLY}$  does not cause the MAX5981A/MAX5981B to exit power-on mode.

**Note 9:** In power mode, current-limit foldback is used to reduce the power dissipation in the isolation MOSFET during an overload condition across  $V_{DD}$  and  $RTN$ .

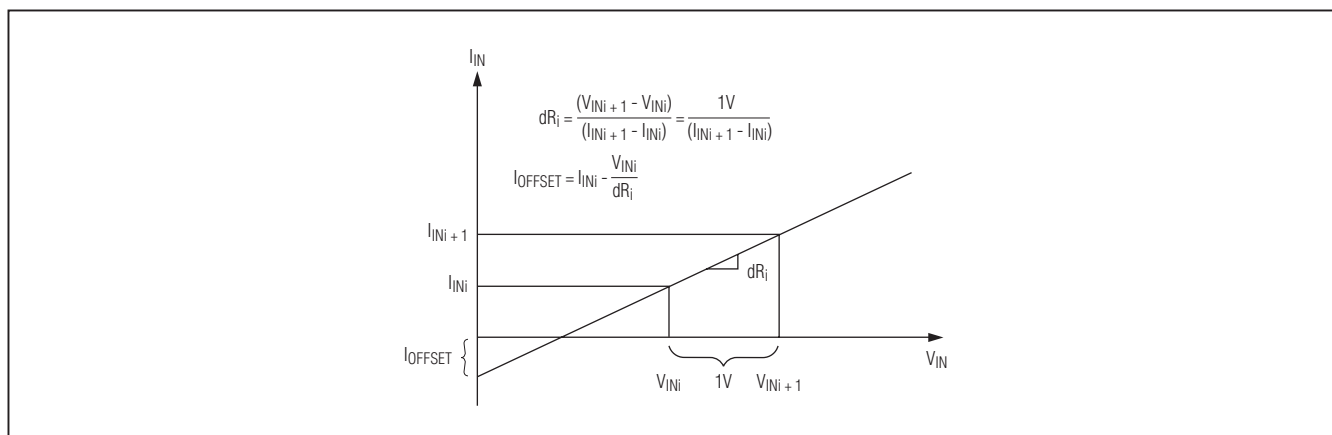


Figure 1. Effective Differential Input Resistance/Offset Current


# IEEE 802.3af/at-Compliant, Powered Device Interface Controllers with Integrated Power MOSFET

## Typical Operating Characteristics


( $V_{IN} = (V_{DD} - V_{SS}) = 54V$ ,  $R_{DET} = 24.9k\Omega$ ,  $R_{CLS} = 615\Omega$ , and  $R_{SL} = 60.4k\Omega$ .  $R_{TN}$ ,  $W_{AD}$ ,  $PG$ ,  $\overline{2EC}$ ,  $\overline{WK}$ , and  $\overline{ULP}$  unconnected; all voltages are referenced to  $V_{SS}$ .)

MAX5981A/MAX5981B


**DETECTION CURRENT  
vs. INPUT VOLTAGE**

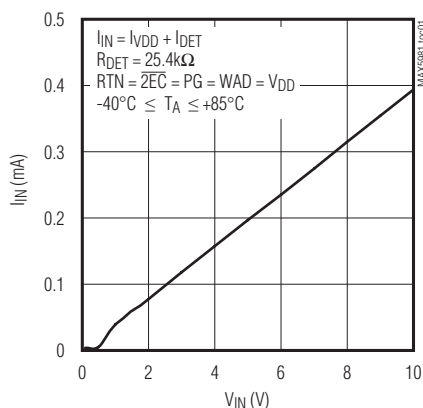


**SIGNATURE RESISTANCE  
vs. INPUT VOLTAGE**

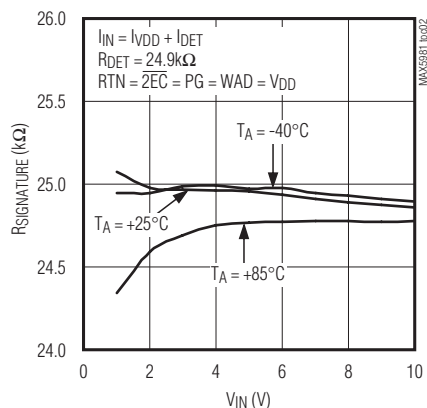


**INPUT OFFSET CURRENT  
vs. INPUT VOLTAGE**

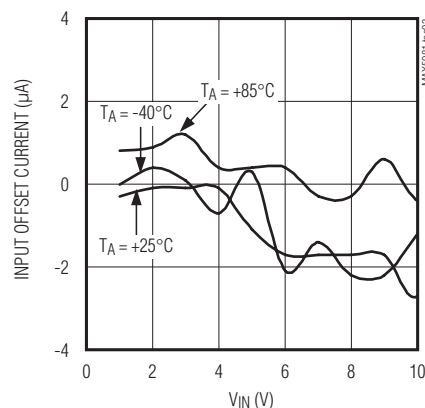


**CLASSIFICATION CURRENT vs.  
INPUT VOLTAGE**

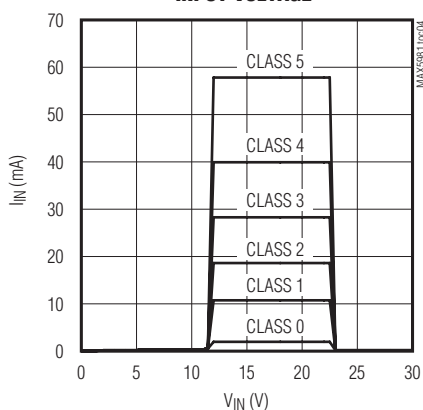


**CLASSIFICATION SETTLING TIME**

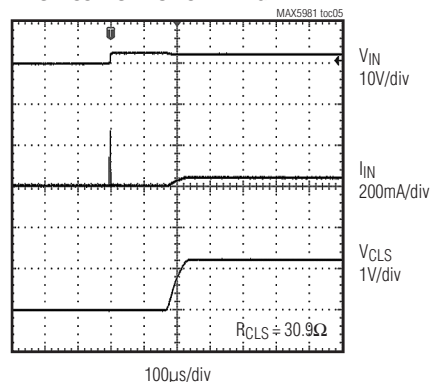


**$\overline{2EC}$  SINK CURRENT vs.  $\overline{2EC}$  VOLTAGE**

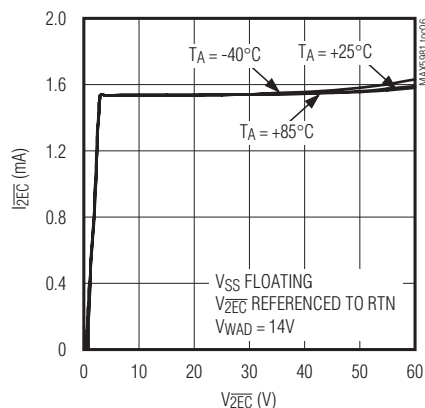

**PG SINK CURRENT vs. PG VOLTAGE**

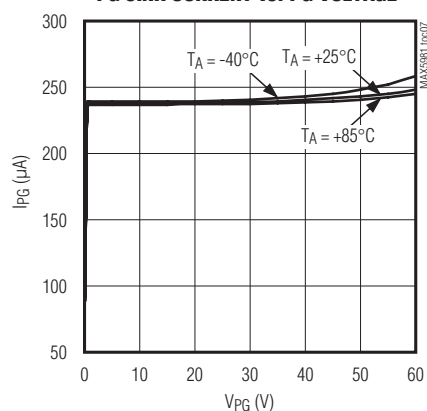






**INRUSH CURRENT LIMIT  
vs.  $R_{TN}$  VOLTAGE**

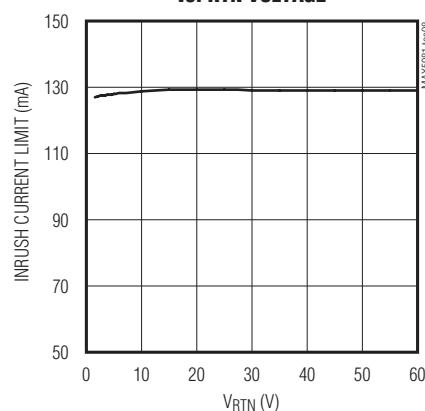

# IEEE 802.3af/at-Compliant, Powered Device Interface Controllers with Integrated Power MOSFET


## Typical Operating Characteristics (continued)

( $V_{IN} = (V_{DD} - V_{SS}) = 54V$ ,  $R_{DET} = 24.9k\Omega$ ,  $R_{CLS} = 615\Omega$ , and  $R_{SL} = 60.4k\Omega$ .  $R_{TN}$ ,  $WAD$ ,  $PG$ ,  $\overline{2EC}$ ,  $WK$ , and  $\overline{ULP}$  unconnected; all voltages are referenced to  $V_{SS}$ .)

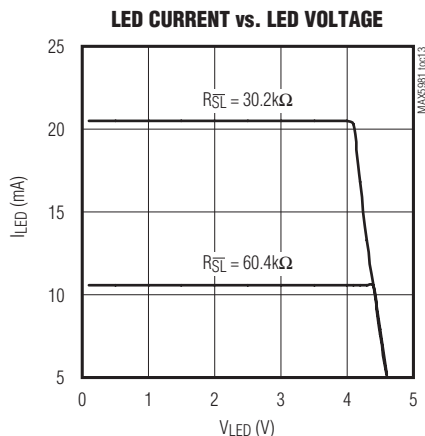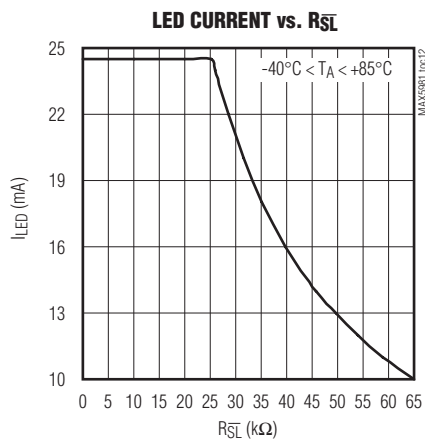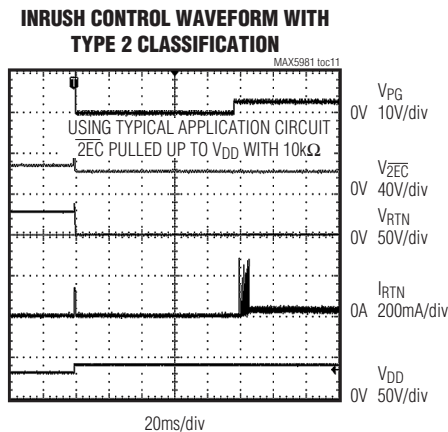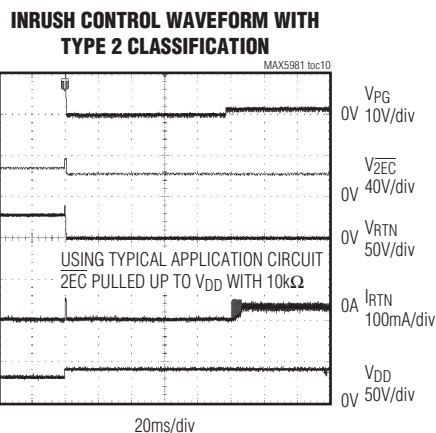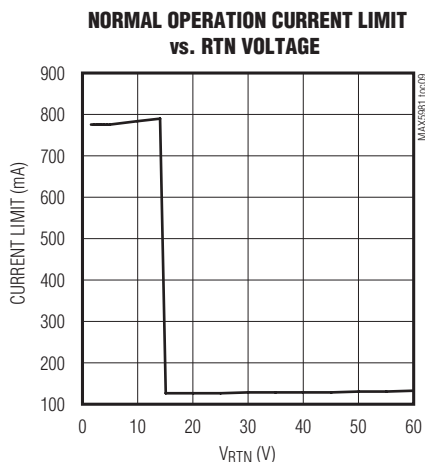

# IEEE 802.3af/at-Compliant, Powered Device Interface Controllers with Integrated Power MOSFET

## Pin Configuration

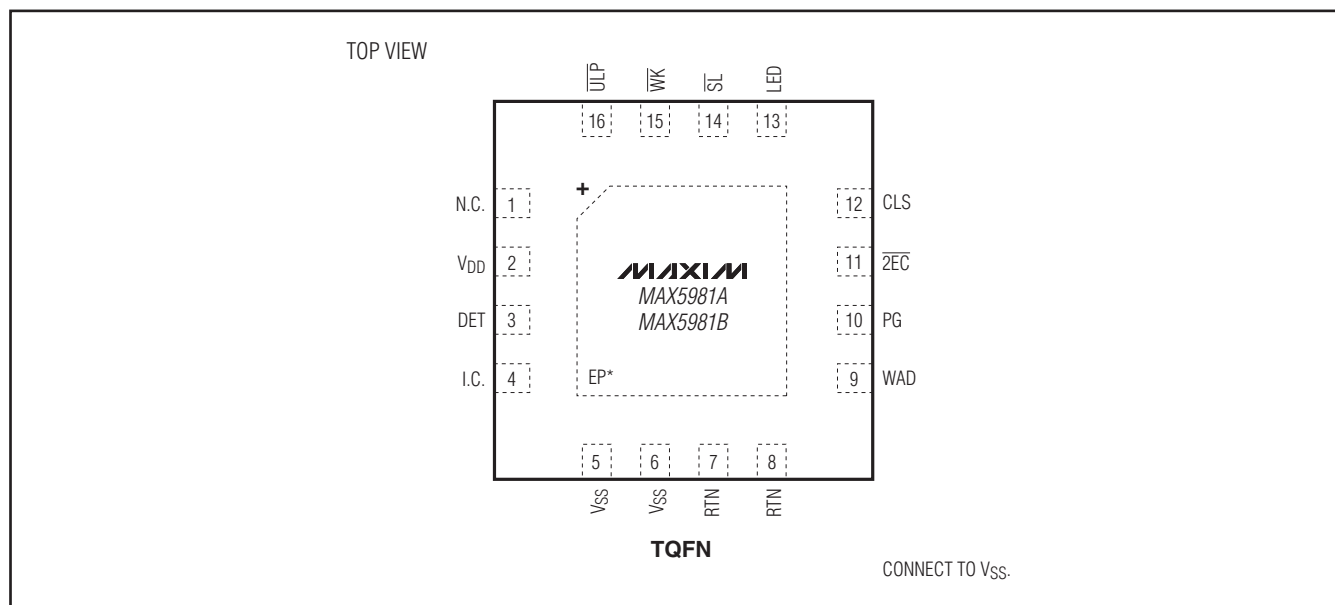

## Pin Description

| PIN  | NAME            | FUNCTION                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|------|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1    | N.C.            | No Connection. Not internally connected.                                                                                                                                                                                                                                                                                                                                                                                                        |
| 2    | V <sub>DD</sub> | Positive Supply Input. Connect a 68nF (min) bypass capacitor between V <sub>DD</sub> and V <sub>SS</sub> .                                                                                                                                                                                                                                                                                                                                      |
| 3    | DET             | Detection Resistor Input. Connect a signature resistor (R <sub>DET</sub> = 24.9kΩ) from DET to V <sub>DD</sub> .                                                                                                                                                                                                                                                                                                                                |
| 4    | I.C.            | Internally Connected. Leave unconnected.                                                                                                                                                                                                                                                                                                                                                                                                        |
| 5, 6 | V <sub>SS</sub> | Negative Supply Input. V <sub>SS</sub> connects to the source of the integrated isolation n-channel power MOSFET.                                                                                                                                                                                                                                                                                                                               |
| 7, 8 | RTN             | Drain of Isolation MOSFET. RTN connects to the drain of the integrated isolation n-channel power MOSFET. Connect RTN to the downstream DC-DC converter ground as shown in the <i>Typical Application Circuit</i> .                                                                                                                                                                                                                              |
| 9    | WAD             | Wall Power Adapter Detector Input. Wall adapter detection is enabled the moment V <sub>DD</sub> - V <sub>SS</sub> crosses the mark event threshold. Detection occurs when the voltage from WAD to RTN is greater than 9V. When a wall power adapter is present, the isolation n-channel power MOSFET turns off, 2EC current sink turns on. Connect WAD directly to RTN when the wall power adapter or other auxiliary power source is not used. |
| 10   | PG              | Open-Drain Power-Good Indicator Output. PG sinks 230μA to disable the downstream DC-DC converter while turning on the hot-swap MOSFET switch. PG current sink is disabled during detection, classification, and in the steady-state power mode. The PG current sink is turned on to disable the downstream DC-DC converter when the device is in sleep mode.                                                                                    |

# IEEE 802.3af/at-Compliant, Powered Device Interface Controllers with Integrated Power MOSFET


## Pin Description (continued)

| PIN | NAME             | FUNCTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-----|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 11  | $\overline{2EC}$ | 2-Event Classification Detect or Wall Adapter Detect Output. A 1.5mA current sink is enabled at $\overline{2EC}$ when a Type 2 PSE or a wall adapter is detected. When powered by a Type 2 PSE, the $\overline{2EC}$ current sink is enabled after the isolation MOSFET is fully on until $V_{IN}$ drops below the UVLO threshold. $\overline{2EC}$ is latched when powered by a Type 2 PSE until $V_{IN}$ drops below the reset threshold. $\overline{2EC}$ also asserts when a wall adapter supply, typically greater than 9V, is applied between WAD and RTN. $\overline{2EC}$ is not latched if asserted by WAD. The $\overline{2EC}$ current sink is turned off when the device is in sleep mode. |
| 12  | CLS              | Classification Resistor Input. Connect a resistor ( $R_{CLS}$ ) from CLS to $V_{SS}$ to set the desired classification current. See the classification current specifications in the <i>Electrical Characteristics</i> table to find the resistor value for a particular PD classification.                                                                                                                                                                                                                                                                                                                                                                                                            |
| 13  | LED              | LED Driver Output. During sleep mode, LED sources a periodic current ( $I_{LED}$ ). The amplitude of $I_{LED}$ is set by $R_{SL}$ according to the formula $I_{LED}$ (in A) = $645.75/(R_{SL} + 1200)$ .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| 14  | $\overline{SL}$  | Sleep Mode Enable Input. A falling edge on $\overline{SL}$ brings the device into sleep mode ( $\overline{V_{SL}}$ must drop below 0.75V). An external resistor ( $R_{SL}$ ) connected between $\overline{SL}$ and $V_{SS}$ sets the LED current ( $I_{LED}$ ).                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 15  | $\overline{WK}$  | Wake Mode Enable Input. $\overline{WK}$ has an internal 2.5k $\Omega$ pullup resistor to the internal 5V bias rail. A falling edge on $\overline{WK}$ brings the device out of sleep mode and into the normal operating mode (wake mode).                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 16  | $\overline{ULP}$ | Ultra-Low-Power Enable Input (in Sleep Mode). $\overline{ULP}$ has an internal 50k $\Omega$ pullup resistor to the internal 5V bias rail. A falling edge on $\overline{SL}$ while $\overline{ULP}$ is asserted low enables ultra-low-power mode. When ultra-low-power mode is enabled, the power consumption of the device is reduced even lower than normal sleep while still supporting MPS.                                                                                                                                                                                                                                                                                                         |
| —   | EP               | Exposed Pad. Do not use EP as an electrical connection to $V_{SS}$ . EP is internally connected to $V_{SS}$ through a resistive path and must be connected to $V_{SS}$ externally. To optimize power dissipation, solder the exposed pad to a large copper power plane.                                                                                                                                                                                                                                                                                                                                                                                                                                |

# IEEE 802.3af/at-Compliant, Powered Device Interface Controllers with Integrated Power MOSFET


## Simplified Block Diagram

MAX5981A/MAX5981B

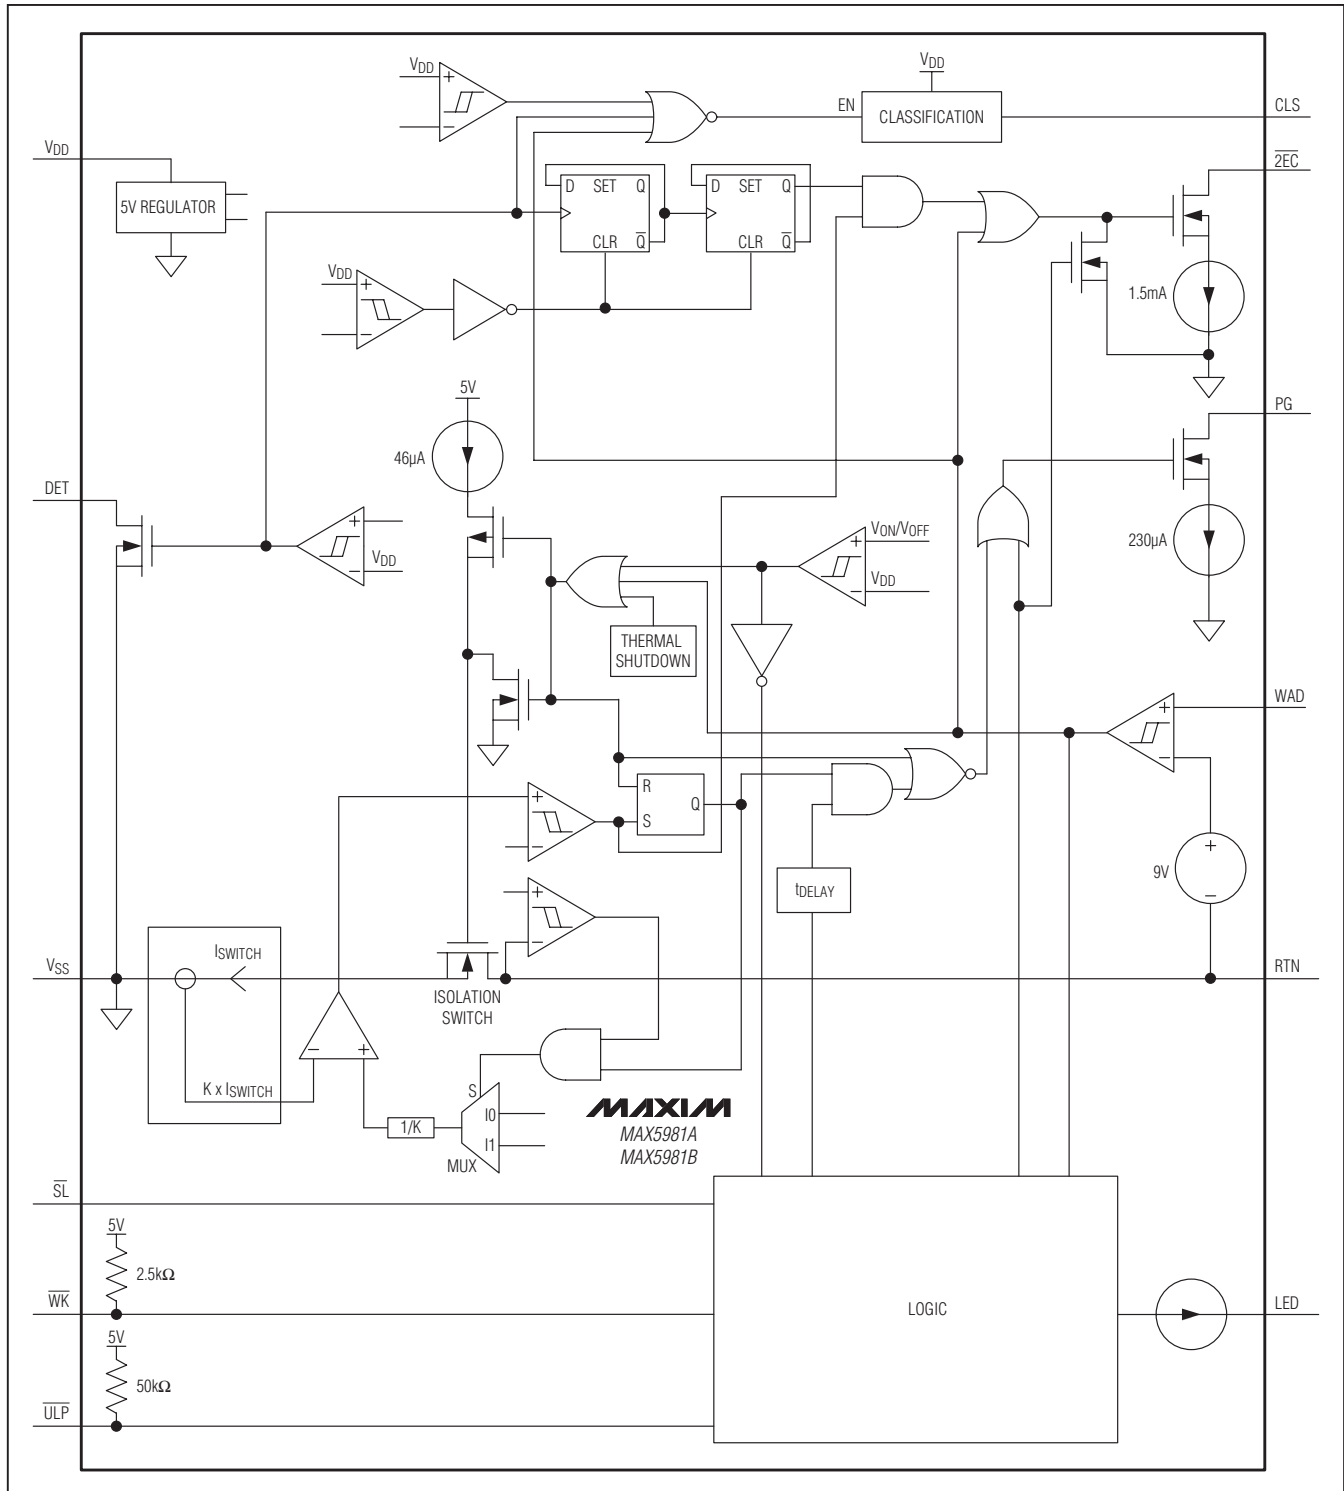

# IEEE 802.3af/at-Compliant, Powered Device Interface Controllers with Integrated Power MOSFET

## Typical Operating Circuit

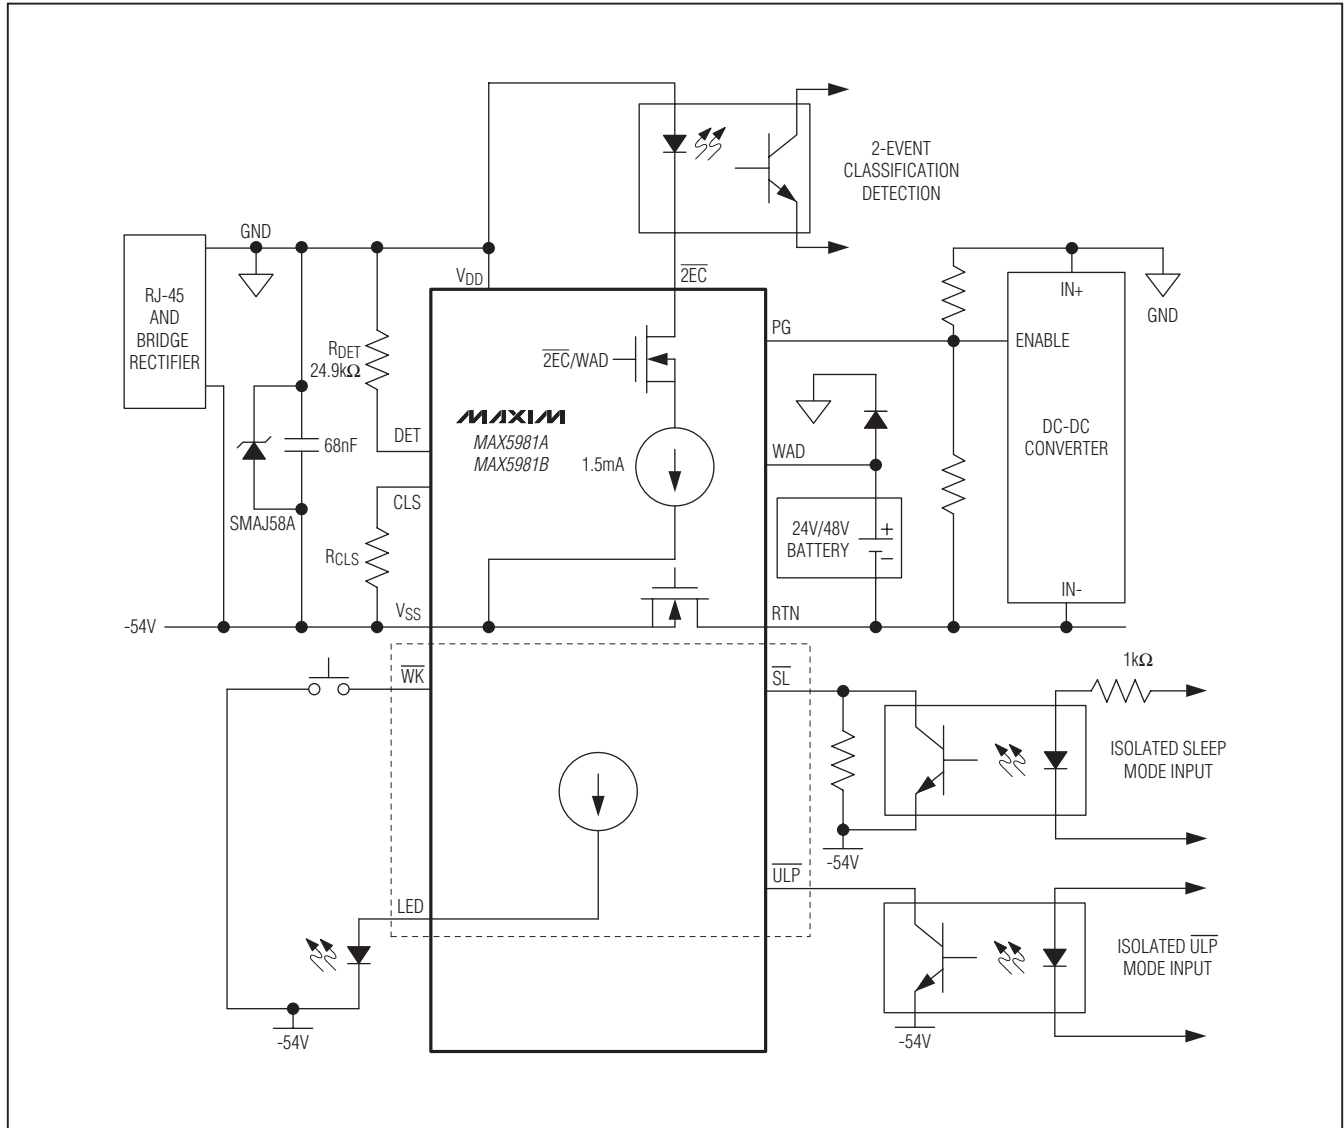

# IEEE 802.3af/at-Compliant, Powered Device Interface Controllers with Integrated Power MOSFET

## Detailed Description

### Operating Modes

Depending on the input voltage ( $V_{IN} = V_{DD} - V_{SS}$ ), the MAX5981 operates in four different modes: PD detection, PD classification, mark event, and PD power. The devices enter PD detection mode when the input voltage is between 1.4V and 10.1V. The device enters PD classification mode when the input voltage is between 12.6V and 20V. The device enters PD power mode once the input voltage exceeds  $V_{ON}$ .

#### Detection Mode ( $1.4V \leq V_{IN} \leq 10.1V$ )

In detection mode, the power source equipment (PSE) applies two voltages on  $V_{IN}$  in the 1.4V to 10.1V range (1V step minimum) and then records the current measurements at the two points. The PSE then computes DV/DI to ensure the presence of the 24.9k $\Omega$  signature resistor. Connect the signature resistor ( $R_{DET}$ ) from  $V_{DD}$  to DET for proper signature detection. The MAX5981 pulls DET low in detection mode. DET goes high impedance when the input voltage exceeds 12.5V. In detection mode, most of the MAX5981 internal circuitry is off and the offset current is less than 10 $\mu$ A.

If the voltage applied to the PD is reversed, install protection diodes at the input terminal to prevent internal damage to the MAX5981 (see the *Typical Application Circuit*). Since the PSE uses a slope technique (DV/DI) to calculate the signature resistance, the DC offset due to the protection diodes is subtracted and does not affect the detection process.

#### Classification Mode ( $12.6V \leq V_{IN} \leq 20V$ )

In the classification mode, the PSE classifies the PD based on the power consumption required by the PD.

This allows the PSE to efficiently manage power distribution. Class 0–5 is defined as shown in Table 1. (The IEEE 802.3af/at standard defines only Class 0–4 and Class 5 for any special requirement.) An external resistor ( $R_{CLS}$ ) connected from CLS to  $V_{SS}$  sets the classification current.

The PSE determines the class of a PD by applying a voltage at the PD input and measuring the current sourced out of the PSE. When the PSE applies a voltage between 12.6V and 20V, the MAX5981A/MAX5981B exhibit a current characteristic with a value shown in Table 1. The PSE uses the classification current information to classify the power requirement of the PD. The classification current includes the current drawn by  $R_{CLS}$  and the supply current of the MAX5981A/MAX5981B so the total current drawn by the PD is within the IEEE 802.3af/at standard figures. The classification current is turned off whenever the device is in power mode.

#### 2-Event Classification and Detection

During 2-Event classification, a Type 2 PSE probes PD for classification twice. In the first classification event, the PSE presents an input voltage between 12.6V and 20.5V and the MAX5981A/MAX5981B present the programmed load ICLASS. The PSE then drops the probing voltage below the mark event threshold of 10.1V and the MAX5981A/MAX5981B present the mark current (IMARK). This sequence is repeated one more time.

When the MAX5981A/MAX5981B are powered by a Type 2 PSE, the 2-Event identification output  $\overline{2EC}$  asserts low after the internal isolation n-channel MOSFET is fully turned on.  $\overline{2EC}$  current sink is turned off when  $V_{DD}$  goes below the UVLO threshold ( $V_{OFF}$ ) and turns on when  $V_{DD}$  goes above the UVLO threshold ( $V_{ON}$ ), unless  $V_{DD}$  goes below  $V_{THR}$  to reset the latched output of the

**Table 1. Setting Classification Current**

| CLASS | MAXIMUM POWER USED BY PD (W) | $R_{CLS}$ ( $\Omega$ ) | $V_{IN}^*$ (V) | CLASS CURRENT SEEN AT $V_{IN}$ (mA) |     | IEEE 802.3at PD CLASSIFICATION CURRENT SPECIFICATION (mA) |     |
|-------|------------------------------|------------------------|----------------|-------------------------------------|-----|-----------------------------------------------------------|-----|
|       |                              |                        |                | MIN                                 | MAX | MIN                                                       | MAX |
| 0     | 0.44 to 12.95                | 615                    | 12.6 to 20     | 0                                   | 4   | 0                                                         | 5   |
| 1     | 0.44 to 3.84                 | 117                    | 12.6 to 20     | 9                                   | 12  | 8                                                         | 13  |
| 2     | 3.84 to 6.49                 | 66.5                   | 12.6 to 20     | 17                                  | 20  | 16                                                        | 21  |
| 3     | 6.49 to 12.95                | 43.7                   | 12.6 to 20     | 26                                  | 30  | 25                                                        | 31  |
| 4     | 12.95 to 25.5                | 30.9                   | 12.6 to 20     | 36                                  | 44  | 35                                                        | 45  |
| 5     | > 25.5                       | 21.3                   | 12.6 to 20     | 54                                  | 64  | 51                                                        | 68  |

\* $V_{IN}$  is measured across the MAX5981A/MAX5981B input  $V_{DD}$  to  $V_{SS}$ .

# IEEE 802.3af/at-Compliant, Powered Device Interface Controllers with Integrated Power MOSFET

Type 2 PSE detection flag. Alternatively, the  $\overline{2EC}$  output also serves as a wall adapter detection output when the MAX5981A/MAX5981B are powered by an external wall power adapter. See the *Wall Power Adapter Detection and Operation* section for more information.

## Power Mode (Wake Mode)

The MAX5981A/MAX5981B enter power mode when  $V_{IN}$  rises above the undervoltage lockout threshold ( $V_{ON}$ ). When  $V_{IN}$  rises above  $V_{ON}$ , the MAX5981A/MAX5981B turn on the internal n-channel isolation MOSFET to connect VSS to RTN with inrush current limit internally set to 135mA (typ). The isolation MOSFET is fully turned on when the voltage at RTN is near VSS and the inrush current is reduced below the inrush limit. Once the isolation MOSFET is fully turned on, the MAX5981A/MAX5981B change the current limit to 800mA. The open-drain power-good output (PG) remains low for a minimum of  $t_{DELAY}$  until the power MOSFET fully turns on to keep the downstream DC-DC converter disabled during inrush.

## Undervoltage Lockout

The MAX5981A/MAX5981B operate up to a 60V supply voltage with a turn-on UVLO threshold ( $V_{ON}$ ) at 35.4V and a turn-off UVLO threshold ( $V_{OFF}$ ) at 31V. When the input voltage is above  $V_{ON}$ , the MAX5981A/MAX5981B enter power mode and the internal MOSFET is turned on. When the input voltage goes below  $V_{OFF}$  for more than  $t_{OFF\_DLY}$ , the MOSFET turns off.

## Sleep and Ultra-Low-Power Sleep Modes

The MAX5981A/MAX5981B feature a sleep mode, which pulls PG low while keeping the internal n-channel isolation MOSFET turned on. The PG output is used to disable downstream DC-DC converters reducing the power consumption of the overall PD system in sleep mode. In sleep mode, the LED driver output (LED) sources periodic current pulses. The LED current  $I_{LED}$  is set by an external resistor  $R_{SL}$ , see the *Applications Information* section for more information.

An ultra-low-power sleep mode allows the MAX5981A/MAX5981B to further reduce power consumption while maintaining the power signature of the standard. The ultra-low-power enable input  $\overline{ULP}$  is internally held high with a 50k $\Omega$  pullup resistor to the internal 5V bias of the MAX5981A/MAX5981B. Set  $\overline{ULP}$  to logic-low and apply a falling edge to SL to enable ultra-low-power sleep mode. Apply a falling edge on the wake-mode enable input ( $\overline{WK}$ ) to disable sleep or ultra-low-power sleep mode and resume normal operation.

## LED Driver

The MAX5981A/MAX5981B drive an LED connected from the output LED to VSS. During sleep mode/ultra-low-power sleep mode, the LED is driven by current pulses with the amplitude set by the resistor connected from SL to VSS. The LED driver current amplitude is programmable from 10mA to 20mA using  $R_{SL}$  according to the following formula:

$$I_{LED} = \frac{645.75}{R_{SL} + 1200} \text{ (in amperes)}$$

## Power-Good Output

An open-drain output (PG) is used to allow disabling downstream DC-DC converter until the n-channel isolation MOSFET is fully turned on. PG is pulled low to VSS for a period of  $t_{DELAY}$  and until the internal isolation MOSFET is fully turned on. The PG is also pulled low during sleep mode and coming out of thermal shutdown.

## Thermal-Shutdown Protection

The MAX5981A/MAX5981B include thermal protection from excessive heating. If the junction temperature exceeds the thermal-shutdown threshold of +140°C, the MAX5981A/MAX5981B turn off the internal power MOSFET, LED driver, and  $\overline{2EC}$  current sink. When the junction temperature falls below +112°C, the device enters inrush mode and then return to power mode. Inrush mode ensures the downstream DC-DC converter is turned off as the internal power MOSFET is turned on.

## Wall Power Adapter Detection and Operation

For applications where an auxiliary power source such as a wall power adapter is used to power the PD, the MAX5981A/MAX5981B feature wall power adapter detection. The MAX5981A/MAX5981B give highest priority to the WAD and smoothly switch the power supply to WAD when it is detected. Once the input voltage ( $V_{DD} - V_{SS}$ ) exceeds the mark event threshold, the MAX5981A/MAX5981B enable wall adapter detection. The wall power adapter is connected from WAD to RTN. The MAX5981A/MAX5981B detect the wall power adapter when the voltage from WAD to RTN is greater than 9V. When a wall power adapter is detected, the internal n-channel isolation MOSFET turns off,  $\overline{2EC}$  current sink turns on, and classification current is disabled if  $V_{IN}$  is in the classification range.

# IEEE 802.3af/at-Compliant, Powered Device Interface Controllers with Integrated Power MOSFET

## Applications Information

### Operation with 12V Adapter

#### Layout Procedure

Careful PCB layout is critical to achieve high efficiency and low EMI. Follow these layout guidelines for optimum performance:

- 1) Place the input capacitor, classification resistor, and transient voltage suppressor as close as possible to the MAX5981A/MAX5981B.
- 2) Use large SMT component pads for power dissipating devices such as the MAX5981A/MAX5981B and the external diodes.

- 3) Use short and wide traces for high-power paths.
- 4) Use the MAX5981A/MAX5981B evaluation kit layout as a reference.
- 5) Place enough vias in the pad for the EP of the MAX5981A/MAX5981B so that heat generated inside can be effectively dissipated by the PCB copper. The recommended spacing for the vias is 1mm to 1.2mm pitch. The thermal vias should be plated (1oz copper) and have a small barrel diameter (0.3mm to 0.33mm).


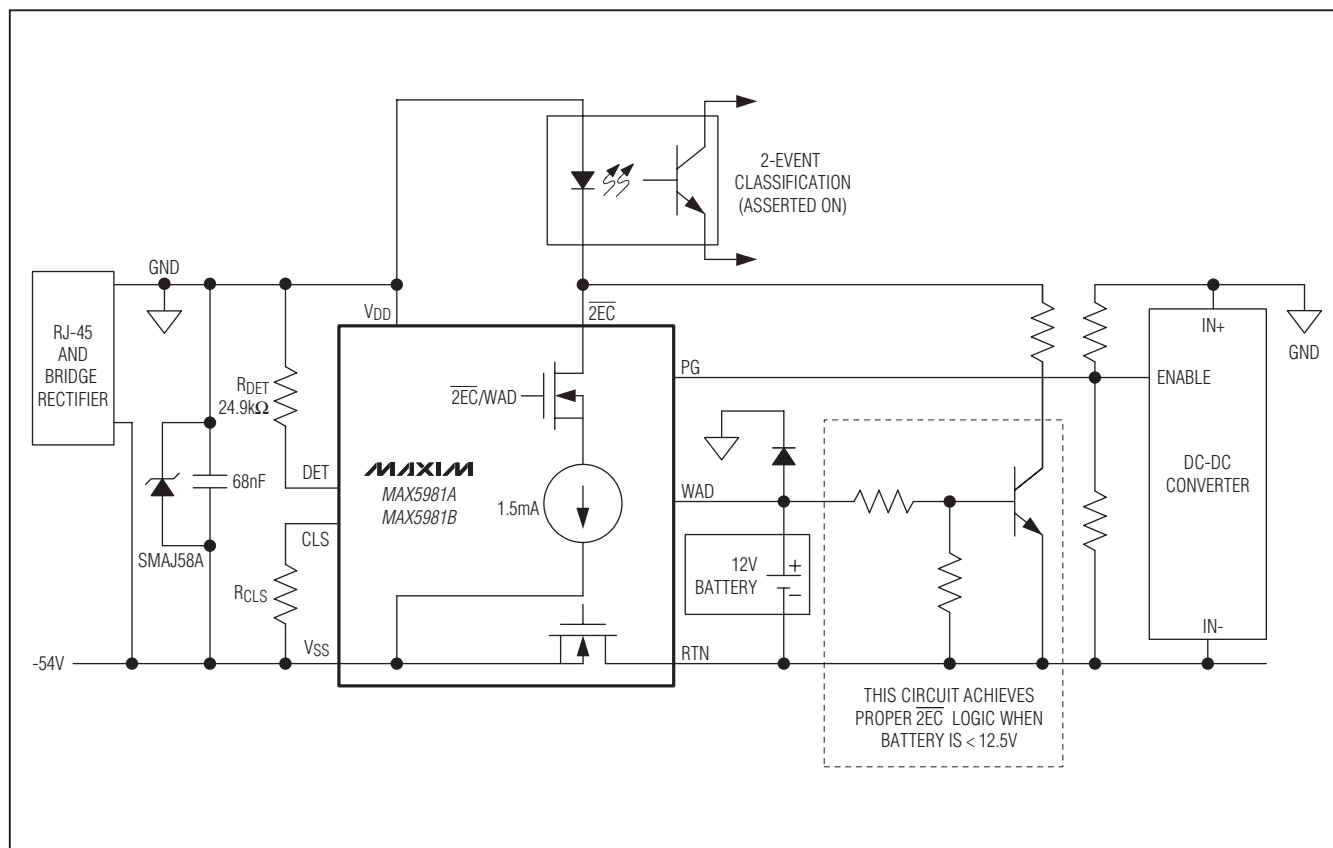


Figure 2. Typical Configuration When Using a 12V Wall Power Adapter

# IEEE 802.3af/at-Compliant, Powered Device Interface Controllers with Integrated Power MOSFET

## Typical Application Circuit

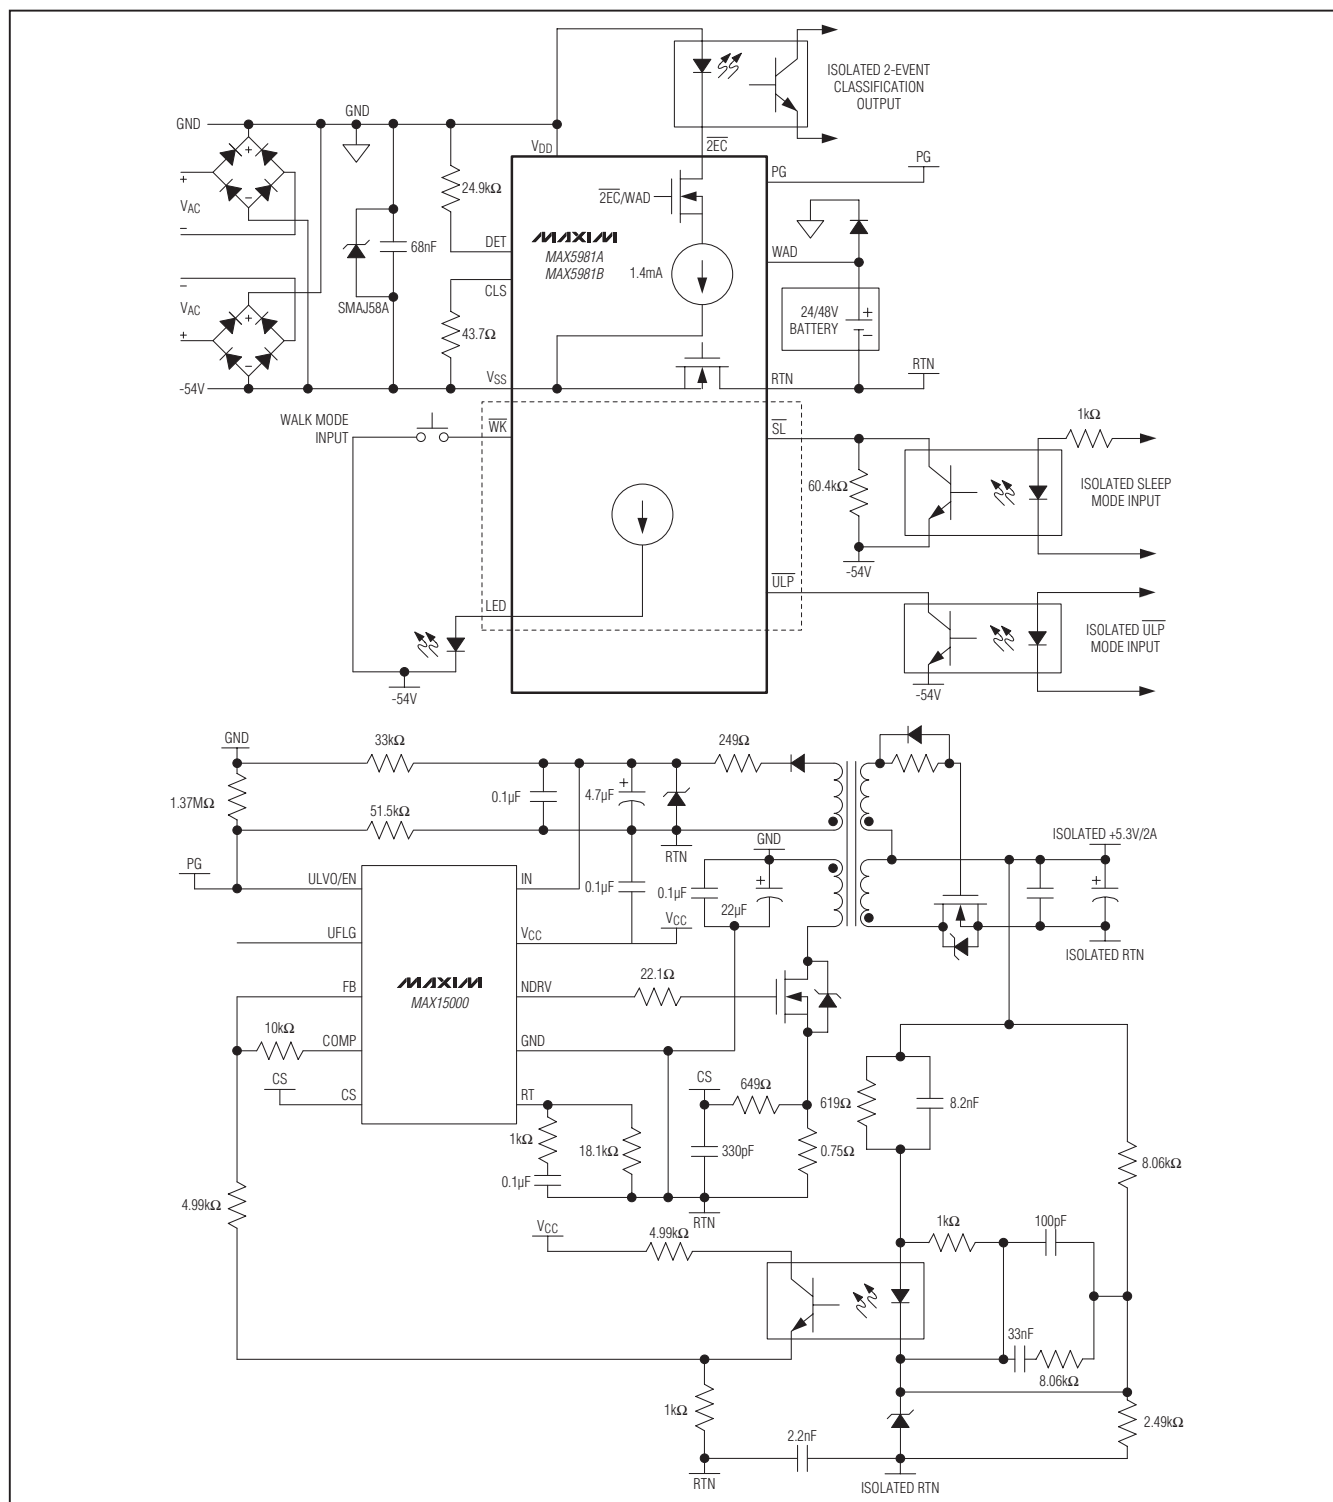

# IEEE 802.3af/at-Compliant, Powered Device Interface Controllers with Integrated Power MOSFET

## Chip Information

PROCESS: BiCMOS

## Package Information

For the latest package outline information and land patterns, (footprints) go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages). Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

| PACKAGE TYPE | PACKAGE CODE | OUTLINE NO.             | LAND PATTERN NO.        |
|--------------|--------------|-------------------------|-------------------------|
| 16 TQFN-EP   | T1655+4      | <a href="#">21-0140</a> | <a href="#">90-0121</a> |

MAX5981A/MAX5981B

# IEEE 802.3af/at-Compliant, Powered Device Interface Controllers with Integrated Power MOSFET

## Revision History

| REVISION NUMBER | REVISION DATE | DESCRIPTION                                                                                                                                                                                                                                | PAGES CHANGED       |
|-----------------|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 0               | 1/11          | Initial release                                                                                                                                                                                                                            | —                   |
| 1               | 8/11          | Revised <i>General Description</i> , <i>Absolute Maximum Ratings</i> , <i>Electrical Characteristics</i> , <i>Pin Description</i> , <i>Typical Operating Circuit</i> , <i>LED Driver</i> section, and <i>Typical Application Circuit</i> . | 1–8, 10, 11, 12, 14 |
| 2               | 8/11          | Revised <i>General Description</i> , <i>Electrical Characteristics</i> , <i>Typical Operating Characteristics</i> , and <i>Pin Description</i> .                                                                                           | 1, 4, 6, 8          |

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

16 **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600**

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А