

Advantech

AQD-D3L8GE16-SG

Datasheet

Rev. 1.1

2013-09-24

Description

AQD-D3L8GE16-SG is a DDR3 ECC Unbuffered DIMM, high-speed, low power memory module that use 18 pcs of 512Mx8bits DDR3 low voltage SDRAM in FBGA package and a 2048 bits serial EEPROM on a 240-pin printed circuit board. AQD-D3L8GE16-SG is a Dual In-Line Memory Module and is intended for mounting into 240-pin edge connector sockets.

Synchronous design allows precise cycle control with the use of system clock. Data I/O transactions are possible on both edges of DQS. Range of operation frequencies, programmable latencies allow the same device to be useful for a variety of high bandwidth, high performance memory system applications.

Features

- RoHS compliant products.
- JEDEC standard 1.35V(1.28V~1.45V) Power supply
- VDDQ=1.35V(1.28V~1.45V) & 1.5V(1.425V~1.575V)
- Clock Freq: 800MHZ for 1600Mb/s/Pin.
- Programmable CAS Latency: 6, 7, 8, 9, 10, 11
- Programmable Additive Latency (Posted /CAS):
0,CL-2 or CL-1 clock
- Programmable /CAS Write Latency (CWL)
= 8(DDR3-1600)
- 8 bit pre-fetch
- Burst Length: 4, 8
- Bi-directional Differential Data-Strobe
- Internal calibration through ZQ pin
- On Die Termination with ODT pin
- Serial presence detect with EEPROM
- On DIMM Thermal Sensor
- Asynchronous reset

• Pin Identification

• Pin Identification

| Symbol | Function |
|--------------------------|----------------------------|
| A0~A15, BA0~BA2 | Address Inputs |
| /RAS | Row Address Strobe |
| /CAS | Column Address Strobe |
| /WE | Write Enable |
| /S0, /S1 | Chip Selects |
| CKE0, CKE1 | Clock Enables |
| ODT0, ODT1 | On-die termination control |
| DQ0~DQ63 | Data Input/Output |
| CB0~CB7 | ECC Check bits |
| DQS0~DQS8 /DQS0~/DQS8 | Data Strobe |
| DM0~DM8 | Data Masks |
| CK0, /CK0 CK1, /CK1 | Clocks Input |
| /RESET | Reset Pin |
| /EVENT | Temperature Event Pin |
| VDD | Core and I/O Power |
| VSS | Ground |
| VREFDQ VREFCA | Input/Output Reference |
| VTT | Termination Voltage |
| VDDSPD | SPD Power |
| SCL | SPD Clock Input |
| SDA | SPD Data |
| SA0~SA2 | SPD Address |
| NC | No Connection |


Pin Assignments

| Pin No | Pin Name | Pin No | Pin Name | Pin No | Pin Name | Pin No | Pin Name | Pin No | Pin Name | Pin No | Pin Name |
|--------|----------|--------|----------|--------|----------|--------|----------|--------|----------|--------|----------|
| 01 | VREFDQ | 41 | VSS | 81 | DQ32 | 121 | VSS | 161 | DM8 | 201 | DQ37 |
| 02 | VSS | 42 | /DQS8 | 82 | DQ33 | 122 | DQ4 | 162 | NC | 202 | VSS |
| 03 | DQ0 | 43 | DQS8 | 83 | VSS | 123 | DQ5 | 163 | VSS | 203 | DM4 |
| 04 | DQ1 | 44 | VSS | 84 | /DQS4 | 124 | VSS | 164 | CB6 | 204 | NC |
| 05 | VSS | 45 | CB2 | 85 | DQS4 | 125 | DM0 | 165 | CB7 | 205 | VSS |
| 06 | /DQS0 | 46 | CB3 | 86 | VSS | 126 | NC | 166 | VSS | 206 | DQ38 |
| 07 | DQS0 | 47 | VSS | 87 | DQ34 | 127 | VSS | 167 | NC | 207 | DQ39 |
| 08 | VSS | 48 | NC | 88 | DQ35 | 128 | DQ6 | 168 | /RESET | 208 | VSS |
| 09 | DQ2 | 49 | NC | 89 | VSS | 129 | DQ7 | 169 | CKE1,NC | 209 | DQ44 |
| 10 | DQ3 | 50 | CKE0 | 90 | DQ40 | 130 | VSS | 170 | VDD | 210 | DQ45 |
| 11 | VSS | 51 | VDD | 91 | DQ41 | 131 | DQ12 | 171 | A15 | 211 | VSS |
| 12 | DQ8 | 52 | BA2 | 92 | VSS | 132 | DQ13 | 172 | A14 | 212 | DM5 |
| 13 | DQ9 | 53 | NC | 93 | /DQS5 | 133 | VSS | 173 | VDD | 213 | NC |
| 14 | VSS | 54 | VDD | 94 | DQS5 | 134 | DM1 | 174 | A12 | 214 | VSS |
| 15 | /DQS1 | 55 | A11 | 95 | VSS | 135 | NC | 175 | A9 | 215 | DQ46 |
| 16 | DQS1 | 56 | A7 | 96 | DQ42 | 136 | VSS | 176 | VDD | 216 | DQ47 |
| 17 | VSS | 57 | VDD | 97 | DQ43 | 137 | DQ14 | 177 | A8 | 217 | VSS |
| 18 | DQ10 | 58 | A5 | 98 | VSS | 138 | DQ15 | 178 | A6 | 218 | DQ52 |
| 19 | DQ11 | 59 | A4 | 99 | DQ48 | 139 | VSS | 179 | VDD | 219 | DQ53 |
| 20 | VSS | 60 | VDD | 100 | DQ49 | 140 | DQ20 | 180 | A3 | 220 | VSS |
| 21 | DQ16 | 61 | A2 | 101 | VSS | 141 | DQ21 | 181 | A1 | 221 | DM6 |
| 22 | DQ17 | 62 | VDD | 102 | /DQS6 | 142 | VSS | 182 | VDD | 222 | NC |
| 23 | VSS | 63 | CK1,NC | 103 | DQS6 | 143 | DM2 | 183 | VDD | 223 | VSS |
| 24 | /DQS2 | 64 | /CK1,NC | 104 | VSS | 144 | NC | 184 | CK0 | 224 | DQ54 |
| 25 | DQS2 | 65 | VDD | 105 | DQ50 | 145 | VSS | 185 | /CK0 | 225 | DQ55 |
| 26 | VSS | 66 | VDD | 106 | DQ51 | 146 | DQ22 | 186 | VDD | 226 | VSS |
| 27 | DQ18 | 67 | VREFCA | 107 | VSS | 147 | DQ23 | 187 | /EVENT | 227 | DQ60 |
| 28 | DQ19 | 68 | NC | 108 | DQ56 | 148 | VSS | 188 | A0 | 228 | DQ61 |
| 29 | VSS | 69 | VDD | 109 | DQ57 | 149 | DQ28 | 189 | VDD | 229 | VSS |
| 30 | DQ24 | 70 | A10/AP | 110 | VSS | 150 | DQ29 | 190 | BA1 | 230 | DM7 |
| 31 | DQ25 | 71 | BA0 | 111 | /DQS7 | 151 | VSS | 191 | VDD | 231 | NC |
| 32 | VSS | 72 | VDD | 112 | DQS7 | 152 | DM3 | 192 | /RAS | 232 | VSS |
| 33 | /DQS3 | 73 | /WE | 113 | VSS | 153 | NC | 193 | /S0 | 233 | DQ62 |
| 34 | DQS3 | 74 | /CAS | 114 | DQ58 | 154 | VSS | 194 | VDD | 234 | DQ63 |
| 35 | VSS | 75 | VDD | 115 | DQ59 | 155 | DQ30 | 195 | ODT0 | 235 | VSS |
| 36 | DQ26 | 76 | /S1,NC | 116 | VSS | 156 | DQ31 | 196 | A13 | 236 | VDDSPD |
| 37 | DQ27 | 77 | ODT1,NC | 117 | SA0 | 157 | VSS | 197 | VDD | 237 | SA1 |
| 38 | VSS | 78 | VDD | 118 | SCL | 158 | CB4 | 198 | NC | 238 | SDA |
| 39 | CB0 | 79 | NC | 119 | SA2 | 159 | CB5 | 199 | VSS | 239 | VSS |
| 40 | CB1 | 80 | VSS | 120 | VTT | 160 | VSS | 200 | DQ36 | 240 | VTT |

/S1,ODT1,CKE1 : Used for dual-rank ECC U-DIMM; NC on single-rank ECC U-DIMM.

CK1 and /CK1 : Used for dual-rank ECC U-DIMM; not used on single-rank ECC U-DIMM but terminated.

8GB, 1Gx72 Module(2 Rank x8)

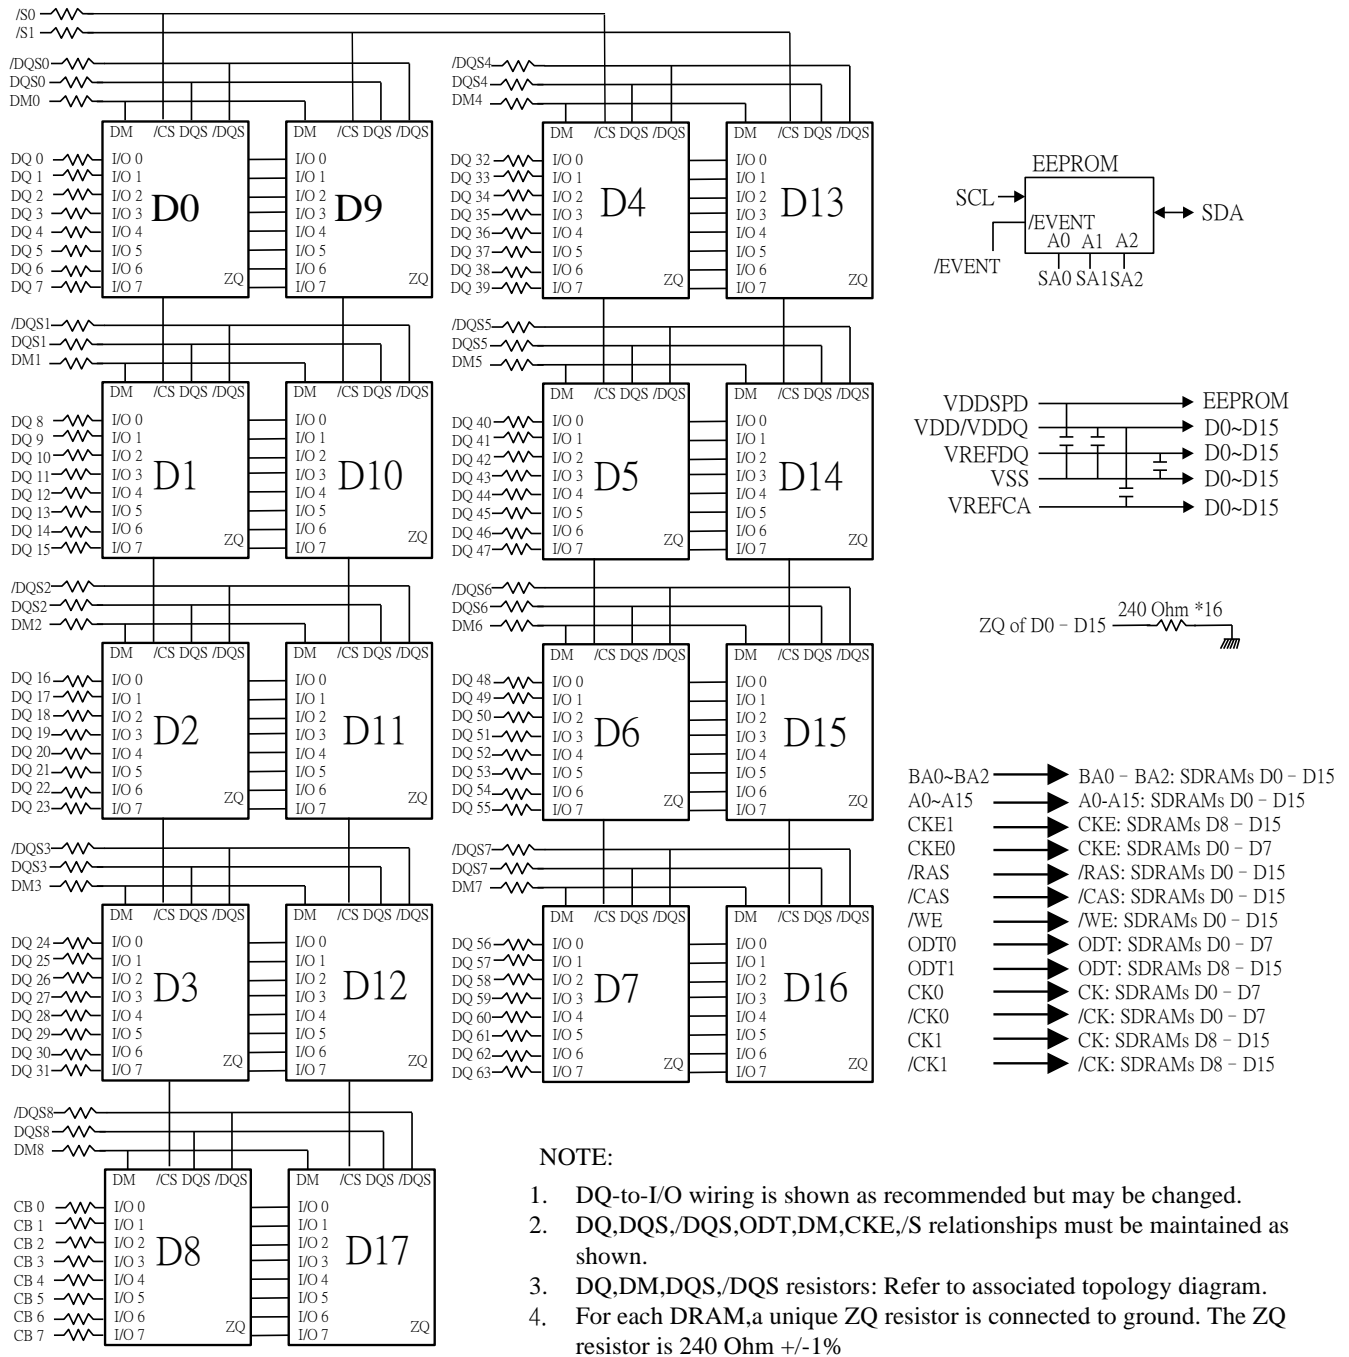

This technical information is based on industry standard data and tests believed to be reliable. However, Advantech makes no warranties, either expressed or implied, as to its accuracy and assume no liability in connection with the use of this product. Advantech reserves the right to make changes in specifications at any time without prior notice.

Operating Temperature Condition

| Parameter | Symbol | Rating | Unit | Note |
|-----------------------|--------|---------|------|------|
| Operating Temperature | TOPER | 0 to 85 | °C | 1,2 |

Note: Operating Temperature is the case surface temperature on the center/top side of the DRAM. For the measurement conditions, please refer to JESD51-2 standard.

Absolute Maximum DC Ratings

| Parameter | Symbol | Value | Unit | Note |
|-------------------------------------|-----------|--------------|------|------|
| Voltage on VDD relative to Vss | VDD | -0.4 ~ 1.975 | V | 1 |
| Voltage on VDDQ pin relative to Vss | VDDQ | -0.4 ~ 1.975 | V | 1 |
| Voltage on any pin relative to Vss | VIN, VOUT | -0.4 ~ 1.975 | V | 1 |
| Storage temperature | TSTG | -55~+100 | °C | 1,2 |

Note:

1. Stress greater than those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.
2. Storage Temperature is the case surface temperature on the center/top side of the DRAM. For the measurement conditions, please refer to JESD51-2 standard.

AC & DC Operating Conditions

Recommended DC operating conditions

| Parameter | Symbol | Voltage | Rating | | | Unit | Notes |
|---------------------------------|-------------------------|---------|------------|-----------|------------|------|-------|
| | | | Min | Typ. | Max | | |
| Supply voltage | VDD | 1.35V | 1.283 | 1.35 | 1.45 | V | 1, 2 |
| | | 1.5V | 1.425 | 1.5 | 1.575 | | |
| Supply voltage for Output | VDDQ | 1.35V | 1.283 | 1.35 | 1.45 | V | 1, 2 |
| | | 1.5V | 1.425 | 1.5 | 1.575 | | |
| I/O Reference Voltage (DQ) | VREF _{DQ} (DC) | 1.35V | 0.49*VDDQ | 0.50*VDDQ | 0.51*VDDQ | V | 3 |
| I/O Reference Voltage (CMD/ADD) | VREF _{CA} (DC) | 1.5V | 0.49*VDDQ | 0.50*VDDQ | 0.51*VDDQ | V | 3 |
| AC Input Logic High | VIH(AC) | 1.35V | VREF+0.160 | - | - | V | |
| | | 1.5V | VREF+0.175 | - | - | | |
| AC Input Logic Low | VIL(AC) | 1.35V | - | - | VREF-0.160 | V | |
| | | 1.5V | - | - | VREF-0.175 | | |
| DC Input Logic High | VIH(DC) | 1.35V | VREF+0.09 | - | VDD | V | |
| | | 1.5V | VREF+0.1 | - | VDD | | |
| DC Input Logic Low | VIL(DC) | 1.35V | VSS | - | VREF-0.09 | V | |
| | | 1.5V | VSS | - | VREF-0.1 | | |

Note:

1. Under all conditions VDDQ must be less than or equal to VDD.
2. VDDQ tracks with VDD, AC parameters are measured with VDD and VDDQ tied together.
3. Peak to peak AC noise on VREF may not allow deviate from VREF(DC) by more than +/-1% VDD.

IDD Specification parameters Definition

(IDD values are for full operating range of Voltage and Temperature)

8GB, 1Gx72 Module(2 Rank x8)

| Parameter | Symbol | DDR3 1600 CL11 | Unit |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|----------------|------|
| Operating One bank Active-Precharge current; tCK = tCK(IDD), tRC = tRC(IDD), tRAS = tRASmin(IDD); CKE is HIGH, /CS is HIGH between valid commands; Address bus inputs are SWITCHING; Data bus inputs are SWITCHING | IDD0 | 855 | mA |
| Operating One bank Active-read-Precharge current; IOUT = 0mA; BL = 8, CL = CL(IDD), AL = 0; tCK = tCK(IDD), tRC = tRC(IDD), tRAS = tRASmin(IDD), tRCD = tRCD(IDD); CKE is HIGH, /CS is HIGH between valid commands; Address bus inputs are SWITCHING; Data pattern is same as IDD4W | IDD1 | 963 | mA |
| Precharge power-down current; All banks idle; tCK = tCK(IDD); CKE is LOW; Other control and address bus inputs are STABLE; Data bus inputs are FLOATING | IDD2P | 666 | mA |
| Precharge quiet standby current; All banks idle; tCK = tCK(IDD); CKE is HIGH, /CS is HIGH; Other control and address bus inputs are STABLE; Data bus inputs are FLOATING | IDD2Q | 810 | mA |
| Precharge standby current; All banks idle; tCK = tCK(IDD); CKE is HIGH, /CS is HIGH; Other control and address bus inputs are SWITCHING; Data bus inputs are SWITCHING | IDD2N | 900 | mA |
| Active power - down current; All banks open; tCK = tCK(IDD); CKE is LOW; Other control and address bus inputs are STABLE; Data bus inputs are FLOATING | IDD3P | 1134 | mA |
| Active standby current; All banks open; tCK = tCK(IDD), tRAS = tRASmax(IDD), tRP = tRP(IDD); CKE is HIGH, /CS is HIGH between valid commands; Other control and address bus inputs are SWITCHING; Data bus inputs are SWITCHING | IDD3N | 1116 | mA |
| Operating burst read current; All banks open, Continuous burst reads, IOUT = 0mA; BL = 4, CL = CL(IDD), AL = 0; tCK = tCK(IDD), tRAS = tRASmax(IDD), tRP = tRP(IDD); CKE is HIGH, /CS is HIGH between valid commands; Address bus inputs are SWITCHING; Data pattern is same as IDD4W | IDD4R | 1863 | mA |
| Operating burst write current; All banks open, Continuous burst writes; BL = 8, CL = CL(IDD), AL = 0; tCK = tCK(IDD), tRAS = tRASmax(IDD), tRP = tRP(IDD); CKE is HIGH, /CS is HIGH between valid commands; Address bus inputs are SWITCHING; Data bus inputs are SWITCHING IDD4R | IDD4W | 1665 | mA |
| Burst refresh current; tCK = tCK(IDD); Refresh command at every tRFC(IDD) interval; CKE is HIGH, /CS is HIGH between valid commands; Other control and address bus inputs are SWITCHING; Data bus inputs are SWITCHING | IDD5 | 2160 | mA |
| Self refresh current; CK and /CK at 0V; CKE = 0.2V; Other control and address bus inputs are FLOATING; Data bus inputs are FLOATING | IDD6 | 396 | mA |
| Operating bank interleave read current; All bank interleaving reads, IOUT = 0mA; BL = 8, CL = CL(IDD), AL = tRCD(IDD)-1*tCK(IDD); tCK = tCK(IDD), Trc = tRC(IDD), tRRD = tRRD(IDD), tRCD = 1*tCK(IDD); CKE is HIGH, CS is HIGH between valid commands; Address bus inputs are STABLE during DESELECTs; Data pattern is same as IDD4R; | IDD7 | 2790 | mA |

Note: 1. Module IDD was calculated on the specific brand DRAM(4xnm) component IDD and can be differently measured according to DQ loading capacitor.

Timing Parameters & Specifications

| Speed | | DDR3 1600 | | Unit |
|-------------------------------------------------------------------------|------------|----------------------|-------|------|
| Parameter | Symbol | Min | Max | |
| Average Clock Period | tCK | 1.25 | <1.5 | ns |
| CK high-level width | tCH | 0.47 | 0.53 | tCK |
| CK low-level width | tCL | 0.47 | 0.53 | tCK |
| DQS, /DQS to DQ skew, per group, per access | tDQSQ | - | 100 | ps |
| DQ output hold time from DQS, /DQS | tQH | 0.38 | - | tCK |
| DQ low-impedance time from CK, /CK | tLZ(DQ) | -450 | 225 | ps |
| DQ high-impedance time from CK, /CK | tHZ(DQ) | - | 225 | ps |
| Data setup time to DQS, /DQS reference to Vih(ac)Vil(ac) levels | tDS(1.35V) | - | - | ps |
| | tDS(1.50V) | - | - | ps |
| Data hold time to DQS, /DQS reference to Vih(ac)Vil(ac) levels | tDH(1.35V) | 55 | - | ps |
| | tDH(1.50V) | 45 | - | ps |
| DQ and DM input pulse width for each input | tDIPW | 360 | - | ps |
| DQS, /DQS Read preamble | tRPRE | 0.9 | - | tCK |
| DQS, /DQS differential Read postamble | tRPST | 0.3 | - | tCK |
| DQS, /DQS Write preamble | tWPRE | 0.9 | - | tCK |
| DQS, /DQS Write postamble | tWPST | 0.3 | - | tCK |
| DQS, /DQS low-impedance time | tLZ(DQS) | -450 | 225 | ps |
| DQS, /DQS high-impedance time | tHZ(DQS) | - | 225 | ps |
| DQS, /DQS differential input low pulse width | tDQSL | 0.45 | 0.55 | tCK |
| DQS, /DQS differential input high pulse width | tDQSH | 0.45 | 0.55 | tCK |
| DQS, /DQS rising edge to CK, /CK rising edge | tDQSS | -0.27 | +0.27 | tCK |
| DQS, /DQS falling edge setup time to CK, /CK rising edge | tDSS | 0.18 | - | tCK |
| DQS, /DQS falling edge hold time to CK, /CK rising edge | tDSH | 0.18 | - | tCK |
| Delay from start of Internal write transaction to Internal read command | tWTR | Max (4tck, 7.5ns) | - | |
| Write recovery time | tWR | 15 | - | ns |
| Mode register set command cycle time | tMRD | 4 | - | tCK |
| /CAS to /CAS command delay | tCCD | 4 | - | nCK |

| Speed | | DDR3 1600 | | Unit |
|-----------------------------------------------------------------------------------|----------|--------------------------|-----|------|
| Parameter | Symbol | Min | Max | |
| Auto precharge write recovery + precharge time | tDAL | tWR+tRP/tck | | nCK |
| Active to active command period for 1KB page size | tRRD | Max (4tck, 6ns) | - | ns |
| Active to active command period for 2KB page size | tRRD | Max (4tck, 7.5ns) | - | |
| Four Activate Window for 1KB page size | tFAW | 30 | - | ns |
| Four Activate Window for 2KB page size products | tFAW | 40 | - | ns |
| Power-up and RESET calibration time | tZQinitl | 512 | - | tCK |
| Normal operation Full calibration time | tZQoper | 256 | - | tCK |
| Normal operation short calibration time | tZQcs | 64 | - | tCK |
| Exit self refresh to commands not requiring a locked DLL | tXS | Max (5tCK, tRFC+10ns) | - | |
| Exit self refresh to commands requiring a locked DLL | tXSDLL | tDLL(min) | - | tCK |
| Internal read to precharge command delay | tRTP | Max (4tck, 7.5ns) | - | |
| Minimum CKE low width for Self refresh entry to exit timing | tCKESR | tCK(min)+1tCK | - | |
| Exit power down with DLL to any valid command: Exit Precharge Power Down with DLL | tXP | Max (3tCK, 6ns) | - | |
| CKE minimum pulse width (high and low pulse width) | tCKE | Max (3tCK, 5ns) | - | |
| Asynchronous RTT turn-on delay (Power-Down mode) | tAONPD | 2 | 8.5 | ns |
| Asynchronous RTT turn-off delay (Power-Down mode) | tAOFPD | 2 | 8.5 | ns |
| ODT turn-on | tAON | -225 | 225 | ps |
| ODT turn-off | tAOF | 0.3 | 0.7 | tCK |

SERIAL PRESENCE DETECT SPECIFICATION

| AQD-ED3L8G16E-SG Serial Presence Detect | | | |
|-----------------------------------------|---------------------------------------------------------------------------------------|-------------------------------------------------------------------|-------------|
| Byte No. | Function Described | Standard Specification | Vendor Part |
| 0 | Number of SPD Bytes written / SPD device size / CRC coverage during module production | CRC:0-116Byte SPD Byte use: 176Byte SPD Byte total: 256Byte | 92 |
| 1 | SPD Revision | Version 1.0 | 10 |
| 2 | Key Byte / DRAM Device Type | DDR3 SDRAM | 0B |
| 3 | Key Byte / Module Type | UDIMM | 02 |
| 4 | SDRAM Density and Banks | 4Gb 8banks | 04 |
| 5 | SDRAM Addressing | ROW:16, Column:10 | 21 |
| 6 | Module Nominal Voltage | 1.35V | 02 |
| 7 | Module Organization | 2Rank / x8 | 09 |
| 8 | Module Memory Bus Width | ECC, 72bit | 0B |
| 9 | Fine Timebase Dividend and Divisor | 2.5ps | 52 |
| 10 | Medium Timebase Dividend | 0.125ns | 01 |
| 11 | Medium Timebase Divisor | 0.125ns | 08 |
| 12 | SDRAM Minimum Cycle Time (tCKmin) | 1.25ns | 0A |
| 13 | Reserved | - | 00 |
| 14 | CAS Latencies Supported, Least Significant Byte | 6, 7, 8, 9, 10, 11 | FC |
| 15 | CAS Latencies Supported, Most Significant Byte | - | 00 |
| 16 | Minimum CAS Latency Time (tAAmin) | 13.125ns | 69 |
| 17 | Minimum Write Recovery Time (tWRmin) | 15ns | 78 |
| 18 | Minimum /RAS to /CAS Delay Time (tRCDmin) | 13.125ns | 69 |
| 19 | Minimum Row Active to Row Active Delay Time (tRRDmin) | 8ns | 30 |
| 20 | Minimum Row Precharge Time (tRPmin) | 13.125ns | 69 |
| 21 | Upper Nibble for tRAS and tRC | - | 11 |
| 22 | Minimum Active to Precharge Time (tRASmin) | 35ns | 18 |
| 23 | Minimum Active to Active/Refresh Time (tRCmin) | 48.125ns | 81 |
| 24 | Minimum Refresh Recovery Time (tRFCmin), Least Significant Byte | 260ns | 20 |
| 25 | Minimum Refresh Recovery Time ((tRFCmin), Most Significant Byte | 260ns | 08 |
| 26 | Minimum Internal Write to Read Command Delay Time (tWTmin) | 7.5ns | 3C |
| 27 | Minimum Internal Read to Precharge Command Delay Time (tRTPmin) | 7.5ns | 3C |
| 28 | Upper Nibble for tFAW | 30ns | 00 |
| 29 | Minimum Four Active Window Delay Time (tFAWmin) | 30ns | F0 |
| 30 | SDRAM Optional Features | DLL off Mode, RZQ/6, RZQ/7 | 83 |
| 31 | SDRAM Thermal and Refresh Options | No ODTs , No ASR | 01 |
| 32 | Module Thermal Sensor | Support TS | 80 |

| | | | | | | | | |
|---------|-----------------------------------------------------|---------------------|----------|----|----|----|----|----|
| 33-59 | Reserved | - | 00 | | | | | |
| 60 | Module Nominal Height | 30mm | 0F | | | | | |
| 61 | Module Max Thickness | Planar Double Sides | 11 | | | | | |
| 62 | Reference Raw Card Used | R/C E | 24 | | | | | |
| 63 | Address Mapping from Edge Connector to DRAM | Mirrored | 01 | | | | | |
| 64-116 | Reserved | - | 00 | | | | | |
| 117 | Module Manufacturer ID Code, Least Significant Byte | Transcend | 01 | | | | | |
| 118 | Module Manufacturer ID Code, Most Significant Byte | Transcend | 4F | | | | | |
| 119 | Module Manufacturing Location | Taipei | 54 | | | | | |
| 120-121 | Module Manufacturing Date | - | 00 | | | | | |
| 122-125 | Module Serial Number | - | 00 | | | | | |
| 126-127 | Cyclical Redundancy Code | - | F3, 5F | | | | | |
| 128-145 | Module Part Number | AQD-D3L8GE16-SG | 41 | 51 | 44 | 2D | 44 | 33 |
| | | | 4C | 38 | 47 | 45 | 31 | 36 |
| | | | 2D | 53 | 47 | 20 | 20 | 20 |
| 146-147 | Revision Code | - | 00 | | | | | |
| 148-149 | DRAM Manufacturer ID Code | By Manufacturer | Variable | | | | | |
| 150-175 | Manufacturer Specific Data | By Manufacturer | Variable | | | | | |
| 176-255 | Open for customer use | Undefined | 00 | | | | | |

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А