



USB-TO-SERIAL
CONVERTERS



EDGEPORT®

Easy out-of-the-box solution for I/O expansion is available in a wide variety of configurations for maximum flexibility and scalability

Edgeport USB-to-serial converters offer instant I/O expansion for peripheral device connectivity. An out-of-the-box (external) alternative to PCI cards, Edgeport makes it easy to add serial and USB ports to a PC, server or thin client in minutes – without opening the chassis, reconfiguring or rebooting the system.

Edgeport is available in multiple configurations for maximum flexibility and scalability. Choose from compact form factors for space-prohibitive applications; single port “bump-in-the-cable” solutions for notebook expansion; software-selectable RS-232/422/485 models to connect any type of serial device to


one box; metal enclosures for rugged applications; models with galvanic isolated ports for extended electrical safety; and DB-9 or DB-25 connectors to meet cabling requirements.

Feature-rich design, reliability and unmatched operating system support make Edgeport USB-to-serial converters ideal for mission-critical enterprise applications.

BENEFITS


- Add 1, 2, 4, 8 or 16 serial ports to a PC, thin client or server in minutes
- Designed for peripheral device connectivity in retail stations, self check-out systems, emergency vehicles, kiosks, ATMs and more
- Software selectable MEI, galvanic isolated, industrial, compact and metal ruggedized models
- Low total cost of ownership with external, user-installable solution

RELATED PRODUCTS

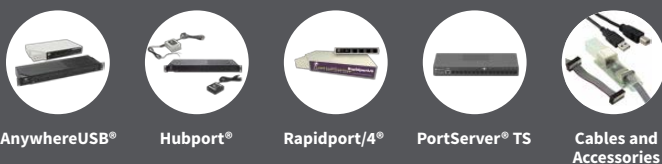

APPLICATION EXAMPLE

POS CONNECTIVITY

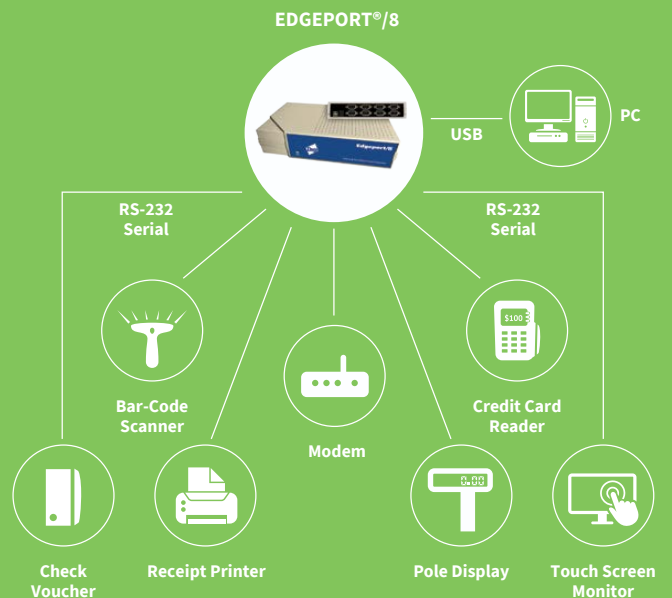

SPECIFICATIONS	Edgeport® Serial Edgeport® Extended Safety Edgeport® Industrial		
INTERFACES (VARIES BY MODEL)			
SERIAL PORTS	1, 2, 4, 8 or 16	4 (separately isolated)	1, 2, 4 or 8
SERIAL TYPE	RS-232	RS-232/422/485	RS-422/485, software selectable RS-232/422/485
SERIAL CONNECTOR	DB-9, DB-25	DB-9	DB-9
SERIAL DATA RATE	230 Kbps per port simultaneously		
DOWNSTREAM USB PORTS	4 (16-port models only)	1 (separately isolated)	0
FEATURES			
USB	USB 1.0 and USB 1.1 compatible; backwards compatibility for USB 2.0 and USB 3.0; USB-IF certified; Plug and Play		
LEDS	Tri-state LED displays device status and COM port activity		
OPERATING SYSTEMS	Windows 10®, Windows 8, Windows 7, Windows Vista®, Windows Server 2012, Windows Server® 2008 R2, Windows XP®, Windows XP Embedded, Windows CE 5, Windows CE 6 (x86 only), Windows Server® 2003 R2, Windows 2000; Linux*, Sun Solaris (SPARC)**		
CABLES	1-meter USB cable		
OTHER (GENERAL)	Automatic port reacquisition; COM port assignments maintained across reboots; Full hardware and software flow control; No additional IRQ or memory address requirements; Low power consumption; Rack mountable; Hot-swappable		
OTHER (MODEL-SPECIFIC)	N/A	2.0 kV DC galvanic isolation on all ports	N/A
POWER REQUIREMENTS			
POWER SUPPLY	External power supply not required for models without USB ports (USB powered); Models with USB ports (Edgeport 416) ship with power supply: 100/240VAC 60/50 Hz at 5VDC @ 3 Amps max		
ENVIRONMENTAL			
OPERATING TEMPERATURE	0° C to 55° C (32° F to 131° F)		
RELATIVE HUMIDITY	0% to 95% (non-condensing)		
REGULATORY APPROVALS			
SAFETY	EN60950, UL 1950, CSA 2.2 No. 950, IEC 950		
EMISSIONS/IMMUNITY	CE, FCC Part 15 Class B, EN55022, EN55024		

*Driver support provided by Linux USB maintainers.

**Driver support provided by Sun.

SPECIFICATIONS		Edgeport® Compact	Edgeport® Metal
INTERFACES (VARIES BY MODEL)			
SERIAL PORTS	2		4
SERIAL TYPE	RS-232		RS-232
SERIAL CONNECTOR	DB-9		
SERIAL DATA RATE	230 Kbps per port simultaneously		
DOWNSTREAM USB PORTS	2		0
OTHER PORTS	N/A		N/A
FEATURES			
USB	USB 1.0 and USB 1.1 compatible; backwards compatibility for USB 2.0 and USB 3.0; USB-IF certified; Plug and Play		
LEDS	Tri-state LED displays device status and COM port activity		
OPERATING SYSTEMS	Windows® 10, Windows 8, Windows 7, Windows Vista®, Windows Server 2012, Windows Server® 2008 R2, Windows XP®, Windows XP Embedded, Windows CE 5, Windows CE 6 (x86 only), Windows Server® 2003 R2, Windows 2000; Linux*, Sun Solaris (SPARC)**		
CABLES	Captive 2-meter cable for secure connection in rugged environments (mobile computing)		1-meter USB cable
OTHER (GENERAL)	Automatic port reacquisition; COM port assignments maintained across reboots; Full hardware and software flow control; No additional IRQ or memory address requirements; Low power consumption; Rack mountable; Hot-swappable		
OTHER (MODEL-SPECIFIC)	N/A		Aluminum chassis; Designed for rugged environments (emergency vehicles, restaurant kitchens); Rack mount bracket for added security
POWER REQUIREMENTS			
POWER SUPPLY	USB powered		
ENVIRONMENTAL			
OPERATING TEMPERATURE	0° C to 55° C (32° F to 131° F)		
RELATIVE HUMIDITY	0% to 95% (non-condensing)		
REGULATORY APPROVALS			
SAFETY	EN60950, UL 1950, CSA 2.2 No. 950, IEC 950		
EMISSIONS/IMMUNITY	CE, FCC Part 15 Class B, EN55022, EN55024		

*Driver support provided by Linux USB maintainers.

**Driver support provided by Sun.

SPECIFICATIONS

Measurements



EDGEPORT/1, 1I

Length: 3.15 in (8.00 cm)
 Width: 1.75 in (4.40 cm)
 Height: 0.80 in (2.03 cm)
 Weight: 1.60 oz (45.36 g)



EDGEPORT/4M

Length: 4.30 in (10.92 cm)
 Width: 8.00 in (20.32 cm)
 Height: 1.36 in (3.45 cm)
 Weight: 10.00 oz (311.00 g)



EDGEPORT/2C, 22C

Length: 2.38 in (6.04 cm)
 Width: 3.94 in (10.00 cm)
 Height: 1.00 in (2.54 cm)
 Weight: 5.00 oz (141.75 g)



EDGEPORT/416, 416/DB-25, 8/DB-25

Length: 5.00 in (12.70 cm)
 Width: 17.00* in (43.118 cm)
 Height: 1.80 in (4.53 cm)
 Weight: 41.30 oz (1170.84 g)



EDGEPORT/4/DB-25, 8, 8S MEI

Length: 4.35 in (11.05 cm)
 Width: 7.20 in (18.29 cm)
 Height: 1.75 in (4.45 cm)
 Weight: 16.00 oz (453.59 g)



EDGEPORT/2, 2S, 4, 4S MEI, 4S MEI ISOLATED

Length: 4.35 in (11.05 cm)
 Width: 7.20 in (18.29 cm)
 Height: 1.03 in (2.61 cm)
 Weight: 10.00 oz (311.00 g)

* 19.0 in (48.26 cm) with optional rack mount ears



PART NUMBERS	DESCRIPTION
301-1003-10	Edgeport/2c - 2 RS-232 serial DB-9, captive 2-meter cable
301-1003-30	Edgeport/22c - 2 USB, 2 RS-232 serial DB-9, captive cable
301-1000-02	Edgeport/2 - 2 RS-232 serial DB-9
301-1000-03	Edgeport/2 - 2 RS-232 serial DB-9 (International)
301-1000-04	Edgeport/4 - 4 RS-232 serial DB-9
301-1000-10	Edgeport/416 DB-9 - 4 USB, 16 RS-232 serial DB-9, rack mountable
301-1001-11	Edgeport/1 - 1 RS-232 serial DB-9
301-1001-21	Edgeport/1 25 Unit Bulk Pack - 1 RS-232 serial DB-9 (25 each)
301-1001-15	Edgeport/1 with 2-Meter Captive Cable - 1 RS-232 serial DB-9, captive 2 meter cable
301-1002-08	Edgeport/8 DB-9 - 8 RS-232 serial DB-9
301-1016-08	Edgeport/8/DB-25 - 8 RS-232 serial DB-25, rack mountable
301-1016-16	Edgeport/416 DB-25 - 4 USB, 16 RS-232 serial DB-25, rack mountable
301-2000-10	Edgeport/416 DB-9 - 4 USB, 16 RS-232 serial DB-9, rack mountable (International)
301-2016-16	Edgeport/416 DB-25 - 4 USB, 16 RS-232 serial DB-25, rack mountable (International)
301-1000-95	Edgeport/4s MEI Isolated - 4 RS-232/422/485 serial DB-9 software selectable with galvanic isolation
301-1000-92	Edgeport/2s MEI - 2 RS-232/422/485 serial DB-9; software selectable
301-1000-94	Edgeport/4s MEI - 4 RS-232/422/485 serial DB-9; software selectable
301-1001-31	Edgeport/1i - 1 RS-422/485 serial DB-9
301-1002-98	Edgeport/8s MEI - 8 RS-232/422/485 serial DB-9; software selectable
301-1000-81	Edgeport/4m - 4 RS-232 serial DB-9, aluminum chassis

FOR MORE INFORMATION
PLEASE VISIT WWW.DIGI.COM



DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2015 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91001226
F1/915

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL FRANCE
+33-1-55-61-98-98 / www.digi.fr

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn



Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А