

FEATURES AND BENEFITS*

- Up to 10 year DC life
- 160V DC working voltage
- Resistive cell balancing
- Compact and light weight package
- Screw terminals

TYPICAL APPLICATIONS

- Wind turbine pitch control
- Small UPS systems
- Small industrial systems



PRODUCT SPECIFICATIONS

ELECTRICAL

BMOD0006 E160 B02

Rated Capacitance ¹	5.8 F
Minimum Capacitance, initial ¹	5.8 F
Maximum Capacitance, initial ¹	7 F
Maximum ESR _{DC} , initial ¹	240 mΩ
Test Current for Capacitance and ESR _{DC} ¹	35 A
Rated Voltage	160 V
Absolute Maximum Voltage ²	170 V
Absolute Maximum Current	170 A
Leakage Current at 25°C, maximum ³	25 mA
Maximum Series Voltage	750 V
Capacitance of Individual Cells ⁹	350 F
Maximum Stored Energy, Individual Cell ⁹	0.35 Wh
Number of Cells	60

TEMPERATURE

Operating Temperature (Cell Case Temperature)	
Minimum	-40°C
Maximum	65°C
Storage Temperature (Stored Uncharged)	
Minimum	-40°C
Maximum	70°C

PHYSICAL

Mass, typical	5.2 kg
Power Terminals	M5 Thread
Recommended Torque - Terminal	4 Nm
Vibration Specification	IEC60068-2-6
Shock Specification	IEC60068-2-27,-29
Environmental Protection	IP54
Cooling	Natural Convection

*Results may vary. Additional terms and conditions, including the limited warranty, apply at the time of purchase. See the warranty details for applicable operating and use requirements.

PRODUCT SPECIFICATIONS (Cont'd)

MONITORING / CELL VOLTAGE MANAGEMENT

BMOD0006 E160 B02

Internal Temperature Sensor

N/A

Temperature Interface

N/A

Cell Voltage Monitoring

Voltage Center Tap

Connector

M4

Cell Voltage Management

Passive

POWER AND ENERGY

Usable Specific Power, P_d^4

2,500 W/kg

Impedance Match Specific Power, P_{max}^5

5,100 W/kg

Specific Energy, E_{max}^6

4 Wh/kg

Stored Energy, E_{stored}^7

21 Wh

SAFETY

Short Circuit Current, typical

(Current possible with short circuit from rated voltage.

670 A

Do not use as an operating current.)

Certifications

RoHS

High-Pot Capability¹⁰

5,600 VDC

TYPICAL CHARACTERISTICS

THERMAL CHARACTERISTICS

Thermal Resistance (R_{ca} , All Cell Cases to Ambient), typical⁸

1.1°C/W

Thermal Capacitance (C_{th}), typical

4,800 J/°C

Maximum Continuous Current ($\Delta T = 15^\circ\text{C}$)⁸7 A_{RMS}Maximum Continuous Current ($\Delta T = 40^\circ\text{C}$)⁸12 A_{RMS}

LIFE

DC Life at High Temperature¹

(held continuously at Rated Voltage and Maximum Operating Temperature)

1,500 hours

Capacitance Change (% decrease from minimum initial value)

20%

ESR Change (% increase from maximum initial value)

100%

Projected DC Life at 25°C¹

(held continuously at Rated Voltage)

10 years

Capacitance Change (% decrease from minimum initial value)

20%

ESR Change (% increase from maximum initial value)


100%

Shelf Life

(Stored uncharged at 25°C)

4 years

ESR AND CAPACITANCE VS TEMPERATURE

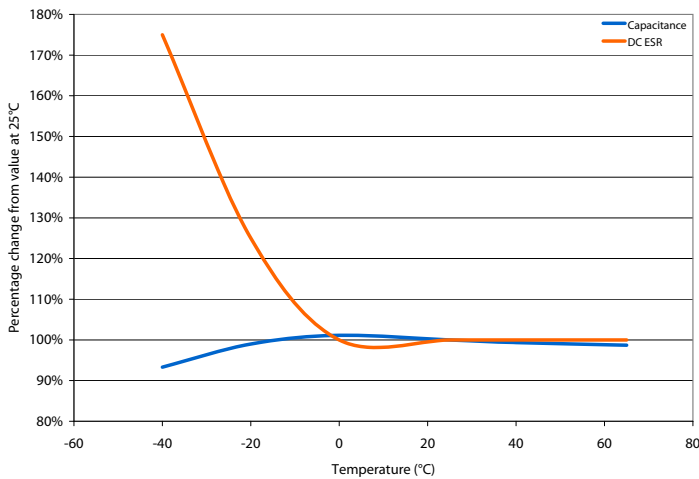

NOTES

1. Capacitance and ESR_{DC} measured at 25°C using specified test current per waveform below.
2. Absolute maximum voltage, non-repeated. Not to exceed 1 second.
3. After 72 hours at rated voltage. Initial leakage current can be higher.

$$4. \text{ Per IEC 62391-2, } P_d = \frac{0.12V^2}{ESR_{DC} \times \text{mass}}$$

$$5. P_{\max} = \frac{V^2}{4 \times ESR_{DC} \times \text{mass}}$$


$$6. E_{\max} = \frac{\frac{1}{2} CV^2}{3,600 \times \text{mass}}$$

$$7. E_{\text{stored}} = \frac{\frac{1}{2} CV^2}{3,600}$$

$$8. \Delta T = I_{\text{RMS}}^2 \times ESR \times R_{ca}$$


9. Per United Nations material classification UN3499, all Maxwell ultracapacitors have less than 10 Wh capacity to meet the requirements of Special Provisions 361. Both individual ultracapacitors and modules composed of those ultracapacitors shipped by Maxwell can be transported without being treated as dangerous goods (hazardous materials) under transportation regulations.

10. Duration = 60 seconds. Not intended as an operating parameter.

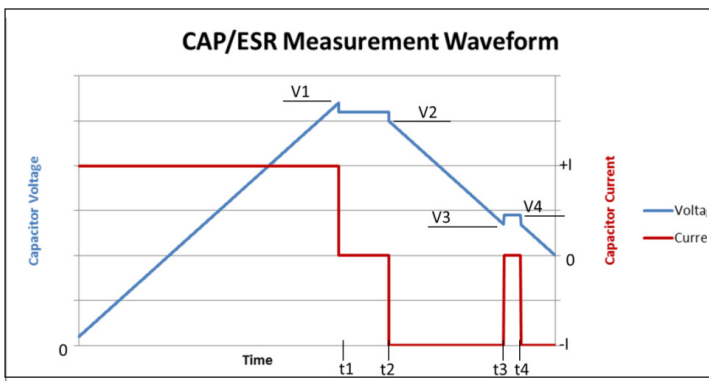

$$V1 = V_{\text{rated}} \quad t2 - t1 = 15 \text{ seconds} \quad \text{Capacitance} = I \times (t3 - t2) / (V2 - V3)$$

$$V3 = 0.5 \times V_{\text{rated}} \quad t4 - t3 = 5 \text{ seconds} \quad ESR = (V4 - V3) / I$$

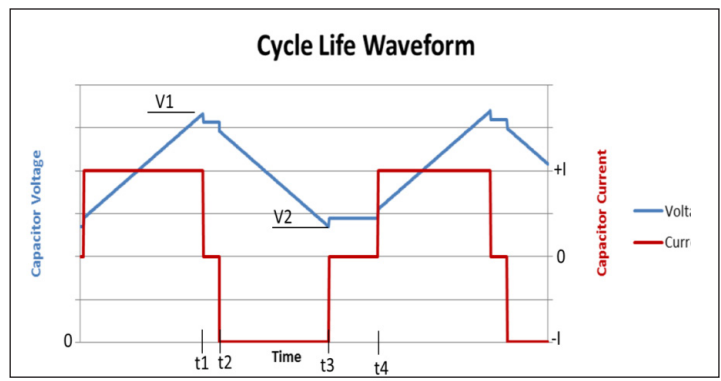

$$V1 = V_{\text{rated}} \quad t2 - t1 = 5 \text{ seconds (I=0)}$$

$$V2 = 0.5 \times V_{\text{rated}} \quad t4 - t3 = 15 \text{ seconds (I=0)}$$


MOUNTING RECOMMENDATIONS

Please refer to the user manual for installation recommendations.

MARKINGS

Products are marked with the following information: Rated capacitance, rated voltage, product number, name of manufacturer, positive and negative terminal, warning marking, serial number.

BMOD0006 E160 B02

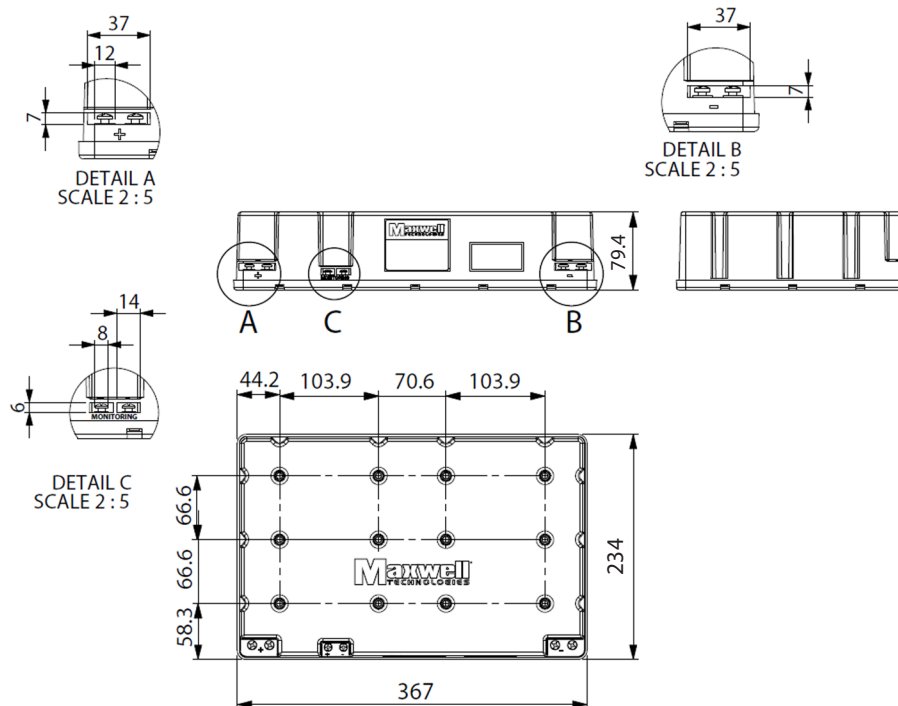

Part Description	Dimensions (mm)			Package Quantity
	L (±0.7mm)	W (±0.7mm)	H (±0.7mm)	
BMOD0006 E160 B02	367.0	234.0	79.4	3

Product dimensions are for reference only unless otherwise identified. Product dimensions and specifications may change without notice.

Please contact Maxwell Technologies directly for any technical specifications critical to application. All products featured on this datasheet are covered by the following U.S. patents and their respective foreign counterparts: 6643119, 7295423, 7307830, 7342770, 7352558, 7384433, 7440258, 7492571, 7508651, 7791860, 7791861, 7859826, 7883553, 7935155, 8072734, 8279580, and patents pending.



Maxwell Technologies, Inc. Global Headquarters

3888 Calle Fortunada
San Diego, CA 92123
USA
Tel: +1 858 503 3300
Fax: +1 858 503 3301



Maxwell Technologies SA

Route de Montena 65
CH-1728 Rossens
Switzerland
Tel: +41 (0)26 411 85 00
Fax: +41 (0)26 411 85 05



Maxwell Technologies, GmbH

Leopoldstrasse 244
80807 München
Germany
Tel: +49 (0)89 / 4161403 0
Fax: +49 (0)89 / 4161403 99



Maxwell Technologies Shanghai Trading Co. Ltd.

Unit A2,C 12th Floor
Huarun Times Square
500 Zhangyang Road,
Pudong New Area
Shanghai 200122,
P.R. China
Phone: +86 21 3852 4000
Fax: +86 21 3852 4099



Maxwell Technologies Korea Co., Ltd.

Room 1524, D-Cube City
Office Tower, 15F #662
Gyeongin-Ro, Guro-Gu,
Seoul, 152-706
South Korea
Phone: +82 10 4518 9829

MAXWELL TECHNOLOGIES, MAXWELL, MAXWELL CERTIFIED INTEGRATOR, ENABLING ENERGY'S FUTURE, BOOSTCAP, C CELL, D CELL and their respective designs and/or logos are either trademarks or registered trademarks of Maxwell Technologies, Inc. and may not be copied, imitated or used, in whole or in part, without the prior written permission from Maxwell Technologies, Inc. All contents copyright © 2014 Maxwell Technologies, Inc. All rights reserved. No portion of these materials may be reproduced in any form, or by any means, without prior written permission from Maxwell Technologies, Inc.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А