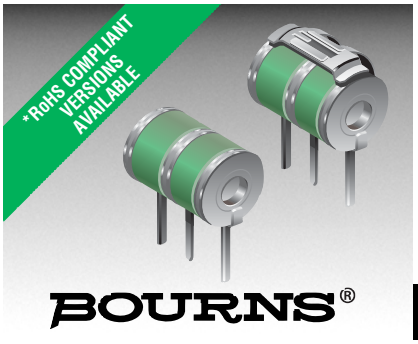

Features

- Balanced TRIGARD®
- Approximately 8 mm diameter, 11 mm long
- UL recognized
- Custom configurations available
- High surge current rating
- Stable breakdown throughout life
- RoHS compliant* version available

Applications

- Telecommunications
- Industrial electronics
- Commercial electronics
- Consumer electronics
- Automotive, aircraft, military electronics

2026 Series - 3-Pole Gas Discharge Tube

Characteristics

Test Methods per ITU-T (CCITT) K.12, IEEE C62.31, RUS PE-80, Telcordia GR 1361

Characteristic	Model No.						
	2026-07	2026-09	2026-15	2026-20	2026-23	2026-25	2026-26
DC Sparkover ±20 % @ 100 V/s	75 V	90 V	150 V	200 V	230 V	250 V	260V[1]
Impulse Sparkover							
100 V/µs	275 V	275 V	350 V	425 V	450 V	475 V	475 V
1000 V/µs	700 V	600 V	575 V	625 V	650 V	700 V	700 V

Characteristic	Model No.					
	2026-30	2026-35	2026-40	2026-42	2026-47	2026-60
DC Sparkover ±20 % @ 100 V/s	300 V	350 V	400 V	420 V	470 V	600 V
Impulse Sparkover						
100 V/µs	500 V	625 V	675 V	725 V	800 V	925 V
1000 V/µs	775 V	875 V	925 V	1000 V	1100 V	1250 V

Impulse Transverse Delay	1000 V/µs	< 75 ns	
Insulation Resistance	100 V (50 V for Model 2026–07 & 2026-09)	> 10^{10} Ω	
Glow Voltage	10 mA	~ 70 V	
Arc Voltage	1A	~ 10 V	
Glow-Arc Transition Current		< 0.5 A	
Capacitance	1 MHz	< 2 pF	
DC Holdover Voltage[2]	>135 V, (52 V for Model 2026-07 & 2026-09, 80 V for Model 2026-15)	< 150 ms	
Impulse Discharge Current	40000 A, 8/20 µs[3]	1 operation minimum	
	20000 A, 8/20 µs	> 10 operations	
	5000 A, 10/350 µs	1 operation	
	1000 A, 10/1000 µs	> 400 operations	
Alternating Discharge Current	130 Arms, 11 cycles[3]	1 operation minimum	
	20 Arms, 1 s	> 10 operations	
Operation and Storage Temperature		-40 to +90 °C	
Climatic Category (IEC 60068-1)		40/ 90/ 21	

Optional Switch-Grade Fail-short device available.

Notes:

- **UL recognized component, UL File E153537.**
- Model number marking on tube: 26-xxx V.
- The rated discharge current for TRIGARD® Gas Discharge Tubes is the total current equally divided between each line to ground.
- Sparkover limits after life ±25 %, IR >10^8Ω (-25 %,+30 % for Model 2026-07, 2026-09 and 2026-60).
- Line to Line voltage is approximately 1.8 to 2 times the stated Line to Ground breakdown voltage.
- At delivery AQL 0.65 Level II, DIN ISO 2859

[1] Tube meets BT requirement Type 14 A/1 (210-310 V).
[2] Network applied.
[3] DC Sparkover may exceed ±25 % after discharge, but will continue to protect without venting.

*RoHS Directive 2002/95/EC Jan 27, 2003 including Annex.
Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.

Product Dimensions (additional lead form configurations available upon request)

2026-XX-A

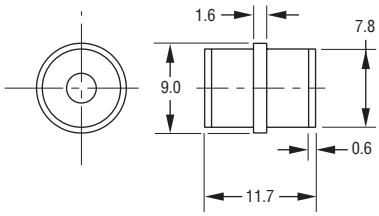

2026-XX-A1

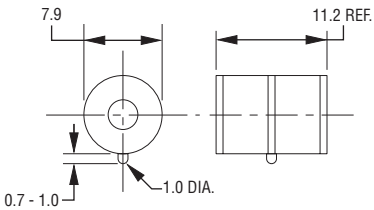

2026-XX-C2

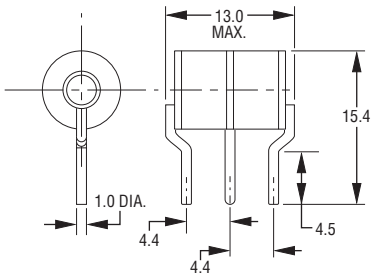

2026-XX-C3

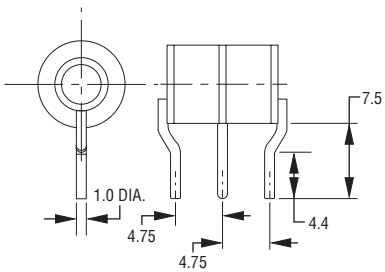

2026-XX-C4

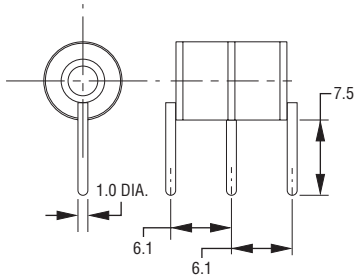

2026-XX-C8



2026-XX-C
1.0 mm dia. lead wire

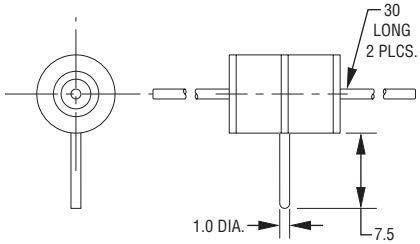

FAIL-SHORT CONFIGURATION
2026-XX-C2F SHOWN



DIMENSIONS: MILLIMETERS
UNITS WITH LEADS ARE BASED ON THE 2026-XX-A1 BODY.

How to Order

2026 - nn - x n F LF

Model Number Designator

Voltage (Divided by 10)

07 = 75 V	30 = 300 V
09 = 90 V	35 = 350 V
15 = 150 V	40 = 400 V
20 = 200 V	42 = 420 V
23 = 230 V	47 = 470 V
25 = 250 V	60 = 600 V
26 = 260 V	

Leads
A = None
C = 1 mm

Lead Shape
(See Product Dimension Drawings)

Fail-Short Option
Blank = Standard Product
F = With Fail-Short Mechanism

RoHS Compliant Option
Blank =Standard Product
LF = RoHS Compliant Product

Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.

Switch-Grade Fail-short Device Shorting Curve 2026-XX-XF

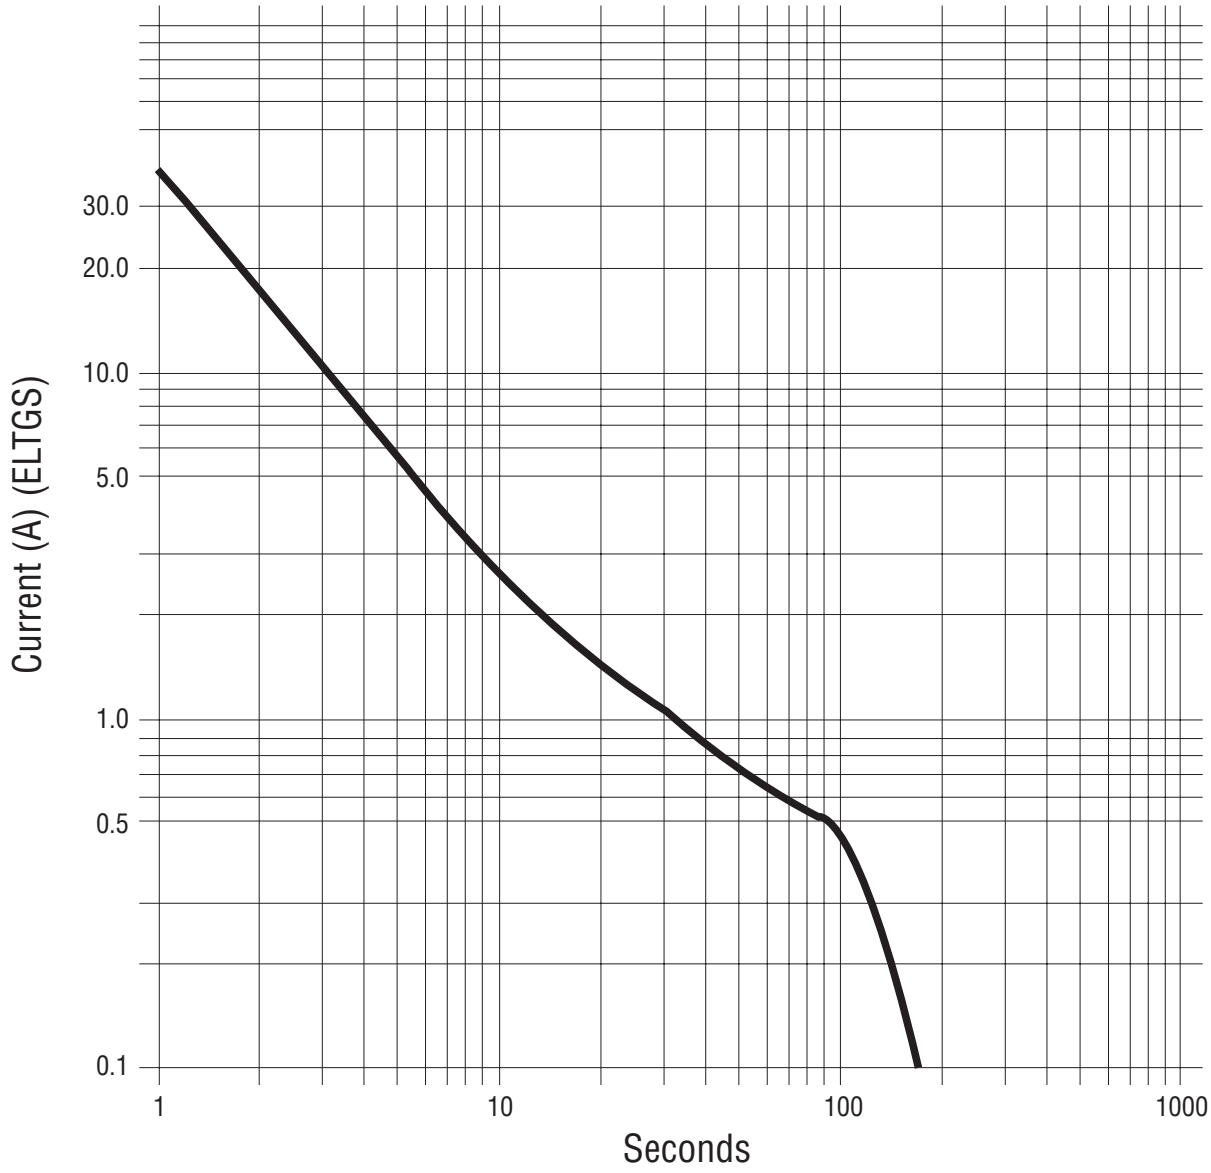

ELTGS = Each Line to Ground Simultaneously

NOTE: When using a GDT fail-short device, it is imperative that all components associated and connected to the GDT with failsafe be tested in their respective completely integrated environment (finished product) to assure desired operation.

Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.

OCEAN CHIPS
Океан Электроники
Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».

AVIC JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).

FORSTAR®

Телефон: 8 (812) 309-75-97 (многоканальный)
Факс: 8 (812) 320-03-32
Электронная почта: ocean@oceanchips.ru
Web: http://oceanchips.ru/
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А