




## Surface Mount Multilayer Ceramic Chip Capacitors for Safety Certified Applications

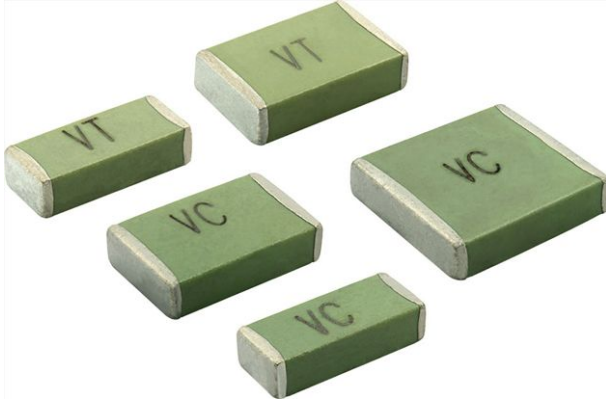

### FEATURES

- Approved IEC 60384-14
- Specialty: safety certified capacitors
- Wet build process
- Reliable Noble Metal Electrode (NME) system
- Material categorization:  
for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)



**RoHS**  
COMPLIANT  
HALOGEN  
**FREE**  
**GREEN**  
(5-2008)

### APPLICATIONS

- Power supplies
- Facsimile and telephone
- AC equipment and appliances
- Lighting strike and voltage surge protection
- EMI and AC line filtering
- Isolators

### ELECTRICAL SPECIFICATIONS

#### Note

- Electrical characteristics at +25 °C unless otherwise specified

**Operating Temperature:** -55 °C to +125 °C

**Capacitance Range X1 / Y2 (1):** 10 pF to 1.0 nF

**Capacitance Range X2 (1):** 10 pF to 470 pF

**Voltage Range:** 250 V<sub>AC</sub>

**Temperature Coefficient of Capacitance (TCC):**

0 ppm/°C ± 30 ppm/°C from -55 °C to +125 °C

**Dissipation Factor (DF) (1):**

0.1 % maximum for values ≤ 1000 pF at 1.0 V<sub>RMS</sub> at 1 MHz  
or per IEC 60384-14 at 1.0 V<sub>RMS</sub> at 10 kHz

**Insulating Resistance:**

at +25 °C 100 000 MΩ min. or 1000 ΩF whichever is less  
at +125 °C 10 000 MΩ min. or 100 ΩF whichever is less

**Aging Rate:** 0 % maximum per decade

**Voltage Proof Test:**

X1 / Y2: 1500 V<sub>AC</sub> (RMS), 60 s ± 1 s

X2: 1075 V<sub>DC</sub>, 60 s ± 1 s

**Peak Impulse Voltage:**

X1 / Y2: 5000 V

X2: 2500 V

**Climatic Category According to EN 60068-1:**

55/125/21

#### Note

(1) **Test conditions per IEC 60384-14:**

Voltage: 1.0 V<sub>RMS</sub>

Capacitance: C ≤ 100 pF at 1 MHz and C > 100 pF at 1 kHz



QUICK REFERENCE DATA				
DIELECTRIC	CASE	MAXIMUM VOLTAGE (V <sub>AC</sub> )	CAPACITANCE	
			MINIMUM	MAXIMUM
C0G (NP0) (X1 / Y2)	2008	250	10 pF	220 pF
	2012	250	18 pF	470 pF
	2220	250	47 pF	1.0 nF
C0G (NP0) (X2)	2008	250	10 pF	390 pF
	2012	250	18 pF	470 pF

**Notes**

- Detail ratings see “Selection Chart”
- Size 2008 and 2012 are compatible with 1808 and 1812 solderlands and full conform with the IEC-60384-14 requirements for creepage distance


ORDERING INFORMATION								
VJ2008	A	101	K	X	U	S	T	### <sup>(1)</sup>
CASE CODE	DIELECTRIC	CAPACITANCE NOMINAL CODE	CAPACITANCE TOLERANCE	TERMINATION	AC VOLTAGE RATING	MARKING	PACKAGING	PROCESS CODE
2008 2012 2220	A = C0G (NP0)	Expressed in picofarads (pF). The first two digits are significant, the third is a multiplier. <b>Examples:</b> 101 = 100 pF	J = ± 5 % K = ± 10 %	X = Ni barrier 100 % tin plated	U = 250 V <sub>AC</sub>	S = marked (see Part Marking table below)	T = 7" reel/plastic tape R = 11 1/4"/13" reel/plastic tape	X1 = X1 / Y2 X2 = X2

**Notes**

- <sup>(1)</sup> Process code must be added to control products and requirements
- Detail ratings see “Selection Chart”

PART MARKING		
MARKING	1 <sup>ST</sup> DIGIT MANUFACTURER	2 <sup>ND</sup> DIGIT DIELECTRIC AND RATING
VC	V = Vishay	C = C0G/NP0, X1/Y2
VT		T = C0G/NP0, X2

**DIMENSIONS** in inches (millimeters)

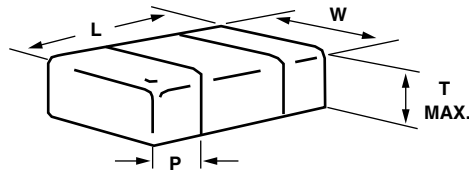

CASE CODE	PART ORDERING NUMBER	LENGTH (L)	WIDTH (W)	MAXIMUM THICKNESS (T)	TERMINATION (P)	
					MINIMUM	MAXIMUM
2008	VJ2008	0.200 ± 0.010 (5.08 ± 0.25)	0.080 ± 0.010 (2.03 ± 0.25)	0.086 (2.18)	0.010 (0.25)	0.030 (0.76)
2012	VJ2012	0.200 ± 0.010 (5.08 ± 0.25)	0.126 ± 0.008 (3.20 ± 0.20)	0.086 (2.18)	0.010 (0.25)	0.030 (0.76)
2220	VJ2220	0.220 ± 0.008 (5.59 ± 0.20)	0.200 ± 0.010 (5.08 ± 0.25)	0.086 (2.18)	0.010 (0.25)	0.030 (0.76)



SELECTION CHART						
DIELECTRIC		C0G (NP0) (X1/Y2)			C0G (NP0) (X2)	
STYLE		VJ2008 <sup>(1)</sup>	VJ2012 <sup>(1)</sup>	VJ2220 <sup>(1)</sup>	VJ2008 <sup>(1)</sup>	VJ2012 <sup>(1)</sup>
CASE CODE		2008	2012	2220	2008	2012
VOLTAGE (V <sub>AC</sub> )		250	250	250	250	250
VOLTAGE CODE		U	U	U	U	U
CAP. CODE	CAP.					
100	10 pF	•			•	
120	12 pF	•			•	
150	15 pF	•			•	
180	18 pF	•	•		•	•
220	22 pF	•	•		•	•
270	27 pF	•	•		•	•
330	33 pF	•	•		•	•
390	39 pF	•	•		•	•
470	47 pF	•	•	•	•	•
560	56 pF	•	•	•	•	•
680	68 pF	•	•	•	•	•
820	82 pF	•	•	•	•	•
101	100 pF	•	•	•	•	•
121	120 pF	•	•	•	•	•
151	150 pF	•	•	•	•	•
181	180 pF	•	•	•	•	•
221	220 pF	•	•	•	•	•
271	270 pF		•	•	•	•
331	330 pF		•	•	•	•
391	390 pF		•	•	•	•
471	470 pF		•	•		•
561	560 pF			•		
681	680 pF			•		
821	820 pF			•		
102	1.0 nF			•		
122	1.2 nF					
152	1.5 nF					
182	1.8 nF					

**Notes**

<sup>(1)</sup> See soldering recommendations within this data book, or visit [www.vishay.com/doc?45034](http://www.vishay.com/doc?45034)

• RoHS-compliant

PACKAGING QUANTITIES <sup>(1)</sup>			
CASE CODE	TAPE SIZE	7" REEL QUANTITIES	11 1/4" AND 13" REEL QUANTITIES
		PACKAGING CODE "T"	PACKAGING CODE "R"
2008	12 mm	2000	10 000
2012	12 mm	1000	4000
2220	12 mm	1000	4000

**Note**

<sup>(1)</sup> Reference: EIA standard RS481 - "Taping of Surface Mount Components for Automatic Placement"



APPROVALS				
IEC 60384-14 - Safety tests CB test certificates:				
X1/Y2-capacitor:	DE1-51726	10 pF to 1000 pF	250 V <sub>AC</sub>	
X2-capacitor:	DE1-51726	10 pF to 470 pF	250 V <sub>AC</sub>	
DIN EN 60384-14 (VDE 0565 Teil 1-1):2006-04; EN 60384-14:2005-08; IEC 60384-14 (ed.3)				
X1/Y2-capacitor:	70001064	10 pF to 1000 pF	250 V~	
X2-capacitor:	70001064	10 pF to 470 pF	250 V~	
CAN/CSA-E60384-14:09 and ANSI/UL 60384-14-2009				

STORAGE AND HANDLING CONDITIONS
<p>(1) Store the components at 5 °C to 40 °C ambient temperature and ≤ 70 % relative humidity conditions.</p> <p>(2) The product is recommended to be used within a time-frame of 2 years after shipment. Check solderability in case extended shelf life beyond the expiry date is needed.</p> <p>Precautions:</p> <ol style="list-style-type: none"> <li>Do not store products in an environment containing corrosive elements, especially where chloride gas, sulfide gas, acid, alkali, salt or the like are present. This may cause corrosion or oxidization of the terminations, which can easily lead to poor soldering.</li> <li>Store products on the shelf and avoid exposure to moisture or dust.</li> <li>Do not expose products to excessive shock, vibration, direct sunlight and so on.</li> </ol>



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Material Category Policy

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.**

**Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.**

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.**

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А