

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0855025011

Status:

Active

Description:

Modular Jack, Right Angle, Low Profile, SMT, 6/6, Pin-in-Hole- Reflow

Documents:

3D Model

Drawing (PDF)

Application Specification (PDF)

Product Specification PS-85502-001 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

UL

E107635

General

Product Family

Series

Comments

Component Type

Magnetic

Performance Category

Power over Ethernet (PoE)

Product Name

Modular Jacks/Plugs

85502

Pin and Paste

PCB Jack

No

3

N/A

RJ12

Physical

Boot Color

Color - Resin

Durability (mating cycles max)

Flammability

Inverted / Top Latch

Lightpipes/LEDs

Material - Metal

Material - Plating Mating

Material - Plating Termination

Material - Resin

Orientation

PCB Locator

PCB Retention

PCB Thickness Recommended (in)

PCB Thickness Recommended (mm)

Packaging Type

Pitch - Mating Interface (in)

Pitch - Mating Interface (mm)

Pitch - Term. Interface (in)

Pitch - Term. Interface (mm)

Plating min: Mating (µin)

Plating min: Mating (µm)

Plating min: Termination (µin)

Plating min: Termination (µm)

Ports

Positions / Loaded Contacts

Surface Mount Compatible (SMC)

Temperature Range - Operating

Termination Interface: Style

Waterproof / Dustproof

Wire/Cable Type

N/A

Black

500

94V-0

No

None

Brass

Gold

Tin

High Temperature Thermoplastic

Right Angle (Side Entry)

Yes

Yes

0.062 In

1.57 mm

Embossed Tape on Reel

0.040 In

1.02 mm

0.050 In

1.27 mm

120.00, 50.8

1.27, 3.000

120.00, 76

1.9, 3.00

1

6/6

Yes

-40°C to +80°C

Surface Mount

No

N/A

Electrical

Series

image - Reference only

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Halogen-Free

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

85502Series

Mates With

FCC 68 Plugs

Current - Maximum per Contact	1.5A
Shielded	No
Voltage - Maximum	125V AC (RMS)

Solder Process Data

Duration at Max. Process Temperature (seconds)	45
Lead-free Process Capability	Reflow Capable (SMT only)
Max. Cycles at Max. Process Temperature	3
Process Temperature max. C	260

Material Info

Reference - Drawing Numbers

Packaging Specification	PK-85502
Product Specification	PS-85502-001
Sales Drawing	SD-85502-103

This document was generated on 06/07/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

10 9 8 7 6 5 4 3 2 1

NOTES:

1- MATERIAL:

HOUSING: LCP GLASS FILLED UL 94V0, COLOUR: BLACK

TERMINAL: BRASS PLATED WITH:

0.00127/.000050 MIN GOLD IN CONTACT AREA,
0.00190/.000075 MIN PURE TIN IN TAIL AREA,
BOTH OVER 0.00127/.000050 MIN NICKEL OVERALL.

SOLDER PEGS: BRASS PLATED WITH 0.0020/.000078 MIN TIN.

2- JACK FOR MATING WITH F.C.C.68 PLUGS.
(MOLEX 90075 SERIES).

3- PRODUCT SPECIFICATION: MOLEX PS-85502-001

4- POLYIMIDE ADHESIVE TAPE FOR PICK & PLACE SURFACE.
THICKNESS: 125 μm /4921 μm

5- PACKAGING SPECIFICATION: MOLEX PK-85502.
(BLISTER PACKAGING).




6- COPLANARITY OF SIGNAL LEADS: 0.10/.004

7- SEE DIMENSIONS IN CHART ON SHEET 2.



8- P.C. BOARD THICKNESS: 1.57/.062

9- MANUFACTURING I.D. CAN BE EITHER MG, MXF OR MXI.

10- APPLICATION SPEC: AS-85513-001

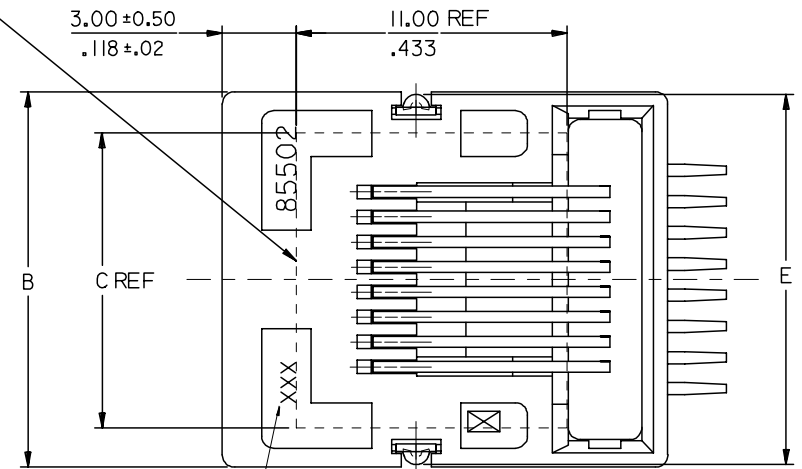

NOTE 9.

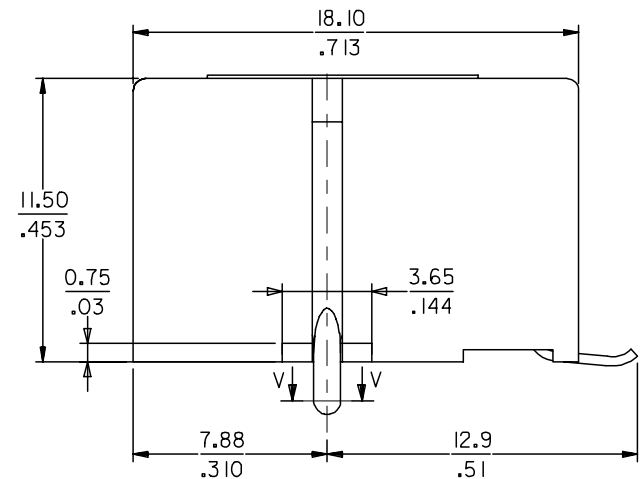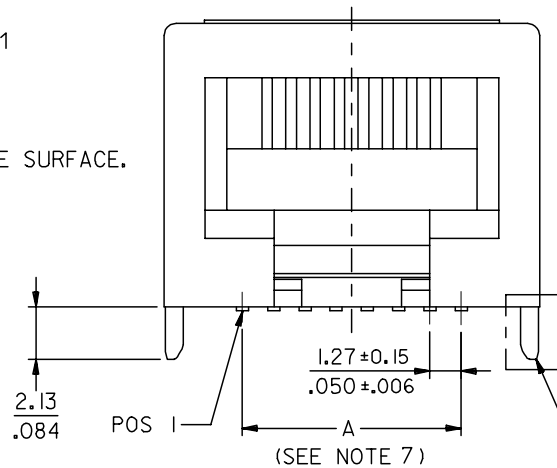

SEE DETAIL X

MODIFIED MATL	2007/02/15
EC NO: E2007-0717	2007/02/15
DRWN:DBYRNES	2007/02/15
CHKD:	2007/02/15
APPR:EOMAHONY	2007/02/15
REV	


QUALITY SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)		
	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .010
2 PLACES	± 0.25	± .014
1 PLACE	± 0.35	± ---
ANGULAR ± 2 °		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

DIMENSION STYLE MM/IN	
DRAWN BY	DATE
DB	2006/06/12
CHECKED BY	DATE
EOMAHONY	2006/06/15
APPROVED BY	DATE
EOMAHONY	2006/06/15
MATERIAL NO.	
SEE CHART SHT 2	
SIZE	A3

SCALE 5:1	DESIGN UNITS METRIC		THIRD ANGLE PROJECTION
TITLE			
R/A LOW PROFILE P.C.JACK SMT; 4,6 & 8 CKTS WITH THROUGH HOLE SOLDER PEGS			
MOLEX MOLEX INCORPORATED			
DOCUMENT NO. SD-85502-103			SHEET NO. 1 OF 2
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

TWO OPTIONAL HOLES FOR THE 8 POSITION-VERSION FOR THE COMPATIBILITY WITH THE INTERNAL SHIELDED VERSION.

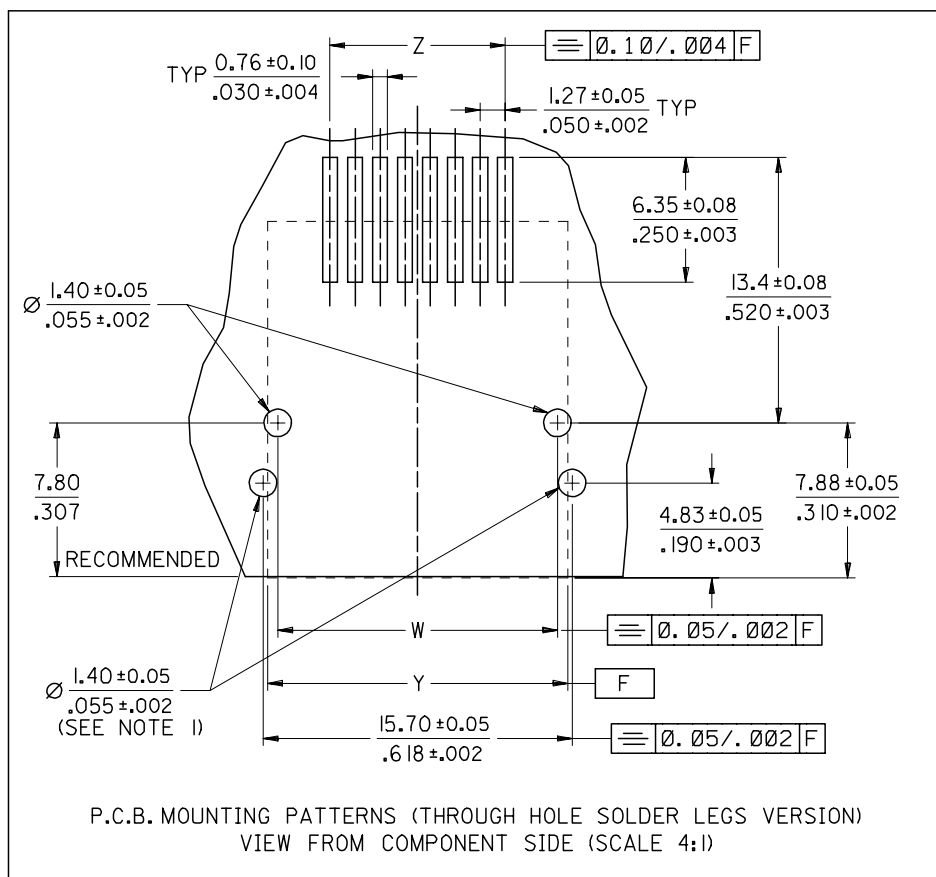

PART NUMBERS FOR SMT JACK WITH THROUGH HOLE SOLDER PEGS									
	HOUSING COLOR	POS 4	TOOLED	POS 6	TOOLED	POS 6	TOOLED	POS 8	TOOLED
		4 CKTS		4 CKTS		6 CKTS		8 CKTS	
STANDARD VERSION	BLACK	85502-5009		85502-5010		85502-5011		85502-5012	

TYPE DIM	POS 4	POS 6		POS 8
	4 CKTS	4 CKTS	6 CKTS	8 CKTS
A ±0.15/-.006	3.81 / .150	3.81 / .150	6.35 / .250	8.89 / .350
B	11.18 / .440	13.21 / .520	13.21 / .520	15.24 / .600
C (REF)	8.50 / .335	8.50 / .335	8.50 / .335	12.00 / .472
E	11.08 / .436	13.11 / .516	13.11 / .516	15.14 / .596
W ±0.05/-.002	10.13 / .399	12.16 / .479	12.16 / .479	14.19 / .559
Y (REF)	11.18 / .440	13.21 / .520	13.21 / .520	15.24 / .600
Z ±0.05/-.002	3.81 / .150	3.81 / .150	6.35 / .250	8.89 / .350

SEE SHEET 1	2007/02/19	QUALITY SYMBOLS
EC NO: E2007-0717	2007/02/19	 = 0
DRWN:DBYRNES	2007/02/19	 = 0
CHKD:	2007/02/19	
APPR:EDWAHONY		
REV	DESCRIPTION	

GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM/IN		SCALE 5:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION															
<table><tr><td></td><td>mm</td><td>INCH</td></tr><tr><td>4 PLACES</td><td>± ---</td><td>± ---</td></tr><tr><td>3 PLACES</td><td>± ---</td><td>± .010</td></tr><tr><td>2 PLACES</td><td>± 0.25</td><td>± .014</td></tr><tr><td>1 PLACE</td><td>± 0.35</td><td>± ---</td></tr></table>				mm	INCH	4 PLACES	± ---	± ---	3 PLACES	± ---	± .010	2 PLACES	± 0.25	± .014	1 PLACE	± 0.35	± ---	DRAWN BY DB		DATE 2006/06/12		
	mm	INCH																				
4 PLACES	± ---	± ---																				
3 PLACES	± ---	± .010																				
2 PLACES	± 0.25	± .014																				
1 PLACE	± 0.35	± ---																				
			CHECKED BY EOMAHONY		DATE 2006/06/15																	
			APPROVED BY EOMAHONY		DATE 2006/06/15																	
ANGULAR ± 2 °			MATERIAL NO.		DOCUMENT NO.		SHEET NO.															
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE CHART		SD-85502-103		2 OF 2															
SIZE  THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																						

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А