

# MOS FET Relays G3VM-41UR10/51UR

**World's Smallest New VSON Package with Low Output Capacitance and Low ON Resistance (Low C × R)**

- RoHS Compliant

**Application Examples**

- Semiconductor test equipment
- Test & measurement devices
- Data loggers
- Communication equipment



**NEW**

**Note:** The actual product is marked differently from the image shown here.

**List of Models**



Package type	Contact form	Terminals	Load voltage (peak value)	Continuous Load Current (peak value)	Model	Minimum Packaging Quantity
VSON4	SPST-NO (1FormA)	Surface-mounting terminals	40 VAC or VDC	120 mA	G3VM-41UR10	---
					G3VM-41UR10(TR05)	500
			50 VAC or VDC	300 mA	G3VM-51UR	---
					G3VM-51UR(TR05)	500

**Note:** G3VM-41UR10 and G3VM-51UR, without “(TR05)”, are provided as a Tape-cut versions, for sample purposes. Tape-cut VSON's are packaged without humidity resistance. Use manual soldering to mount them.

**Dimensions**

**Note:** All units are in millimeters unless otherwise indicated.

G3VM-41UR10  
G3VM-51UR

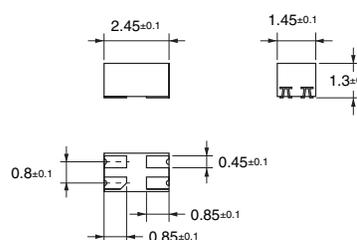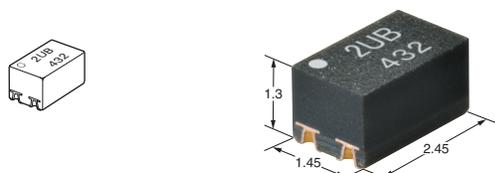


Weight: 0.01 g


**Note:** The actual product is marked differently from the image shown here.

**Terminal Arrangement/Internal Connections (Top View)**

G3VM-41UR10  
G3VM-51UR




VSON (Very Small Outline Non-leaded)  
VSON4



**Note:** The actual product is marked differently from the image shown here.

**Actual Mounting Pad Dimensions (Recommended Value, Top View)**

G3VM-41UR10  
G3VM-51UR



■ Absolute Maximum Ratings (Ta = 25°C)


Item		Symbol	G3VM-41UR10	G3VM-51UR	Unit	Measurement Conditions
Input	LED forward current	$I_F$	30		mA	
	LED forward current reduction rate	$\Delta I_F/^\circ\text{C}$	-0.3		mA/°C	$T_a \geq 25^\circ\text{C}$
	LED reverse voltage	$V_R$	5		V	
	Connection temperature	$T_J$	125		°C	
Output	Load voltage (AC peak/DC)	$V_{OFF}$	40	50	V	
	Continuous load current	$I_O$	120	300	mA	
	ON current reduction rate	$\Delta I_{ON}/^\circ\text{C}$	-1.2	-3	mA/°C	$T_a \geq 25^\circ\text{C}$
	Pulse ON current	$I_{OP}$	360	900	mA	$t=100\text{ms}$ , Duty=1/10
	Connection temperature	$T_J$	125		°C	
Dielectric strength between input and output (See note 1.)		$V_{I-O}$	300		$V_{rms}$	AC for 1 min
Ambient operating temperature		$T_a$	-40 to +85		°C	With no icing or condensation
Ambient storage temperature		$T_{stg}$	-40 to +125		°C	
Soldering temperature		---	260		°C	10 s

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.


■ Electrical Characteristics (Ta = 25°C)

Item		Symbol	G3VM-41UR10	G3VM-51UR	Unit	Measurement conditions	
Input	LED forward voltage	$V_F$	Minimum	1.1		V	$I_F = 10\text{ mA}$
			Typical	1.27			
			Maximum	1.4			
	Reverse current	$I_R$	Maximum	10		$\mu\text{A}$	$V_R = 5\text{ V}$
	Capacity between terminals	$C_T$	Typical	30		pF	$V = 0$ , $f = 1\text{ MHz}$
Trigger LED forward current	$I_{FT}$	Maximum	3.0		mA	$I_O = 100\text{ mA}$	
Release LED forward current	$I_{FC}$	Minimum	0.1		mA	$I_{OFF} = 10\ \mu\text{A}$	
Output	Maximum resistance with output ON	$R_{ON}$	Typical	12	1	$\Omega$	$I_F = 5\text{ mA}$ , $t < 1\text{ s}$ -41UR10 : $I_O = 120\text{ mA}$ -51UR : $I_O = 300\text{ mA}$
			Maximum	14	1.5		
	Current leakage when the relay is open	$I_{LEAK}$	Maximum	1		nA	-41UR10 : $V_{OFF} = 40\text{ V}$ -51UR : $V_{OFF} = 50\text{ V}$
Capacity between terminals	$C_{OFF}$	Typical	0.45	12	pF	$V = 0$ , $f = 100\text{ MHz}$ , $t < 1\text{ s}$	
		Maximum	0.8	20			
Capacity between I/O terminals		$C_{I-O}$	Typical 1		pF	$f = 1\text{ MHz}$ , $V_s = 0\text{ V}$	
Insulation resistance between I/O terminals		$R_{I-O}$	Typical $10^8$		M $\Omega$	$V_{I-O} = 500\text{ VDC}$ , $R_{OH} \leq 60\%$	
Turn-ON time		$t_{ON}$	Maximum 0.2	0.5	ms	$I_F = 5\text{ mA}$ , $R_L = 200\ \Omega$ , $V_{DD} = 20\text{ V}$ (See note 2.)	
Turn-OFF time		$t_{OFF}$	Maximum 0.3	0.4			
Equivalent rise time		ERT	Typical	---	40	ps	$I_F = 5\text{ mA}$ , $V_{DD} = 0.25\text{ V}$ $Tr(in)=25\text{ps}$ (See note 3.)
			Maximum	---	90		

Note: 2. Turn-ON and Turn-OFF Times



Note: 3. Equivalent Rise Time

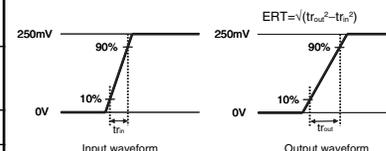

■ Recommended Operating Conditions

For usage with high reliability, the Recommended Operating Conditions are measures that takes into account the derating of the Absolute Maximum ratings and the Electrical Characteristics. Each item on this list is an independent condition, not simultaneously satisfying several conditions.


Item	Symbol	G3VM-41UR10	G3VM-51UR	Unit	
Load voltage (AC peak/DC)	$V_{DD}$	Maximum 32	40	V	
Operating LED forward current	$I_F$	Minimum	5		mA
		Typical	7.5		
		Maximum	20		
Continuous load current (AC peak/DC)	$I_O$	Maximum 120	300		
Ambient Operating temperature	$T_a$	Minimum	-20		°C
		Maximum	65		

■ **Approved Standards**


Applying for UL recognition

■ **Engineering Data**


**LED forward current vs. Ambient temperature**

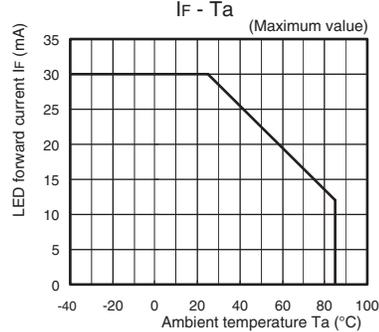


**Continuous load current vs. Ambient temperature**

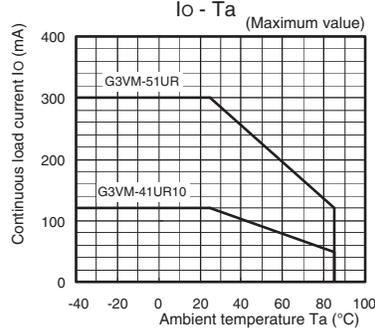


**LED forward current vs. LED forward voltage**

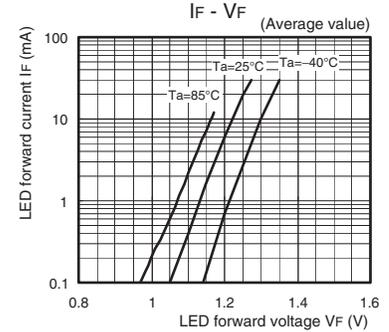


**Continuous load current vs. On-state voltage**

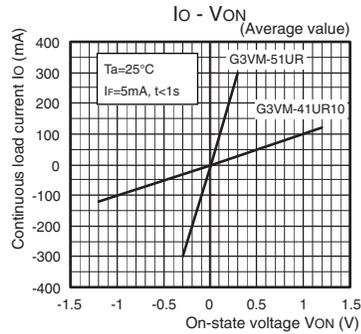


**On-state resistance vs. Ambient temperature G3VM-41UR10**

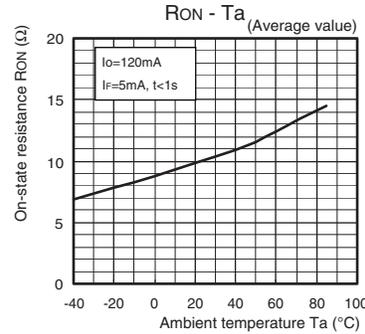


**G3VM-51UR**

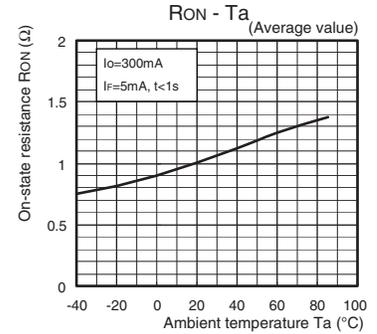


**Trigger LED forward current vs. Ambient temperature**

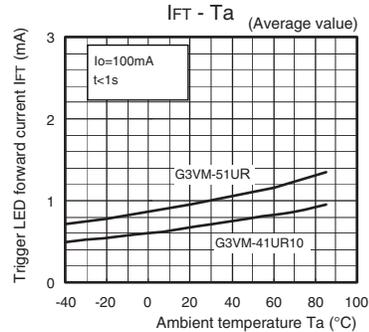


**Turn ON, Turn OFF time vs. LED forward current**

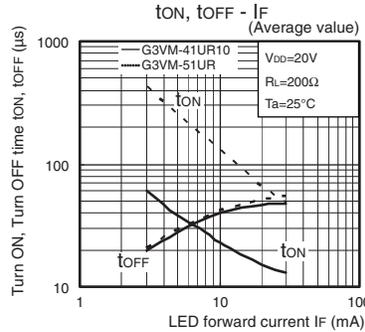


**Turn ON, Turn OFF time vs. Ambient temperature**

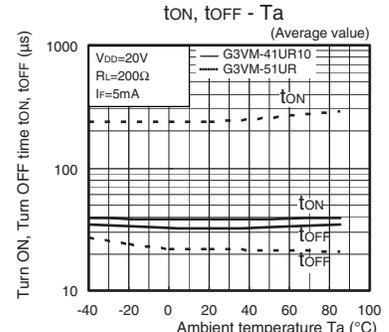


**Current leakage vs. Load voltage**

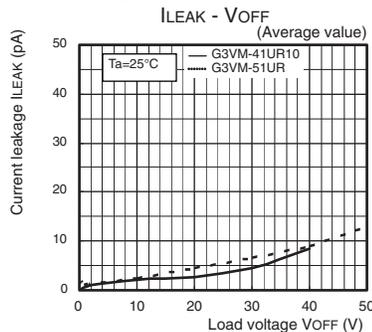

**Current Leakage vs. Ambient Temperature**

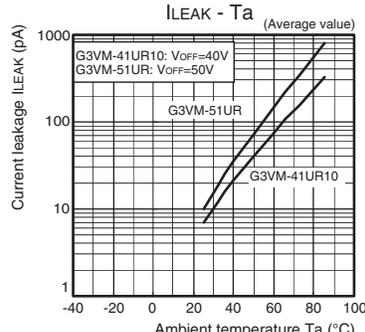

**Output terminal capacitance vs. Load voltage**

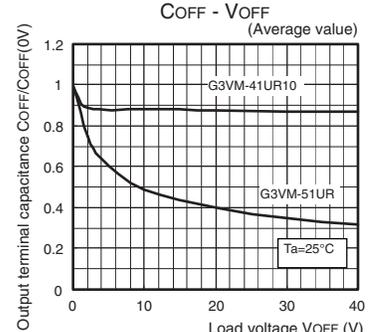

All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at [http://www.components.omron.com/components/web/webfiles.nsf/sales\\_terms.html](http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html)

**ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.**  
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

**OMRON**<sup>®</sup>  
**OMRON ELECTRONIC  
COMPONENTS LLC**  
**847-882-2288**

**OMRON ON-LINE**

Global - <http://www.omron.com>  
USA - <http://www.components.omron.com>

Cat. No. K268-E-01

09/14

Specifications subject to change without notice

Printed in USA

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А