


Silicon N-Channel MOSFET Tetrode

- For low noise , high gain controlled input stages up to 1GHz
- Operating voltage 5 V
- Pb-free (RoHS compliant) package
- Qualified according AEC Q101

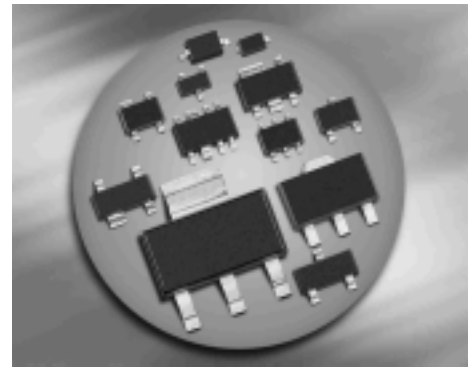

ESD (Electrostatic discharge) sensitive device, observe handling precaution!

Type	Package	Pin Configuration						Marking
BF2040	SOT143	1=S	2=D	3=G2	4=G1	-	-	NFs
BF2040R	SOT143R	1=D	2=S	3=G1	4=G2	-	-	NFs
BF2040W	SOT343	1=D	2=S	3=G1	4=G2	-	-	NFs

Maximum Ratings

Parameter	Symbol	Value	Unit
Drain-source voltage	V_{DS}	8	V
Continuous drain current	I_D	40	mA
Gate 1/ gate 2-source current	$\pm I_{G1/2SM}$	10	
Gate 1 (external biasing)	$+V_{G1SE}$	7	V
Total power dissipation $T_S \leq 76^\circ\text{C}$, BF2040, BF2040R $T_S \leq 94^\circ\text{C}$, BF2040W	P_{tot}	200 200	mW
Storage temperature	T_{stg}	-55 ... 150	$^\circ\text{C}$
Channel temperature	T_{ch}	150	

Thermal Resistance

Parameter	Symbol	Value	Unit
Channel - soldering point ¹⁾ BF2040, BF2040R BF2040W	R_{thchs}	≤ 370 ≤ 280	K/W

¹⁾For calculation of R_{thJA} please refer to Application Note Thermal Resistance

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified


Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Drain-source breakdown voltage $I_D = 20\ \mu\text{A}$, $V_{G1S} = 0$, $V_{G2S} = 0$	$V_{(\text{BR})\text{DS}}$	10	-	-	V
Gate1-source breakdown voltage $+I_{G1S} = 10\ \text{mA}$, $V_{G2S} = 0$, $V_{\text{DS}} = 0$	$+V_{(\text{BR})\text{G1SS}}$	6	-	15	
Gate2-source breakdown voltage $+I_{G2S} = 10\ \text{mA}$, $V_{G1S} = 0$, $V_{\text{DS}} = 0$	$+V_{(\text{BR})\text{G2SS}}$	6	-	15	
Gate1-source leakage current $V_{G1S} = 5\ \text{V}$, $V_{G2S} = 0$, $V_{\text{DS}} = 0$	$+I_{\text{G1SS}}$	-	-	50	nA
Gate2-source leakage current $V_{G2S} = 5\ \text{V}$, $V_{G1S} = 0$, $V_{\text{DS}} = 0$	$+I_{\text{G2SS}}$	-	-	50	
Drain current $V_{\text{DS}} = 5\ \text{V}$, $V_{G1S} = 0$, $V_{G2S} = 4\ \text{V}$	I_{DSS}	-	-	50	μA
Drain-source current $V_{\text{DS}} = 5\ \text{V}$, $V_{G2S} = 4\ \text{V}$, $R_{\text{G1}} = 100\ \text{k}\Omega$	I_{DSX}	-	15	-	mA
Gate1-source pinch-off voltage $V_{\text{DS}} = 5\ \text{V}$, $V_{G2S} = 4\ \text{V}$, $I_D = 20\ \mu\text{A}$	$V_{\text{G1S(p)}}$	0.3	0.6	-	V
Gate2-source pinch-off voltage $V_{\text{DS}} = 5\ \text{V}$, $I_D = 20\ \mu\text{A}$	$V_{\text{G2S(p)}}$	0.3	0.7	-	

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
AC Characteristics - (verified by random sampling)					
Forward transconductance $V_{DS} = 5\text{ V}$, $I_D = 15\text{ mA}$, $V_{G2S} = 4\text{ V}$	g_{fs}	37	42	-	mS
Gate1 input capacitance $V_{DS} = 5\text{ V}$, $I_D = 15\text{ mA}$, $V_{G2S} = 4\text{ V}$, $f = 10\text{ MHz}$	C_{g1ss}	-	2.9	3.4	pF
Output capacitance $V_{DS} = 5\text{ V}$, $I_D = 15\text{ mA}$, $V_{G2S} = 4\text{ V}$, $f = 10\text{ MHz}$	C_{dss}	-	1.6	-	
Power gain $V_{DS} = 5\text{ V}$, $I_D = 15\text{ mA}$, $V_{G2S} = 4\text{ V}$, $f = 800\text{ MHz}$	G_p	20	23	-	dB
Noise figure $V_{DS} = 5\text{ V}$, $I_D = 15\text{ mA}$, $V_{G2S} = 4\text{ V}$, $f = 800\text{ MHz}$	F	-	1.6	2.2	dB
Gain control range $V_{DS} = 5\text{ V}$, $V_{G2S} = 4 \dots 0\text{ V}$, $f = 800\text{ GHz}$	ΔG_p	45	50	-	


Total power dissipation $P_{\text{tot}} = f(T_S)$

BF2040, BFD2040R

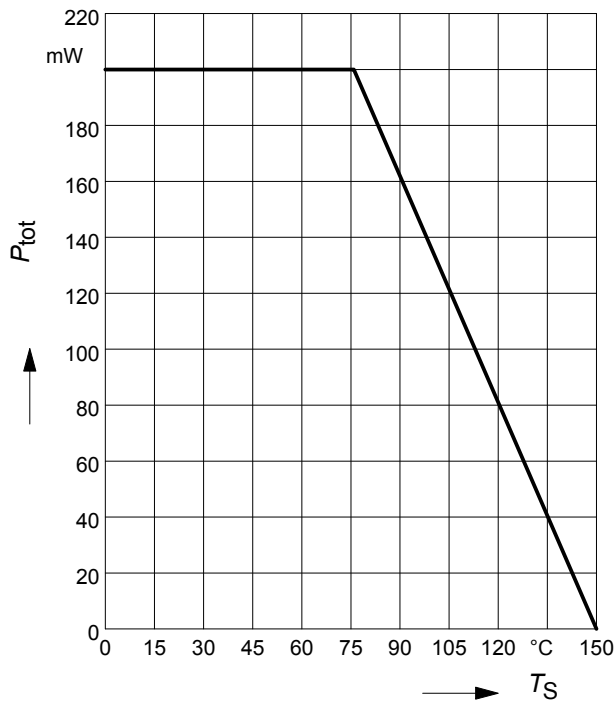


Total power dissipation $P_{\text{tot}} = f(T_S)$

BF2040W

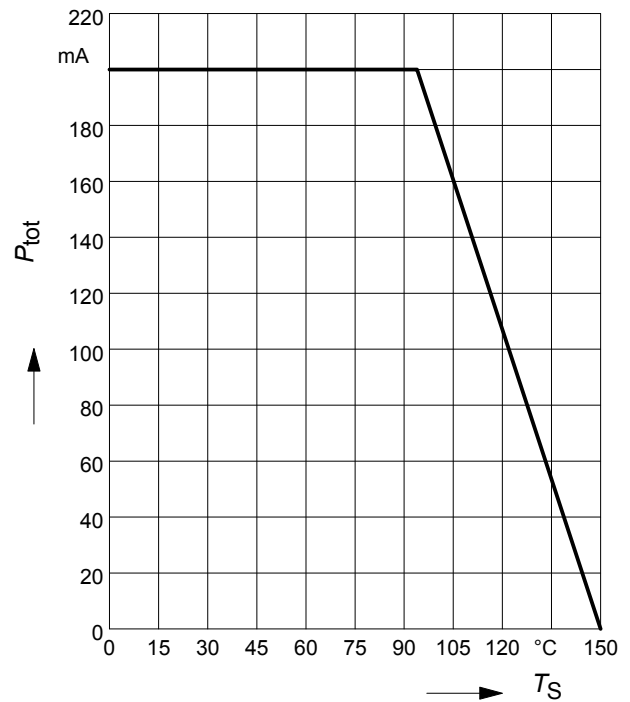

Drain current $I_D = f(I_{G1})$


$V_{G2S} = 4V$

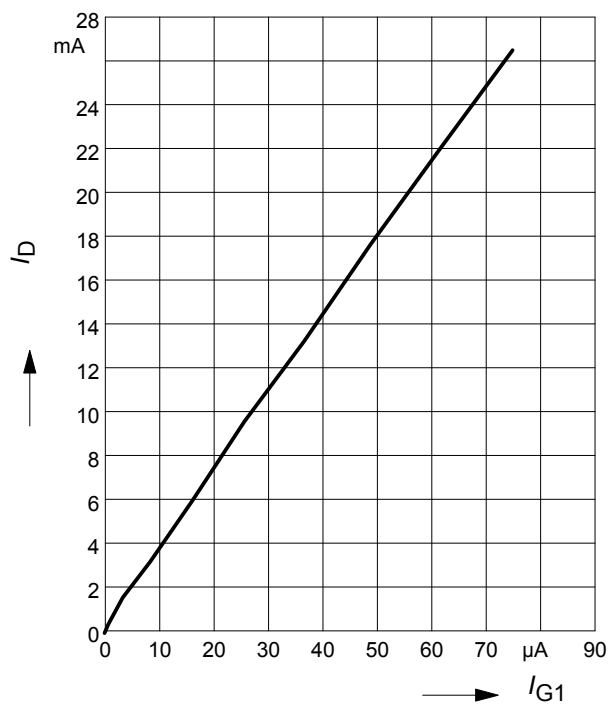

Output characteristics $I_D = f(V_{DS})$

$V_{G2S} = 4V$


$V_{G1S} = \text{Parameter}$

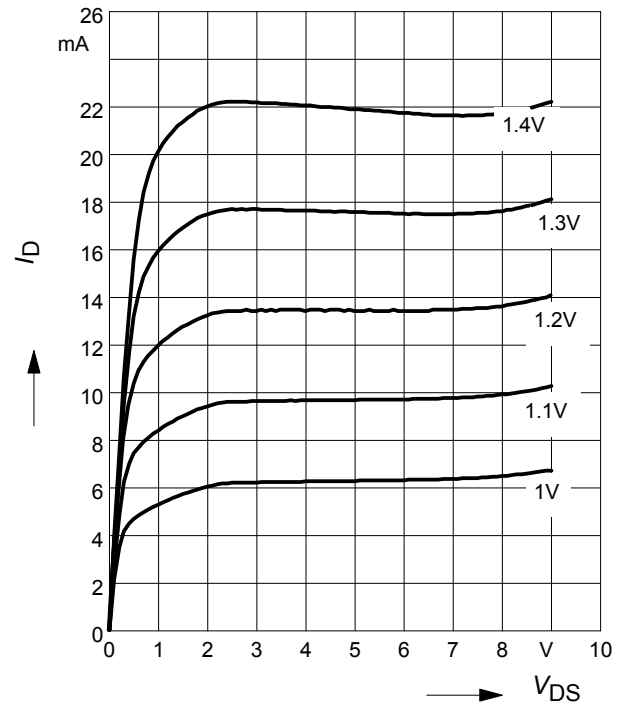

Gate 1 current $I_{G1} = f(V_{G1S})$

$V_{DS} = 5V$


$V_{G2S} = \text{Parameter}$

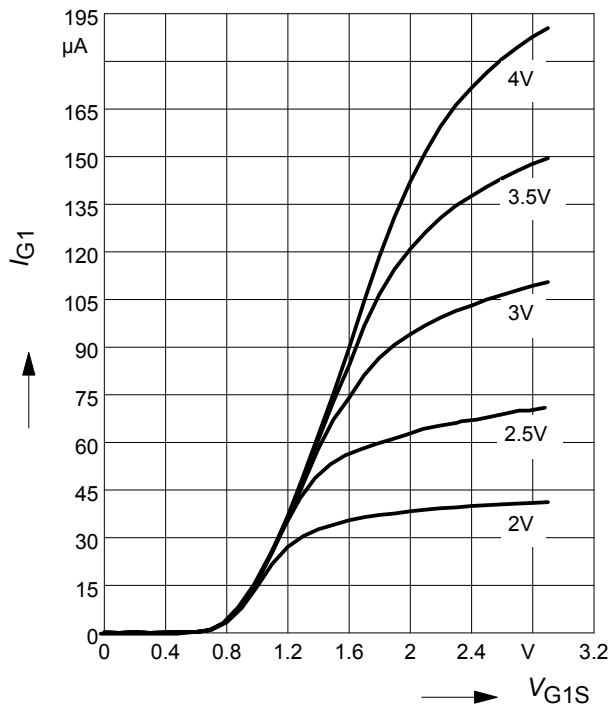

Gate 1 forward transconductance

$g_{fs} = f(I_D)$


$V_{DS} = 5V, V_{G2S} = \text{Parameter}$

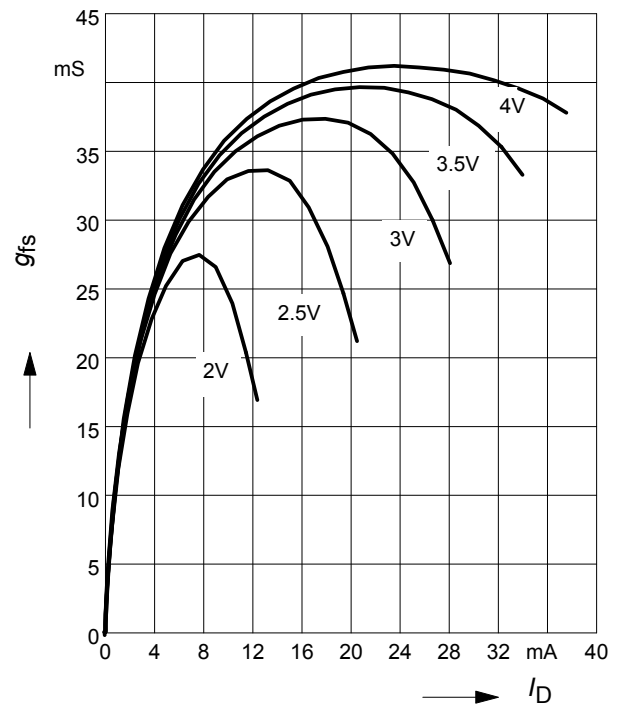

Drain current $I_D = f(V_{G1S})$

$V_{DS} = 5V$


$V_{G2S} = \text{Parameter}$

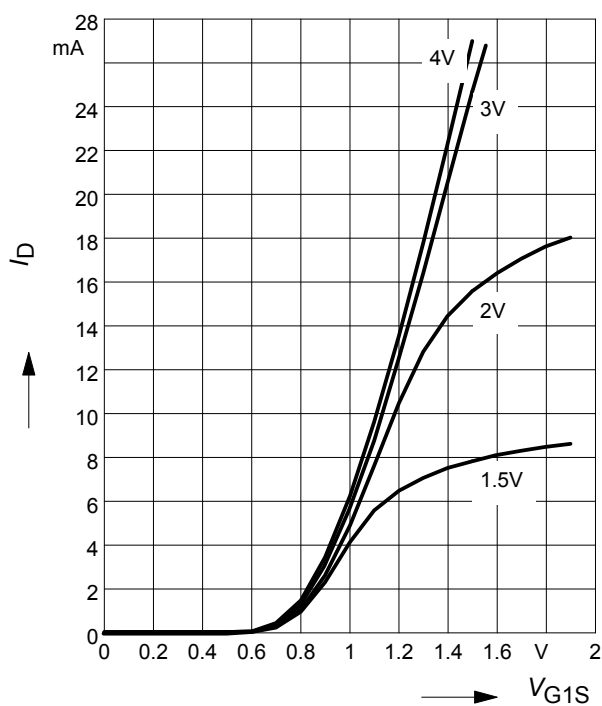

Drain current $I_D = f(V_{GG})$

$V_{DS} = 5V, V_{G2S} = 4V, R_{G1} = 80k\Omega$


(connected to V_{GG} , $V_{GG} = \text{gate1 supply voltage}$)

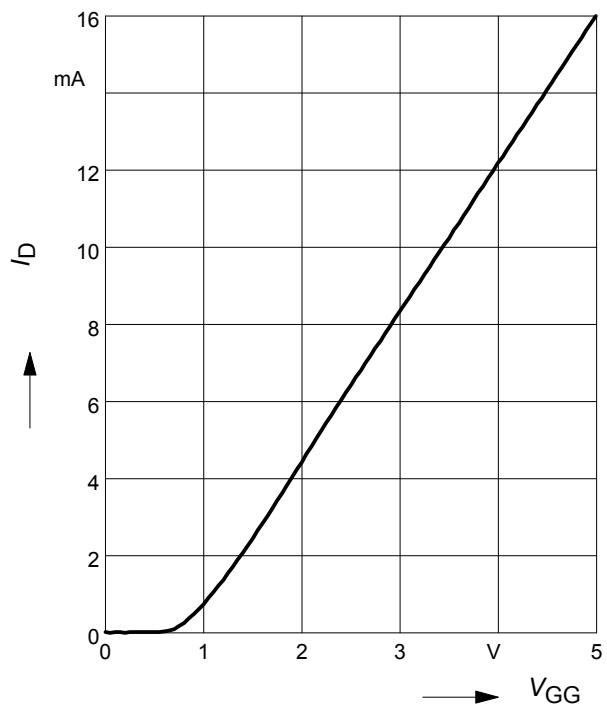

Drain current $I_D = f(V_{GG})$


$V_{G2S} = 4V$

R_{G1} = Parameter in $k\Omega$

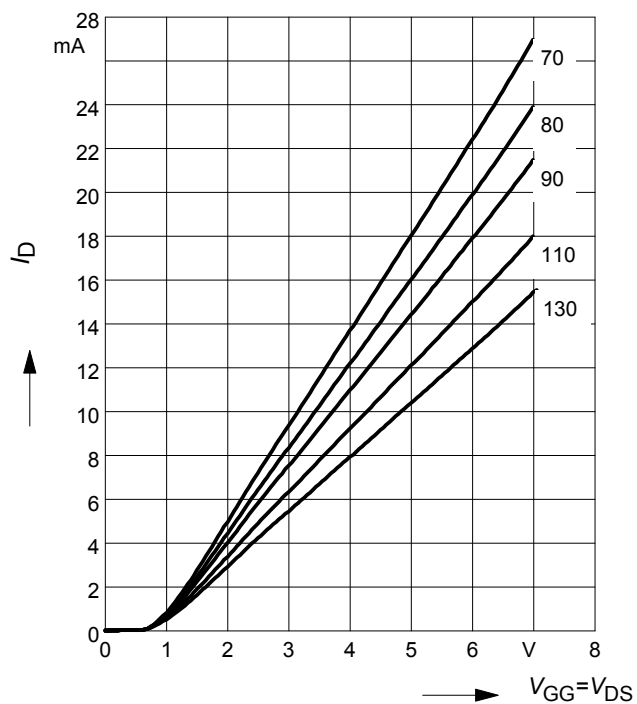


Crossmodulation $V_{unw} = (AGC)$

$V_{DS} = 5V$

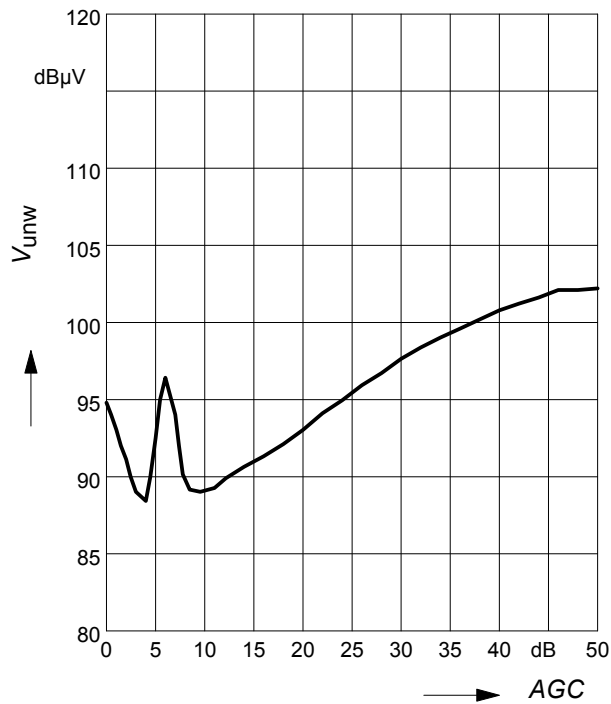

Cossmodulation test circuit

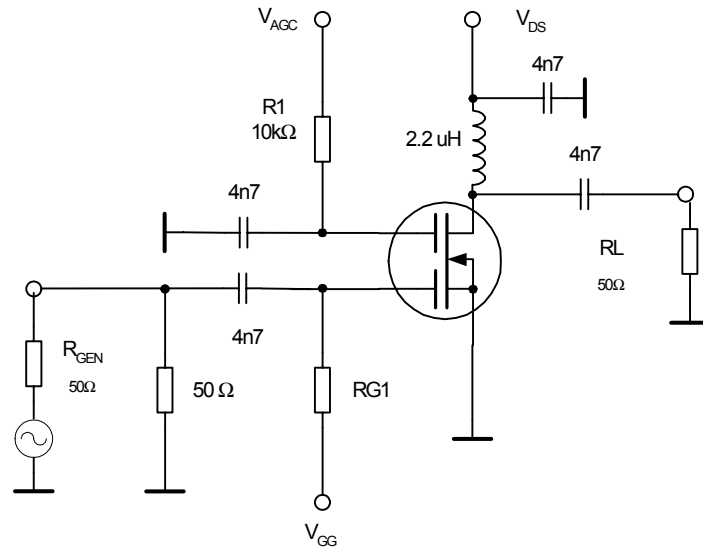

Semibiased

The drawing shows a 4-pin connector with the following dimensions and features:

- 3D View:** Shows the connector with a 'D' logo on the top surface.
- Top View (B-B):**
 - Overall width: 2.9 ± 0.1
 - Pin pitch: 1.9
 - Pin numbers: 1, 2, 3, 4
 - Pin 1 width: 0.2
 - Pin 1 position from left edge: $0.8^{+0.1}_{-0.05}$
 - Pin 2 position from left edge: $0.4^{+0.1}_{-0.05}$
 - Pin 2 width: 0.25 (M)
 - Pin 2 position from right edge: 1.7
- Side View (A-A):**
 - Overall height: 2.4 ± 0.15
 - Pin height: 1 ± 0.1
 - Pin position from top: 0.1 MAX.
 - Pin angle: 10° MAX.
 - Pin width: $0.08 \dots 0.15$
 - Pin angle: $0 \dots 8^\circ$
 - Pin position from bottom: 0.15 MIN.
 - Pin width: 1.3 ± 0.1
 - Pin position from right edge: 0.2 (M)


Diagram illustrating the marking on the BFP181 package:

- Manufacturer:** Infineon
- Date code (YM):** 2005, June
- Type code:** BFP181
- Pin 1:** Indicated by a line pointing to the bottom-left pin.


Technical drawing of a mechanical part showing top and side views with dimensions:

- Top View Dimensions:**
 - Overall width: 4
 - Overall height: 8
 - Distance from left edge to center of first hole: 3.15
 - Distance between centers of first and second holes: 2.6
 - Distance between centers of second and third holes: 2.6
 - Distance from center of third hole to right edge: 2.6
- Side View Dimensions:**
 - Overall thickness: 0.2
 - Distance from bottom edge to center of hole: 1.15
- Other Features:**
 - Three circular holes are shown in the top view.
 - A rectangular feature labeled "Pin 1" is located on the left side.
 - Section lines (hatching) are present in the side view.


Package Outline

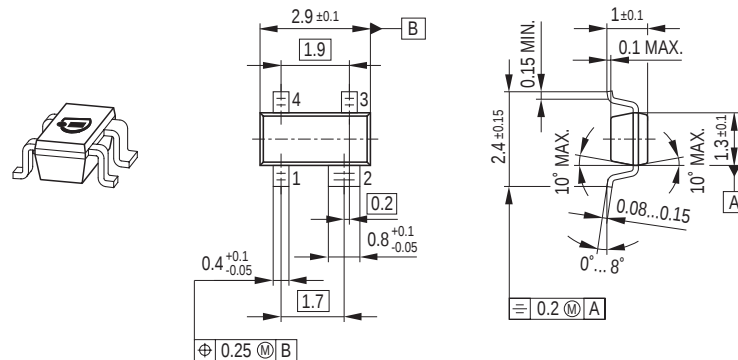

Foot Print




Marking Layout (Example)

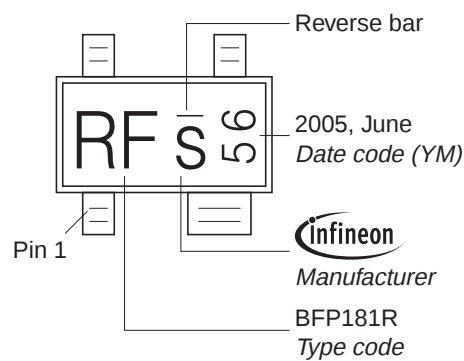


Standard Packing


Reel ø180 mm = 3.000 Pieces/Reel
Reel ø330 mm = 10.000 Pieces/Reel

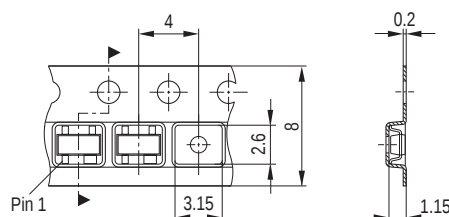


Package Outline

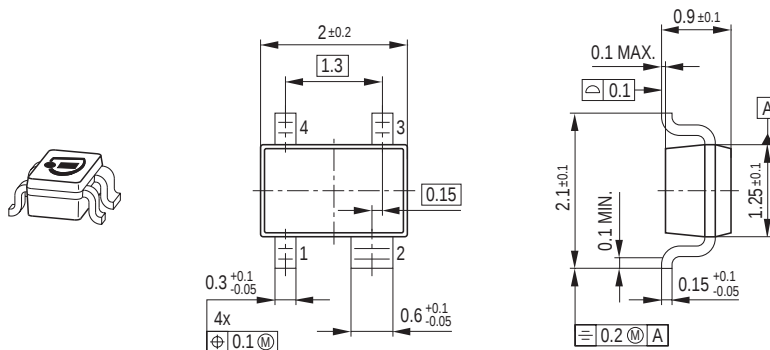

Foot Print




Marking Layout (Example)

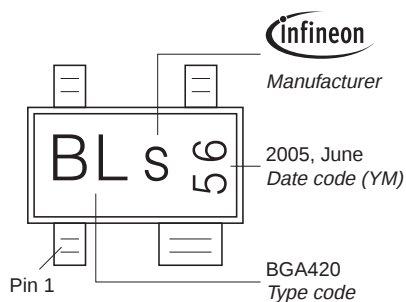

Standard Packing

Reel ø180 mm = 3.000 Pieces/Reel
Reel ø330 mm = 10.000 Pieces/Reel

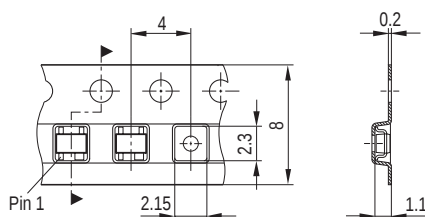

Edition 2006-02-01

Published by

Infineon Technologies AG

81726 München, Germany

© Infineon Technologies AG 2007.

All Rights Reserved.

Attention please!

The information given in this dokument shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system.

Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А