

# NGTB20N120IHRWG

## IGBT with Monolithic Free Wheeling Diode

This Insulated Gate Bipolar Transistor (IGBT) features a robust and cost effective Field Stop (FS) Trench construction, provides and superior performance in demanding switching applications, and offers low on-state voltage with minimal switching loss. The IGBT is well suited for resonant or soft switching applications.

### Features

- Extremely Efficient Trench with Fieldstop Technology
- Low Switching Loss Reduces System Power Dissipation
- Optimized for Low Losses in IH Cooker Application
- Reliable and Cost Effective Single Die Solution
- These are Pb-Free Devices

### Typical Applications

- Inductive Heating
- Consumer Appliances
- Soft Switching

### ABSOLUTE MAXIMUM RATINGS

| Rating   | Symbol    | Value                | Unit             |
|--|-----------|----------------------|------------------|
| Collector-emitter voltage @ $T_J = 25^\circ\text{C}$   | $V_{CES}$ | 1200                 | V                |
| Collector current<br>@ $T_C = 25^\circ\text{C}$<br>@ $T_C = 100^\circ\text{C}$                               | $I_C$     | 40<br>20             | A                |
| Pulsed collector current, $T_{pulse}$ limited by $T_{Jmax}$ , 10 $\mu\text{s}$ Pulse, $V_{GE} = 15\text{ V}$ | $I_{CM}$  | 120                  | A                |
| Diode forward current<br>@ $T_C = 25^\circ\text{C}$<br>@ $T_C = 100^\circ\text{C}$                           | $I_F$     | 40<br>20             | A                |
| Diode pulsed current, $T_{pulse}$ limited by $T_{Jmax}$ , 10 $\mu\text{s}$ Pulse, $V_{GE} = 0\text{ V}$      | $I_{FM}$  | 120                  | A                |
| Gate-emitter voltage<br>Transient Gate-emitter voltage ( $T_{pulse} = 5\ \mu\text{s}$ , $D < 0.10$ )         | $V_{GE}$  | $\pm 20$<br>$\pm 25$ | V                |
| Power Dissipation<br>@ $T_C = 25^\circ\text{C}$<br>@ $T_C = 100^\circ\text{C}$                               | $P_D$     | 384<br>192           | W                |
| Operating junction temperature range   | $T_J$     | -40 to +175          | $^\circ\text{C}$ |
| Storage temperature range  | $T_{stg}$ | -55 to +175          | $^\circ\text{C}$ |
| Lead temperature for soldering, 1/8" from case for 5 seconds   | $T_{SLD}$ | 260                  | $^\circ\text{C}$ |


Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.



**ON Semiconductor**<sup>®</sup>

<http://onsemi.com>

**20 A, 1200 V**  
 **$V_{CEsat} = 2.10\text{ V}$**   
 **$E_{off} = 0.45\text{ mJ}$**

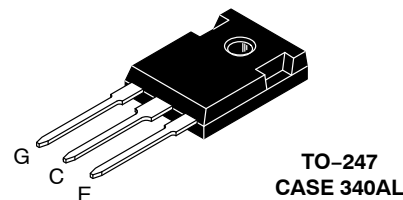

### MARKING DIAGRAM



A = Assembly Location  
Y = Year  
WW = Work Week  
G = Pb-Free Package

### ORDERING INFORMATION

| Device          | Package          | Shipping        |
|-----------------|------------------|-----------------|
| NGTB20N120IHRWG | TO-247 (Pb-Free) | 30 Units / Rail |

# NGTB20N120IHRWG

## THERMAL CHARACTERISTICS

| Rating                                 | Symbol          | Value | Unit                        |
|--|-----------------|-------|-----------------------------|
| Thermal resistance junction-to-case    | $R_{\theta JC}$ | 0.39  | $^{\circ}\text{C}/\text{W}$ |
| Thermal resistance junction-to-ambient | $R_{\theta JA}$ | 40    | $^{\circ}\text{C}/\text{W}$ |

## ELECTRICAL CHARACTERISTICS ( $T_J = 25^{\circ}\text{C}$ unless otherwise specified)

| Parameter | Test Conditions | Symbol | Min | Typ | Max | Unit |
|-----------|-----------------|--------|-----|-----|-----|------|
|-----------|-----------------|--------|-----|-----|-----|------|

### STATIC CHARACTERISTIC

|   |   |               |      |              |            |    |
|---|---|---------------|------|--------------|------------|----|
| Collector-emitter breakdown voltage, gate-emitter short-circuited | $V_{GE} = 0\text{ V}, I_C = 5\text{ mA}$  | $V_{(BR)CES}$ | 1200 | -            | -          | V  |
| Collector-emitter saturation voltage                              | $V_{GE} = 15\text{ V}, I_C = 20\text{ A}$<br>$V_{GE} = 15\text{ V}, I_C = 20\text{ A}, T_J = 175^{\circ}\text{C}$         | $V_{CEsat}$   | -    | 2.10<br>2.30 | 2.45<br>-  | V  |
| Gate-emitter threshold voltage                                    | $V_{GE} = V_{CE}, I_C = 250\text{ }\mu\text{A}$   | $V_{GE(th)}$  | 4.5  | 5.5          | 6.5        | V  |
| Collector-emitter cut-off current, gate-emitter short-circuited   | $V_{GE} = 0\text{ V}, V_{CE} = 1200\text{ V}$<br>$V_{GE} = 0\text{ V}, V_{CE} = 1200\text{ V}, T_J = 175^{\circ}\text{C}$ | $I_{CES}$     | -    | -            | 0.2<br>2.8 | mA |
| Gate leakage current, collector-emitter short-circuited           | $V_{GE} = 20\text{ V}, V_{CE} = 0\text{ V}$   | $I_{GES}$     | -    | -            | 100        | nA |

### DYNAMIC CHARACTERISTIC

|                              |  |           |   |      |   |    |
|------------------------------|--|-----------|---|------|---|----|
| Input capacitance            | $V_{CE} = 20\text{ V}, V_{GE} = 0\text{ V}, f = 1\text{ MHz}$    | $C_{ies}$ | - | 5320 | - | pF |
| Output capacitance           |  | $C_{oes}$ | - | 124  | - |    |
| Reverse transfer capacitance |  | $C_{res}$ | - | 100  | - |    |
| Gate charge total            | $V_{CE} = 600\text{ V}, I_C = 20\text{ A}, V_{GE} = 15\text{ V}$ | $Q_g$     | - | 225  | - | nC |
| Gate to emitter charge       |  | $Q_{ge}$  | - | 36   | - |    |
| Gate to collector charge     |  | $Q_{gc}$  | - | 98   | - |    |

### SWITCHING CHARACTERISTIC, INDUCTIVE LOAD

|                         |  |              |   |      |   |    |
|-------------------------|--|--------------|---|------|---|----|
| Turn-off delay time     | $T_J = 25^{\circ}\text{C}$<br>$V_{CC} = 600\text{ V}, I_C = 20\text{ A}$<br>$R_g = 10\text{ }\Omega$<br>$V_{GE} = 0\text{ V}/15\text{ V}$  | $t_{d(off)}$ | - | 235  | - | ns |
| Fall time               |  | $t_f$        | - | 155  | - |    |
| Turn-off switching loss |  | $E_{off}$    | - | 0.45 | - |    |
| Turn-off delay time     | $T_J = 150^{\circ}\text{C}$<br>$V_{CC} = 600\text{ V}, I_C = 20\text{ A}$<br>$R_g = 10\text{ }\Omega$<br>$V_{GE} = 0\text{ V}/15\text{ V}$ | $t_{d(off)}$ | - | 255  | - | ns |
| Fall time               |  | $t_f$        | - | 250  | - |    |
| Turn-off switching loss |  | $E_{off}$    | - | 1.10 | - |    |

### DIODE CHARACTERISTIC

|                 |   |       |   |              |      |   |
|-----------------|---|-------|---|--------------|------|---|
| Forward voltage | $V_{GE} = 0\text{ V}, I_F = 20\text{ A}$<br>$V_{GE} = 0\text{ V}, I_F = 20\text{ A}, T_J = 175^{\circ}\text{C}$ | $V_F$ | - | 1.75<br>2.50 | 2.10 | V |
|-----------------|---|-------|---|--------------|------|---|

# NGTB20N120IHRWG

## TYPICAL CHARACTERISTICS

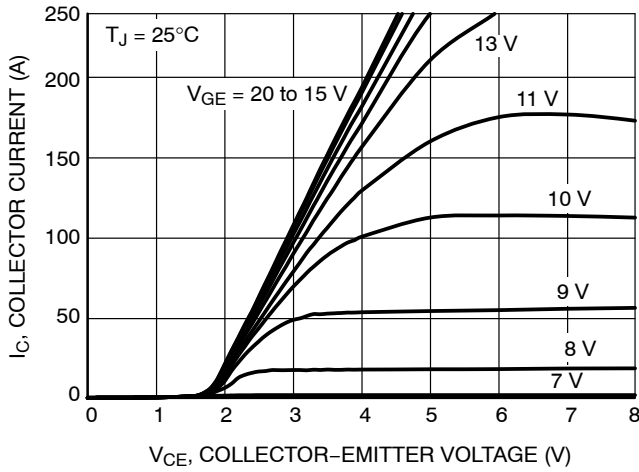


Figure 1. Output Characteristics

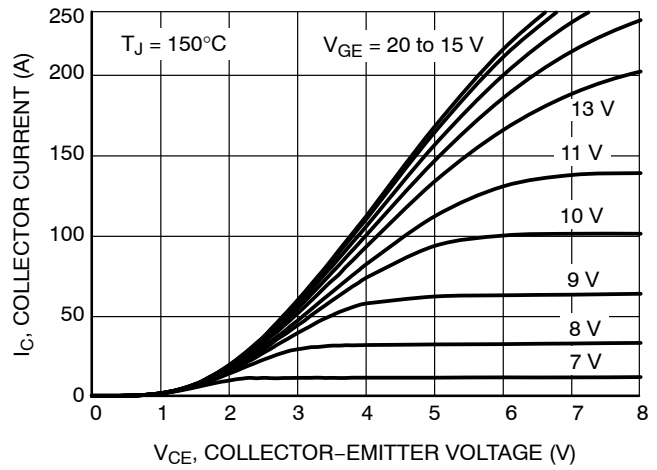


Figure 2. Output Characteristics

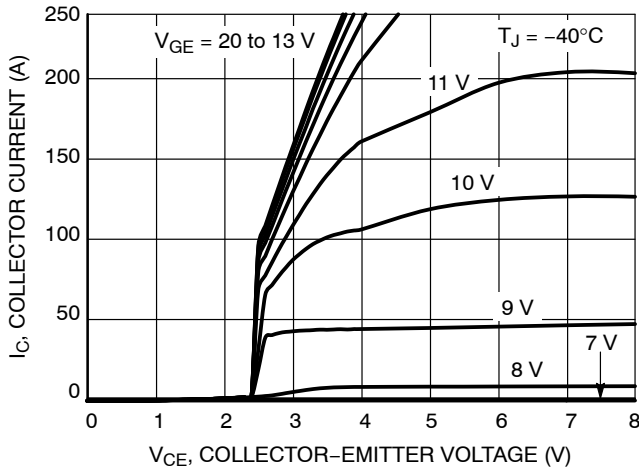


Figure 3. Output Characteristics

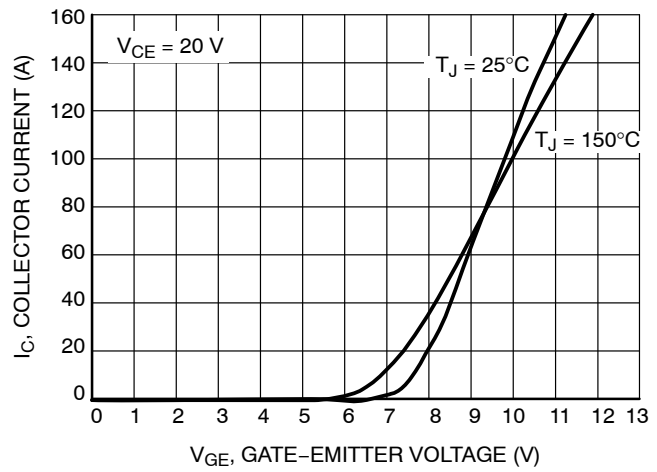


Figure 4. Typical Transfer Characteristics

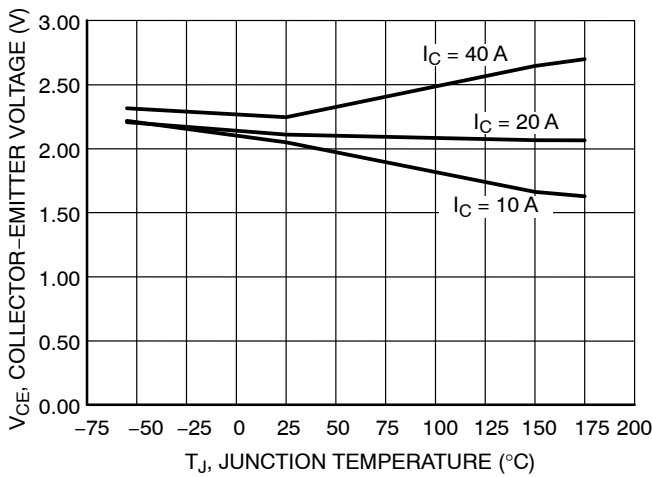


Figure 5.  $V_{CE(sat)}$  vs.  $T_J$

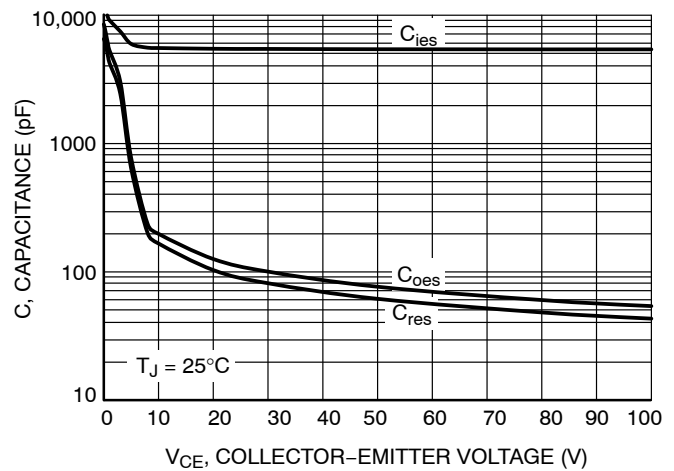


Figure 6. Typical Capacitance

# NGTB20N120IHRWG

## TYPICAL CHARACTERISTICS

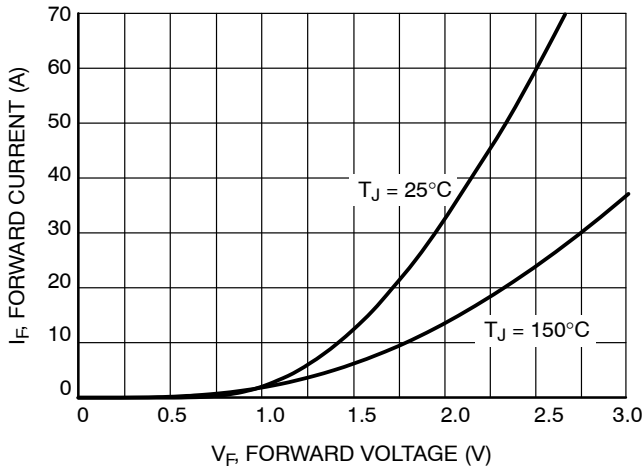


Figure 7. Diode Forward Characteristics

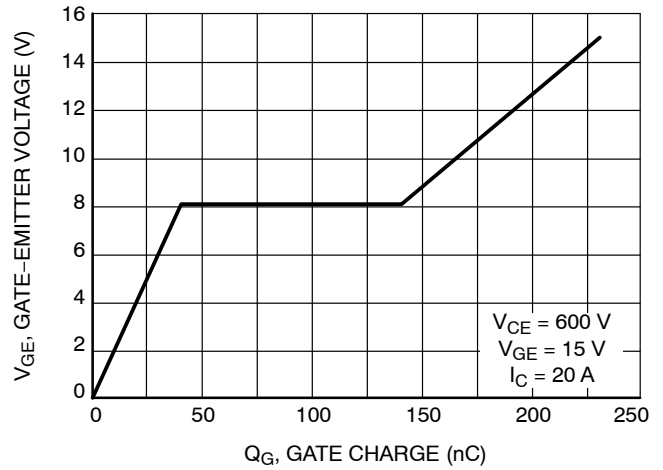


Figure 8. Typical Gate Charge

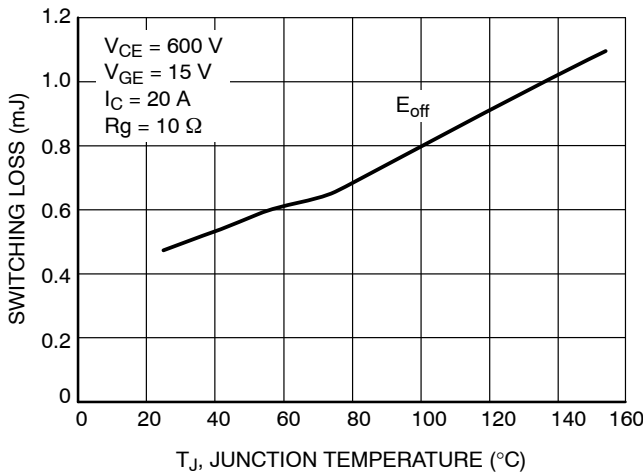


Figure 9. Switching Loss vs. Temperature

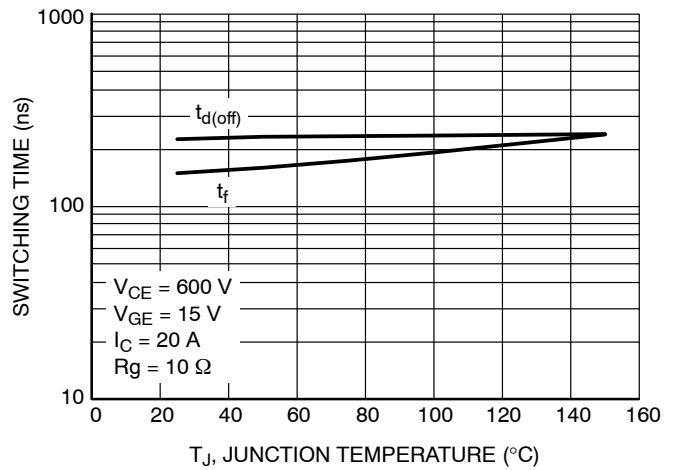


Figure 10. Switching Time vs. Temperature

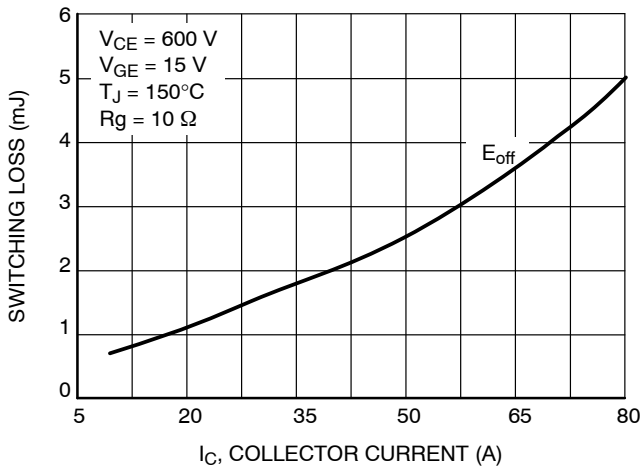


Figure 11. Switching Loss vs.  $I_C$

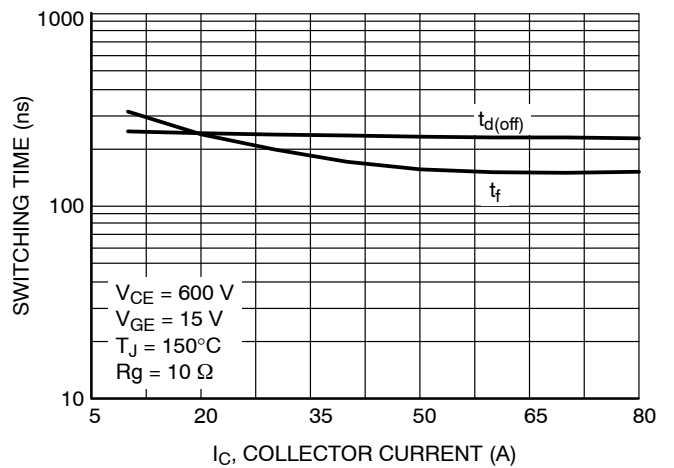


Figure 12. Switching Time vs.  $I_C$

# NGTB20N120IHRWG

## TYPICAL CHARACTERISTICS

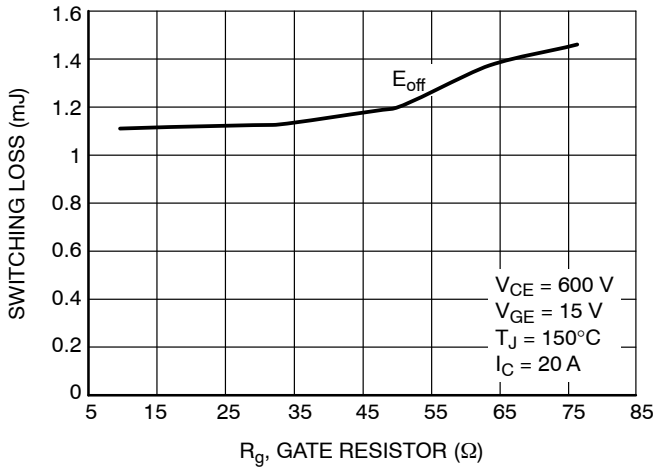


Figure 13. Switching Loss vs.  $R_g$

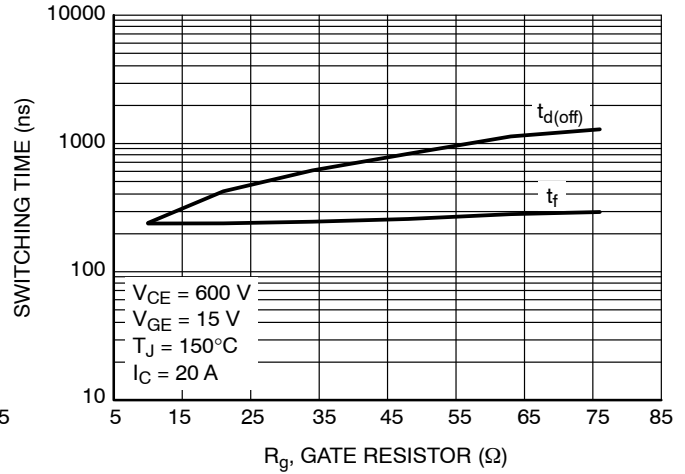


Figure 14. Switching Time vs.  $R_g$

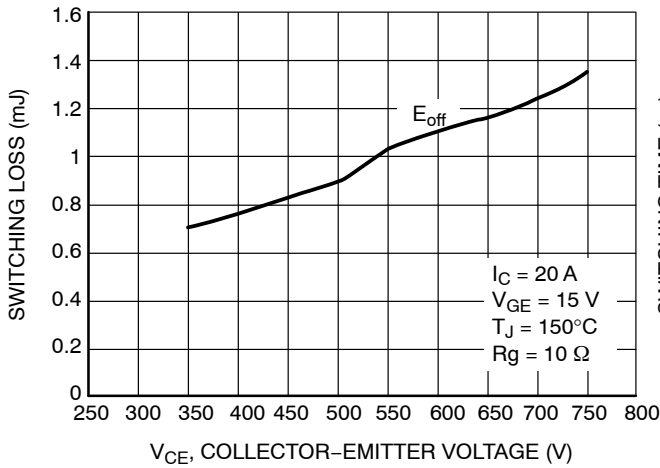


Figure 15. Switching Loss vs.  $V_{CE}$

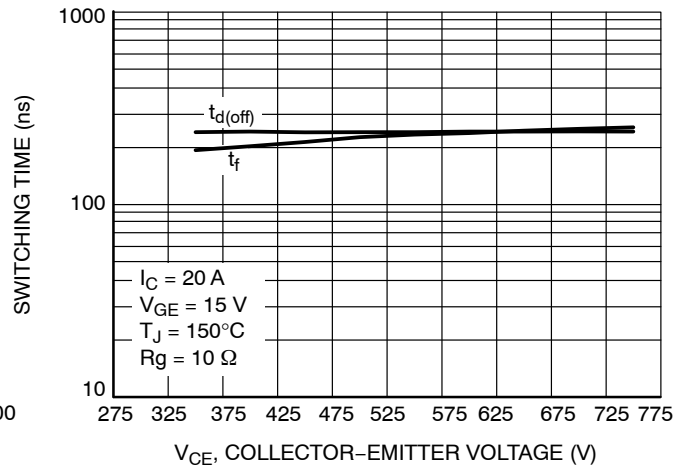


Figure 16. Switching Time vs.  $V_{CE}$

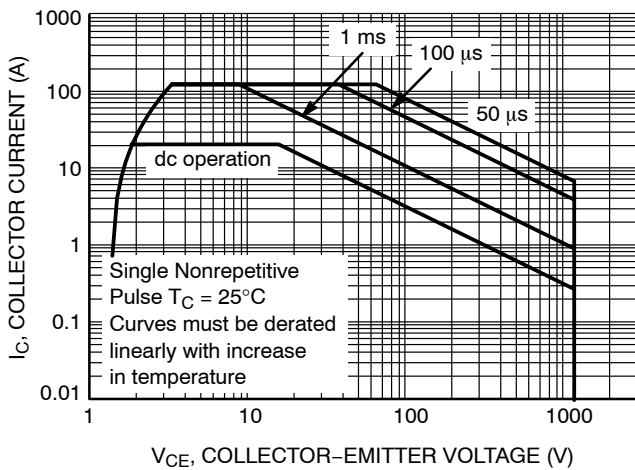


Figure 17. Safe Operating Area


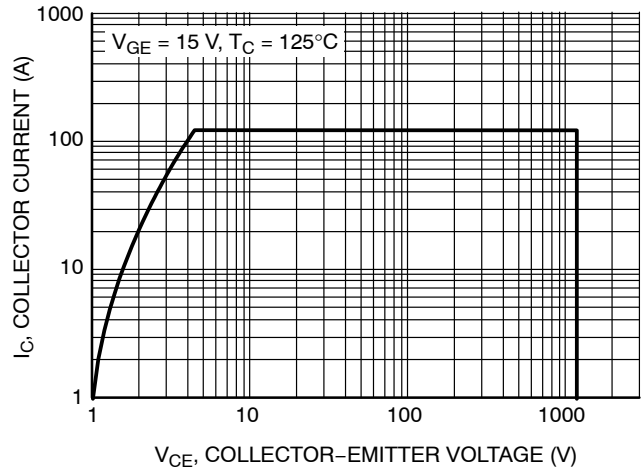



Figure 18. Reverse Bias Safe Operating Area

# NGTB20N120IHRWG


## TYPICAL CHARACTERISTICS

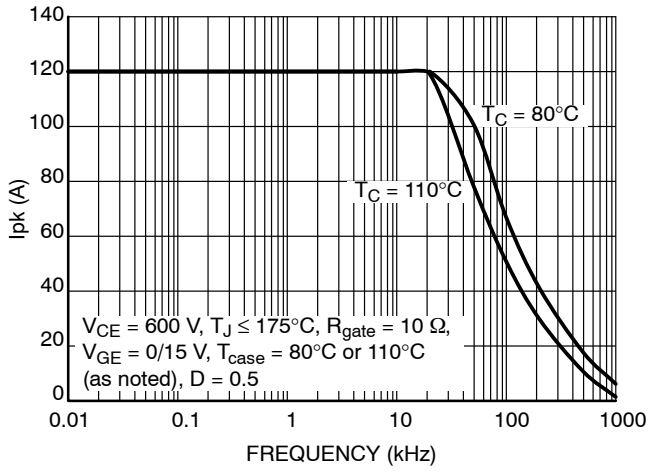

**Figure 19. Collector Current vs. Switching Frequency**

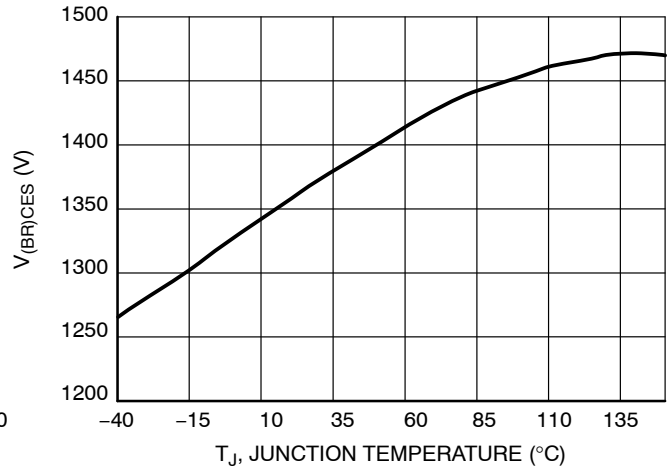

**Figure 20. Typical  $V_{(BR)CES}$  vs. Temperature**

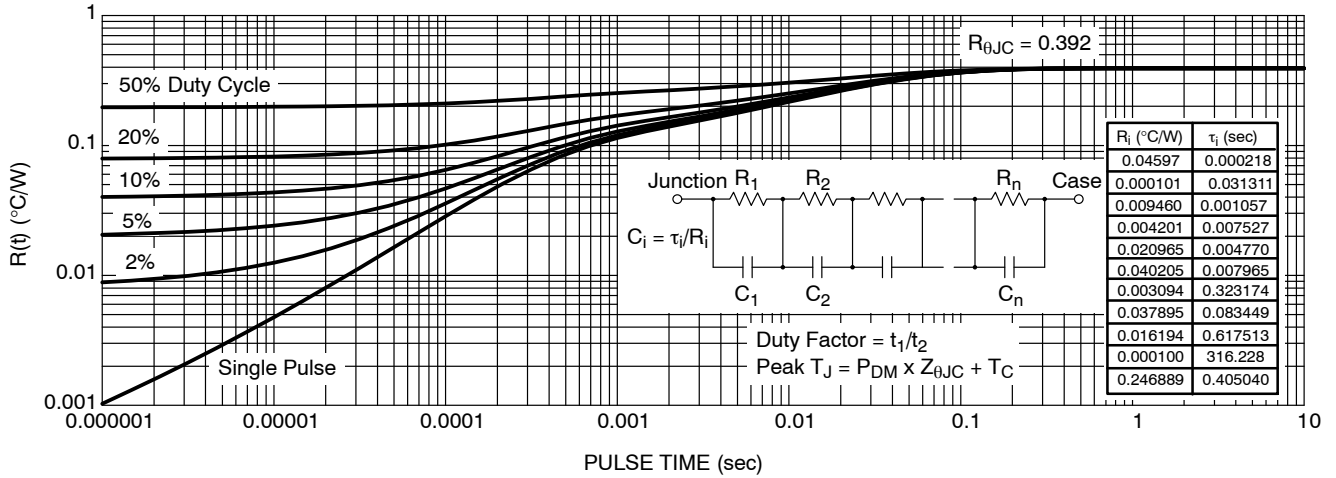

**Figure 21. IGBT Transient Thermal Impedance**

NGTB20N120IHRWG



Figure 22. Test Circuit for Switching Characteristics

# NGTB20N120IHRWG



Figure 23. Definition of Turn On Waveform



# NGTB20N120IHRWG

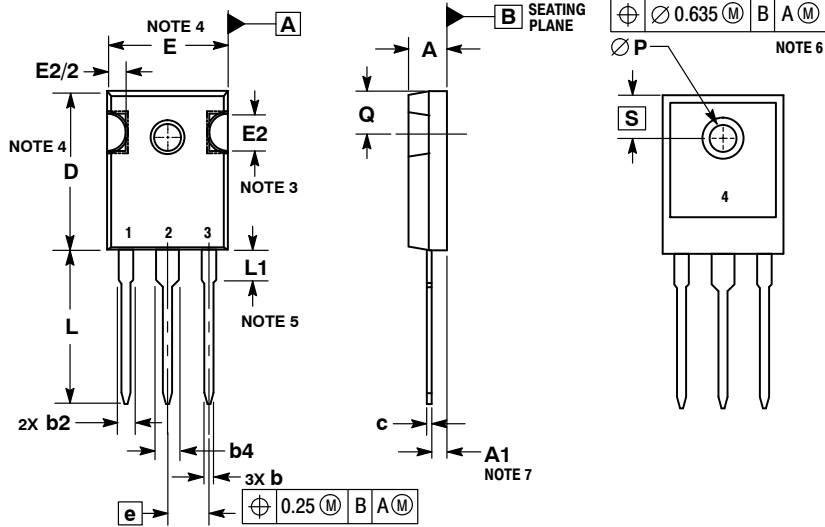


Figure 24. Definition of Turn Off Waveform

# NGTB20N120IHRWG

## PACKAGE DIMENSIONS

### TO-247 CASE 340AL ISSUE A



#### NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. SLOT REQUIRED, NOTCH MAY BE ROUNDED.
4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED 0.13 PER SIDE. THESE DIMENSIONS ARE MEASURED AT THE OUTERMOST EXTREME OF THE PLASTIC BODY.
5. LEAD FINISH IS UNCONTROLLED IN THE REGION DEFINED BY L1.
6.  $\varnothing P$  SHALL HAVE A MAXIMUM DRAFT ANGLE OF 1.5° TO THE TOP OF THE PART WITH A MAXIMUM DIAMETER OF 3.91.
7. DIMENSION A1 TO BE MEASURED IN THE REGION DEFINED BY L1.

| MILLIMETERS |          |       |
|-------------|----------|-------|
| DIM         | MIN      | MAX   |
| A           | 4.70     | 5.30  |
| A1          | 2.20     | 2.60  |
| b           | 1.00     | 1.40  |
| b2          | 1.65     | 2.35  |
| b4          | 2.60     | 3.40  |
| c           | 0.40     | 0.80  |
| D           | 20.30    | 21.40 |
| E           | 15.50    | 16.25 |
| E2          | 4.32     | 5.49  |
| e           | 5.45 BSC |       |
| L           | 19.80    | 20.80 |
| L1          | 3.50     | 4.50  |
| P           | 3.55     | 3.65  |
| Q           | 5.40     | 6.20  |
| S           | 6.15 BSC |       |

**ON Semiconductor** and **ON** are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

#### PUBLICATION ORDERING INFORMATION

**LITERATURE FULFILLMENT:**  
Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
Phone: 81-3-5817-1050

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)  
**Order Literature:** <http://www.onsemi.com/orderlit>  
For additional information, please contact your local Sales Representative

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А