

# MINIATURE RELAY

## 2 POLES—1 to 2 A (FOR SIGNAL SWITCHING)


### RA SERIES

RoHS compliant



#### ■ FEATURES

- Ultra high sensitivity (75 to 150 mW)
- High reliability-bifurcated contacts
- Conforms to FCC rules and regulations Part 68
  - Dielectric strength 1,500 VAC between coil and contacts
  - Surge strength 1,500 V
- UL, CSA recognized
- Wide operating range
- DIL pitch terminals
- Plastic sealed type
- Latching type available
- Dial-pulse relay available
- RoHS compliant since date code: 0418H  
Please see page 7 for more information

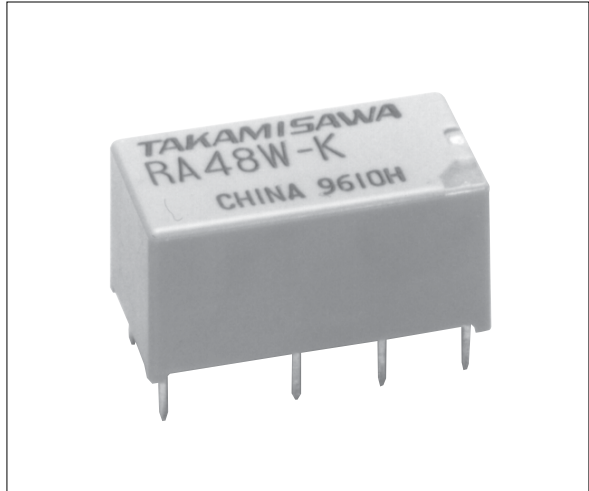

#### ■ ORDERING INFORMATION

[Example]      RA   L   -   D   12   W   -   K  
                   (a)   (b)   (\*)   (c)   (d)   (e)        (f)

(a)	Series Name	RA : RA Series
(b)	Operation Function	Nil : Standard type L : Latching type
(c)	Number of Coil	Nil : Single winding type D : Double winding type
(d)	Nominal Voltage	Refer to the COIL DATA CHART
(e)	Contact	W : Bifurcated type
(f)	Enclosure	K : Plastic sealed type

Note: Actual marking omits the hyphen (-) of (\*)  
 For movable and stationary contact with gold overlay type, add suffix ""-OH"".

# RA SERIES

## COIL DATA CHART

	MODEL	Nominal voltage	Coil resistance ( $\pm 10\%$ )	Must operate voltage*1	Must release voltage*1	Nominal power
Standard Type	RA-1.5 W-K	1.5 VDC	15 $\Omega$	+1.0 VDC	+0.15 VDC	150 mW
	RA- 3 W-K	3 VDC	60 $\Omega$	+2.0 VDC	+0.3 VDC	150 mW
	RA-4.5 W-K	4.5 VDC	135 $\Omega$	+3.1 VDC	+0.45 VDC	150 mW
	RA- 5 W-K	5 VDC	167 $\Omega$	+3.4 VDC	+0.5 VDC	150 mW
	RA- 6 W-K	6 VDC	240 $\Omega$	+4.0 VDC	+0.6 VDC	150 mW
	RA- 9 W-K	9 VDC	540 $\Omega$	+6.1 VDC	+0.9 VDC	150 mW
	RA- 12 W-K	12 VDC	960 $\Omega$	+8.1 VDC	+1.2 VDC	150 mW
	RA- 18 W-K	18 VDC	2,160 $\Omega$	+12.3 VDC	+1.8 VDC	150 mW
	RA- 24 W-K	24 VDC	2,880 $\Omega$	+16.1 VDC	+2.4 VDC	200 mW
	RA- 48 W-K	48 VDC	11,520 $\Omega$	+32.2 VDC	+4.8 VDC	200 mW

Note: \*1 Specified values are subject to pulse wave voltage.  
All values in the table are measured at 20°C.

	MODEL	Nominal voltage	Coil resistance ( $\pm 10\%$ )	Set voltage*1	Reset voltage*1	Nominal power
Single Winding Latching Type	RAL-1.5 W-K	1.5 VDC	30 $\Omega$	+1.0 VDC	-1.0 VDC	75 mW
	RAL- 3 W-K	3 VDC	120 $\Omega$	+2.1 VDC	-2.1 VDC	75 mW
	RAL-4.5 W-K	4.5 VDC	270 $\Omega$	+3.1 VDC	-3.1 VDC	75 mW
	RAL- 5 W-K	5 VDC	335 $\Omega$	+3.4 VDC	-3.4 VDC	75 mW
	RAL- 6 W-K	6 VDC	480 $\Omega$	+4.1 VDC	-4.1 VDC	75 mW
	RAL- 9 W-K	9 VDC	1,080 $\Omega$	+6.3 VDC	-6.3 VDC	75 mW
	RAL- 12 W-K	12 VDC	1,920 $\Omega$	+8.3 VDC	-8.3 VDC	75 mW
	RAL- 18 W-K	18 VDC	4,320 $\Omega$	+12.5 VDC	-12.5 VDC	75 mW
	RAL- 24 W-K	24 VDC	5,760 $\Omega$	+16.6 VDC	-16.6 VDC	100 mW
	RAL-48 W-K	48 VDC	11,520 $\Omega$	+21.0 VDC	-21.0 VDC	200 mW
Double Winding Latching Type	RAL-D1.5 W-K	1.5 VDC	P 15 $\Omega$	+1.0 VDC		150 mW
			S 15 $\Omega$		+1.0 VDC	
	RAL-D 3 W-K	3 VDC	P 60 $\Omega$	+2.0 VDC		150 mW
			S 60 $\Omega$		+2.0 VDC	
	RAL-D4.5 W-K	4.5 VDC	P 135 $\Omega$	+3.1 VDC		150 mW
			S 135 $\Omega$		+3.1 VDC	
	RAL-D 5 W-K	5 VDC	P 167 $\Omega$	+3.4 VDC		150 mW
			S 167 $\Omega$		+3.4 VDC	
	RAL-D 6 W-K	6 VDC	P 240 $\Omega$	+4.0 VDC		150 mW
			S 240 $\Omega$		+4.0 VDC	
	RAL-D 9 W-K	9 VDC	P 540 $\Omega$	+6.1 VDC		150 mW
			S 540 $\Omega$		+6.1 VDC	
	RAL-D 12 W-K	12 VDC	P 960 $\Omega$	+8.1 VDC		150 mW
			S 960 $\Omega$		+8.1 VDC	
RAL-D 18 W-K	18 VDC	P 2,160 $\Omega$	+12.3 VDC		150 mW	
		S 2,160 $\Omega$		+12.3 VDC		
RAL-D 24 W-K	24 VDC	P 2,880 $\Omega$	+16.1 VDC		200 mW	
		S 2,880 $\Omega$		+16.1 VDC		
RAL-D 48 W-K	48 VDC	P 11,520 $\Omega$	+32.2 VDC		200 mW	
		S 11,520 $\Omega$		+32.2 VDC		

Note: \*1 Specified values are subject to pulse wave voltage.  
All values in the table are measured at 20°C.

P: Primary coil S: Secondary coil

## ■ SPECIFICATIONS

Item		Standard Type	Single Winding Latching Type	Double Winding Latching Type
		RA-( ) W-K	RAL-( ) W-K	RAL-D ( ) W-K
Contact	Arrangement	2 form C (DPDT)		
	Material	Gold overlay palladium		
	Style	Bifurcated (cross bar)		
	Resistance (initial)	Maximum 100 mΩ (at 1 A 6 VDC)		
	Rating (resistive)	0.5 A 120 VAC or 1 A 24 VDC		
	Maximum Carrying Current	2 A		
	Maximum Switching Power	60 VA, 24 W		
	Maximum Switching Voltage	250 VAC, 220 VDC		
	Maximum Switching Current	2 A		
	Minimum Switching Load*1	0.01 mA 10 mVDC		
	Capacitance (10 MHz)	Approximately 1.5 pF (between open contacts), 1.0 pF (adjacent contacts) Approximately 1.7 pF (between coil and contacts)		
Coil	Nominal Power (at 20°C)	150 to 200 mW	75 to 200 mW	150 to 200 mW
	Operate Power (at 20°C)	70 to 90 mW	40 to 50 mW	70 to 90 mW
	Operating Temperature	-40°C to +80°C (no frost) (refer to the CHARACTERISTIC DATA)		
Time Value	Operate (at nominal voltage)	Maximum 6 ms	Maximum 6 ms (set)	
	Release (at nominal voltage)	Maximum 4 ms	Maximum 6 ms (reset)	
Life	Mechanical	2 × 10 <sup>7</sup> operations minimum		
	Electrical	2 × 10 <sup>5</sup> ops. min. (0.5 A 120 VAC), 5 × 10 <sup>5</sup> ops. min. (1 A 24 VDC)		
Other	Vibration Resistance	Misoperation	10 to 55 Hz (double amplitude of 5.0 mm)	
		Endurance	10 to 55 Hz (double amplitude of 5.0 mm)	
	Shock Resistance	Misoperation	500 m/s <sup>2</sup> (11 ±1 ms)	
		Endurance	1,000 m/s <sup>2</sup> ( 6 ±1 ms)	
	Weight	Approximately 3.7 g		

\*1 Minimum switching loads mentioned above are reference values. Please perform the confirmation test with the actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

## ■ INSULATION








Item	Standard	Single latch	Double latch
Isolation (initial)	Minimum 1,000 MΩ (at 500VDC)		
Dielectric Strength	open contacts	1,000VAC 1 min.,	
	coil and contacts/ adjacent contact	1,500VAC 1 min.,	
Surge Voltage	1500V (coil-contact) (10/160 μs standard wave)		

## ■ SAFETY STANDARDS













Type	Compliance	Contact rating
UL	UL 478, UL 508 E 45026	Flammability: UL 94-V0 (plastics) 0.5A, 120VAC (resistive) 2A, 30VDC (resistive) 0.5A, 60VDC (resistive)
CSA	C22.2 No. 14 LR 35579	



# RA SERIES

## CHARACTERISTIC DATA

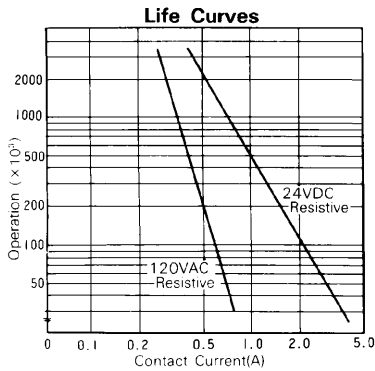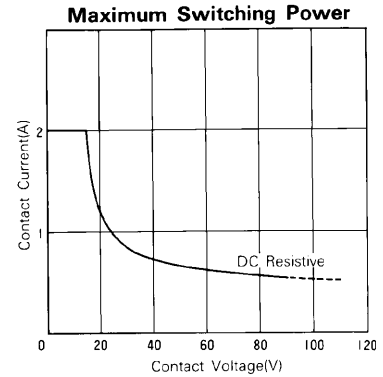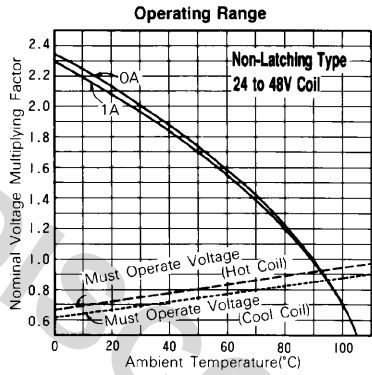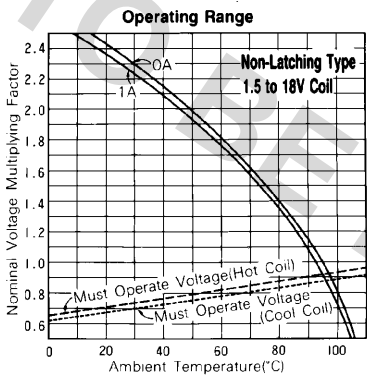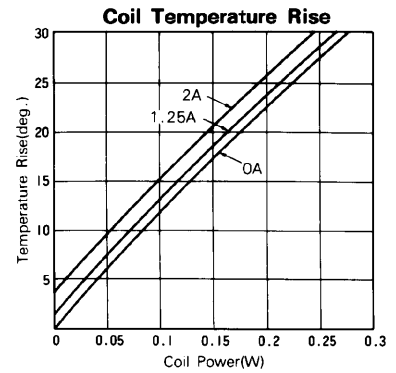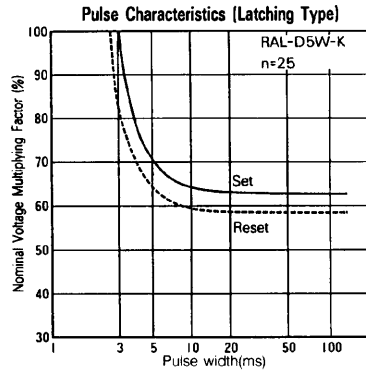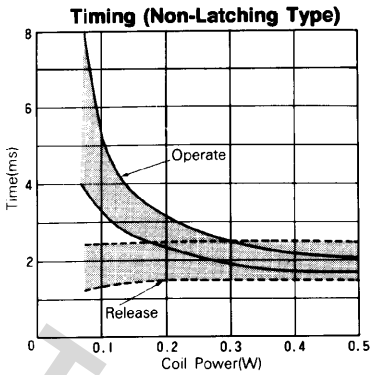

## REFERENCE DATA

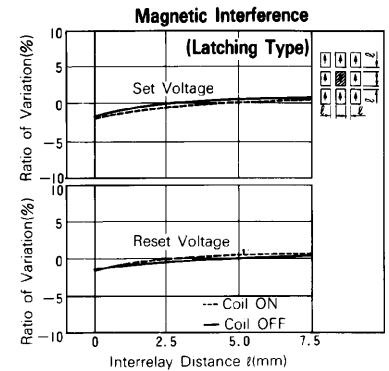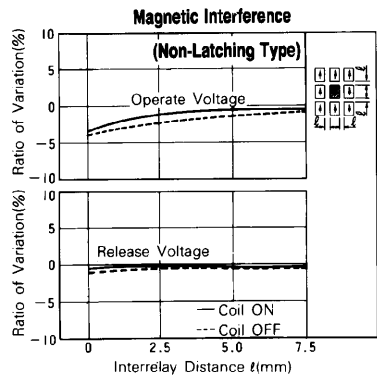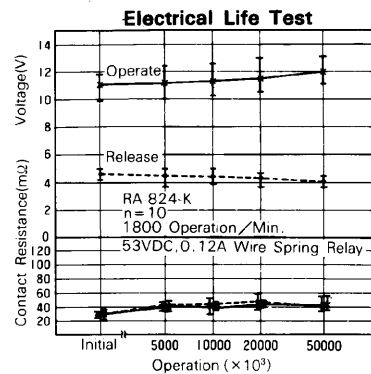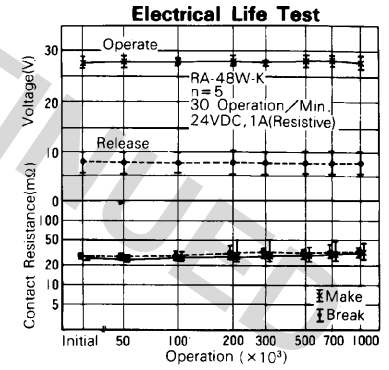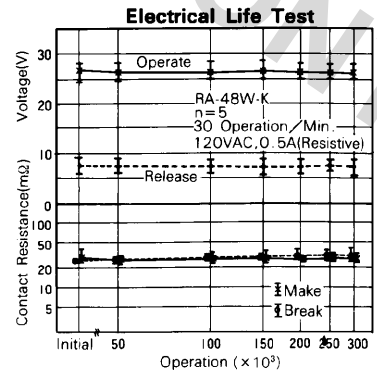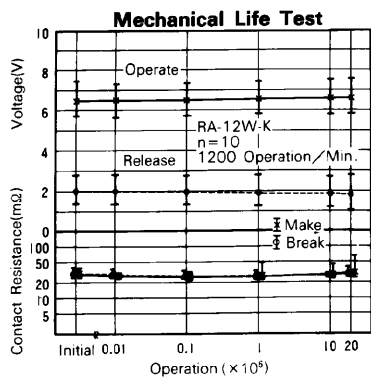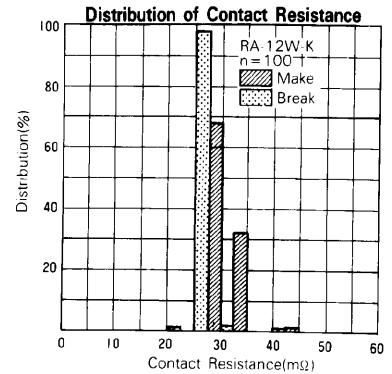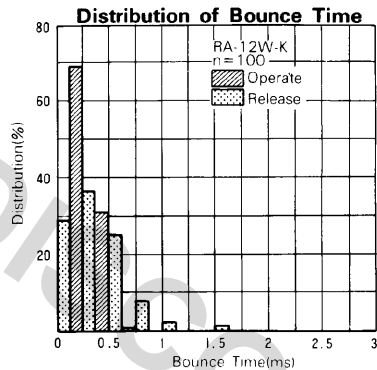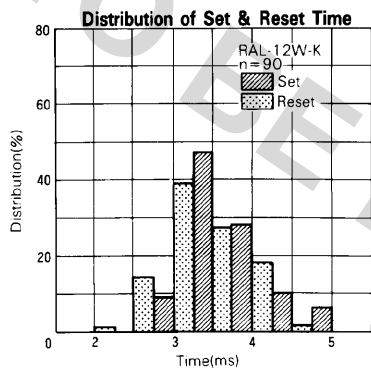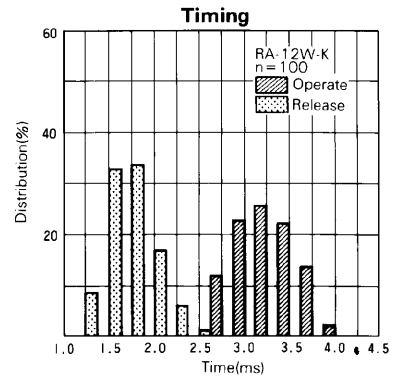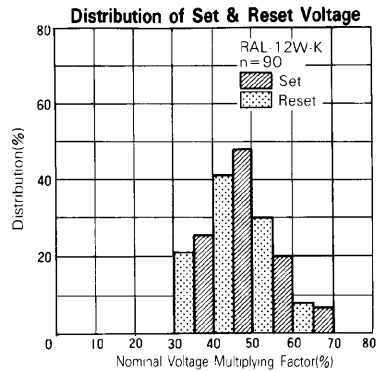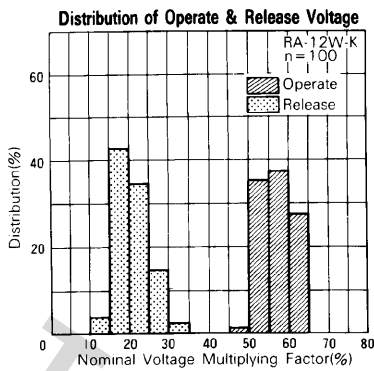


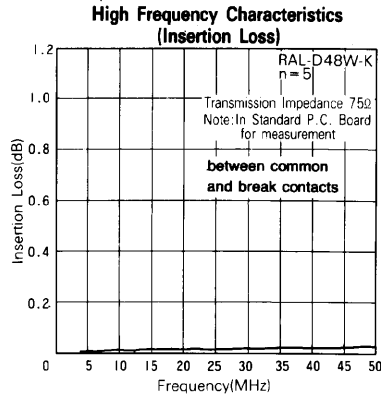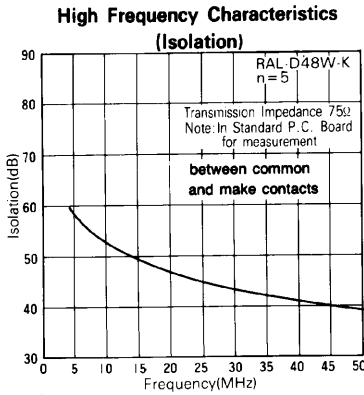


## ■ DIMENSIONS

### • Dimensions


RA, RAL type (Non-latching type, single winding latching type)

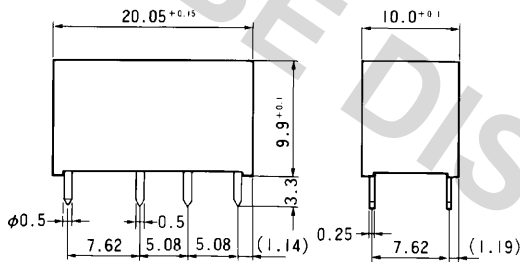




### • Schematics (Bottom View)



### • PC board mounting hole layout (Bottom View)

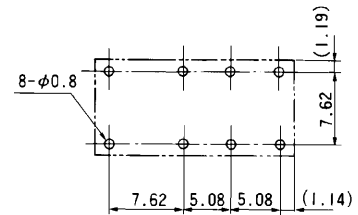

RAL-D type (Double winding latching type)

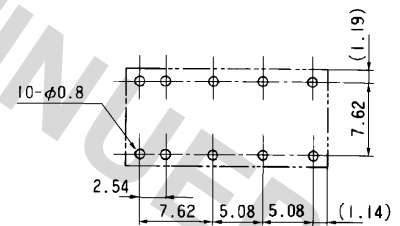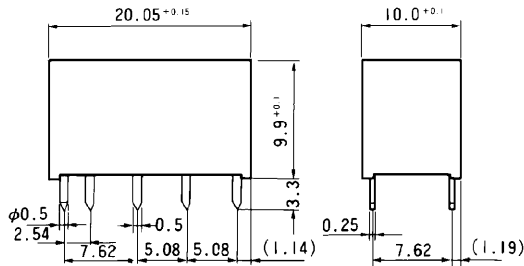

Unit: mm

## RoHS Compliance and Lead Free Relay Information

### 1. General Information

- Relays produced after the specific date code that is indicated on each data sheet are lead-free now. Most of our signal and power relays are lead-free. Please refer to Lead-Free Status Info. (<http://www.fujitsu.com/us/downloads/MICRO/fcai/relays/lead-free-letter.pdf>)
- Lead free solder paste currently used in relays is Sn-3.0Ag-0.5Cu.
- All signal and most power relays also comply with RoHS. Please refer to individual data sheets. Relays that are RoHS compliant do not contain the 5 hazardous materials that are restricted by RoHS directive (lead, mercury, chromium IV, PBB, PBDE).
- It has been verified that using lead-free relays in leaded assembly process will not cause any problems (compatible).
- "LF" is marked on each outer and inner carton. (No marking on individual relays).
- To avoid leaded relays (for lead-free sample, etc.) please consult with area sales office.
- We will ship leaded relays as long as the leaded relay inventory exists.

Note: Cadmium was exempted from RoHS on October 21, 2005. (Amendment to Directive 2002/95/EC)

### 2. Recommended Lead Free Solder Profile

- Recommended solder paste Sn-3.0Ag-0.5Cu.

#### Reflow Solder condition

**Flow Solder condition:**

Pre-heating: maximum 120°C  
Soldering: dip within 5 sec. at  
260°C solder bath

**Solder by Soldering Iron:**

Soldering Iron  
Temperature: maximum 360°C  
Duration: maximum 3 sec.

**We highly recommend that you confirm your actual solder conditions**

### 3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays.

### 4. Tin Whisker

- Dipped SnAgCu solder is known as low risk tin whisker. No considerable length whisker was found by our in house test.

## Fujitsu Components International Headquarter Offices

### Japan

Fujitsu Component Limited  
Gotanda-Chuo Building  
3-5, Higashigotanda 2-chome, Shinagawa-ku  
Tokyo 141, Japan  
Tel: (81-3) 5449-7010  
Fax: (81-3) 5449-2626  
Email: [promothq@ft.ed.fujitsu.com](mailto:promothq@ft.ed.fujitsu.com)  
Web: [www.fcl.fujitsu.com](http://www.fcl.fujitsu.com)

### North and South America

Fujitsu Components America, Inc.  
250 E. Caribbean Drive  
Sunnyvale, CA 94089 U.S.A.  
Tel: (1-408) 745-4900  
Fax: (1-408) 745-4970  
Email: [components@us.fujitsu.com](mailto:components@us.fujitsu.com)  
Web: <http://www.fujitsu.com/us/services/edevices/components/>

### Europe

Fujitsu Components Europe B.V.  
Diamantlaan 25  
2132 WV Hoofddorp  
Netherlands  
Tel: (31-23) 5560910  
Fax: (31-23) 5560950  
Email: [info@fceu.fujitsu.com](mailto:info@fceu.fujitsu.com)  
Web: [emea.fujitsu.com/components/](http://emea.fujitsu.com/components/)

### Asia Pacific

Fujitsu Components Asia Ltd.  
102E Pasir Panjang Road  
#01-01 Citilink Warehouse Complex  
Singapore 118529  
Tel: (65) 6375-8560  
Fax: (65) 6273-3021  
Email: [fcal@fcal.fujitsu.com](mailto:fcal@fcal.fujitsu.com)  
Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2009 Fujitsu Components America, Inc. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice.  
Rev. June 30, 2009.

TO BE DISCONTINUED



Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А