

Commercial Chip - X7R 16Vdc to 10kVdc

A range of commercial MLC chip capacitors in Stable EIA Class II dielectric. Class II X7R chips are used as decoupling, by-pass, filtering and transient voltage suppression elements and exhibit +/-15% temperature coefficient and predictable variation of electrical properties with time, temperature and voltage.

Designed for surface mount application with nickel barrier terminations making them suitable for solder wave and reflow solder board attachment as well as vapor phase attachment for part sizes 2225 or smaller. Silver-palladium terminations are also available for hybrid use with conductive epoxy.

Standard EIA case sizes and available C/V values are listed below - special sizes, thicknesses and other voltage ratings are available; please contact the sales office for information.

Capacitance and voltage selection for popular chip sizes

| Size | 0402 | 0504 | 0603 | 0805 | 1005 | 1206 | 1210 | 1515 | 1808 | 1812 | 1825 | | | |
|---------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|----------------|---------------|----------------|---------------|----------------|
| Min cap. | 121 | 121 | 121 | 121 | 121 | 121 | 121 | 151 | 151 | 151 | 151 | 471 | 471 | |
| Tmax inches: mm: | 0.024 0.61 | 0.044 1.12 | 0.035 0.89 | 0.054 1.37 | 0.054 1.37 | 0.064 1.63 | 0.065 1.63 | 0.130 3.02 | 0.065 1.63 | 0.080* 2.03 | 0.065 1.63 | 0.100* 2.54 | 0.080 2.03 | 0.140* 3.56 |
| 16V | 562 | 393 | 273 | 124 | 154 | 334 | 474 | 125 | 684 | 824 | 125 | 155 | 185 | 225 |
| 25V | 472 | 333 | 223 | 104 | 124 | 274 | 474 | 105 | 564 | 564 | 105 | 125 | 155 | 225 |
| 50V | 472 | 333 | 223 | 104 | 124 | 274 | 474 | 824 | 394 | 564 | 824 | 125 | 155 | 225 |
| 100V | 472 | 333 | 223 | 683 | 823 | 184 | 334 | 684 | 274 | 394 | 564 | 824 | 125 | 185 |
| 200V | 222 | 153 | 103 | 333 | 473 | 104 | 184 | 564 | 184 | 224 | 334 | 564 | 824 | 155 |
| 250V | 152 | 103 | 682 | 273 | 393 | 683 | 124 | 394 | 124 | 154 | 224 | 394 | 684 | 125 |
| 300V | • | • | • | 153 | 183 | 473 | 823 | 274 | 823 | 104 | 154 | 224 | 474 | 824 |
| 400V | • | • | • | 123 | 123 | 273 | 563 | 224 | 563 | 823 | 104 | 184 | 334 | 564 |
| 500V | • | • | • | 123 | 822 | 223 | 563 | 154 | 563 | 683 | 104 | 154 | 334 | 474 |
| 600V | • | • | • | 822 | 822 | 183 | 393 | 124 | 393 | 563 | 683 | 124 | 224 | 394 |
| 800V† | • | • | • | 472 | 472 | 103 | 273 | 823 | 273 | 333 | 473 | 683 | 124 | 274 |
| 1kV† | • | • | • | 272 | 272 | 682 | 153 | 563 | 153 | 223 | 273 | 473 | 823 | 154 |
| 1.5kV† | • | • | • | • | • | 222 | 472 | 183 | 472 | 682 | 822 | 153 | 273 | 563 |
| 2kV† | • | • | • | • | • | 102 | 222 | 822 | 272 | 332 | 472 | 682 | 123 | 273 |
| 3kV† | • | • | • | • | • | • | • | 152 | 561 | 821 | 122 | 222 | 272 | 472 |
| 4kV† | • | • | • | • | • | • | • | 122 | 331 | 391 | 681 | 122 | 152 | 272 |
| 5kV† | • | • | • | • | • | • | • | • | • | • | • | • | 821 | 182 |
| 6kV† | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| 7kV† | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| 8kV† | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| 9kV† | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| 10kV† | • | • | • | • | • | • | • | • | • | • | • | • | • | • |

† Units rated above 800V may require conformal coating to preclude arcing over chip surface

Commercial Chip - X7R 16Vdc to 10kVdc



- For dielectric characteristics see page 6.
- For dimensions see page 12.
- For termination options see pages 3 & 15.
- For capacitance tolerances available see page 15.
- For ordering information see page 15.

Note: Maximum capacitance values are shown below as 3 digit code: 2 significant figures followed by the no. of zeros e.g. 183 = 18,000pF.

Capacitance and voltage selection for popular chip sizes

| | 2020 | 2221 | 2225 | | 2520 | 3333 | 3530 | 4040 | 4540 | 5440 | 5550 | 6560 | 7565 | Size | |
|--|---------------|---------------|---------------|----------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|--------------------|------|
| | 471 | 471 | 471 | 471 | 102 | 102 | 102 | 102 | 102 | 102 | 102 | 222 | 222 | Min cap. | |
| | 0.180 4.57 | 0.080 2.03 | 0.080 2.03 | 0.150* 3.81 | 0.180 4.57 | 0.250 6.35 | 0.250 6.35 | 0.300 7.62 | 0.300 7.62 | 0.300 7.62 | 0.300 7.62 | 0.300 7.62 | 0.300 7.62 | inches mm | Tmax |
| | 185 | 155 | 225 | 275 | 355 | 525 | 525 | 825 | 905 | 106 | 126 | 206 | 256 | 16V | |
| | 155 | 125 | 185 | 225 | 325 | 505 | 505 | 755 | 805 | 106 | 106 | 186 | 226 | 25V | |
| | 155 | 125 | 185 | 225 | 325 | 425 | 425 | 705 | 755 | 905 | 106 | 156 | 206 | 50V | |
| | 155 | 125 | 155 | 225 | 275 | 405 | 405 | 625 | 685 | 825 | 905 | 126 | 186 | 100V | |
| | 125 | 684 | 105 | 185 | 225 | 355 | 355 | 565 | 625 | 705 | 825 | 825 | 156 | 200V | |
| | 105 | 564 | 824 | 155 | 185 | 325 | 325 | 505 | 605 | 685 | 805 | 825 | 126 | 250V | |
| | 824 | 394 | 474 | 105 | 125 | 225 | 225 | 475 | 505 | 575 | 705 | 755 | 106 | 300V | |
| | 564 | 274 | 394 | 684 | 824 | 125 | 125 | 255 | 275 | 305 | 375 | 545 | 875 | 400V | |
| | 474 | 274 | 334 | 564 | 684 | 105 | 105 | 185 | 185 | 185 | 225 | 335 | 475 | 500V | |
| | 274 | 224 | 274 | 474 | 394 | 684 | 684 | 155 | 155 | 155 | 225 | 275 | 395 | 600V | |
| | 224 | 124 | 154 | 334 | 274 | 474 | 394 | 684 | 824 | 105 | 155 | 225 | 275 | 800V [†] | |
| | 154 | 823 | 104 | 224 | 184 | 334 | 334 | 564 | 684 | 684 | 105 | 155 | 185 | 1kV [†] | |
| | 393 | 273 | 333 | 683 | 563 | 124 | 124 | 274 | 334 | 344 | 474 | 684 | 824 | 1.5kV [†] | |
| | 273 | 123 | 153 | 333 | 273 | 823 | 683 | 154 | 184 | 184 | 274 | 394 | 474 | 2kV [†] | |
| | 472 | 272 | 332 | 682 | 822 | 333 | 273 | 473 | 563 | 683 | 823 | 124 | 184 | 3kV [†] | |
| | 272 | 152 | 152 | 332 | 472 | 183 | 153 | 223 | 333 | 393 | 473 | 823 | 104 | 4kV [†] | |
| | 152 | 821 | 102 | 222 | 272 | 123 | 103 | 123 | 183 | 223 | 333 | 473 | 563 | 5kV [†] | |
| | • | • | • | • | • | 682 | 562 | 822 | 123 | 153 | 223 | 333 | 393 | 6kV [†] | |
| | • | • | • | • | • | 472 | 472 | 562 | 822 | 103 | 153 | 223 | 273 | 7kV [†] | |
| | • | • | • | • | • | • | 332 | 472 | 682 | 822 | 123 | 153 | 223 | 8kV [†] | |
| | • | • | • | • | • | • | 272 | 332 | 472 | 562 | 103 | 123 | 183 | 9kV [†] | |
| | • | • | • | • | • | • | 182 | 272 | 392 | 472 | 682 | 103 | 123 | 10kV [†] | |



* Denotes non standard chip thickness.
Order code needs to have an 'X' inserted together with the dimension in inches e.g. X080 where dimension is 0.080"

Chip Ordering Information



| Prefix | Case Size | Dielectric | Capacitance | Capacitance Tolerance | Voltage | Termination | Special Thickness | High Reliability Testing | Packaging | Marking | High Reliability Test Criteria |
|--------|-----------|------------|-------------|-----------------------|---------|-------------|-------------------|--------------------------|-----------|---------|--------------------------------|
| XX | 1206 | N | 472 | J | 101 | N | X050 | H | T | M | HB |

Capacitance Code

1st two digits are significant, third digit denotes number of zeros, R = decimal
Examples:

| | |
|-----|-----------|
| 1R0 | = 1.0pF |
| 120 | = 12pF |
| 471 | = 470pF |
| 102 | = 1,000pF |
| 273 | = 0.027μF |
| 474 | = 0.47μF |
| 105 | = 1.0μF |

Special Thickness

| | |
|------|---|
| None | Standard thickness as per Novacap catalog specifications |
| X | Denotes a special thickness other than standard. Specify in inches if required. (As shown above X = 0.050") |

Packaging

| | |
|------|-------------|
| None | Bulk |
| T | Tape & Reel |
| W | Waffle Pack |

Marking

| | |
|------|--|
| None | Unmarked |
| M | Marked *Marking not available on sizes ≤ 0603 |

High Reliability Testing

| | |
|------|--------------------------|
| None | Standard product |
| H | High Reliability Testing |
| H | High Temp Screening |

Hi-Reliability Testing Criteria

| | |
|----|-----------------------|
| HB | MIL-PRF-55681 Group A |
| HV | MIL-PRF-49467 Group A |
| HS | MIL-PRF-123 Group A |

Dielectric Codes

| | | |
|----|-------------------|----------------------------|
| N | C0G/NP0 | Ultra Stable |
| M | C0G/NP0 | Ultra Stable Magnetic Free |
| F | C0G/NP0 | High Temp. (up to 160°C) |
| D | C0G/NP0 | High Temp. (up to 200°C) |
| K | R3L | Ultra Stable |
| R | R2D | Pulse Energy |
| Y | Y5V | General Purpose |
| Z | Z5U | General Purpose |
| B | X7R | Stable |
| C | X7R | Stable Magnetic Free |
| X | BX | MIL |
| S | X8R | High Temp. (up to 150°C) |
| E | Class II | High Temp. (up to 200°C) |
| G | Class II | High Temp. (up to 160°C) |
| W | X5R | Stable |
| RN | Lead free C0G/NP0 | Ultra Stable |
| RB | Lead free X7R | Stable |
| BB | X7R BME | Stable |
| BW | X5R BME | Stable |

Voltage Code

1st two digits are significant, third digit denotes number of zeros. For example:

| | |
|-----|----------------|
| 160 | = 16 Volts |
| 101 | = 100 Volts |
| 501 | = 500 Volts |
| 102 | = 1,000 Volts |
| 502 | = 5,000 Volts |
| 103 | = 10,000 Volts |

Termination Codes

| | | |
|----|------------------------------|-------------------|
| P | Palladium Silver | |
| PR | Palladium Silver* | |
| K | Solderable Palladium Silver* | |
| N | Nickel Barrier* | 100% tin |
| Y | Nickel Barrier | 90% tin, 10% lead |
| NG | Nickel Barrier Gold Flash* | |
| C | FlexiCap™/Nickel Barrier* | 100% tin |
| D | FlexiCap™/Nickel Barrier | 90% tin, 10% lead |
| B | Copper Barrier* | 100% tin |
| E | Copper Barrier | 90% tin, 10% lead |
| S | Silver* | |

* Indicates RoHS terminations

Capacitance Tolerance Codes

| Code | Tolerance | Dielectric | | | | | | | | | | Positive VTC | | |
|------|-----------------|------------|---|-----|-----|-----|---------|-----|----|-----|----------|--------------|-----|---|
| | | C0G/NP0 | | | R3L | R2D | Y5V/Z5U | X7R | BX | X8R | Class II | | X5R | |
| | * Not RF series | N | M | F/D | K | R | Y/Z | B | C | X | S | E/G | W | P |
| B | ±0.10pF | • | • | | | | | | | | | | | |
| C | ±0.25pF | • | • | | • | | | | | | | | | |
| D | ±0.50pF | • | • | | • | | | | | | | | | |
| F | ±1% | • | • | • | | | | | | | | | | |
| G | ±2% | • | • | • | • | | | | | | | | | |
| J | ±5% | • | • | • | • | • | | •* | • | •* | • | • | | |
| K | ±10% | • | • | • | • | • | | • | • | • | • | • | • | • |
| M | ±20% | • | | • | • | • | • | • | • | • | • | • | • | • |
| Z | +80% -20% | • | | | | • | • | •* | | | | | | • |
| P | +100% -0% | • | | | | • | • | •* | | | | | | • |

Prefix Definitions

| | | |
|------|---|------------|
| None | Standard chip | |
| RF | Improved ESR Capacitor | p. 23 |
| LS | Y ³ Certified Safety Capacitor | p. 42 - 43 |
| ES | Y ² Certified Safety Capacitor | p. 42 - 43 |
| ST | Stacked Capacitor Assembly | p. 48 - 53 |
| SM | Stacked Hi-Rel Capacitor Assembly | p. 48 - 53 |
| CR | Cap-Rack Capacitor Array | p. 54 |
| RC | Bleed Resistor | p. 58 - 61 |

Technical Information

Novacap provides application notes throughout this catalog as a guide to chip selection and attachment methods. Refer to the Novacap Technical Brochure found at www.novacap.com for more details. This technical information includes the nature of capacitance, dielectric properties, electrical properties, classes of dielectrics, ferroelectric behavior, test standards, and high reliability test plans. Please do not hesitate to contact the sales office for any product or technical assistance.

Capacitor Size

Size availability is based primarily on capacitance values and voltage rating. Smaller units are generally less expensive. Because mass affects the thermal shock susceptibility of chip capacitors, size selection should consider the soldering method used to attach the chip to the board. Sizes 1812 and smaller can be wave, vapor phase, or reflow soldered. Larger units require reflow soldering.

Chip Selection

Multilayer capacitors (MLC) are categorized by dielectric performance with temperature. The Temperature Coefficient of Capacitance describes the variance of capacitance value with temperature. The choice of components is therefore largely determined by the temperature stability required of the device and the size necessary for the desired capacitance value and voltage rating.

Packaging

Units are available reeled, in waffle pack, or bulk packaged. Bar coded labels are standard for reeled and bulk packaging.

Primary Dielectric Types

COG/NP0:

Ultra stable Class I dielectric, with negligible dependence of capacitance on temperature, voltage, frequency, and time. Used in circuitry requiring very stable performance.

X7R:

Stable Class II dielectric, with predictable change in properties across a temperature range of -55°C to +125°C. Used as blocking, decoupling, bypassing, and frequency discriminating elements. This dielectric is ferroelectric and provides higher capacitance than Class I materials.

BX:

The military specification for ceramic chip capacitors (MIL-PRF-55681) defines a mid-K stable dielectric designated as BX. The BX specification has voltage temperature limits in addition to temperature limits of capacitance. The BX dielectric is limited to ±15% maximum change in capacitance between 25°C and -55°C or +125°C and also has a voltage restriction of +15% / -25% maximum change in capacitance between 25°C and -55°C or +125°C at rated voltage.

Z5U/Y5V:

General purpose Class III dielectrics with higher dielectric constant and greater variation of properties over temperature and voltage. Very high capacitance per volume is attainable for general purpose applications where stability over a wide temperature range is not critical.

Dielectric Termination Combinations

| Dielectric | Code | Palladium Silver | Palladium Silver | Solderable Palladium Silver | Nickel Barrier 100% tin | Nickel Barrier 90/10% tin/lead | Nickel Barrier Gold flash | FlexiCap™/Nickel Barrier 100% tin | FlexiCap™/Nickel Barrier 90/10% tin/lead | Copper Barrier 100% tin | Copper Barrier 90/10% tin/lead | Solderable Silver |
|--------------------|------|------------------|------------------|-----------------------------|-------------------------|--------------------------------|---------------------------|-----------------------------------|--|-------------------------|--------------------------------|-------------------|
| | | RoHS | RoHS | RoHS | RoHS | RoHS | RoHS | RoHS | RoHS | RoHS | RoHS | RoHS |
| COG/NP0 | N/RN | • | • | • | • | • | • | • | • | | | • |
| R3L | K | • | • | • | • | • | • | • | • | | | |
| X7R | B/RB | • | • | • | • | • | • | • | • | | | • |
| X7R BME | BB | | | | • | • | • | | | | | |
| X5R BME | BW | | | | • | • | • | | | | | |
| BX | X | • | • | • | • | • | • | • | • | | | • |
| Y5V | Y | | | | | | | • | • | | | |
| Z5U | Z | | | | | | | • | • | | | |
| COG/NP0 (Mag free) | M | • | • | • | | | | | | • | • | |
| X7R (Mag free) | C | • | • | • | | | | | | • | • | |
| X8R | S | • | • | • | • | • | | • | • | | | • |
| COG/NP0 (160°C) | F | • | • | • | • | • | | • | • | | | • |
| COG/NP0 (200°C) | D | | | • | | | | | | | | • |
| Class II (160°C) | G | • | • | • | • | • | | • | • | | | • |
| Class II (200°C) | E | | | • | | | | | | | | • |
| Pulse Power | P | • | • | • | | | | | | | | |
| R2D | R | • | • | • | | | | | | | | |

Termination Material


We recommend the following termination types:

Solder Attachment:

- N** Nickel Barrier, 100% matte tin plated - RoHS
 - C** FlexiCap™ with Nickel Barrier, 100% tin plated - RoHS
 - Y** Nickel Barrier, tin-lead plated
 - D** FlexiCap™ Nickel Barrier, tin-lead plated
 - B** Copper Barrier 100% matte tin plated - RoHS
 - E** Copper Barrier, tin-lead plated
 - K** Solderable Palladium Silver - RoHS (suitable for conductive epoxy attach)
 - S** Solderable Silver - RoHS
- Conductive Epoxy attachment:**
- P** Palladium Silver
 - PR** Palladium Silver - RoHS
 - NG** Nickel Barrier Gold Flash - RoHS (suitable for soldering attach)


X7R (B) Stable and RoHS 2013 (RB) type

| | |
|---------------------------------|--|
| Operating temperature range: | -55°C to 125°C |
| Temperature coefficient : | ±15% ΔC Max. |
| Dissipation factor | >25V rating: 2.5% max ≤25V rating: 3.5% max |
| Insulation resistance: | @25°C: >100GΩ or >1000ΩF whichever is less @125°C: >10GΩ or >100ΩF whichever is less |
| Dielectric withstanding voltage | ≤200V: 250% 201-500V: 150% or 500V whichever is greater >500V: 120% or 750V whichever is greater |
| Ageing rate: | <2.0% per decade |
| Test parameters: | 1KHz, 1.0 ±0.2 VRMS, 25°C |

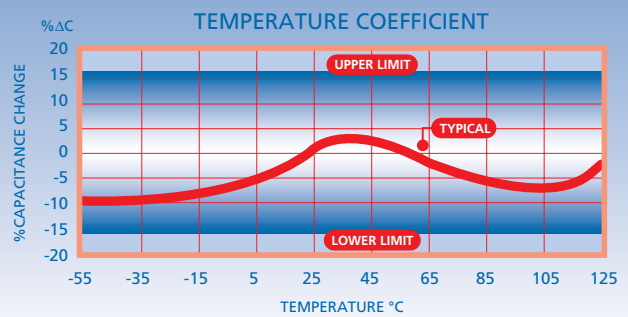


X7R (C) Stable Non Magnetic

| | |
|---------------------------------|--|
| Operating temperature range: | -55°C to 125°C |
| Temperature coefficient: | ±15% ΔC Max. |
| Dissipation factor | >25V rating: 2.5% max ≤25V rating: 3.5% max |
| Insulation resistance: | @25°C: >100GΩ or >1000ΩF whichever is less @125°C: >10GΩ or >100ΩF whichever is less |
| Dielectric withstanding voltage | ≤200V: 250% 201-500V: 150% or 500V whichever is greater >500V: 120% or 750V whichever is greater |
| Ageing rate: | <2.0% per decade |
| Test parameters: | 1KHz, 1.0 ±0.2 VRMS, 25°C |

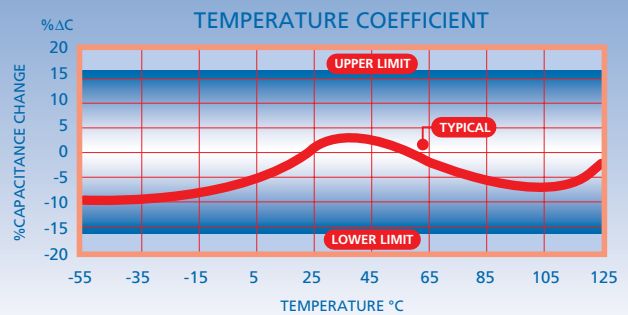


BX (X) Stable

| | |
|---------------------------------|--|
| Operating temperature range: | -55°C to 125°C |
| Temperature coefficient: | ±15% ΔC Max. |
| Temp-voltage coefficient: | +15% -25% ΔC Max. |
| Dissipation factor | >25V rating: 2.5% max ≤25V rating: 3.5% max |
| Insulation resistance: | @25°C: >100GΩ or >1000ΩF whichever is less @125°C: >10GΩ or >100ΩF whichever is less |
| Dielectric withstanding voltage | ≤200V: 250% 201-500V: 150% or 500V whichever is greater >500V: 120% or 750V whichever is greater |
| Ageing rate: | <2.0% per decade |
| Test parameters: | 1KHz, 1.0 ±0.2 VRMS, 25°C |

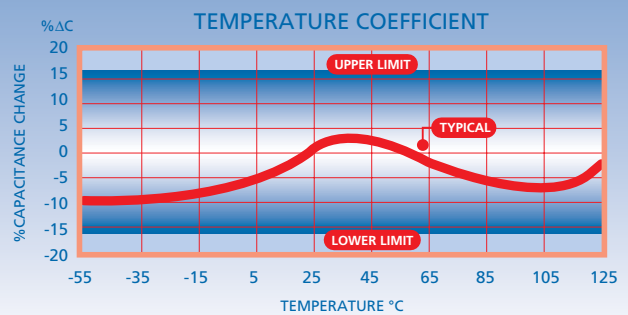

X8R (S) Stable

| | |
|---------------------------------|--|
| Operating temperature range: | -55°C to 150°C |
| Temp. coefficient ≤150°C: | ±15% ΔC Max. |
| Dissipation factor | >25V rating: 2.5% max ≤25V rating: 3.5% max |
| Insulation resistance | @25°C: >100GΩ or >1000ΩF whichever is less @150°C: >10GΩ or >100ΩF whichever is less |
| Dielectric withstanding voltage | ≤200V: 250% 201-500V: 150% or 500V whichever is greater >500V: 120% or 750V whichever is greater |
| Ageing rate: | <2.0% per decade |
| Test parameters: | 1KHz, 1.0 ±0.2 VRMS, 25°C |

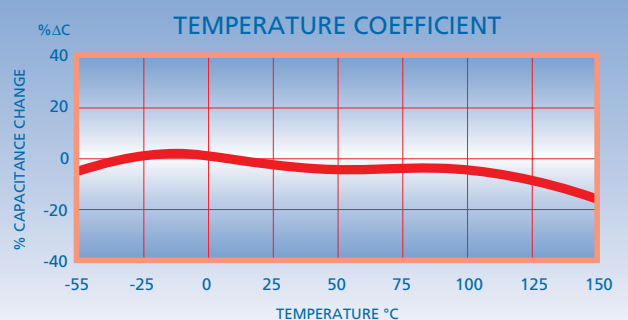



Dimensions - inches (mm)

| Size | Length (L) | Width (W) | Max. Thickness (T)* | Termination Band (MB) |
|---------------|--|-------------------------------|---------------------|-------------------------------|
| 0402 | 0.040 ± 0.004 (1.02 ± 0.102) | 0.020 ± 0.004 (0.508 ± 0.102) | 0.024 (0.610) | 0.010 ± 0.006 (0.254 ± 0.152) |
| 0504 | 0.050 ± 0.006 (1.27 ± 0.152) | 0.040 ± 0.006 (1.02 ± 0.152) | 0.044 (1.12) | 0.014 ± 0.006 (0.356 ± 0.152) |
| RF0505 | 0.055 +0.015 -0.010 (1.4 +0.38 -0.25) | 0.055 ± 0.015 (1.40 ± 0.381) | 0.057 (1.45) | 0.014 ± 0.006 (0.356 ± 0.152) |
| 0603 | 0.060 ± 0.006 (1.52 ± 0.152) | 0.030 ± 0.006 (0.762 ± 0.152) | 0.035 (0.889) | 0.014 ± 0.006 (0.356 ± 0.152) |
| 0805 | 0.080 ± 0.008 (2.03 ± 0.203) | 0.050 ± 0.008 (1.27 ± 0.203) | 0.054 (1.37) | 0.020 ± 0.010 (0.508 ± 0.254) |
| 0907 | 0.090 ± 0.008 (2.29 ± 0.203) | 0.070 ± 0.008 (1.78 ± 0.203) | 0.060 (1.52) | 0.020 ± 0.010 (0.508 ± 0.254) |
| 1005 | 0.100 ± 0.008 (2.54 ± 0.203) | 0.050 ± 0.008 (1.27 ± 0.203) | 0.054 (1.37) | 0.020 ± 0.010 (0.508 ± 0.254) |
| RF1111 | 0.110+0.025 -0.010 (2.79 +0.64 -0.25) | 0.110 ± 0.015 (2.79 ± 0.381) | 0.102 (2.59) | 0.020 ± 0.010 (0.508 ± 0.254) |
| 1206 | 0.125 ± 0.008 (3.18 ± 0.203) | 0.060 ± 0.008 (1.52 ± 0.203) | 0.064 (1.63) | 0.020 ± 0.010 (0.508 ± 0.254) |
| 1210 | 0.125 ± 0.008 (3.18 ± 0.203) | 0.100 ± 0.008 (2.54 ± 0.203) | 0.065 (1.65) | 0.020 ± 0.010 (0.508 ± 0.254) |
| 1515 | 0.150 ± 0.015 (3.81 ± 0.381) | 0.150 ± 0.015 (3.81 ± 0.381) | 0.130 (3.30) | 0.030 ± 0.015 (0.762 ± 0.381) |
| 1808 | 0.180 ± 0.012 (4.57 ± 0.305) | 0.080 ± 0.008 (2.03 ± 0.203) | 0.065 (1.65) | 0.024 ± 0.014 (0.610 ± 0.356) |
| 1812 | 0.180 ± 0.012 (4.57 ± 0.305) | 0.125 ± 0.008 (3.18 ± 0.203) | 0.065 (1.65) | 0.024 ± 0.014 (0.610 ± 0.356) |
| 1825 | 0.180 ± 0.012 (4.57 ± 0.305) | 0.250 ± 0.015 (6.35 ± 0.381) | 0.080 (2.03) | 0.024 ± 0.014 (0.610 ± 0.356) |
| 2020 | 0.200 ± 0.015 (5.08 ± 0.381) | 0.200 ± 0.015 (5.08 ± 0.381) | 0.180 (4.57) | 0.024 ± 0.014 (0.610 ± 0.356) |
| 2221 | 0.220 ± 0.015 (5.59 ± 0.381) | 0.210 ± 0.015 (5.33 ± 0.381) | 0.080 (2.03) | 0.030 ± 0.015 (0.762 ± 0.381) |
| 2225 | 0.220 ± 0.015 (5.59 ± 0.381) | 0.250 ± 0.015 (6.35 ± 0.381) | 0.080 (2.03) | 0.030 ± 0.015 (0.762 ± 0.381) |
| 2520 | 0.250 ± 0.015 (6.35 ± 0.381) | 0.200 ± 0.015 (5.08 ± 0.381) | 0.180 (4.57) | 0.030 ± 0.015 (0.762 ± 0.381) |
| RF2525 | 0.230 +0.020 -0.012 (5.84 +0.51 -0.30) | 0.250 ± 0.015 (6.35 ± 0.381) | 0.165 (4.19) | 0.030 ± 0.015 (0.762 ± 0.381) |
| 3333 | 0.330 ± 0.017 (8.38 ± 0.432) | 0.330 ± 0.017 (8.38 ± 0.432) | 0.250 (6.35) | 0.030 ± 0.015 (0.762 ± 0.381) |
| 3530 | 0.350 ± 0.018 (8.89 ± 0.457) | 0.300 ± 0.015 (7.62 ± 0.381) | 0.250 (6.35) | 0.030 ± 0.015 (0.762 ± 0.381) |
| 4040 | 0.400 ± 0.020 (10.2 ± 0.508) | 0.400 ± 0.020 (10.2 ± 0.508) | 0.300 (7.62) | 0.040 ± 0.020 (1.02 ± 0.508) |
| 4540 | 0.450 ± 0.023 (11.4 ± 0.584) | 0.400 ± 0.020 (10.2 ± 0.508) | 0.300 (7.62) | 0.040 ± 0.020 (1.02 ± 0.508) |
| 5440 | 0.540 ± 0.027 (13.7 ± 0.686) | 0.400 ± 0.020 (10.2 ± 0.508) | 0.300 (7.62) | 0.040 ± 0.020 (1.02 ± 0.508) |
| 5550 | 0.550 ± 0.028 (14.0 ± 0.711) | 0.500 ± 0.025 (12.7 ± 0.635) | 0.300 (7.62) | 0.040 ± 0.020 (1.02 ± 0.508) |
| 6560 | 0.650 ± 0.033 (16.5 ± 0.838) | 0.600 ± 0.030 (15.2 ± 0.762) | 0.300 (7.62) | 0.040 ± 0.020 (1.02 ± 0.508) |
| 7565 | 0.750 ± 0.038 (19.1 ± 0.965) | 0.650 ± 0.033 (16.5 ± 0.838) | 0.300 (7.62) | 0.040 ± 0.020 (1.02 ± 0.508) |

* Non standard thicknesses are available - consult the sales office for details.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А