


## SST-90 LEDs

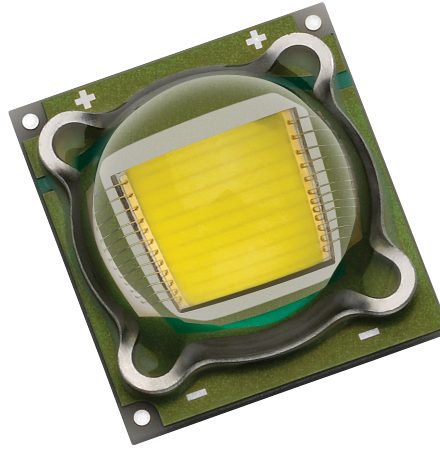

### Table of Contents

|                                               |    |
|-----------------------------------------------|----|
| Table of Products.....                        | 2  |
| Shipping and Labeling<br>Nomenclature .....   | 3  |
| Bin Kit Ordering<br>Nomenclature .....        | 4  |
| White Flux Binning<br>Structure .....         | 5  |
| White Chromaticity<br>Binning Structure ..... | 5  |
| Monochromatic<br>Binning Structure .....      | 10 |
| SST-90 Bin Kit Ordering<br>Codes .....        | 11 |

### Introduction:

This document describes the binning and labeling nomenclature for SST-90 Big Chip LED™ product as well as the orderable bin kits for each part.

With each build of parts, there is a distribution of performance in both flux and wavelength or chromaticity. In order to guarantee specific performance for customers, each device is measured and subsequently grouped into flux and wavelength or chromaticity bins. Each individual package or reel of parts contains only one combination of flux and wavelength or chromaticity bin. Furthermore, bins are combined into orderable bin kits comprising of a selection of flux and wavelength or chromaticity bins to ease the ordering process.



**Table of Products**

| Products    | Ordering Part Number      | Description                                                                                                                                 |
|-------------|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| SST-90-W65S | SST-90-W65S-F11/T11-xx123 | White Big Chip LED™ SST-90 surface mount device consisting of a 9mm <sup>2</sup> LED on ceramic substrate, F11- tray pack, T11- Tape & Reel |
| SST-90-W57S | SST-90-W57S-F11/T11-xx123 |                                                                                                                                             |
| SST-90-WDLS | SST-90-WDLS-F11/T11-xx123 |                                                                                                                                             |
| SST-90-W45S | SST-90-W45S-F11/T11-xx123 |                                                                                                                                             |
| SST-90-W40S | SST-90-W40S-F11/T11-xx123 |                                                                                                                                             |
| SST-90-WCLS | SST-90-WCLS-F11/T11-xx123 |                                                                                                                                             |
| SST-90-W30M | SST-90-W30M-F11/T11-xx123 |                                                                                                                                             |
| SST-90-WWRM | SST-90-WWRM-F11/T11-xx123 |                                                                                                                                             |
| SST-90-R    | SST-90-R-F11/T11-xx123    |                                                                                                                                             |
| SST-90-G    | SST-90-G-F11/T11-xx123    |                                                                                                                                             |
| SST-90-B    | SST-90-B-F11/T11-xx123    |                                                                                                                                             |
| SSR-90-W65S | SSR-90-W65S-R11-xx123     | SSR-90 evaluation module consisting of a SST-90 surface mount device mounted on an aluminum star board                                      |
| SSR-90-W57S | SSR-90-W57S-R11-xx123     |                                                                                                                                             |
| SSR-90-WDLS | SSR-90-WDLS-R11-xx123     |                                                                                                                                             |
| SSR-90-W45S | SSR-90-W45S-R11-xx123     |                                                                                                                                             |
| SSR-90-W40S | SSR-90-W40S-R11-xx123     |                                                                                                                                             |
| SSR-90-WCLS | SSR-90-WCLS-R11-xx123     |                                                                                                                                             |
| SSR-90-W30M | SSR-90-W30M-R11-xx123     |                                                                                                                                             |
| SSR-90-WWRM | SSR-90-WWRM-R11-xx123     |                                                                                                                                             |
| SSR-90-R    | SSR-90-R-R11-xx123        |                                                                                                                                             |
| SSR-90-G    | SSR-90-G-R11-xx123        |                                                                                                                                             |
| SSR-90-B    | SSR-90-B-R11-xx123        |                                                                                                                                             |

### SST-90 Shipping and Labeling Nomenclature

All SST-90 products are packaged and labeled with their respective bin as outlined in the following pages. Each package or reel will only contain one bin. The part number designation is as follows:

**A B C — 1 2 3 — D 4 5 E — F 6 7 — G H — I 8**

| Product Family | Chip Area | Color | Package Configuration | Flux Bin | Chromaticity Bin/<br>Wavelength |
|----------------|-----------|-------|-----------------------|----------|---------------------------------|
|----------------|-----------|-------|-----------------------|----------|---------------------------------|

|                                         |                                                                                                                                                                                                                                                                                                                                                                                    |  |  |  |  |
|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|
| <b>Product Family</b>                   | A - Package type: "S" denotes surface mount<br>B - Lens type: "S" denotes dome<br>C - Chip quantity: "T" denotes single chip and "R" denotes prototyping board                                                                                                                                                                                                                     |  |  |  |  |
| <b>Chip Area</b>                        | 1 2 3 - Total LED chip area (mm <sup>2</sup> ) x 10: "90" denotes 9mm <sup>2</sup>                                                                                                                                                                                                                                                                                                 |  |  |  |  |
| <b>Color</b>                            | D - Color: "W" denotes white, "R" denotes red, "G" denotes Green, "B" denotes blue<br>4 5 - Color temperature: "65" denotes 6500K, "DL" denotes daylight white (6500K through 5700K) etc., not applicable for monochrome parts<br>E - Color rendering: "S" (standard) denotes a typical CRI of 70, "M" (moderate) denotes a typical CRI of 83, not applicable for monochrome parts |  |  |  |  |
| <b>Package Config.</b>                  | F 6 7 - Package configuration (for internal use)                                                                                                                                                                                                                                                                                                                                   |  |  |  |  |
| <b>Flux Bin</b>                         | G H - Flux bin                                                                                                                                                                                                                                                                                                                                                                     |  |  |  |  |
| <b>Chromaticity Bin/<br/>Wavelength</b> | I 8 - Wavelength / Chromaticity bin                                                                                                                                                                                                                                                                                                                                                |  |  |  |  |

**Example:**

The part number SST-90-W65S-F11-N1-G4 refers to a 6500K standard CRI white, SST-90 emitter, with a flux range from 850 to 900 lumens and a chromaticity value within the box defined by the four points (0.313, 0.338), (0.321, 0.348), (0.322, 0.336), (0.312, 0.328).

### SST-90 Bin Kit Ordering Nomenclature

All SST-90 products are sold in sets of flux and chromaticity bins called bin kits. Each bin kit specifies a minimum flux bin and a specific selection of chromaticity bins. The ordering part number designation is as follows:

**A B C — 1 2 3 — D 4 5 E — F 6 7 — G H 8 9 0**

| Product Family | Chip Area | Color | Package Configuration | Bin Kit Code |
|----------------|-----------|-------|-----------------------|--------------|
|----------------|-----------|-------|-----------------------|--------------|

|                 |                                                                                                                                                                                                                                                                                                                                                                                    |  |  |  |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|
| Product Family  | A - Package type: "S" denotes surface mount<br>B - Lens type: "S" denotes dome<br>C - Chip quantity: "T" denotes single chip and "R" denotes prototyping board                                                                                                                                                                                                                     |  |  |  |
| Chip Area       | 1 2 3 - Total LED chip area (mm <sup>2</sup> ) x 10: "90" denotes 9mm <sup>2</sup>                                                                                                                                                                                                                                                                                                 |  |  |  |
| Color           | D - Color: "W" denotes white, "R" denotes red, "G" denotes Green, "B" denotes blue<br>4 5 - Color temperature: "65" denotes 6500K, "DL" denotes daylight white (6500K through 5700K) etc., not applicable for monochrome parts<br>E - Color rendering: "S" (standard) denotes a typical CRI of 70, "M" (moderate) denotes a typical CRI of 83, not applicable for monochrome parts |  |  |  |
| Package Config. | F 6 7 - Package configuration (for internal use)                                                                                                                                                                                                                                                                                                                                   |  |  |  |
| Bin Kit Code    | G H - Flux bin<br>8 9 0 - Wavelength/ Chromaticity bin kit code                                                                                                                                                                                                                                                                                                                    |  |  |  |

**Example:**

The ordering part number SST-90-W65S-F11-M1101 refers to a 6500K standard CRI white, SST-90 emitter, with a minimum flux value of 700 lumens and falling in the F4, F3, G4, G3, EF, and DG chromaticity bins.

### SST-90 White Binning Structure


SST-90 LEDs are tested for luminous flux and chromaticity at a drive current of 3.15 A (350 mA/mm<sup>2</sup>) and placed into one of the following luminous flux (FF) and chromaticity (WW) bins:

| Flux Bin (FF) | Minimum Flux (lm) @ 3.15A | Maximum Flux (lm) @ 3.15A |
|---------------|---------------------------|---------------------------|
| L2            | 630                       | 665                       |
| L3            | 665                       | 700                       |
| M             | 700                       | 850                       |
| M2            | 750                       | 800                       |
| M3            | 800                       | 850                       |
| N             | 850                       | 1,000                     |
| N2            | 900                       | 950                       |
| N3            | 950                       | 1,000                     |

\*Note: Luminus maintains a +/- 6% tolerance on flux measurements.

### Chromaticity Bins

Luminus' Standard Chromaticity Bins: 1931 CIE Curve

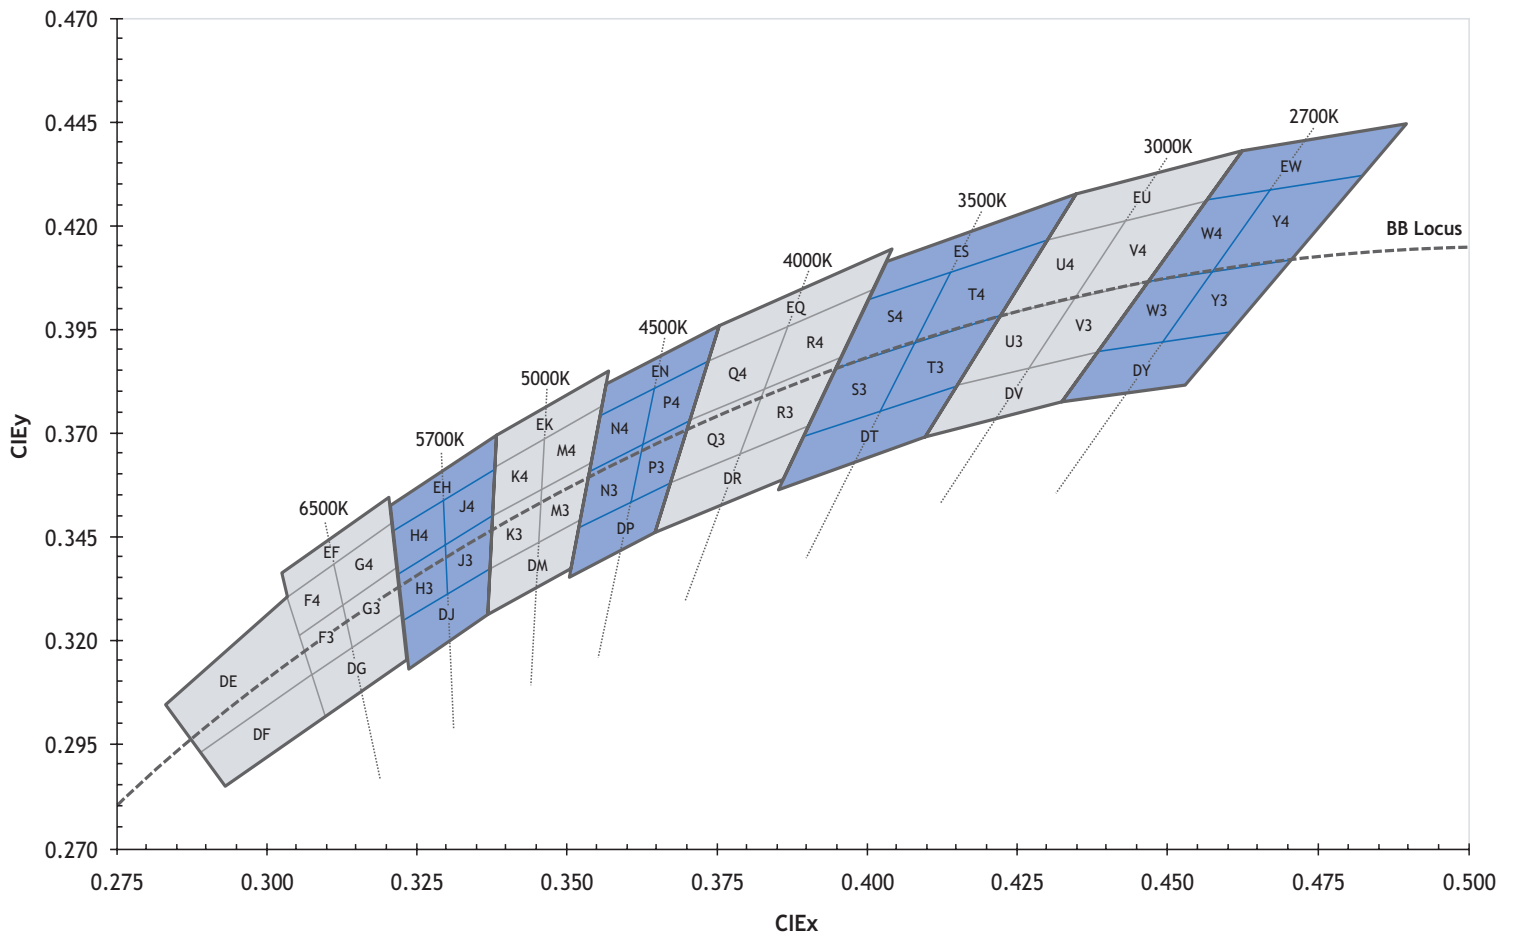

The following tables describe the four chromaticity points that bound each chromaticity bin. Chromaticity bins are grouped together based on the color temperature.

| 6500K Chromaticity Bins |                  |                  |
|-------------------------|------------------|------------------|
| Bin Code (WW)           | CIE <sub>x</sub> | CIE <sub>y</sub> |
| DG                      | 0.307            | 0.311            |
|                         | 0.322            | 0.326            |
|                         | 0.323            | 0.316            |
|                         | 0.309            | 0.302            |
| F3*                     | 0.305            | 0.321            |
|                         | 0.313            | 0.329            |
|                         | 0.315            | 0.319            |
|                         | 0.307            | 0.311            |
| F4*                     | 0.303            | 0.330            |
|                         | 0.312            | 0.339            |
|                         | 0.313            | 0.329            |
|                         | 0.305            | 0.321            |
| G3*                     | 0.313            | 0.329            |
|                         | 0.321            | 0.337            |
|                         | 0.322            | 0.326            |
|                         | 0.315            | 0.319            |
| G4*                     | 0.312            | 0.339            |
|                         | 0.321            | 0.348            |
|                         | 0.321            | 0.337            |
|                         | 0.313            | 0.329            |
| EF                      | 0.302            | 0.335            |
|                         | 0.320            | 0.354            |
|                         | 0.321            | 0.348            |
|                         | 0.303            | 0.330            |
| DE                      | 0.283            | 0.304            |
|                         | 0.303            | 0.330            |
|                         | 0.307            | 0.311            |
|                         | 0.289            | 0.293            |
| DF                      | 0.289            | 0.293            |
|                         | 0.307            | 0.311            |
|                         | 0.309            | 0.302            |
|                         | 0.293            | 0.285            |

| 5700K Chromaticity Bins |                  |                  |
|-------------------------|------------------|------------------|
| Bin Code (WW)           | CIE <sub>x</sub> | CIE <sub>y</sub> |
| DJ                      | 0.322            | 0.324            |
|                         | 0.337            | 0.337            |
|                         | 0.336            | 0.326            |
|                         | 0.323            | 0.314            |
| H3*                     | 0.321            | 0.335            |
|                         | 0.329            | 0.342            |
|                         | 0.329            | 0.331            |
|                         | 0.322            | 0.324            |
| H4*                     | 0.321            | 0.346            |
|                         | 0.329            | 0.354            |
|                         | 0.329            | 0.342            |
|                         | 0.321            | 0.335            |
| J3*                     | 0.329            | 0.342            |
|                         | 0.337            | 0.349            |
|                         | 0.337            | 0.337            |
|                         | 0.330            | 0.331            |
| J4*                     | 0.329            | 0.354            |
|                         | 0.338            | 0.362            |
|                         | 0.337            | 0.349            |
|                         | 0.329            | 0.342            |
| EH                      | 0.320            | 0.352            |
|                         | 0.338            | 0.368            |
|                         | 0.338            | 0.362            |
|                         | 0.321            | 0.346            |

\*Sub-bins within ANSI defined quadrangles per ANSI C78.377-2008

| 5000K Chromaticity Bins |                  |                  |
|-------------------------|------------------|------------------|
| Bin Code (WW)           | CIE <sub>x</sub> | CIE <sub>y</sub> |
| EK                      | 0.338            | 0.368            |
|                         | 0.356            | 0.384            |
|                         | 0.355            | 0.376            |
|                         | 0.338            | 0.362            |
| K3*                     | 0.337            | 0.349            |
|                         | 0.345            | 0.355            |
|                         | 0.345            | 0.343            |
|                         | 0.337            | 0.337            |
| K4*                     | 0.338            | 0.362            |
|                         | 0.347            | 0.369            |
|                         | 0.345            | 0.355            |
|                         | 0.337            | 0.349            |
| M3*                     | 0.345            | 0.355            |
|                         | 0.353            | 0.349            |
|                         | 0.352            | 0.372            |
|                         | 0.344            | 0.343            |
| M4*                     | 0.346            | 0.369            |
|                         | 0.355            | 0.376            |
|                         | 0.353            | 0.362            |
|                         | 0.345            | 0.355            |
| DM                      | 0.337            | 0.337            |
|                         | 0.352            | 0.349            |
|                         | 0.350            | 0.337            |
|                         | 0.336            | 0.326            |

| 4500K Chromaticity Bins |                  |                  |
|-------------------------|------------------|------------------|
| Bin Code (WW)           | CIE <sub>x</sub> | CIE <sub>y</sub> |
| EN                      | 0.356            | 0.384            |
|                         | 0.376            | 0.396            |
|                         | 0.374            | 0.387            |
|                         | 0.355            | 0.374            |
| N3*                     | 0.353            | 0.360            |
|                         | 0.361            | 0.366            |
|                         | 0.359            | 0.352            |
|                         | 0.351            | 0.347            |
| N4*                     | 0.355            | 0.374            |
|                         | 0.364            | 0.381            |
|                         | 0.361            | 0.366            |
|                         | 0.353            | 0.360            |
| P3*                     | 0.361            | 0.366            |
|                         | 0.370            | 0.373            |
|                         | 0.367            | 0.358            |
|                         | 0.359            | 0.352            |
| P4*                     | 0.364            | 0.381            |
|                         | 0.374            | 0.387            |
|                         | 0.370            | 0.373            |
|                         | 0.361            | 0.366            |
| DP                      | 0.351            | 0.347            |
|                         | 0.367            | 0.358            |
|                         | 0.364            | 0.346            |
|                         | 0.350            | 0.335            |

\*Sub-bins within ANSI defined quadrangles per ANSI C78.377-2008

| 4000K Chromaticity Bins |                  |                  |
|-------------------------|------------------|------------------|
| Bin Code (WW)           | CIE <sub>x</sub> | CIE <sub>y</sub> |
| EQ                      | 0.376            | 0.396            |
|                         | 0.404            | 0.414            |
|                         | 0.401            | 0.404            |
|                         | 0.374            | 0.387            |
| Q3*                     | 0.370            | 0.373            |
|                         | 0.382            | 0.380            |
|                         | 0.378            | 0.365            |
|                         | 0.367            | 0.358            |
| Q4*                     | 0.374            | 0.387            |
|                         | 0.387            | 0.396            |
|                         | 0.382            | 0.380            |
|                         | 0.370            | 0.373            |
| R3*                     | 0.382            | 0.380            |
|                         | 0.395            | 0.388            |
|                         | 0.390            | 0.372            |
|                         | 0.378            | 0.365            |
| R4*                     | 0.387            | 0.396            |
|                         | 0.401            | 0.404            |
|                         | 0.395            | 0.388            |
|                         | 0.382            | 0.380            |
| DR                      | 0.367            | 0.358            |
|                         | 0.390            | 0.372            |
|                         | 0.386            | 0.359            |
|                         | 0.364            | 0.346            |

| 3500K Chromaticity Bins |                  |                  |
|-------------------------|------------------|------------------|
| Bin Code (WW)           | CIE <sub>x</sub> | CIE <sub>y</sub> |
| ES                      | 0.403            | 0.411            |
|                         | 0.435            | 0.427            |
|                         | 0.430            | 0.417            |
|                         | 0.400            | 0.402            |
| S3*                     | 0.394            | 0.385            |
|                         | 0.407            | 0.392            |
|                         | 0.402            | 0.375            |
|                         | 0.389            | 0.369            |
| S4*                     | 0.400            | 0.402            |
|                         | 0.415            | 0.409            |
|                         | 0.407            | 0.392            |
|                         | 0.394            | 0.385            |
| T3*                     | 0.407            | 0.392            |
|                         | 0.422            | 0.399            |
|                         | 0.415            | 0.381            |
|                         | 0.402            | 0.375            |
| T4*                     | 0.415            | 0.409            |
|                         | 0.430            | 0.417            |
|                         | 0.422            | 0.399            |
|                         | 0.407            | 0.392            |
| DT                      | 0.389            | 0.369            |
|                         | 0.415            | 0.381            |
|                         | 0.409            | 0.369            |
|                         | 0.385            | 0.357            |

\*Sub-bins within ANSI defined quadrangles per ANSI C78.377-2008



| 3000K Chromaticity Bins |                  |                  |
|-------------------------|------------------|------------------|
| Bin Code (WW)           | CIE <sub>x</sub> | CIE <sub>y</sub> |
| EU                      | 0.435            | 0.427            |
|                         | 0.462            | 0.437            |
|                         | 0.456            | 0.426            |
|                         | 0.430            | 0.417            |
| U3*                     | 0.422            | 0.399            |
|                         | 0.434            | 0.403            |
|                         | 0.426            | 0.385            |
|                         | 0.415            | 0.381            |
| U4*                     | 0.430            | 0.417            |
|                         | 0.443            | 0.421            |
|                         | 0.434            | 0.403            |
|                         | 0.422            | 0.399            |
| V3*                     | 0.434            | 0.403            |
|                         | 0.447            | 0.408            |
|                         | 0.437            | 0.389            |
|                         | 0.426            | 0.385            |
| V4*                     | 0.443            | 0.421            |
|                         | 0.456            | 0.426            |
|                         | 0.447            | 0.408            |
|                         | 0.434            | 0.403            |
| DV                      | 0.415            | 0.381            |
|                         | 0.437            | 0.389            |
|                         | 0.431            | 0.377            |
|                         | 0.409            | 0.369            |

| 2700K Chromaticity Bins |                  |                  |
|-------------------------|------------------|------------------|
| Bin Code (WW)           | CIE <sub>x</sub> | CIE <sub>y</sub> |
| EW                      | 0.462            | 0.437            |
|                         | 0.488            | 0.444            |
|                         | 0.481            | 0.432            |
|                         | 0.456            | 0.426            |
| W3*                     | 0.447            | 0.408            |
|                         | 0.458            | 0.410            |
|                         | 0.448            | 0.392            |
|                         | 0.437            | 0.389            |
| W4*                     | 0.456            | 0.426            |
|                         | 0.469            | 0.429            |
|                         | 0.458            | 0.410            |
|                         | 0.447            | 0.408            |
| Y3*                     | 0.458            | 0.410            |
|                         | 0.70             | 0.413            |
|                         | 0.459            | 0.394            |
|                         | 0.448            | 0.392            |
| Y4*                     | 0.469            | 0.429            |
|                         | 0.481            | 0.432            |
|                         | 0.470            | 0.413            |
|                         | 0.458            | 0.410            |
| DY                      | 0.437            | 0.389            |
|                         | 0.459            | 0.394            |
|                         | 0.452            | 0.382            |
|                         | 0.431            | 0.377            |

\*Sub-bins within ANSI defined quadrangles per ANSI C78.377-2008

### SST-90 Monochromatic Binning Structure

All SST-90 monochromatic LEDs are tested for luminous flux/ dominant wavelength and placed into one of the following flux/ wave length bins. The binning structure is universally applied across each monochromatic color of the SST-90 product line. Consult the local sales person for the available flux/ wavelength bins for the product:

#### Flux Bins

| Color | Luminous Flux Bin (FF) | Minimum Flux (lm) @ 3.15A | Maximum Flux (lm) @ 3.15A |
|-------|------------------------|---------------------------|---------------------------|
| Red   | BG                     | 275                       | 350                       |
|       | BH                     | 350                       | 475                       |
| Green | CF                     | 640                       | 775                       |
|       | CG                     | 775                       | 940                       |
| Blue  | DE                     | 90                        | 120                       |
|       | DF                     | 120                       | 160                       |
|       | DG                     | 160                       | 200                       |

#### Wavelength Bins

| Color | Wavelength Bin (FF) | Minimum Wavelength @ 3.15A | Maximum Wavelength @ 3.15A |
|-------|---------------------|----------------------------|----------------------------|
| Red   | R2                  | 611                        | 615                        |
|       | R3                  | 615                        | 619                        |
|       | R4                  | 619                        | 623                        |
|       | R5                  | 623                        | 627                        |
|       | R6                  | 627                        | 631                        |
|       | R7                  | 631                        | 635                        |
| Green | G2                  | 510                        | 515                        |
|       | G3                  | 515                        | 520                        |
|       | G4                  | 520                        | 525                        |
|       | G5                  | 525                        | 530                        |
|       | G6                  | 530                        | 535                        |
|       | G7                  | 535                        | 540                        |
| Blue  | B4                  | 450                        | 455                        |
|       | B5                  | 455                        | 460                        |
|       | B6                  | 460                        | 465                        |
|       | B7                  | 465                        | 470                        |
|       | B8                  | 470                        | 475                        |

\*Note: Luminus maintains a +/- 6% tolerance on flux measurements.

**SST-90 and SSR-90 Bin Kit Order Codes**

The following tables describe the bin kit ordering codes for the SST-90 and SSR-90. The flux and wave length or chromaticity bins are also included in the bin kit. Each kit specifies a minimum flux and the listed wave length or chromaticity bins. A maximum flux is not specified. Within each kit, Luminus may ship any part meeting or exceeding the minimum flux specification. Shipments will always meet the listed wave length or chromaticity bins. For information on ordering bin kits not listed below, please contact Luminus or an official distributor.

**SST-90 and SSR-90 Bin Kit Order Codes**

| Color                                                    | Luminous Flux     |           | Chromaticity Bins                                        | Kit Number |
|----------------------------------------------------------|-------------------|-----------|----------------------------------------------------------|------------|
|                                                          | Bin Kit Flux Code | Min. Flux |                                                          |            |
| White<br>W65S<br>6500K, Standard CRI (typ. 70)           | N2                | 900       | F4, F3, G4, G3, EF, DG, DE, DF                           | N2100      |
|                                                          |                   |           | F4, F3, G4, G3, EF, DG                                   | N2101      |
|                                                          |                   |           | F4, F3, G4, G3                                           | N2102      |
|                                                          | N3                | 950       | F4, F3, G4, G3, EF, DG, DE, DF                           | N3100      |
|                                                          |                   |           | F4, F3, G4, G3, EF, DG                                   | N3101      |
|                                                          |                   |           | F4, F3, G4, G3                                           | N3102      |
| White<br>WDL5<br>6500K & 5700K<br>Standard CRI (typ. 70) | N2                | 900       | F4, F3, G4, G3, EF, DG, DE, DF<br>H4, H3, J4, J3, EH, DJ | N2150      |
|                                                          | N3                | 950       | F4, F3, G4, G3, EF, DG, DE, DF<br>H4, H3, J4, J3, EH, DJ | N3150      |
| White<br>W57S<br>5700K, Standard CRI (typ. 70)           | N2                | 900       | H4, H3, J4, J3, EH, DJ                                   | N2200      |
|                                                          |                   |           | H4, H3, J4, J3                                           | N2201      |
|                                                          | N3                | 950       | H4, H3, J4, J3, EH, DJ                                   | N3200      |
|                                                          |                   |           | H4, H3, J4, J3                                           | N3201      |
| White<br>W45S<br>4500K, Standard CRI (typ. 70)           | M2                | 750       | N4, N3, P4, P3, EN, DP                                   | M2400      |
|                                                          |                   |           | N4, N3, P4, P3                                           | M2401      |
|                                                          | M3                | 800       | N4, N3, P4, P3, EN, DP                                   | M3400      |
|                                                          |                   |           | N4, N3, P4, P3                                           | M3401      |
|                                                          | N                 | 850       | N4, N3, P4, P3, EN, DP                                   | GN400      |
|                                                          |                   |           | N4, N3, P4, P3                                           | GN401      |
| White<br>WCLS<br>4500K & 4000K<br>Standard CRI (typ. 70) | M2                | 750       | N3, N4, P3, P4, DP, EN<br>Q3, Q4, R3, R4, DR, EQ         | M2450      |
|                                                          | M3                | 800       | N3, N4, P3, P4, DP, EN<br>Q3, Q4, R3, R4, DR, EQ         | M3450      |
|                                                          | N                 | 850       | N3, N4, P3, P4, DP, EN<br>Q3, Q4, R3, R4, DR, EQ         | GN450      |



|                                                          |    |     |                                                  |       |
|----------------------------------------------------------|----|-----|--------------------------------------------------|-------|
| White<br>W40S<br>4000K, Standard CRI (typ. 70)           | M2 | 750 | Q4, Q3, R4, R3, EQ, DR                           | M2500 |
|                                                          |    |     | Q4, Q3, R4, R3                                   | M2501 |
|                                                          | M3 | 800 | Q4, Q3, R4, R3, EQ, DR                           | M3500 |
|                                                          |    |     | Q4, Q3, R4, R3                                   | M3501 |
|                                                          | N  | 850 | Q4, Q3, R4, R3, EQ, DR                           | GN500 |
|                                                          |    |     | Q4, Q3, R4, R3                                   | GN501 |
| White<br>W30M<br>3000K, Moderate CRI (typ. 83)           | L  | 600 | U4, U3, V4, V3, EU, DV                           | GL700 |
|                                                          |    |     | U4, U3, V4, V3                                   | GL701 |
|                                                          | L2 | 630 | U4, U3, V4, V3, EU, DV                           | L2700 |
|                                                          |    |     | U4, U3, V4, V3                                   | L2701 |
|                                                          | L3 | 665 | U4, U3, V4, V3, EU, DV                           | L3700 |
|                                                          |    |     | U4, U3, V4, V3                                   | L3701 |
| White<br>WWRM<br>3000K & 2700K<br>Moderate CRI (typ. 83) | L  | 600 | U3, U4, V3, V4, DV, EU<br>W3, W4, Y3, Y4, DY, EW | GL750 |
|                                                          | L2 | 630 | U3, U4, V3, V4, DV, EU<br>W3, W4, Y3, Y4, DY, EW | L2750 |
|                                                          | L3 | 665 | U3, U4, V3, V4, DV, EU<br>W3, W4, Y3, Y4, DY, EW | L3750 |

| Color | Luminous Flux     |           | Wavelength Bins            | Kit Number |
|-------|-------------------|-----------|----------------------------|------------|
|       | Bin Kit Flux Code | Min. Flux |                            |            |
| Red   | HG                | 275       | R2, R3, R4, R5, R6, R7     | HG100      |
|       |                   |           | R4, R5                     | HG101      |
|       | HH                | 350       | R2, R3, R4, R5, R6, R7     | HH100      |
|       |                   |           | R4, R5                     | HH101      |
| Green | JF                | 640       | G2, G3, G4, G5, G6, G7, G8 | JF200      |
|       |                   |           | G4, G5, G6, G7             | JF201      |
|       | JG                | 775       | G2, G3, G4, G5, G6, G7, G8 | JG200      |
|       |                   |           | G4, G5, G6, G7             | JG201      |
| Blue  | KE                | 90        | B4, B5, B6, B7, B8         | KE300      |
|       |                   |           | B5, B6, B7                 | KE301      |
|       | KF                | 120       | B4, B5, B6, B7, B8         | KF300      |
|       |                   |           | B5, B6, B7                 | KF301      |
|       | KG                | 160       | B4, B5, B6, B7, B8         | KG300      |
|       |                   |           | B5, B6, B7                 | KG301      |

The products, their specifications and other information appearing in this document are subject to change by Luminus Devices without notice. Luminus Devices assumes no liability for errors that may appear in this document, and no liability otherwise arising from the application or use of the product or information contained herein. None of the information provided herein should be considered to be a representation of the fitness or suitability of the product for any particular application or as any other form of warranty. Luminus Devices' product warranties are limited to only such warranties as accompany a purchase contract or purchase order for such products. Nothing herein is to be construed as constituting an additional warranty. No information contained in this publication may be considered as a waiver by Luminus Devices of any intellectual property rights that Luminus Devices may have in such information. Big Chip LEDs™ is a registered trademark of Luminus Devices, Inc., all rights reserved.

This product is protected by U.S. Patents 6,831,302; 7,074,631; 7,083,993; 7,084,434; 7,098,589; 7,105,861; 7,138,666; 7,166,870; 7,166,871; 7,170,100; 7,196,354; 7,211,831; 7,262,550; 7,274,043; 7,301,271; 7,341,880; 7,344,903; 7,345,416; 7,348,603; 7,388,233; 7,391,059 Patents Pending in the U.S. and other countries.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А