

# 2.4 GHz High-Power and High-Gain Power Amplifier

## SST12LP15A



Data Sheet

### FEATURES:

- **High Gain:**
  - Typically 32 dB gain across 2.4–2.5 GHz over temperature 0°C to +85°C
- **High linear output power:**
  - >29 dBm P1dB
    - Please refer to “Absolute Maximum Stress Ratings” on page 4
  - Meets 802.11g OFDM ACPR requirement up to 25 dBm
  - Added EVM~4% up to 23 dBm for 54 Mbps 802.11g signal
  - Meets 802.11b ACPR requirement up to 25 dBm
- **High power-added efficiency/Low operating current for both 802.11g/b applications**
  - ~26%/300 mA @  $P_{OUT} = 24$  dBm for 802.11g
  - ~27%/350 mA @  $P_{OUT} = 25$  dBm for 802.11b
- **Built-in Ultra-low  $I_{REF}$  power-up/down control**
  - $I_{REF} \sim 2$  mA
- **Low idle current**
  - ~80 mA  $I_{CQ}$
- **High-speed power-up/down**
  - Turn on/off time (10%-90%) <100 ns
  - Typical power-up/down delay with driver delay included <200 ns
- **High temperature stability**
  - ~1 dB gain/power variation between 0°C to +85°C
  - ~1 dB detector variation over 0°C to +85°C
- **Low shut-down current (~1  $\mu$ A)**
- **On-chip power detection**
- **25 dB dynamic range on-chip power detection**
- **Simple input/output matching**
- **Packages available**
  - 16-contact VQFN (3mm x 3mm)
- **All non-Pb (lead-free) devices are RoHS compliant**

### APPLICATIONS:

- WLAN (IEEE 802.11g/b)
- Home RF
- Cordless phones
- 2.4 GHz ISM wireless equipment

### PRODUCT DESCRIPTION

The SST12LP15A is a high-power and high-gain power amplifier based on the highly-reliable InGaP/GaAs HBT technology.

The SST12LP15A can be easily configured for high-power applications with superb power-added efficiency while operating over the 2.4-2.5 GHz frequency band. It typically provides 32 dB gain with 26% power-added efficiency @  $P_{OUT} = 24$  dBm for 802.11g and 27% power-added efficiency @  $P_{OUT} = 25$  dBm for 802.11b.

The SST12LP15A has excellent linearity, typically ~4% added EVM at 23 dBm output power which is essential for 54 Mbps 802.11g operation while meeting 802.11g spectrum mask at 25 dBm. SST12LP15A also has wide-range (>25 dB), temperature-stable (~1 dB over 85°C), single-ended/differential power detectors which lower users' cost on power control.

The power amplifier IC also features easy board-level usage along with high-speed power-up/down control. Ultra-low reference current (total  $I_{REF} \sim 2$  mA) makes the SST12LP15A controllable by an on/off switching signal directly from the baseband chip. These features coupled with low operating current make the SST12LP15A ideal for the final stage power amplification in battery-powered 802.11g/b WLAN transmitter applications.

The SST12LP15A is offered in 16-contact VQFN package. See Figure 2 for pin assignments and Table 1 for pin descriptions.



# 2.4 GHz High-Power and High-Gain Power Amplifier SST12LP15A

Data Sheet

## FUNCTIONAL BLOCKS

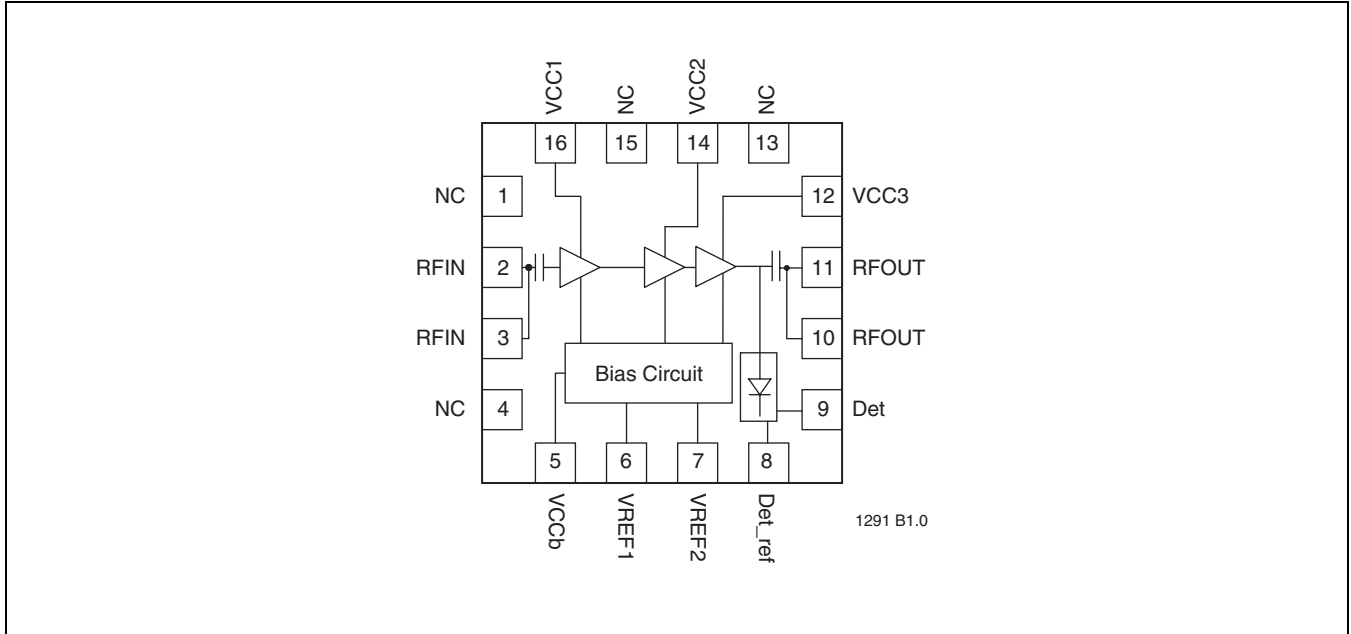


FIGURE 1: Functional Block Diagram6

## 2.4 GHz High-Power and High-Gain Power Amplifier SST12LP15A



Data Sheet

### PIN ASSIGNMENTS

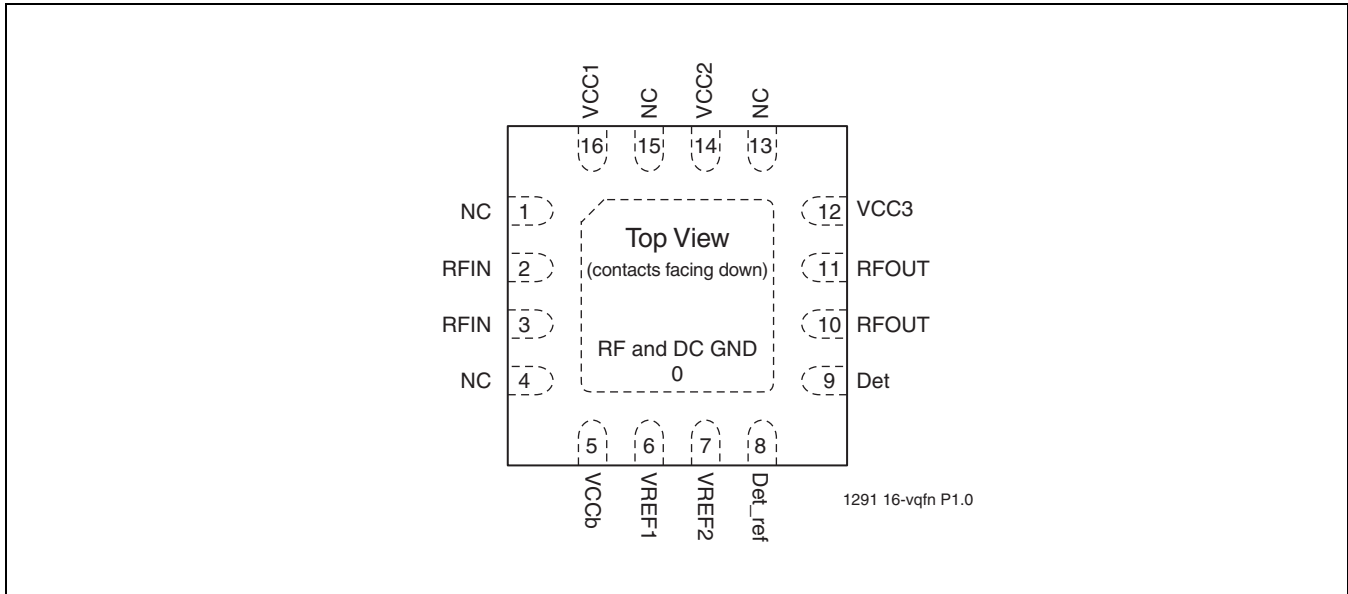


FIGURE 2: Pin Assignments for 16-contact VQFN

### PIN DESCRIPTIONS

TABLE 1: Pin Description

| Symbol  | Pin No. | Pin Name      | Type <sup>1</sup> | Function  |
|---------|---------|---------------|-------------------|---|
| GND     | 0       | Ground        |                   | The center pad should be connected to RF ground with several low inductance, low resistance vias. |
| NC      | 1       | No Connection |                   | Unconnected pins.   |
| RFIN    | 2       |               | I                 | RF input, DC decoupled  |
| RFIN    | 3       |               | I                 | RF input, DC decoupled  |
| NC      | 4       | No Connection |                   | Unconnected pins.   |
| VCCb    | 5       | Power Supply  | PWR               | Supply voltage for bias circuit   |
| VREF1   | 6       |               | PWR               | 1st and 2nd stage idle current control  |
| VREF2   | 7       |               | PWR               | 3rd stage idle current control  |
| Det_ref | 8       |               | O                 | On-chip power detector reference  |
| Det     | 9       |               | O                 | On-chip power detector  |
| RFOUT   | 10      |               | O                 | RF output   |
| RFOUT   | 11      |               | O                 | RF output   |
| VCC3    | 12      | Power Supply  | PWR               | Power supply, 3rd stage   |
| NC      | 13      | No Connection |                   | Unconnected pins.   |
| VCC2    | 14      | Power Supply  | PWR               | Power supply, 2nd stage   |
| NC      | 15      | No Connection |                   | Unconnected pins.   |
| VCC1    | 16      | Power Supply  | PWR               | Power supply, 1st stage   |

1. I=Input, O=Output

T1.0 1291



## 2.4 GHz High-Power and High-Gain Power Amplifier SST12LP15A

Data Sheet

### ELECTRICAL SPECIFICATIONS

The AC and DC specifications for the power amplifier interface signals. Refer to Table 2 for the DC voltage and current specifications. Refer to Figures 3 through 10 for the RF performance.

**Absolute Maximum Stress Ratings** (Applied conditions greater than those listed under “Absolute Maximum Stress Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these conditions or conditions greater than those defined in the operational sections of this data sheet is not implied. Exposure to absolute maximum stress rating conditions may affect device reliability.)

|   |                      |
|---|----------------------|
| Input power to pins 2 and 3 ( $P_{IN}$ )                            | +5 dBm               |
| Average output power ( $P_{OUT}$ ) <sup>1</sup>                     | +28 dBm              |
| Supply Voltage at pins 5, 12, 14, 16 ( $V_{CC}$ )                   | -0.3V to +4.6V       |
| Reference voltage to pins 6 ( $V_{REF1}$ ) and pin 7 ( $V_{REF2}$ ) | -0.3V to +3.6V       |
| DC supply current ( $I_{CC}$ )                                      | 500 mA               |
| Operating Temperature ( $T_A$ )                                     | -40°C to +85°C       |
| Storage Temperature ( $T_{STG}$ )                                   | -40°C to +120°C      |
| Maximum Junction Temperature ( $T_J$ )                              | +150°C               |
| Surface Mount Solder Reflow Temperature                             | 260°C for 10 seconds |

1. Never measure with CW source. Pulsed single-tone source with <50% duty cycle is recommended. Exceeding the maximum rating of average output power could cause permanent damage to the device.

### Operating Range

| Range      | Ambient Temp   | $V_{CC}$ |
|------------|----------------|----------|
| Industrial | -40°C to +85°C | 3.3V     |

**TABLE 2: DC Electrical Characteristics at 25°C**

| Symbol     | Parameter   | Min. | Typ  | Max. | Unit |
|------------|---|------|------|------|------|
| $V_{CC}$   | Supply Voltage at pins 5, 12, 14, 16                        | 3.0  | 3.3  | 4.2  | V    |
| $I_{CC}$   | Supply Current  |      |      |      |      |
|            | for 802.11g, 24 dBm   |      | 300  |      | mA   |
|            | for 802.11b, 25 dBm   |      | 350  |      | mA   |
| $I_{CQ}$   | Idle current for 802.11g to meet EVM<4% @ 23dBm             |      | 80   |      | mA   |
| $I_{OFF}$  | Shut down current   |      | 1    |      | μA   |
| $V_{REG1}$ | Reference Voltage for 1st and 2nd Stage, with 270Ω resistor | 2.85 | 2.90 | 2.95 | V    |
| $V_{REG2}$ | Reference Voltage for 3rd Stage, with 100Ω resistor         | 2.85 | 2.90 | 2.95 | V    |

T2.1 1291



## 2.4 GHz High-Power and High-Gain Power Amplifier SST12LP15A

Data Sheet

**TABLE 3: AC Electrical Characteristics for Configuration at 25°C**

| Symbol            | Parameter  | Min.     | Typ      | Max. | Unit           |
|-------------------|--|----------|----------|------|----------------|
| F <sub>L-U</sub>  | Frequency range in 802.11b/g applications (see Figure 11)                  | 2400     |          | 2485 | MHz            |
| P <sub>OUT</sub>  | Output power<br>@ PIN = -10 dBm 11b signals<br>@ PIN = -10 dBm 11g signals |          | 23<br>23 |      | <br>dBm<br>dBm |
| G                 | Small signal gain  | 31       | 32       |      | dB             |
| G <sub>VAR1</sub> | Gain variation over each band (2400-2485 MHz)                              |          |          | ±0.5 | dB             |
| G <sub>VAR2</sub> | Gain ripple over channel (Gain variation over 20 MHz)                      |          | 0.2      |      | dB             |
| ACPR              | Meet 11b spectrum mask<br>Meet 11g OFDM 54 MBPS spectrum mask              | 24<br>24 | 25<br>25 |      | <br>dBm<br>dBm |
| Added EVM         | @ 23 dBm output with 11g OFDM 54 MBPS signal                               |          | 3.5      |      | %              |
| 2f, 3f, 4f, 5f    | Harmonics at 22 dBm, without trapping capacitors                           |          |          | -40  | dBc            |

T3.2 1291



# 2.4 GHz High-Power and High-Gain Power Amplifier SST12LP15A

Data Sheet

## TYPICAL PERFORMANCE CHARACTERISTICS

Test Conditions:  $V_{CC} = 3.3V$ ,  $T_A = 25^\circ C$  Unless otherwise specified.

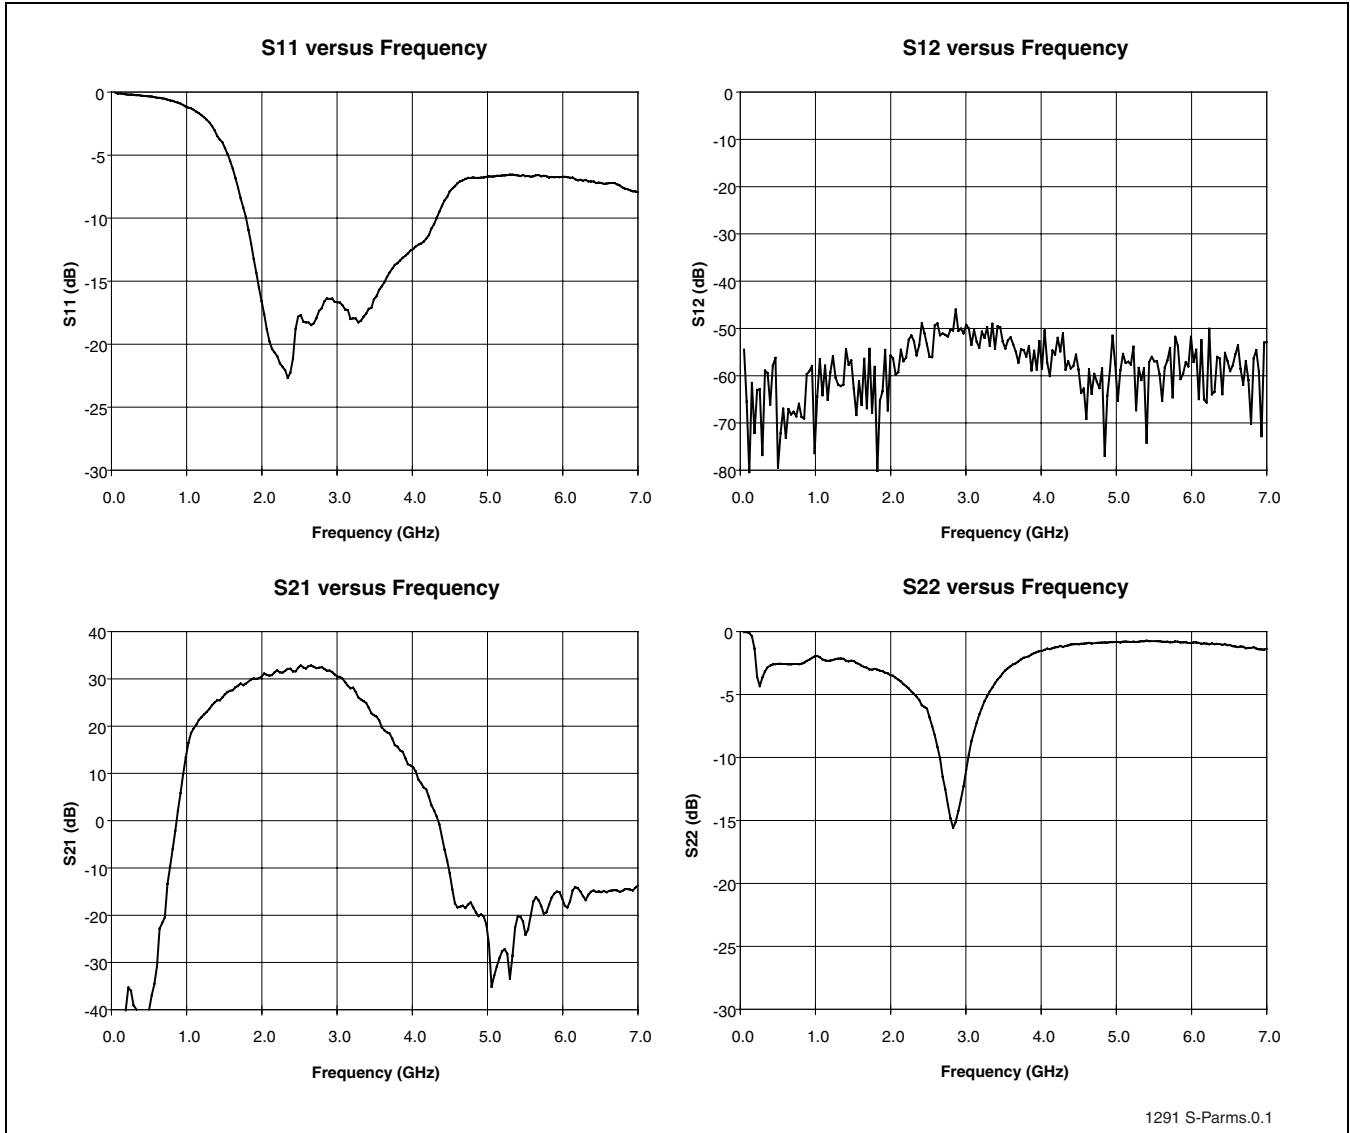


FIGURE 3: S-Parameters



TYPICAL PERFORMANCE CHARACTERISTICS

Test Conditions:  $V_{CC} = 3.3V$ ,  $T_A = 25^\circ C$ , 54 Mbps 802.11g OFDM Signal

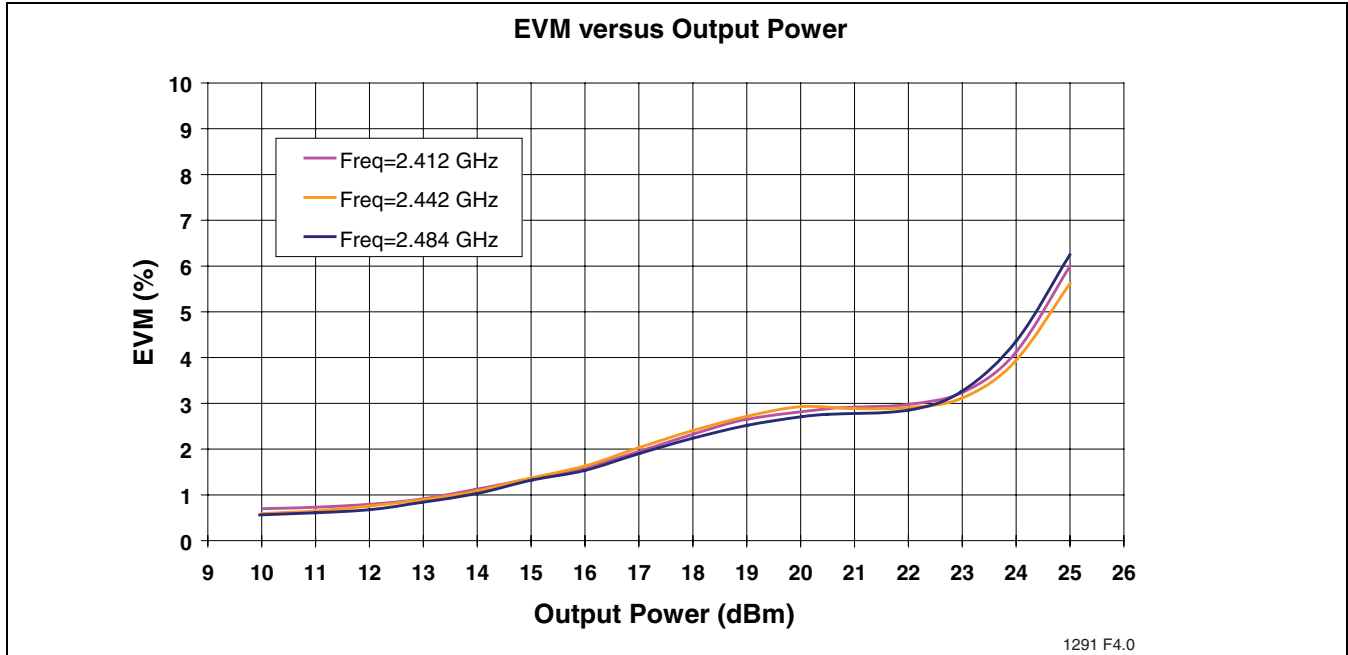


FIGURE 4: EVM versus Output Power

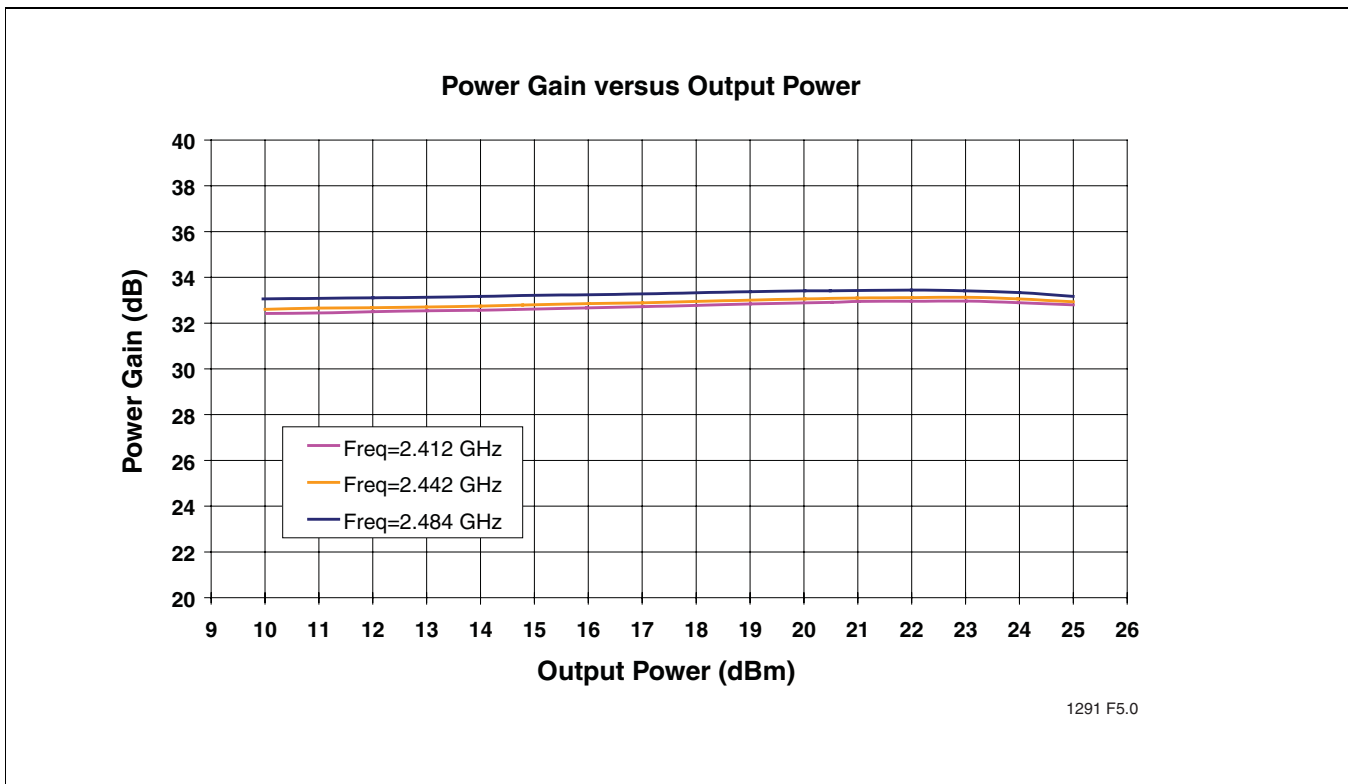


FIGURE 5: Power Gain versus Output Power



# 2.4 GHz High-Power and High-Gain Power Amplifier SST12LP15A

Data Sheet

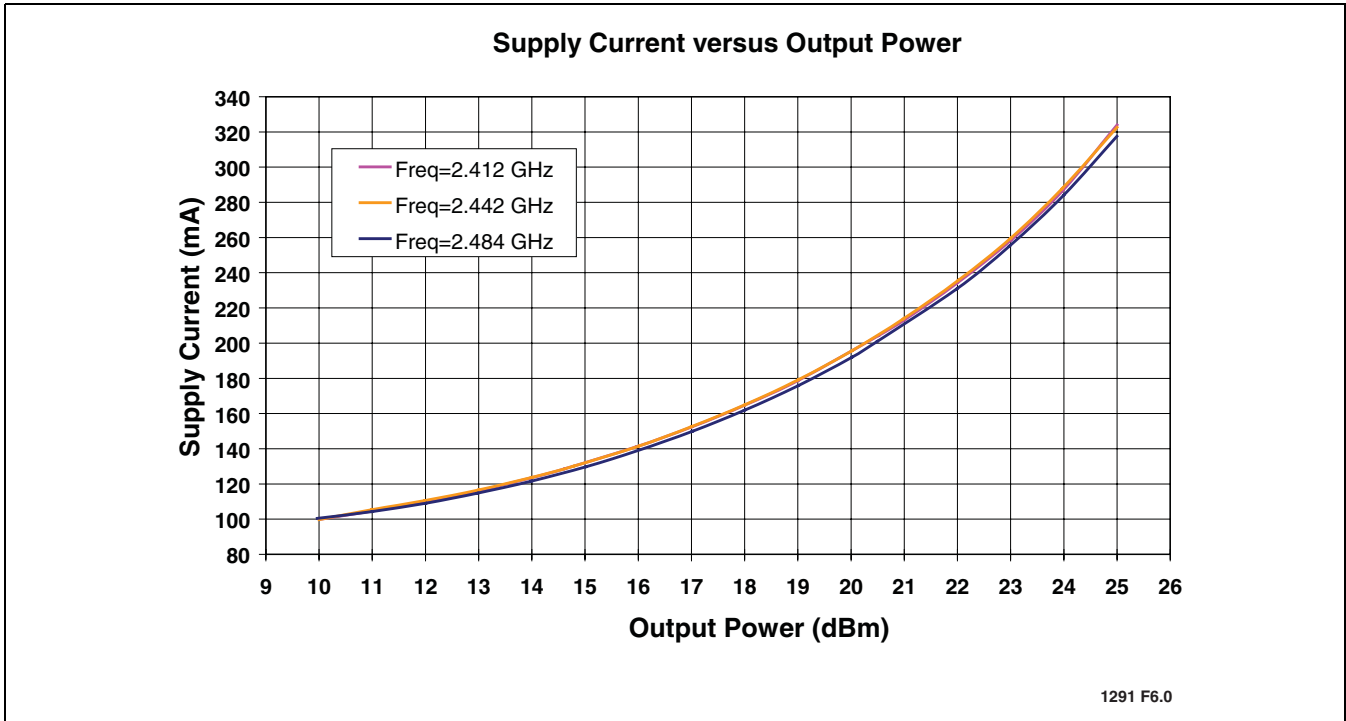


FIGURE 6: Total Current Consumption for 802.11g Operation versus Output Power

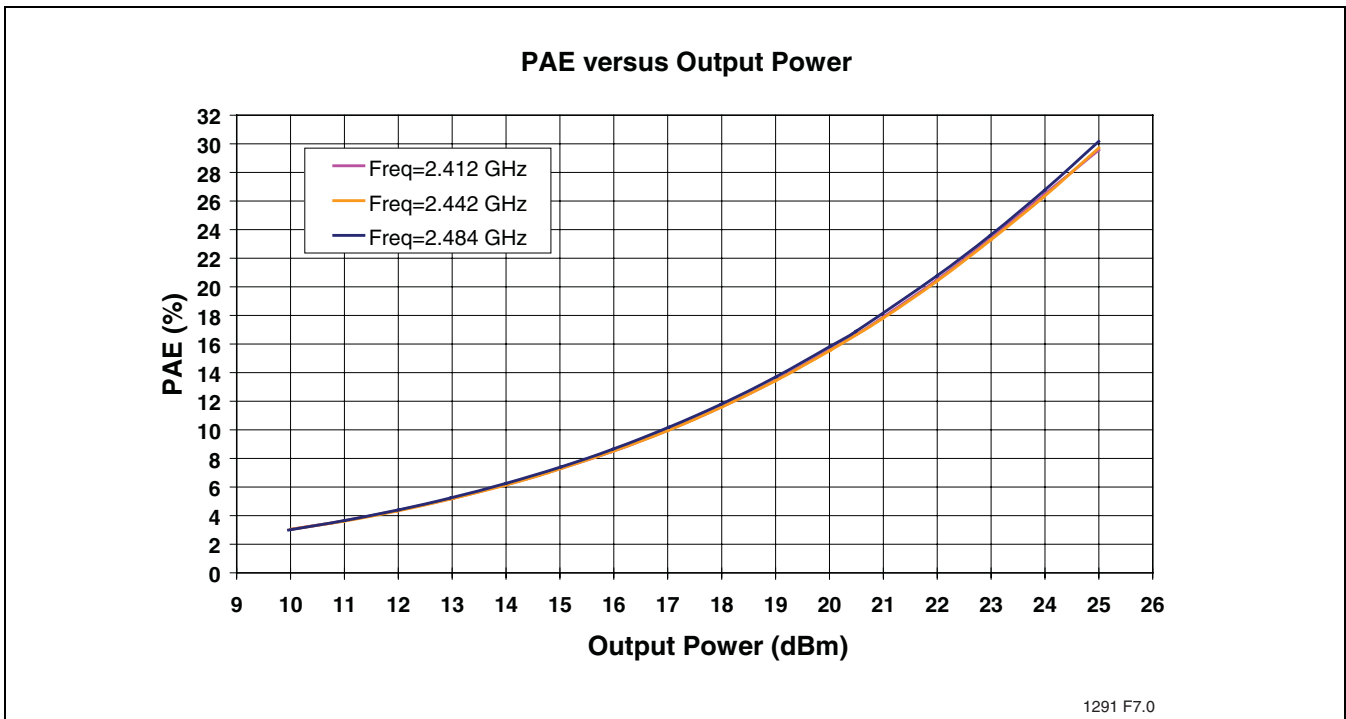


FIGURE 7: PAE versus Output Power



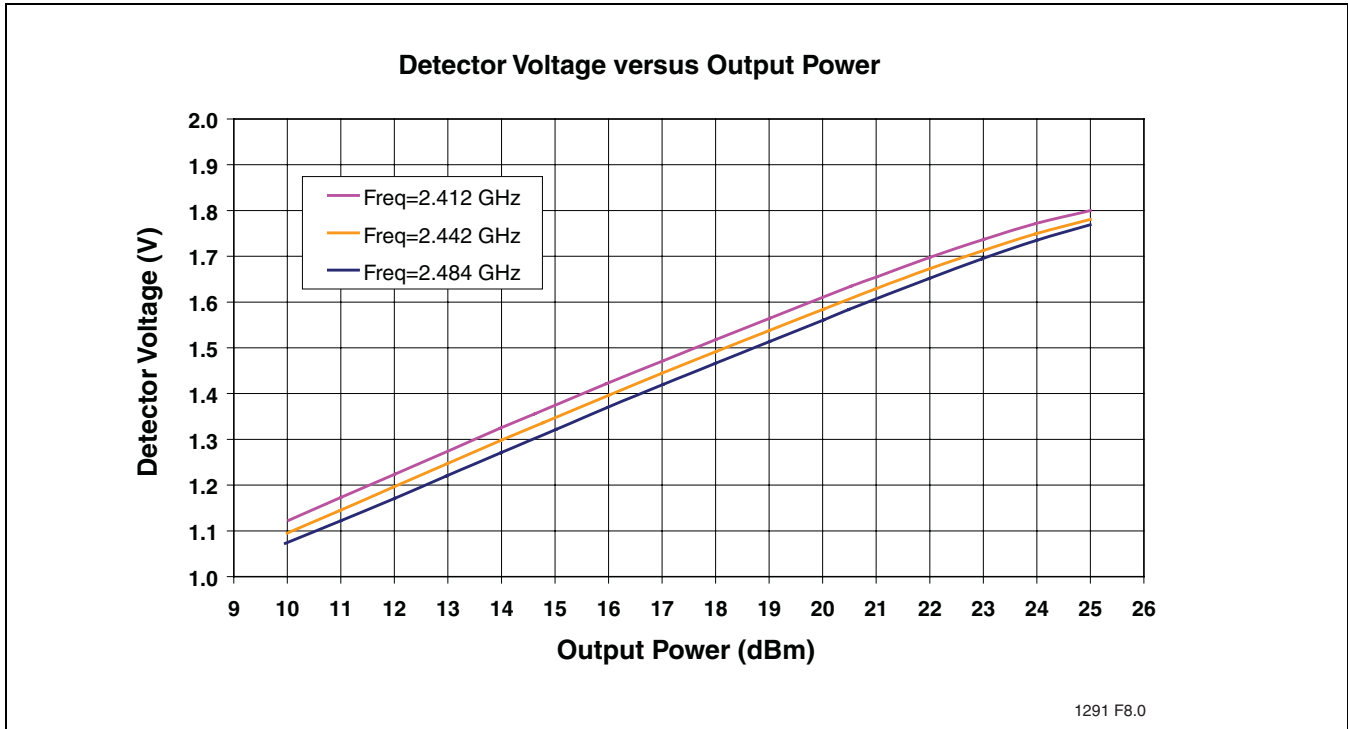


FIGURE 8: Detector Characteristic versus Output Power

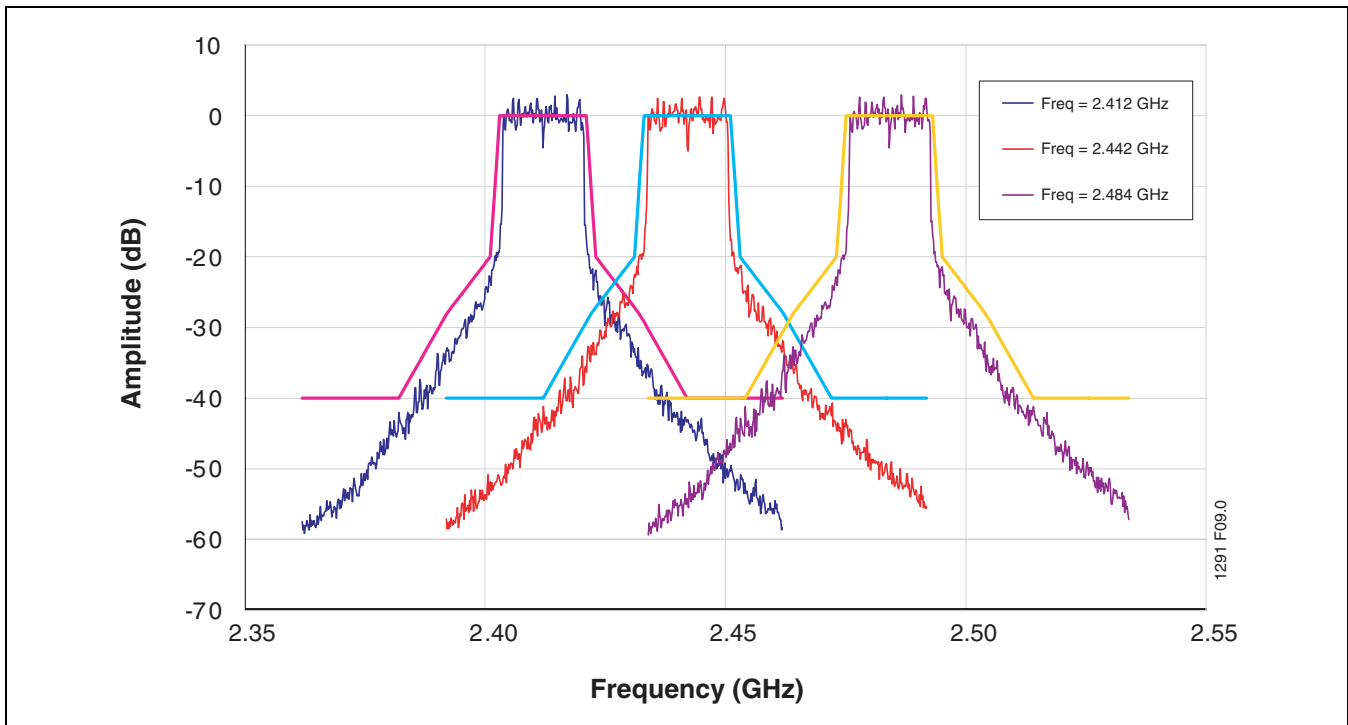


FIGURE 9: 802.11g Spectrum Mask at 24 dBm, Total current 300 mA




## 2.4 GHz High-Power and High-Gain Power Amplifier SST12LP15A


Data Sheet

### TYPICAL PERFORMANCE CHARACTERISTICS

Test Conditions:  $V_{CC} = 3.3V$ ,  $T_A = 25^\circ C$ , 1 Mbps 802.11b CCK signal

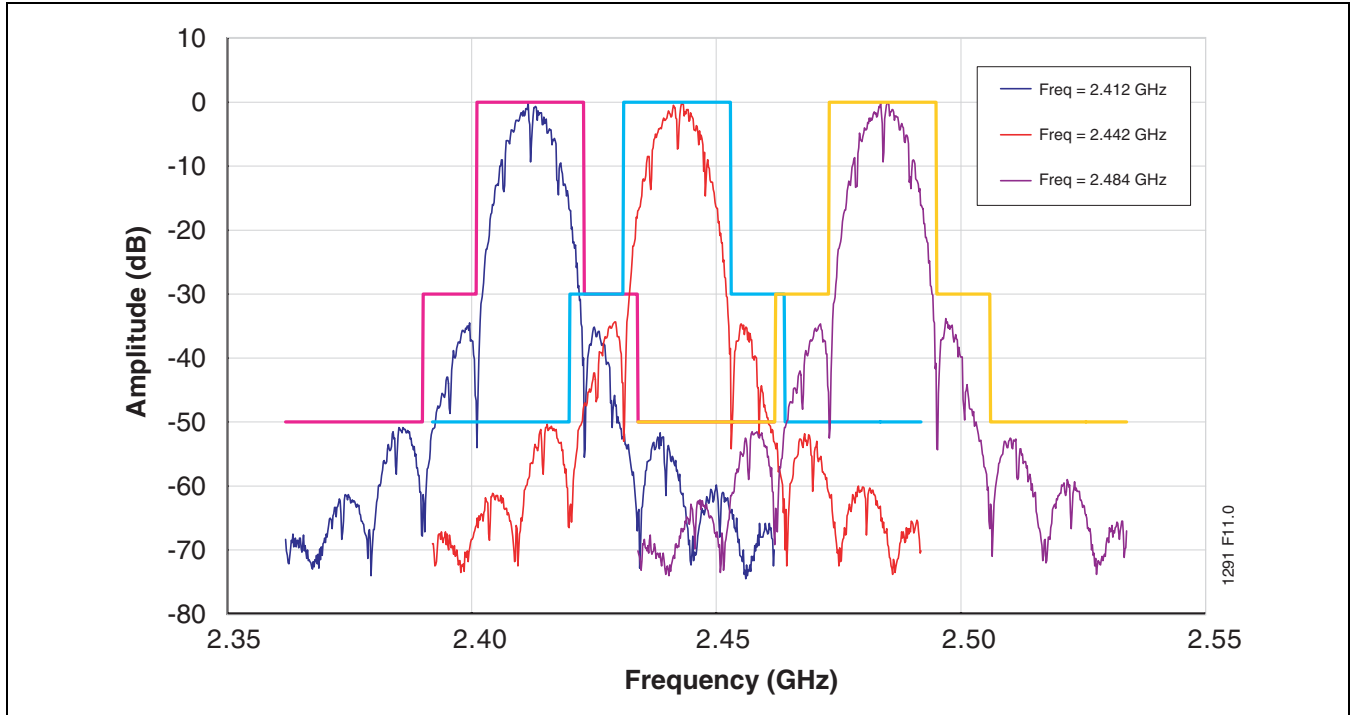

**FIGURE 10: 802.11b Spectrum Mask at 25 dBm, Total current 350 mA**

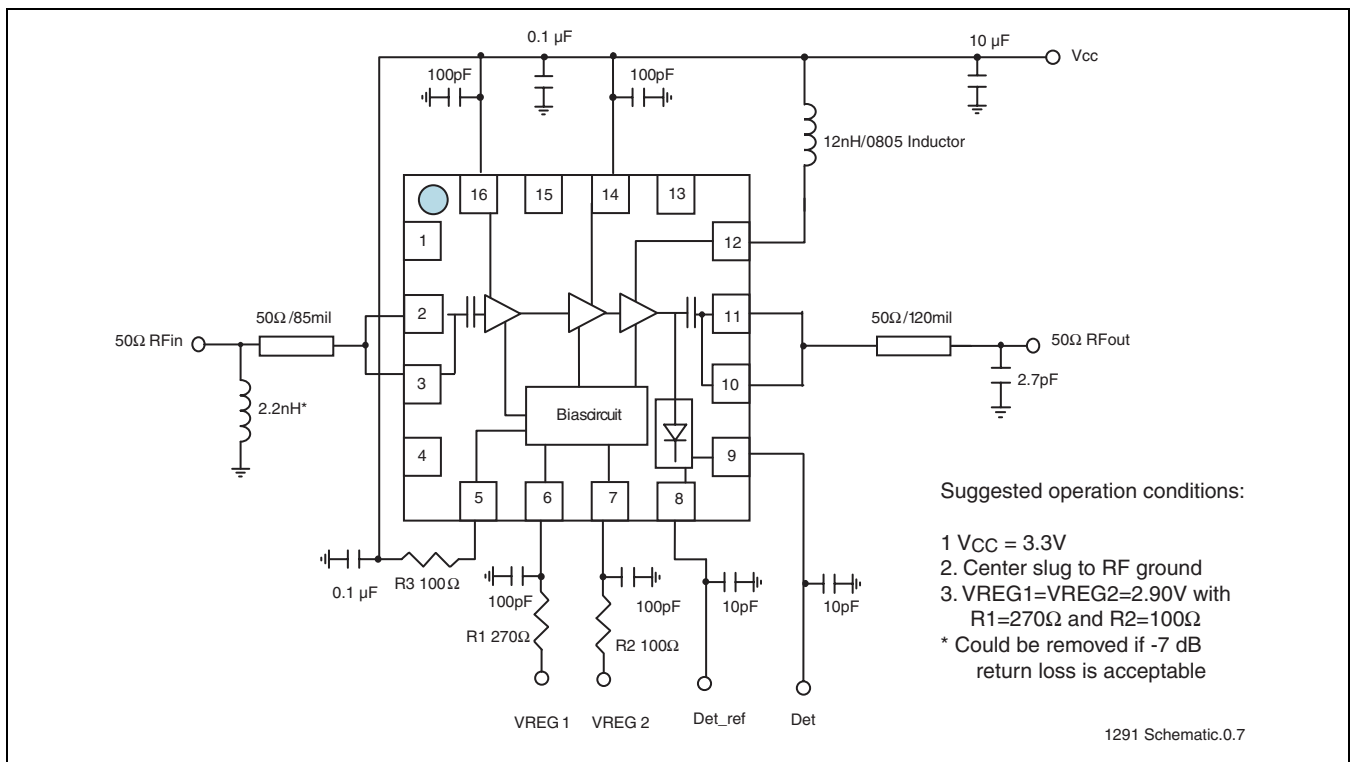


**FIGURE 11: Typical Schematic for High-Power, High-Efficiency 802.11b/g Applications**



# 2.4 GHz High-Power and High-Gain Power Amplifier SST12LP15A

Data Sheet

## PRODUCT ORDERING INFORMATION

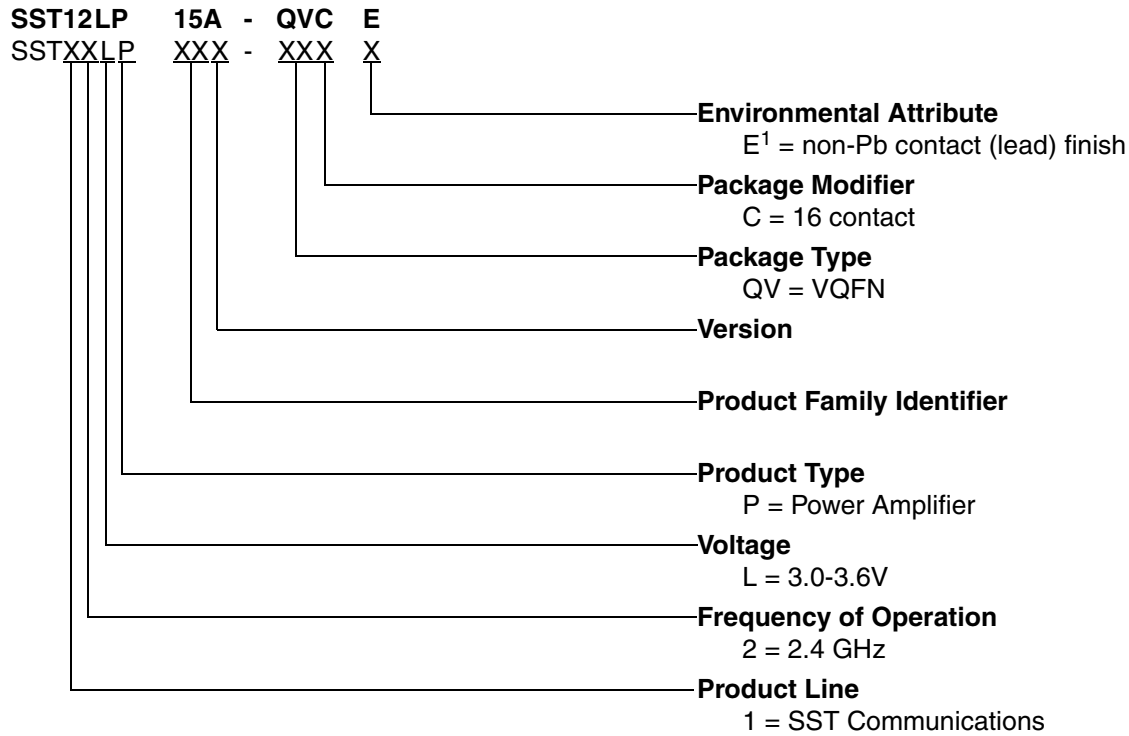


---

1. Environmental suffix "E" denotes non-Pb solder.  
SST non-Pb solder devices are "RoHS Compliant".

### Valid combinations for SST12LP15A

SST12LP15A-QVCE

### SST12LP15A Evaluation Kits

SST12LP15A-QVCE-K

**Note:** Valid combinations are those products in mass production or will be in mass production. Consult your SST sales representative to confirm availability of valid combinations and to determine availability of new combinations.



PACKAGING DIAGRAMS

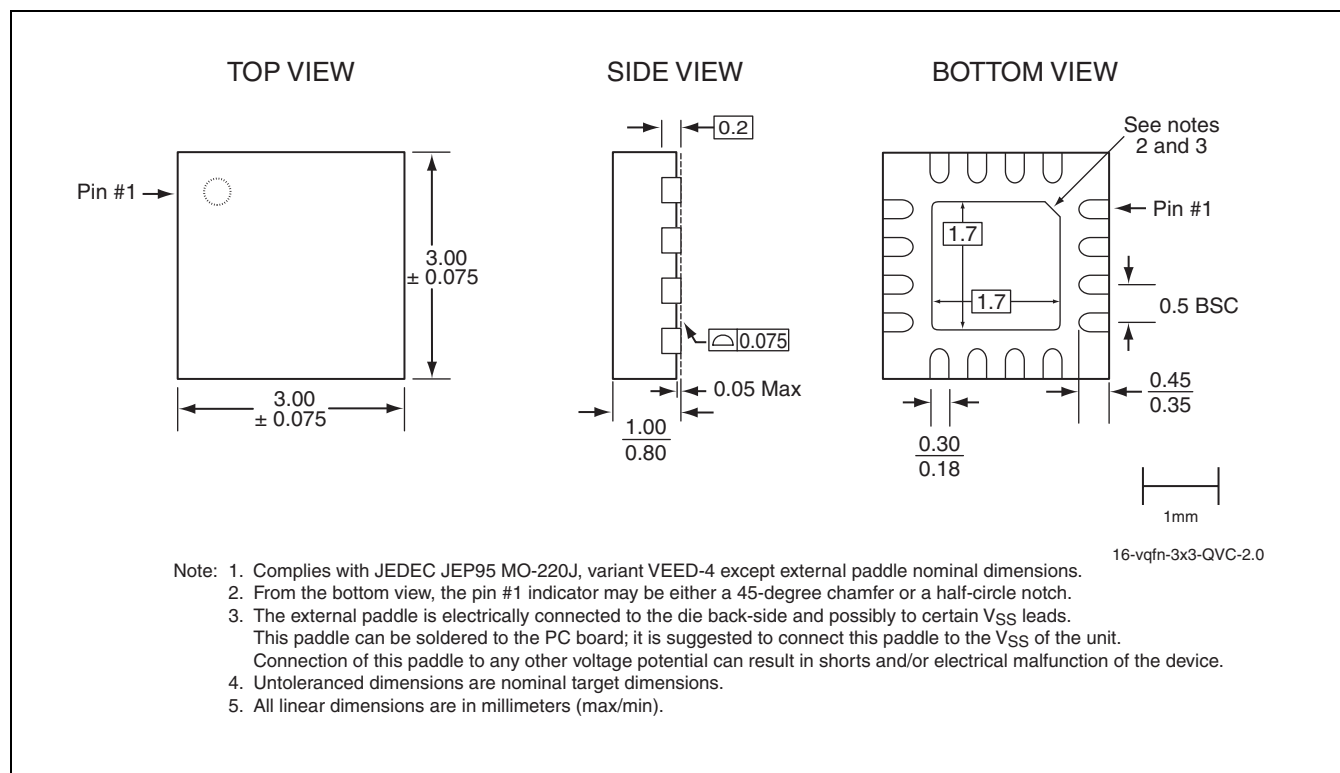


FIGURE 12: 16-contact Very-thin Quad Flat No-lead (VQFN)  
SST Package Code: QVC

TABLE 4: Revision History

| Revision | Description  | Date     |
|----------|--|----------|
| 00       | • Initial release of data sheet  | Mar 2005 |
| 01       | • Updated values for gain and efficiency on page 1<br>• Updated values for VREG1 and VREG2 in Table 2 on page 4<br>• Removed stability parameter from Table 3 on page 5<br>• Updated the typical application schematic on page 10<br>• Updated QVC package drawing.<br>• Updated “Absolute Maximum Stress Ratings” on page 4 | Mar 2006 |
| 02       | • Added information for 2.3-2.4 and 2.5-2.6 applications<br>• Removed leaded part numbers  | Jul 2006 |
| 03       | • Updated “Features:” and “Product Description” on page 1<br>• Revised Table 2 on page 4 and Table 3 on page 5<br>• Updated values in Figure 11 on page 10.<br>• Removed two schematics<br>• Updated Figures 3 - 8   | Sep 2008 |
| 04       | • Updated “Contact Information” on page 13.  | Feb 2009 |



## 2.4 GHz High-Power and High-Gain Power Amplifier SST12LP15A

Data Sheet

### CONTACT INFORMATION

#### Marketing

**SST Communications Corp.**  
5340 Alla Road, Ste. 210  
Los Angeles, CA 90066  
Tel: 310-577-3600  
Fax: 310-577-3605

#### Sales and Marketing Offices

##### NORTH AMERICA

**Silicon Storage Technology, Inc.**  
1171 Sonora Court  
Sunnyvale, CA 94086-5308  
Tel: 408-735-9110  
Fax: 408-735-9036

##### EUROPE

**Silicon Storage Technology Ltd.**  
Mark House  
9-11 Queens Road  
Hersham, Surrey  
KT12 5LU UK  
Tel: 44 (0) 1932-238133  
Fax: 44 (0) 1932-230567

##### JAPAN

**SST Japan**  
NOF Tameike Bldg, 9F  
1-1-14 Akasaka, Minato-ku  
Tokyo, Japan 107-0052  
Tel: 81-3-5575-5515  
Fax: 81-3-5575-5516

##### ASIA PACIFIC NORTH

**SST Macao**  
Room N, 6th Floor,  
Macao Finance Center, No. 202A-246,  
Rua de Pequim, Macau  
Tel: 853-2870-6022  
Fax: 853-2870-6023

##### ASIA PACIFIC SOUTH

**SST Communications Co.**  
16F-6, No. 75, Sec.1, Sintai 5<sup>th</sup> Rd  
Sijhih City, Taipei County 22101  
Taiwan, R.O.C.  
Tel: 886-2-8698-1198  
Fax: 886-2-8698-1190

##### KOREA

**SST Korea**  
6F, Heungkuk Life Insurance Bldg 6-7  
Sunae-Dong, Bundang-Gu, Sungnam-Si  
Kyungki-Do, Korea, 463-020  
Tel: 82-31-715-9138  
Fax: 82-31-715-9137

---

Silicon Storage Technology, Inc. • 1171 Sonora Court • Sunnyvale, CA 94086 • Telephone 408-735-9110 • Fax 408-735-9036  
[www.SuperFlash.com](http://www.SuperFlash.com) or [www.sst.com](http://www.sst.com)

---

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А