

Flexible, rugged, modified elastomeric heat-shrinkable tubing

NT-MIL modified elastomeric heat-shrinkable tubing offers outstanding resistance to abrasion and physical abuse while providing flexibility and strain relief needed in many harnessing applications. NT-MIL tubing is widely used for insulation, strain relief and abrasion protection on cable harnesses and wire bundles in the military and aerospace industries. It meets the stringent requirements of AMS-DTL-23053/1, Classes 1 and 2.

NT-MIL tubing remains flexible at temperatures as low as -70°C without cracking. It also withstands heat shock at 200°C without dripping, flowing or cracking.

NT-MIL tubing is resistant to common fluids and solvents including aviation and ground vehicle fuels, lubricating oil, and hydraulic fluids. It retains excellent physical and electrical properties following exposure.

No special skills are required to install NT-MIL tubing. Using standard heating tools, one operator can complete an installation in minutes, substantially reducing labor costs.

NT-MIL tubing is supplied in a wide range of sizes. Because NT-MIL is heat-shrinkable, each size can accommodate a variety of harness sizes, minimizing inventory and related costs.

Temperature rating


| | |
|-----------------------------------|----------------|
| Full recovery temperature: | 135°C |
| Continuous operating temperature: | -70°C to 121°C |

Specifications*

| Type | Raychem | Military |
|--------|---------|------------------------------|
| NT-MIL | RW-3030 | AMS-DTL-23053/1, Cl. 1 and 2 |

*When ordering, always specify latest issue.

Dimensions (millimeters/inches)

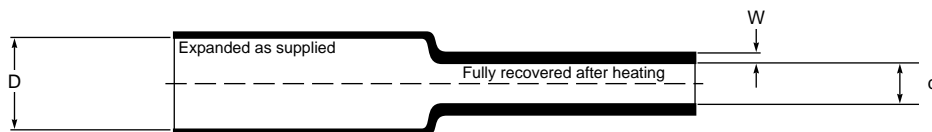

| Size | Inside diameter | | Wall thickness | | Size | Inside diameter | | Wall thickness | | | | | |
|------|-------------------------------|----------------------------------|----------------------------|-------|-------------|-------------------------------|----------------------------------|-----------------------------|-------|------|-------|-------------|---------------|
| | D (min.) Expanded as supplied | d (max.) Recovered after heating | W Recovered after heating* | | | D (min.) Expanded as supplied | d (max.) Recovered after heating | W Recovered after heating** | | | | | |
| 1/8 | 3.2 | 0.125 | 1.6 | 0.062 | 0.66 ± 0.20 | 0.026 ± 0.008 | 1 | 25.4 | 1.000 | 14.5 | 0.570 | 1.77 ± 0.51 | 0.070 ± 0.020 |
| 3/16 | 4.8 | 0.187 | 2.4 | 0.093 | 0.84 ± 0.25 | 0.033 ± 0.010 | 1 1/4 | 31.8 | 1.250 | 18.1 | 0.714 | 2.20 ± 0.51 | 0.087 ± 0.020 |
| 1/4 | 6.4 | 0.250 | 3.6 | 0.143 | 0.89 ± 0.25 | 0.035 ± 0.010 | 1 1/2 | 38.1 | 1.500 | 21.8 | 0.857 | 2.41 ± 0.51 | 0.095 ± 0.020 |
| 3/8 | 9.5 | 0.375 | 5.4 | 0.211 | 1.01 ± 0.25 | 0.040 ± 0.010 | 1 3/4 | 44.5 | 1.750 | 25.4 | 1.000 | 2.71 ± 0.51 | 0.107 ± 0.020 |
| 1/2 | 12.7 | 0.500 | 7.3 | 0.286 | 1.21 ± 0.38 | 0.048 ± 0.015 | 2 | 50.8 | 2.000 | 29.0 | 1.140 | 2.79 ± 0.51 | 0.110 ± 0.020 |
| 5/8 | 15.9 | 0.625 | 9.1 | 0.357 | 1.32 ± 0.38 | 0.052 ± 0.015 | 3 | 76.2 | 3.000 | 43.4 | 1.710 | 3.17 ± 0.51 | 0.125 ± 0.020 |
| 3/4 | 19.1 | 0.750 | 10.9 | 0.428 | 1.44 ± 0.38 | 0.057 ± 0.015 | 4 | 101.6 | 4.000 | 57.9 | 2.280 | 3.55 ± 0.51 | 0.140 ± 0.020 |
| 7/8 | 22.2 | 0.875 | 12.7 | 0.500 | 1.65 ± 0.38 | 0.065 ± 0.015 | | | | | | | |

**Wall thickness will be less if tubing recovery is restricted during shrinkage.

Ordering information

| | |
|----------------------|---|
| Colors | Black |
| Size selection | Always order the largest size that will shrink snugly over the component being covered. |
| Standard packaging | On spools |
| Ordering description | Specify product name, size, and color; for example, NT-MIL 1/4-0 (0=Black). |

Specification values

| | Property | Unit | Requirement | Method of test |
|-------------------|--|----------------------------|--|----------------------------|
| Material | Dimensions | mm (<i>inches</i>) | See Reverse | ASTM D 2671 |
| | Longitudinal change | percent | +1, -10 | ASTM D 2671 |
| | Tensile strength | psi (<i>Mpa</i>) | 1500 (<i>10.3</i>) minimum | ASTM D 412 |
| | Ultimate elongation | percent | 225 minimum | ASTM D 412 |
| | Tensile stress at 200% elongation | psi (<i>Mpa</i>) | 1500 (<i>10.3</i>) maximum | AMS-DTL-23053 |
| | Restricted shrinkage (30 minutes at 135°C/275°F) | | No cracks | AMS-DTL-23053 |
| | Followed by test for: | | | |
| | Voltage withstand | | Pass | |
| | Low temperature flexibility (4 hours at -70°C/-94°F) | | No cracks | AMS-DTL-23053 |
| | Heat shock (4 hours at 200°C/392°F) | | No cracks, flowing or dripping | AMS-DTL-23053 |
| | Heat resistance (168 hours at 121°C/250°F) | | | ASTM D 2671 |
| | Followed by tests for: | | | |
| | Tensile strength | psi (<i>Mpa</i>) | 1200 (<i>8.3</i>) minimum | ASTM D 412 |
| | Ultimate elongation | percent | 175 minimum | ASTM D 412 |
| | Dielectric strength | volts/mil (<i>kV/mm</i>) | Sizes up to 7/8: 300 (<i>11.8</i>) minimum Sizes 1 and larger: 200 (<i>7.8</i>) minimum | ASTM D 2671 |
| Electrical | Dielectric strength | volts/mil (<i>kV/mm</i>) | Sizes up to 7/8: 300 (<i>11.8</i>) minimum Sizes 1 and larger: 200 (<i>7.8</i>) minimum | ASTM D 2671 |
| | Volume resistivity | ohm-cm | 1 x 10 ¹¹ minimum | ASTM D 876 |
| Chemical | Copper mirror corrosion (16 hours at 150°C/302°F) | | No pitting or corrosion | AMS-DTL-23053 |
| | Copper contact corrosion (16 hours at 150°C/302°F) | | No pitting or blackening of copper | AMS-DTL-23053 |
| | Flammability | | Self-extinguishing in 15 seconds; 3 inches maximum burn length | ASTM D 2671 Procedure A |
| | Fungus resistance | | No growth | ASTM G 21 |
| | Water absorption (24 hours at 23°C/73°F) | percent | 1.0 maximum | ASTM D 570 |
| | Fluid resistance (24 hours at 23°C/73°F) in: JP-8 fuel (MIL-T-83133) Hydraulic fluid (MIL-H-5606) Lubricating oil (MIL-L-7808) Lubricating oil (MIL-L 23699) Salt water (5% salt) Anti-icing fluid (MIL-A-8243) | | | AMS-DTL-23053 |
| | Followed by tests for: | | | |
| | Tensile strength | psi (<i>Mpa</i>) | 1000 (<i>6.9</i>) minimum | ASTM D 412 |
| | Ultimate elongation | percent | 175 minimum | ASTM D 412 |
| | Dielectric strength | volts/mil (<i>kV/mm</i>) | 250 (<i>9.8</i>) minimum | ASTM D 2671 |

Note: Consult RW-3030 for specific details about test procedures.

Raychem is a trademark of Tyco Electronics Corporation.

Tyco Electronics Corporation

300 Constitution Drive
Menlo Park, CA 94025-1164
USA
Tel: (800) 926-2425 (US & Canada)
Tel: +1 (650) 361-3860 (All other countries)

Faraday Road
Dorcan, Swindon, SN3 5HH
United Kingdom
Tel: +44 1793 528171

3816 Noborito, Tama-ku
Kawasaki, Kanagawa 214-8533
Japan
Tel: +81 44 900 5102

Asia Pacific Headquarters
26 Ang Mo Kio, Industrial Park 2
Singapore 569507
Tel: +65 4866 151

All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their application. Tyco Electronics Corporation makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. Tyco Electronics Corporation's only obligations are those in the Standard Terms and Conditions of Sale for these products and in no case will Tyco Electronics Corporation be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of the product. Tyco Electronics Corporation's Specifications are subject to change without notice. In addition, Tyco Electronics Corporation reserves the right to make changes in materials or processing without notification to the Buyer which do not affect compliance with any applicable specification.

For more information about this product visit www.tycoelectronics.com

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А