

## 59060 Stainless Steel Threaded Barrel Features and Benefits



### Features

- 2 part magnetically operated proximity sensor
- Stainless steel threaded barrel with retaining nuts
- M8 thread
- Choice of normally open or high voltage contacts
- Customer defined sensitivity
- Choice of cable length and connector


### Benefits

- Robust construction makes this sensor well suited to harsh industrial environments
- Simple installation and adjustment using supplied retaining nuts
- No standby power requirement
- Operates through non-ferrous materials such as wood, plastic or aluminium

### Applications

- Position and limit
- Security systems
- Linear actuator
- Industrial process control

### DIMENSIONS (in) mm

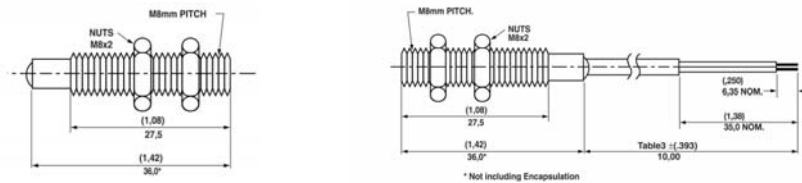

SCHEMATICS	Switch Type
	1 & 2
	3
	4

### CUSTOMER OPTIONS - Switching Specifications

TABLE 1			Normally Open	Normally Open High Voltage	Change Over	Normally Closed
Contact Type			1	2	3	4
Switch Type	Power	Watt - max.	10	10	5	5
Voltage	Switching	Vdc - max.	200	300	175	175
	Breakdown	Vdc - min.	250	450	200	200
Current	Switching	A - max.	0.5	0.5	0.25	0.25
	Carry	A - max.	1.2	1.5	1.5	1.5
Resistance	Contact, Initial	Ω - max.	0.2	0.2	0.2	0.2
	Insulation	Ω - min.	10 <sup>10</sup>	10 <sup>10</sup>	10 <sup>7</sup>	10 <sup>7</sup>
Capacitance	Contact	pF - typ.	0.3	0.2	0.3	0.3
	Operating	°C	-40 to +105	-20 to +105	-40 to +105	-40 to +105
Temperature	Storage	°C	-65 to +105	-65 to +105	-65 to +105	-65 to +105
	Operate	ms - max.	1.0	1.0	3.0	3.0
Time	Release	ms - max.	1.0	1.0	3.0	3.0
	Shock	11ms 1/2 sine	G - max.	100	100	50
Vibration	50-2000 Hz	G - max.	30	30	30	30

### CUSTOMER OPTIONS - Sensitivity, Cable Length and Termination Specification

TABLE 2								TABLE 3		TABLE 4																																																																									
<b>Sensitivity Options:-</b> Activate Distances are approximate using Hamlin 57060 actuator as illustrated Switch AT before modification								<b>Cable Type:-</b> 24 AWG 7/32 PVC 105°C DOUBLE INSULATED		<b>Termination Options:-</b>																																																																									
								Standard Lengths		SELECT OPTION      DESCRIPTION (2 WIRE VERSIONS ILLUSTRATED)																																																																									
<table border="1"> <thead> <tr> <th>Select Option</th> <th colspan="2">S</th> <th colspan="2">T</th> <th colspan="2">U</th> <th colspan="2">V</th> </tr> <tr> <th>Switch Type</th> <th>Pull In AT Range</th> <th>Activate Distance d (in) mm</th> <th>Pull In AT Range</th> <th>Activate Distance d (in) mm</th> <th>Pull In AT Range</th> <th>Activate Distance d (in) mm</th> <th>Pull In AT Range</th> <th>Activate Distance d (in) mm</th> </tr> </thead> <tbody> <tr> <td>1 Normally Open</td> <td>12-18</td> <td>(.472)</td> <td>17-23</td> <td>(.354)</td> <td>22-28</td> <td>(.276)</td> <td>27-33</td> <td>(.217)</td> </tr> <tr> <td>2 High Voltage</td> <td></td> <td>12.0</td> <td></td> <td>9.0</td> <td></td> <td>7.0</td> <td></td> <td>5.5</td> </tr> <tr> <td>3 Change Over</td> <td></td> <td>(.413)</td> <td></td> <td>(.295)</td> <td></td> <td>(.236)</td> <td></td> <td></td> </tr> <tr> <td>4 Normally Closed</td> <td>15-20</td> <td>10.5</td> <td>20-25</td> <td>7.5</td> <td>25-30</td> <td>6.0</td> <td></td> <td></td> </tr> </tbody> </table>								Select Option	S		T		U		V		Switch Type	Pull In AT Range	Activate Distance d (in) mm	Pull In AT Range	Activate Distance d (in) mm	Pull In AT Range	Activate Distance d (in) mm	Pull In AT Range	Activate Distance d (in) mm	1 Normally Open	12-18	(.472)	17-23	(.354)	22-28	(.276)	27-33	(.217)	2 High Voltage		12.0		9.0		7.0		5.5	3 Change Over		(.413)		(.295)		(.236)			4 Normally Closed	15-20	10.5	20-25	7.5	25-30	6.0			<table border="1"> <thead> <tr> <th>SELECT OPTION</th> <th>CABLE LENGTH (in) mm</th> </tr> </thead> <tbody> <tr> <td>01</td> <td>(3.94) 100</td> </tr> <tr> <td>02</td> <td>(11.81) 300</td> </tr> <tr> <td>03</td> <td>(19.69) 500</td> </tr> <tr> <td>04</td> <td>(29.53) 750</td> </tr> <tr> <td>05</td> <td>(39.37) 1000</td> </tr> </tbody> </table>		SELECT OPTION	CABLE LENGTH (in) mm	01	(3.94) 100	02	(11.81) 300	03	(19.69) 500	04	(29.53) 750	05	(39.37) 1000	<table border="1"> <tbody> <tr> <td>A or F</td> <td>Tinned or untinned leads</td> <td></td> </tr> <tr> <td>C</td> <td>6.35mm fastons</td> <td></td> </tr> </tbody> </table>		A or F	Tinned or untinned leads		C	6.35mm fastons	
Select Option	S		T		U		V																																																																												
Switch Type	Pull In AT Range	Activate Distance d (in) mm	Pull In AT Range	Activate Distance d (in) mm	Pull In AT Range	Activate Distance d (in) mm	Pull In AT Range	Activate Distance d (in) mm																																																																											
1 Normally Open	12-18	(.472)	17-23	(.354)	22-28	(.276)	27-33	(.217)																																																																											
2 High Voltage		12.0		9.0		7.0		5.5																																																																											
3 Change Over		(.413)		(.295)		(.236)																																																																													
4 Normally Closed	15-20	10.5	20-25	7.5	25-30	6.0																																																																													
SELECT OPTION	CABLE LENGTH (in) mm																																																																																		
01	(3.94) 100																																																																																		
02	(11.81) 300																																																																																		
03	(19.69) 500																																																																																		
04	(29.53) 750																																																																																		
05	(39.37) 1000																																																																																		
A or F	Tinned or untinned leads																																																																																		
C	6.35mm fastons																																																																																		

### ORDERING INFORMATION

N.B. 57060 actuator sold separately

59060 - X - X - XX - X

Series 59060

Switch Type

Sensitivity

Cable Length

Termination

Table 1

Table 2

Table 3

Table 4

**Hamlin USA** Tel: +1 920 648 3000 • Fax: +1 920 648 3001 • Email: sales.us@hamlin.com  
**Hamlin UK** Tel: +44 (0)1379 649700 • Fax: +44 (0)1379 649702 • Email: sales.uk@hamlin.com  
**Hamlin Germany** Tel: +49 (0) 6181 953660 • Fax: +49 (0) 6181 953666 • Email: sales.de@hamlin.com  
**Hametrol France** Tel: +33 (0) 1 4687 0202 • Fax: +33 (0) 1 4686 6786 • Email: sales.fr@hamlin.com

DETAILS PROVIDED ON THIS DATA SHEET ARE PROVIDED FOR INFORMATION PURPOSES ONLY AND SHOULD NOT BE RELIED UPON AS BEING ACCURATE FOR ANY PARTICULAR PURPOSE. Product performance may be affected by the application to which the product is put. Upon request, HAMLIN will assist purchasers by providing information specific to any particular application. HAMLIN disclaims any and all liability whatsoever for any purchaser's reliance upon the information contained on this data sheet without further consultation with authorised representatives of HAMLIN.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А