

# Analog Devices Welcomes Hittite Microwave Corporation

NO CONTENT ON THE ATTACHED DOCUMENT HAS CHANGED



**THIS PAGE INTENTIONALLY LEFT BLANK**

## 400° ANALOG PHASE SHIFTER 5 - 18 GHz

### Typical Applications


The HMC247 is ideal for:

- Fiber Optics
- Military
- Test Equipment

### Features

- Wide Bandwidth: 5 - 18 GHz
- Phase Shift: >400°
- Single Positive Voltage Control
- Small Size: 2.3 x 1.6 x 0.1 mm

### Functional Diagram

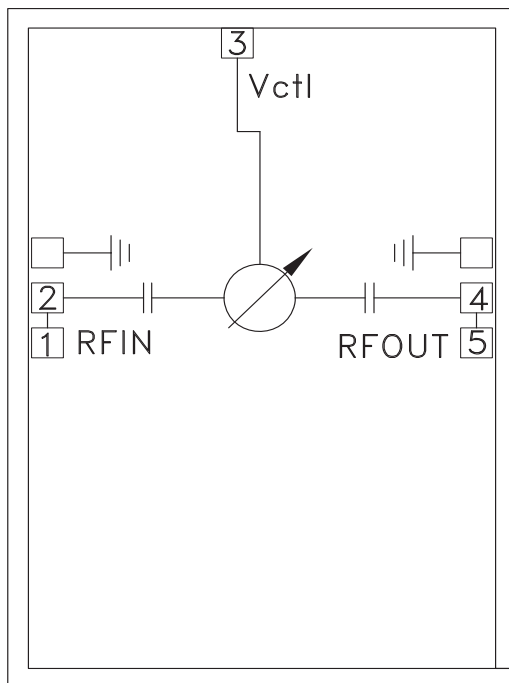

### General Description


The HMC247 is an Analog Phase Shifter die which is controlled via an analog control voltage from 0 to +10V. The HMC247 provides a continuously variable phase shift of 0 to 300 degrees at 9 GHz, and 0 to 100 degrees at 18 GHz, with consistent insertion loss versus phase shift. The phase shift is monotonic with respect to the control voltage. The control port has a modulation bandwidth of 50 MHz. The low insertion loss and compact size enable this part to be used in a wide range of applications, including the phase adjustment of clocks in fiber optic systems and test equipment. All data is measured with the chip in a 50 ohm test fixture, connected via 0.076 mm (3 mil) ribbon bonds of minimal length <0.31 mm (<12 mils).

### Electrical Specifications, $T_A = +25^\circ \text{C}$ , 50 Ohm System


| Parameter                               | Frequency (GHz) | Min. | Typ.   | Max. | Units      |
|---|-----------------|------|--------|------|------------|
| Phase Shift Range:                      | 5 - 10 GHz      | 180  | 400    |      | degrees    |
|   | 10 - 13 GHz     | 135  | 200    |      | degrees    |
|   | 13 - 18 GHz     | 45   | 120    |      | degrees    |
| Insertion Loss                          | 5 - 10 GHz      |      | 8      | 12   | dB         |
|   | 10 - 18 GHz     |      | 4      | 7    | dB         |
| Return Loss (Input and Output)          | 5 - 18 GHz      |      | 8      |      | dB         |
| Control Voltage Range                   | 5 - 18 GHz      |      | 0 - 10 |      | Volt       |
| Modulation Bandwidth                    | 5 - 18 GHz      |      | 50     |      | MHz        |
| Phase Voltage Sensitivity               | 5 - 18 GHz      |      | 40     |      | deg / Volt |
| Insertion Phase Temperature Sensitivity | 5 - 18 GHz      |      | 0.5    |      | deg / °C   |

**400° ANALOG PHASE SHIFTER  
5 - 18 GHz**


**Insertion Loss vs. Control Voltage @ 12 GHz**

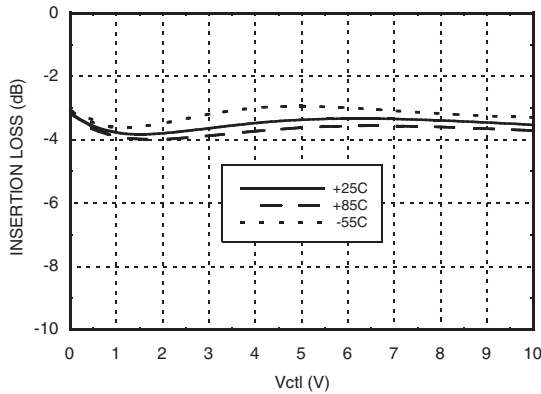


**Phase Shift vs. Control Voltage**

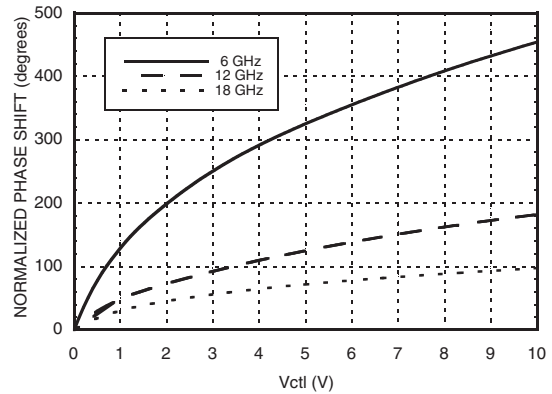


**Phase Shift vs. Frequency @ Vctl = 10V  
(Relative to Vctl = 0V)**

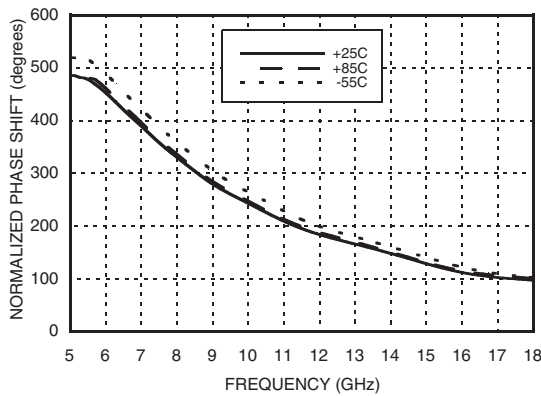


**Insertion Loss vs. Frequency**

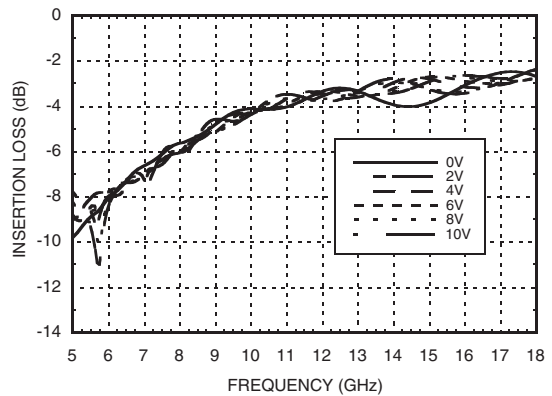

**Input Return Loss vs. Frequency,  
Vctl = 0 to +10V**

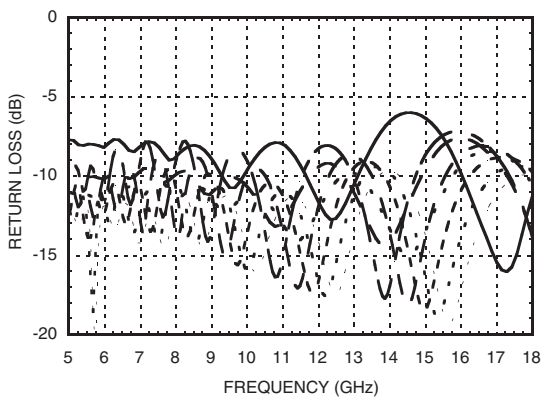


**Output Return Loss vs. Frequency,  
Vctl = 0 to +10V**

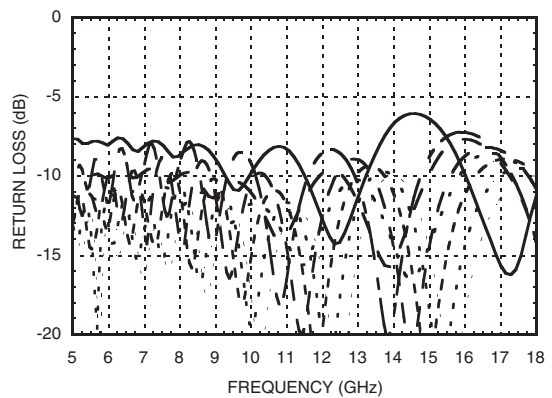


**400° ANALOG PHASE SHIFTER  
5 - 18 GHz**


**Second Harmonics vs. Control Voltage, Pin = -10 dBm**

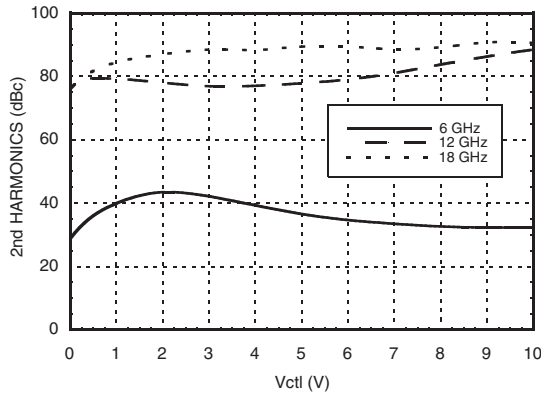


**Input IP3 vs. Control Voltage**

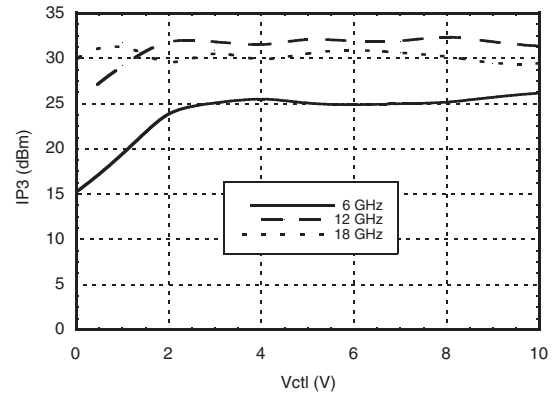


**Insertion Loss vs. Pin @ 7 GHz**

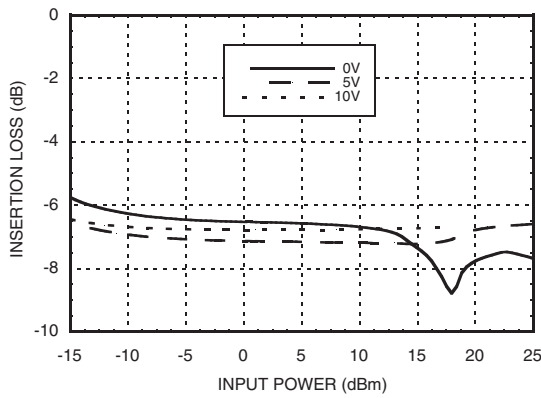


**Insertion Loss vs. Pin @ 12 GHz**

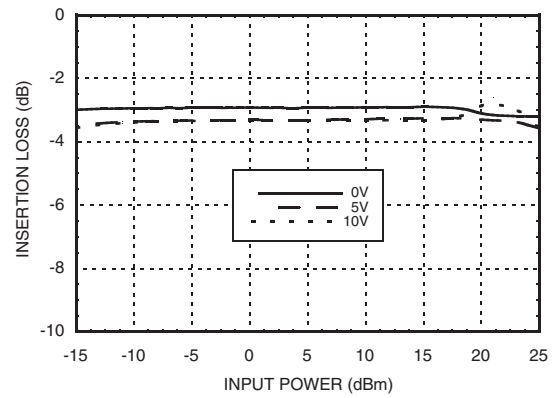

**Insertion Loss vs. Pin @ 18 GHz**

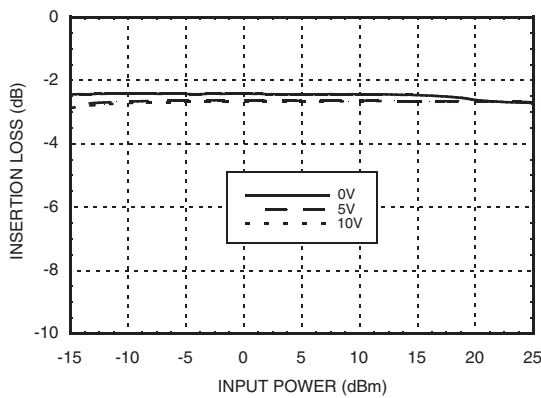


**Phase Shift vs. Pin @ 7 GHz**

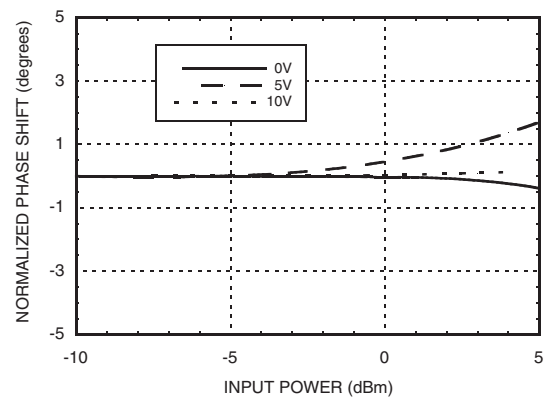


**400° ANALOG PHASE SHIFTER  
5 - 18 GHz**

**Phase Shift vs. Pin @ 12 GHz**

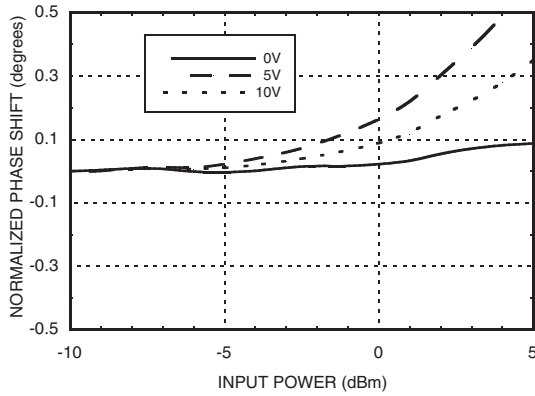


**Phase Shift vs. Pin @ 18 GHz**

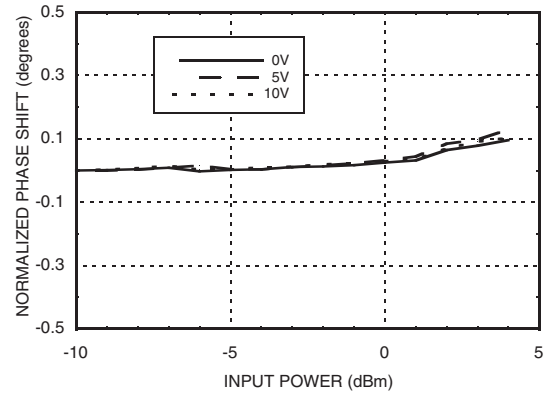





**Absolute Maximum Ratings**

|   |                |
|---|----------------|
| Control Voltage (Vctl)  | +11 Vdc        |
| Reverse Current   | 5 mA           |
| Input Power (RFin)  | +30 dBm        |
| Channel Temperature (Tc)  | 150 °C         |
| Continuous P <sub>diss</sub> (T = 85 °C)<br>(derate 28 mW/°C above 85 °C) | 1.83 W         |
| Thermal Resistance<br>(junction to die bottom)                            | 35.6 °C/W      |
| Storage Temperature   | -65 to +150 °C |
| Operating Temperature   | -55 to +85 °C  |


**Assembly Diagram**

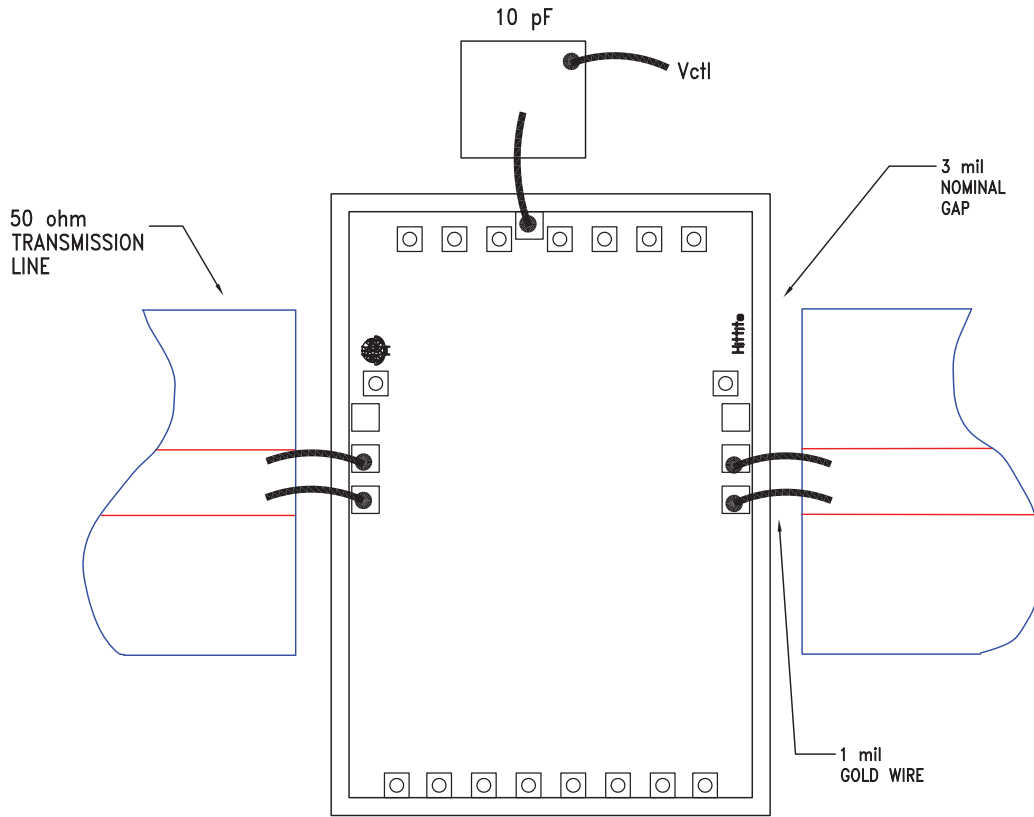

**Pad Descriptions**

| Pad Number | Function | Description  | Interface Schematic   |
|------------|----------|--|---|
| 1, 2       | RFIN     | Port is DC blocked.  | RFIN   |
| 3          | Vctl     | Phase shift control pin. Application of voltage between 0 and 10 volts causes the transmission phase to change. The DC equivalent circuit is a series connected diode resistor |        |
| 4, 5       | RFOUT    | Port is DC blocked.  |  RFOUT |
|            | GND      | The backside of the die must be connected to RF / DC ground.   |        |

**Outline Drawing**

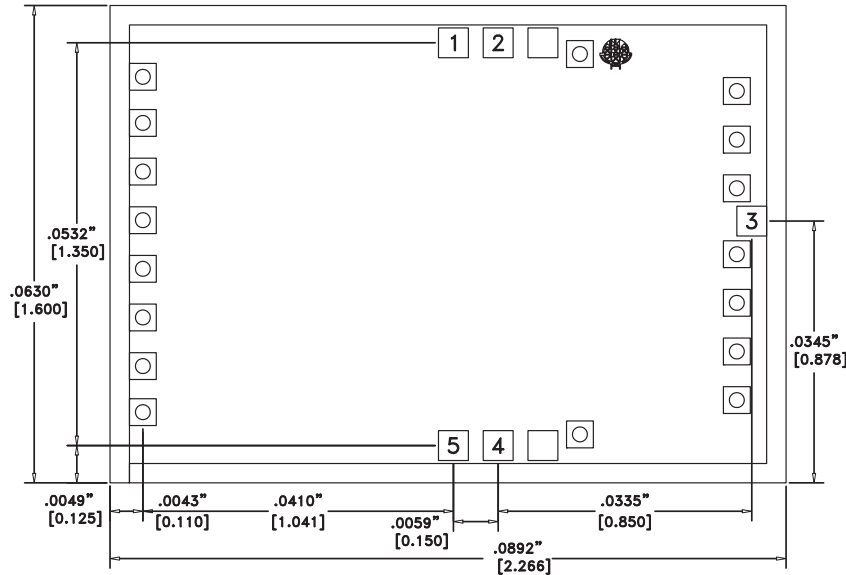

**Die Packaging Information** [1]

| Standard           | Alternate |
|--------------------|-----------|
| WP-4 (Waffle Pack) | [2]       |

[1] Refer to the "Packaging Information" section for die packaging dimensions.

[2] For alternate packaging information contact Hittite Microwave Corporation.

1. ALL DIMENSIONS ARE IN INCHES [MM]
2. TIE ALL UNLABELED BOND PADS TO GROUND.
3. DIE THICKNESS IS .004"
4. TYPICAL BOND PAD IS .004" SQUARE.
5. BACKSIDE METALIZATION: GOLD.
6. BOND PAD METALIZATION: GOLD.

**Handling Precautions**

Follow these precautions to avoid permanent damage.

**Storage:** All bare die are placed in either Waffle or Gel based ESD protective containers, and then sealed in an ESD protective bag for shipment. Once the sealed ESD protective bag has been opened, all die should be stored in a dry nitrogen environment.

**Cleanliness:** Handle the chips in a clean environment. DO NOT attempt to clean the chip using liquid cleaning systems.

**Static Sensitivity:** Follow ESD precautions to protect against ESD strikes.

**Transients:** Suppress instrument and bias supply transients while bias is applied. Use shielded signal and bias cables to minimize inductive pick-up.

**General Handling:** Handle the chip along the edges with a vacuum collet or with a sharp pair of bent tweezers. The surface of the chip has fragile air bridges and should not be touched with vacuum collet, tweezers, or fingers.

**Mounting**

The chip is back-metallized and can be die mounted with electrically conductive epoxy. The mounting surface should be clean and flat.

**Epoxy Die Attach:** Apply a minimum amount of epoxy to the mounting surface so that a thin epoxy fillet is observed around the perimeter of the chip once it is placed into position. Cure epoxy per the manufacturer's schedule.

**Wire Bonding**

Ball or wedge bond with 0.025mm (1 mil) diameter pure gold wire. Thermosonic wirebonding with a nominal stage temperature of 150 deg. C and a ball bonding force of 40 to 50 grams or wedge bonding force of 18 to 22 grams is recommended. Use the minimum level of ultrasonic energy to achieve reliable wirebonds. Wirebonds should be started on the chip and terminated on the package or substrate. All bonds should be as short as possible <0.31mm (12 mils).

For price, delivery, and to place orders, please contact Hittite Microwave Corporation:  
20 Alpha Road, Chelmsford, MA 01824 Phone: 978-250-3343 Fax: 978-250-3373  
Order On-line at [www.hittite.com](http://www.hittite.com)



Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А