



LEAD STYLES

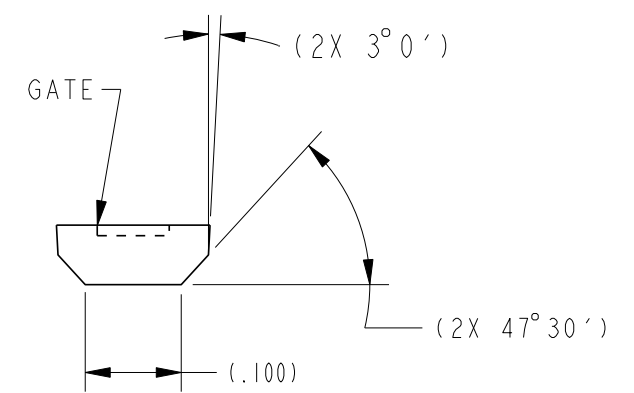



ALL EXCEPT "L" LEAD STYLES

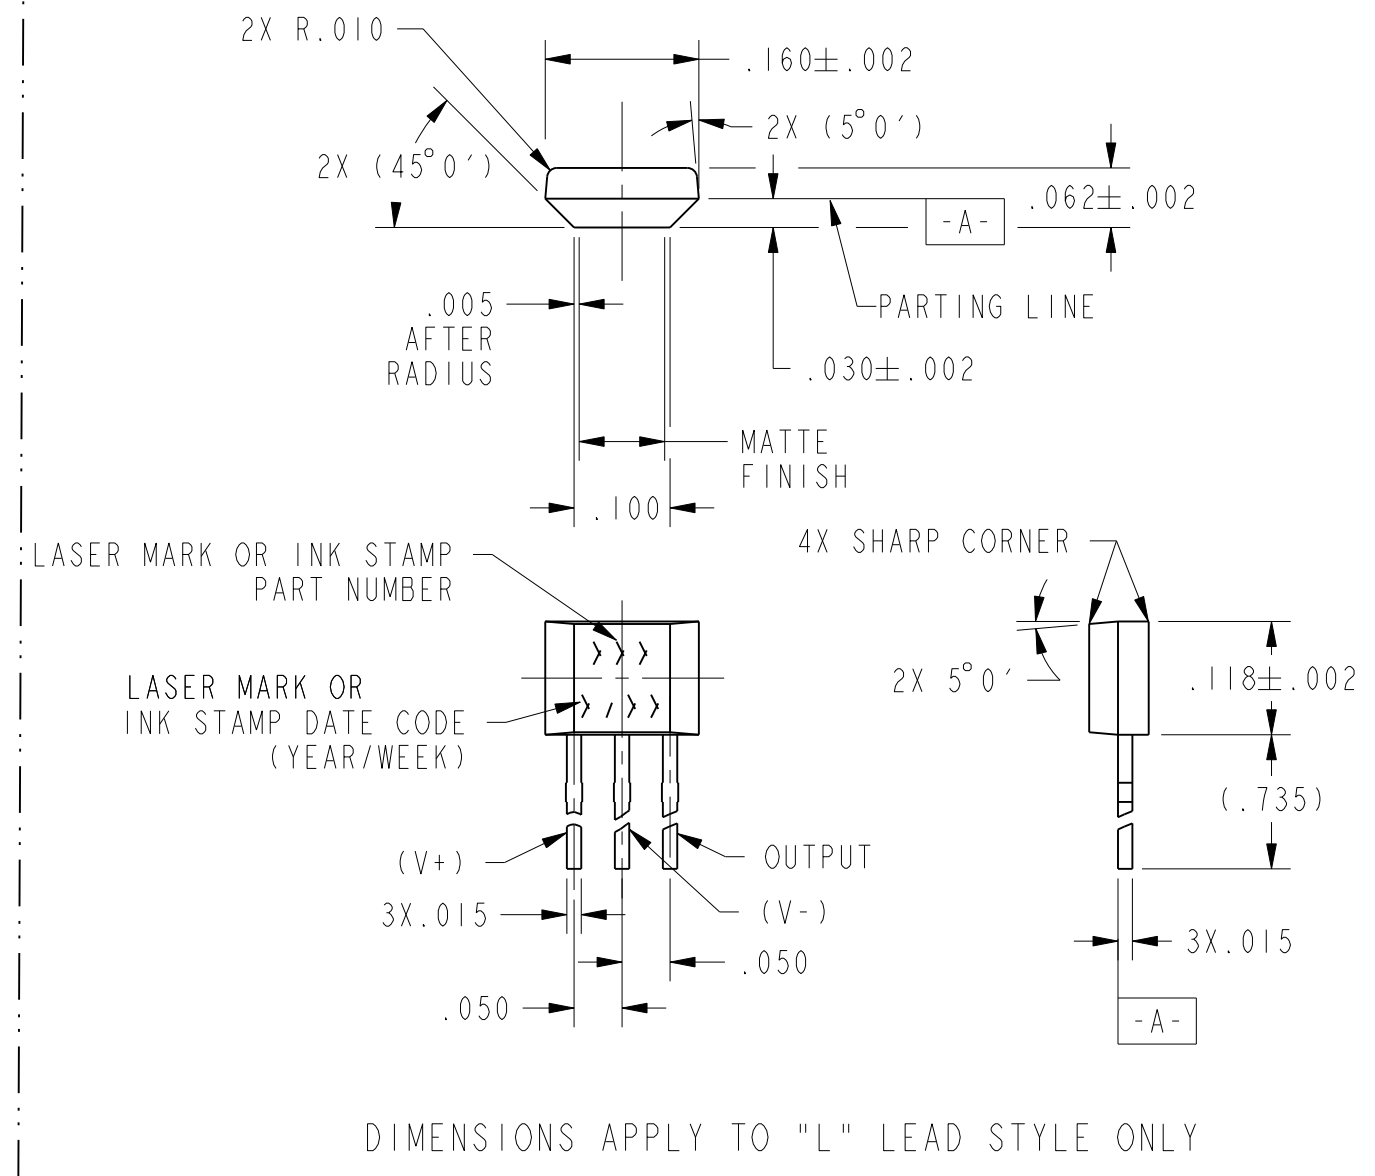



DIMENSIONS APPLY TO "L" LEAD STYLE ONLY

LASER MARK OR INK STAMP BRAND SYMBOL  
.039 HIGH CHARACTERS

LASER MARK OR INK STAMP DATE CODE  
( YEAR, WEEK ) .039 HIGH CHARACTERS ( 3 DIGITS )

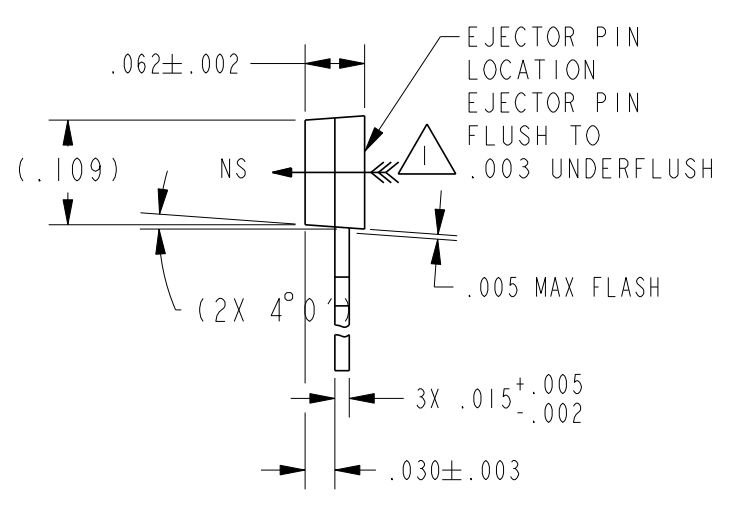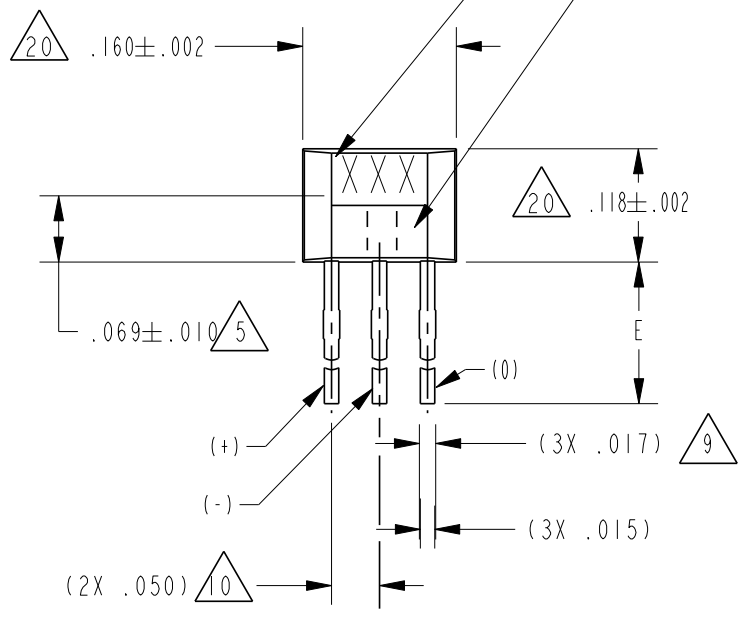


LEAD STYLES "STD", "R", "RP"

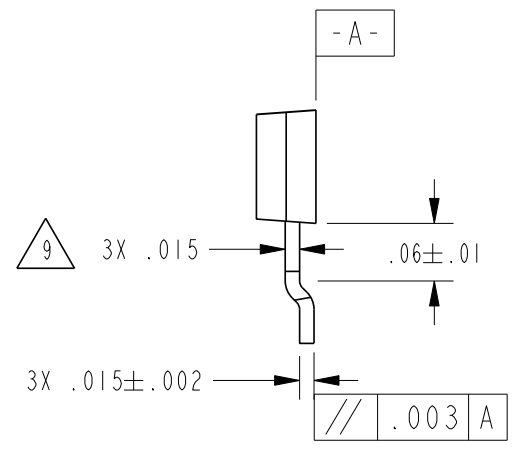

LEAD STYLES "S" & "SP"

NOTES

- 1 THE MAGNETIC FLUX USED TO OPERATE THE SWITCH MUST BE IN THE DIRECTION AND LOCATION SHOWN (THIS ASSUMES THE CONVENTION THAT THE DIRECTION OF THE EXTERNAL FLUX OF A MAGNET IS FROM THE NORTH TO THE SOUTH POLE OF THE MAGNET)
- 2 THE MAGNETIC FIELD STRENGTH (GAUSS) REQUIRED TO CAUSE THE SWITCH TO CHANGE STATE (OPERATE AND RELEASE) WILL BE AS TABULATED. TO TEST THE SWITCH AGAINST THE SPECIFIED LIMITS, THE SWITCH MUST BE PLACED IN A UNIFORM MAGNETIC FIELD
- 3 ABSOLUTE MAXIMUM RATINGS ARE THE EXTREME LIMITS THE DEVICE WILL MOMENTARILY WITHSTAND WITHOUT DAMAGE TO THE DEVICE. ELECTRICAL AND MAGNETIC CHARACTERISTICS ARE NOT GUARANTEED IF THE RATED VOLTAGE AND/OR CURRENTS ARE EXCEEDED NOR WILL THE DEVICE NECESSARILY OPERATE AT ABSOLUTE MAXIMUM RATINGS
- 4 TEST CONDITIONS:  $V_{CC}=12V$ ,  $R_2=1.6K$  OHMS,  $C_2=20\mu f$
- 5 APPROXIMATE HALL ELEMENT LOCATION
- 6 LEADS MUST BE ADEQUATELY SUPPORTED DURING ANY FORMING/SHEERING OPERATION TO ASSURE THAT THE LEADS ARE NOT STRESSED WITHIN THE PLASTIC
- 7 PCB WAVE SOLDERING GUIDELINES ARE AS FOLLOWS:  
250°C PEAK FOR 10 S MAX OR 260°C PEAK FOR 5S MAX  
SOLDERING TIME
- 8  $V_{CC}=12V$ ,  $R_1=1.6K$ ,  $C_1=20\mu f$
- 9 BURRS ARE ALLOWED ONLY IF FULL LENGTH OF LEADS WILL PASS THROUGH  $\varnothing.023$  HOLE. LEAD REFERENCE DIMENSIONS DO NOT INCLUDE SOLDER THICKNESS
- 10 DIMENSION REFERS TO THE LOCATION OF LEAD CENTERLINES AS THEY EXIT THE PLASTIC PACKAGE
- 11 TYPICAL DIMENSIONS NOT SHOWN IN LEAD STYLE "S" AND "SP"
- 12 SOME COMBINATIONS OF BASIC LISTING AND PACKING OPTIONS ARE NOT AVAILABLE
- 13 TAPE AND AMMOPACK PER EIA-468-A-1990
- 14 POCKET TAPE AND REEL PER EIA-481-A-1986
- 15  $V_{CC}=30V$ ,  $I_{sink}=20mA$ ,  $-40^\circ C < T < 150^\circ C$ , B>MAX OP GAUSS FOR SPECIFIC LISTING
- 16  $V_{CC}=3.8V$ ,  $I_{sink}=20mA$ , B>MAX OP GAUSS FOR SPECIFIC LISTING
- 17  $V_{out}=30V$ ,  $V_{CC}=24V$ , B<MIN RELEASE GAUSS FOR SPECIFIC LISTING
- 18 AMMOPACK STYLE "T2" AND "T3". 24 SWITCHES BETWEEN FOLDS, SKIP 1 SPACE AT FOLD. MAY BE REFERRED TO AS "FAN FOLD"
- 19 LEAD STRAIGHTNESS MAY BE DETERIORATED ON SOME UNITS BY BULK PACKAGING. APPLICATIONS HAVING A CRITICAL LEAD STRAIGHTNESS REQUIREMENT SHOULD USE A TAPE PACKAGING OPTION
- 20 MOLDED PART DIMENSIONS DO NOT INCLUDE FLASH. FLASH IS LIMITED TO .005 MAX
- 21 THESE HALL EFFECT SENSORS MAY HAVE AN INITIAL OUTPUT IN EITHER THE ON OR OFF STATE IF POWERED UP WITH AN APPLIED MAGNETIC FIELD IN THE DIFFERENTIAL ZONE (APPLIED MAGNETIC FIELD  $> B_{op}$  AND  $< B_{op}$ ). MICRO SWITCH RECOMMENDS THAT THE APPLICATION CIRCUIT DESIGNER ALLOW 10 MICROSECONDS AFTER SUPPLY VOLTAGE HAS REACHED 5 VOLTS FOR THE OUTPUT VOLTAGE TO STABILIZE

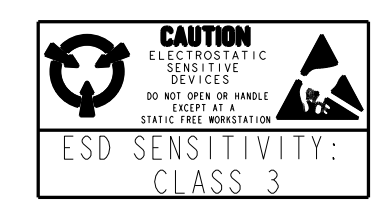

|   |                          |                                     |        |
|---|--------------------------|-------------------------------------|--------|
| THIRD ANGLE PROJECTION  |                          |                                     |        |
| SCALE 5 : 1   |                          |                                     |        |
| DO NOT SCALE PRINT  |                          |                                     |        |
| TOLERANCES<br>APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE : |                          |                                     |        |
| DIM   | TOL                      | DIM                                 | TOL    |
| NO PLACES   | X                        | 1/2, 04                             | X.X    |
| ONE PLACE   | X.X                      | 0.47, 016                           | X.XX   |
| TWO PLACES  | X.XX                     | 0.157, 006                          | X.XXX  |
| THREE PLACES  | X.XXX                    |                                     | X.XXXX |
| ANGLES  |                          |                                     |        |
| SI METRIC   |                          | US CUSTOMARY                        |        |
| DESIGN UNITS  | <input type="checkbox"/> | <input checked="" type="checkbox"/> |        |
| WEIGHT  |                          |                                     |        |

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH a Honeywell Division

SOLID STATE SENSOR

SS400 SERIES CHART 1

CATALOG LISTING

ANSI Y14.5M-1982 APPLIES

FED. MFG. CODE 91929

SS400 SERIES CHART 1  
PAGE 1 OF 4  
RELEASE NO. PR-21345  
DRAWING NUMBER  
16  
ISSUE  
REVISIONS  
E 0034535  
26 OCT 07  
PTC/CAD 3D  
DRAWN  
GRT 26 MAR 02  
CHECK  
SAV 26 MAR 02  
CHECK



CATALOG LISTING  
**SS400 SERIES CHART 1**  
 PAGE 3 OF 4  
 ISSUE 16  
 REVISIONS  
 E 0034535  
 PRS 26 OCT 07  
 PTC/CAD 3D  
 DRAWN  
 KED 14 JAN 99  
 CHECK  
 JAF  
 CHECK  
 14 JAN 99  
 CHECK  
 JAF  
 CHECK  
 14 JAN 99  
 RELEASE NO. PR-21345  
 REPLACES -

TABLE 1 - MAGNETIC AND ELECTRICAL SPECIFICATIONS  $\triangle 2 \triangle 21$

|                   | -40°C | 0°C  | 25°C | 85°C | 125°C | 150°C |
|-------------------|-------|------|------|------|-------|-------|
| MIN OPERATE GAUSS |       |      |      |      |       |       |
| SS411A            | NS    | NS   | NS   | NS   | NS    | NS    |
| SS413A            | NS    | NS   | NS   | NS   | NS    | NS    |
| SS441A            | 50    | 53   | 55   | 45   | 40    | 35    |
| SS443A            | 110   | 110  | 110  | 90   | 80    | 65    |
| SS449A            | 285   | 305  | 310  | 290  | 270   | 260   |
| SS461A            | 5     | 5    | 10   | 10   | 5     | 5     |
| SS466A            | 100   | 100  | 100  | 95   | 80    | 70    |
| MAX OPERATE GAUSS |       |      |      |      |       |       |
| SS411A            | 70    | 65   | 60   | 60   | 65    | 70    |
| SS413A            | 140   | 140  | 140  | 140  | 140   | 140   |
| SS441A            | 135   | 117  | 115  | 120  | 123   | 125   |
| SS443A            | 215   | 190  | 180  | 180  | 190   | 200   |
| SS449A            | 435   | 400  | 390  | 400  | 410   | 420   |
| SS461A            | 110   | 90   | 85   | 85   | 100   | 110   |
| SS466A            | 200   | 185  | 180  | 180  | 180   | 185   |
| MIN RELEASE GAUSS |       |      |      |      |       |       |
| SS411A            | -70   | -65  | -60  | -60  | -65   | -70   |
| SS413A            | -140  | -140 | -140 | -140 | -140  | -140  |
| SS441A            | 20    | 20   | 20   | 15   | 15    | 10    |
| SS443A            | 80    | 80   | 75   | 70   | 60    | 55    |
| SS449A            | 210   | 230  | 235  | 215  | 200   | 185   |
| SS461A            | -110  | -90  | -85  | -85  | -100  | -110  |
| SS466A            | -200  | -185 | -180 | -180 | -100  | -185  |
| MAX RELEASE GAUSS |       |      |      |      |       |       |
| SS411A            | NS    | NS   | NS   | NS   | NS    | NS    |
| SS413A            | NS    | NS   | NS   | NS   | NS    | NS    |
| SS441A            | 120   | 99   | 95   | 105  | 115   | 120   |
| SS443A            | 190   | 165  | 155  | 165  | 180   | 195   |
| SS449A            | 360   | 325  | 315  | 325  | 340   | 345   |
| SS461A            | -5    | -5   | -10  | -10  | -5    | -5    |
| SS466A            | -100  | -100 | -100 | -95  | -80   | -70   |
| MIN DIFF GAUSS    |       |      |      |      |       |       |
| SS411A            | 15    | 15   | 15   | 12   | 12    | 10    |
| SS413A            | 20    | 20   | 20   | 20   | 20    | 20    |
| SS441A            | 15    | 15   | 20   | 15   | 8     | 5     |
| SS443A            | 25    | 25   | 25   | 15   | 10    | 5     |
| SS449A            | 30    | 30   | 30   | 30   | 30    | 30    |
| SS461A            | 50    | 50   | 50   | 50   | 50    | 50    |
| SS466A            | 200   | 200  | 200  | 190  | 160   | 140   |

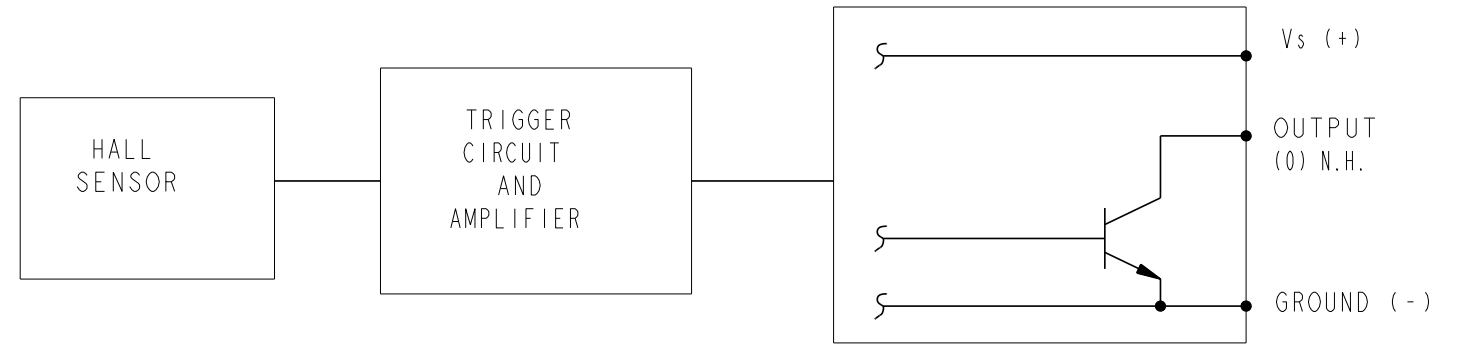


TABLE 2

| PACKING                                    | BAG         |
|--|-------------|
| SPECIFIED VOLTAGE RANGE                    | 3.8 - 30    |
| MAX Ioff milliamp /15                      | 9.0         |
| MAX Ion milliamp /15                       | 10.0        |
| RATED SINK CURRENT Ma                      | 20          |
| MAX Vsat VOLTS /16                         | 0.4         |
| MAX LEAKAGE AT 24V, UA /17                 | 10          |
| RISE TIME AT 25°C<br>10% TO 90% $\mu$ S /4 | 1.5         |
| FALL TIME AT 25°C<br>90% TO 10% $\mu$ S /4 | 1.5         |
| STORAGE TEMP °C                            | -65 TO +160 |
| OPERATING TEMP °C                          | -55 TO +160 |

TABLE 4

| CATALOG LISTING | MAGNETIC TYPE | BRAND SYMBOL |
|-----------------|---------------|--------------|
| SS411A          | BIPOLAR       | 11A          |
| SS413A          | BIPOLAR       | 13A          |
| SS441A          | UNIPOLAR      | 41A          |
| SS443A          | UNIPOLAR      | 43A          |
| SS449A          | UNIPOLAR      | 49A          |
| SS461A          | LATCH         | 61A          |
| SS466A          | LATCH         | 66A          |

ABSOLUTE LIMITS  $\triangle 3$  TABLE 3

|                        |             |
|------------------------|-------------|
| SUPPLY VOLTAGE         | -1 TO +30   |
| APPLIED OUTPUT VOLTAGE | -0.5 TO +30 |
| OUTPUT CURRENT mA      | SEE TABLE 5 |
| MAGNETIC FLUX GAUSS    | NO LIMIT    |

TABLE 5

| OUTPUT CURRENT ABSOLUTE LIMITS |                        |
|--------------------------------|------------------------|
| SUPPLY VOLTAGE                 | OUTPUT CURRENT MAX, MA |
| -1 TO 24                       | 50                     |
| 24 TO 25                       | 37                     |
| 25 TO 26                       | 33                     |
| 26 TO 27                       | 28                     |
| 27 TO 28                       | 24                     |
| 28 TO 29                       | 19                     |
| 29 TO 30                       | 15                     |



| THIRD ANGLE PROJECTION                    |       |
|---|-------|
| SCALE                                     | NONE  |
| DO NOT SCALE PRINT                        |       |
| UNLESS OTHERWISE SPECIFIED TOLERANCES ARE |       |
| ONE PLACE (.0)                            | ±.030 |
| TWO PLACE (.00)                           | ±.015 |
| THREE PLACE (.000)                        | ±.005 |
| ANGLES                                    | ±     |
| WEIGHT                                    |       |

CATALOG LISTING  
**SS400 SERIES CHART 1**

PAGE 4 OF 4

ISSUE  
**16**

REVISIONS

E 0034535  
PRS  
26 OCT 07

REPLACES -

CHECK

CHECK

CHECK

CHECK

14 JAN 99

JAF

CHECK








14 JAN 99

3D

DRAWN

KED

ANSI Y14.5M-1982 APPLIES

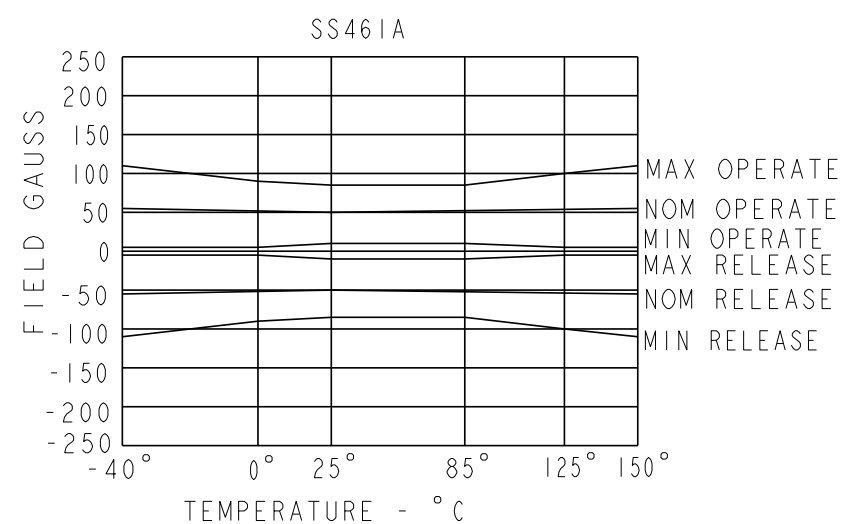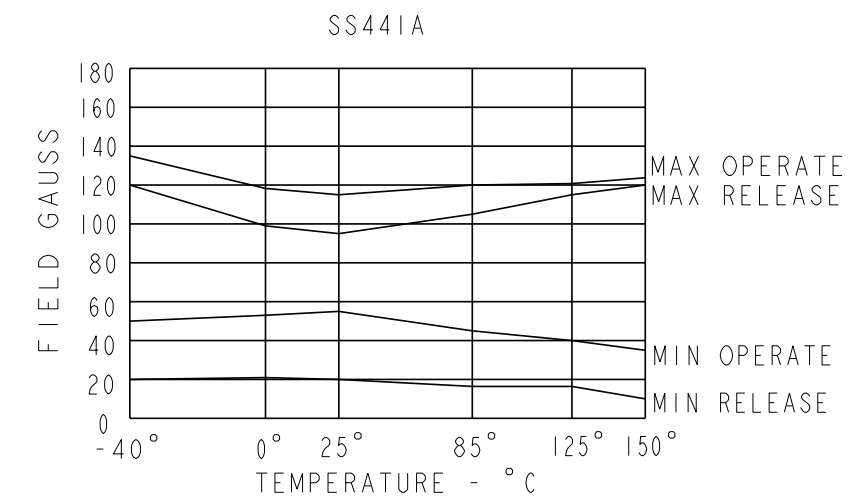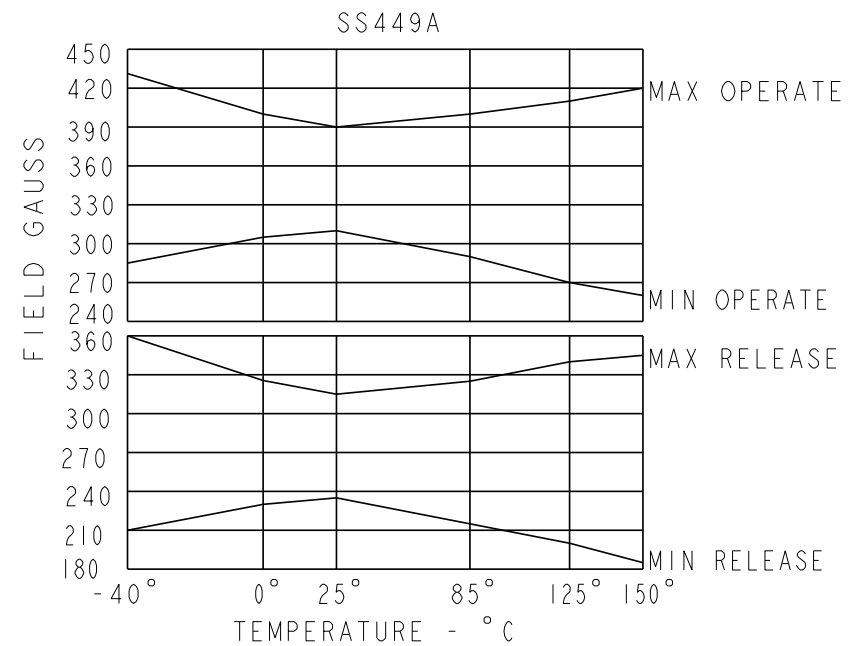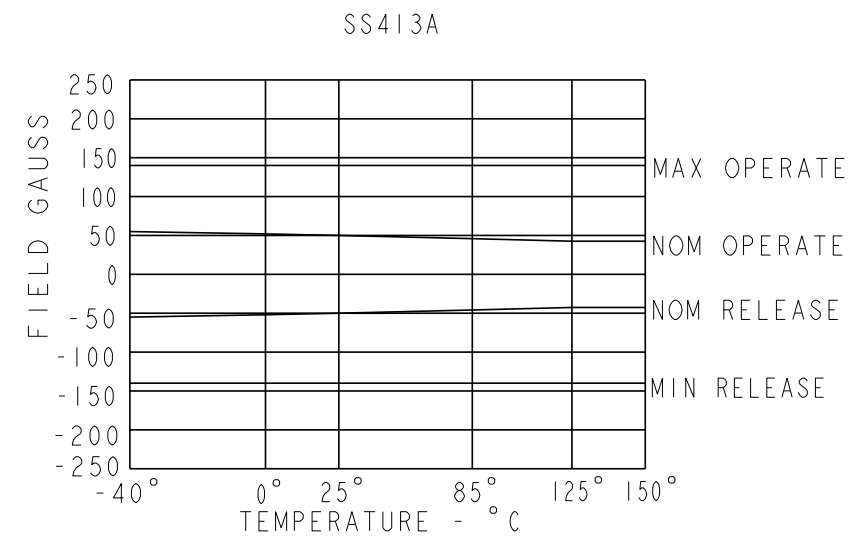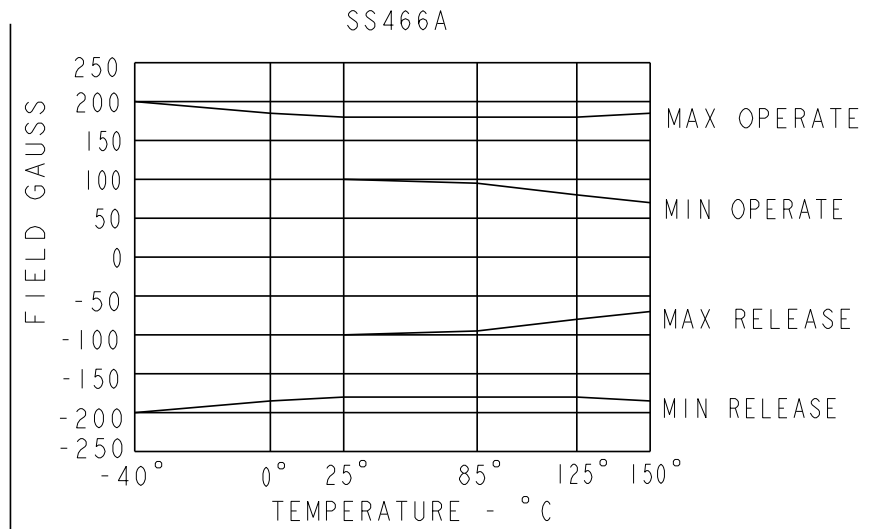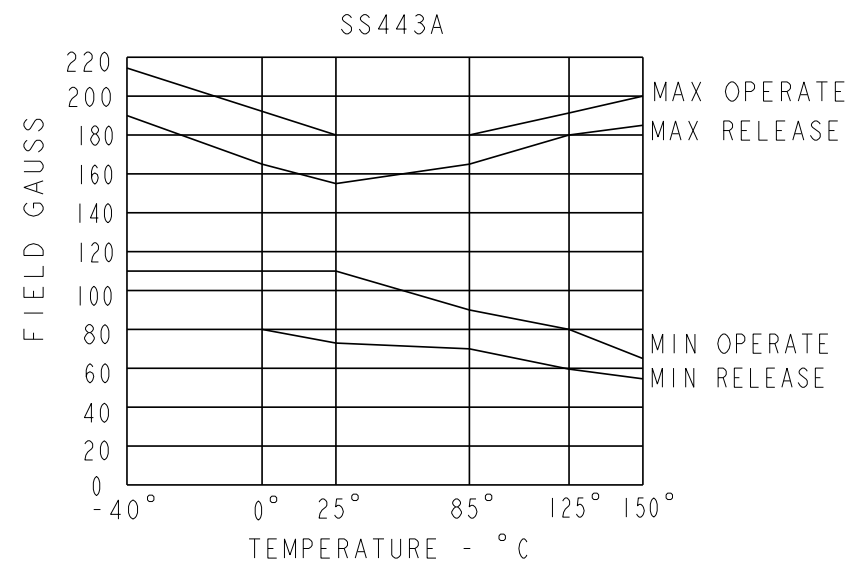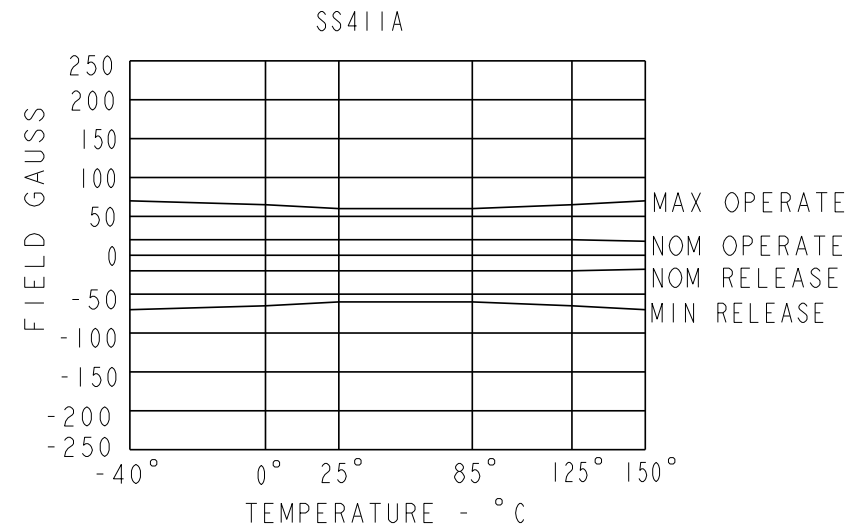

**CAUTION**  
ELECTROSTATIC SENSITIVE DEVICES  
DO NOT OPEN OR HANDLE EXCEPT AT A STATIC FREE WORKSTATION

ESD SENSITIVITY:  
CLASS 3

|   |              |
|---|--------------|
| THIRD ANGLE PROJECTION                    |              |
|   |              |
| SCALE                                     | NONE         |
| DO NOT SCALE PRINT                        |              |
| UNLESS OTHERWISE SPECIFIED TOLERANCES ARE |              |
| ONE PLACE                                 | (.0) ±.030   |
| TWO PLACE                                 | (.00) ±.015  |
| THREE PLACE                               | (.000) ±.005 |
| ANGLES                                    | ±            |
| WEIGHT                                    |              |

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А