



**Features**

- Advanced Process Technology
- Ultra Low On-Resistance
- Logic Level Gate Drive
- 175°C Operating Temperature
- Fast Switching
- Repetitive Avalanche Allowed up to  $T_{jmax}$
- Lead-Free, RoHS Compliant
- Automotive Qualified \*



HEXFET® Power MOSFET

|                         |      |              |
|-------------------------|------|--------------|
| $V_{DS}$                |      | <b>60V</b>   |
| $R_{DS(on)}$            | typ. | <b>5.4mΩ</b> |
|                         | max. | <b>6.8mΩ</b> |
| $I_D$ (Silicon Limited) |      | <b>99A①</b>  |
| $I_D$ (Package Limited) |      | <b>50A</b>   |



|          |          |          |
|----------|----------|----------|
| <b>G</b> | <b>D</b> | <b>S</b> |
| Gate     | Drain    | Source   |

**Description**

Specifically designed for Automotive applications, this HEXFET® Power MOSFET utilizes the latest processing techniques to achieve extremely low on-resistance per silicon area. Additional features of this design are a 175°C junction operating temperature, fast switching speed and improved repetitive avalanche rating. These features combine to make this design an extremely efficient and reliable device for use in Automotive applications and a wide variety of other applications.

| Base part number | Package Type | Standard Pack      |          | Orderable Part Number |
|------------------|--------------|--------------------|----------|-----------------------|
|                  |              | Form               | Quantity |                       |
| AUIRLR3636       | D-Pak        | Tube               | 75       | AUIRLR3636            |
|                  |              | Tape and Reel Left | 3000     | AUIRLR3636TRL         |

**Absolute Maximum Ratings**

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only; and functional operation of the device at these or any other condition beyond those indicated in the specifications is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability. The thermal resistance and power dissipation ratings are measured under board mounted and still air conditions. Ambient temperature ( $T_A$ ) is 25°C, unless otherwise specified.

| Symbol                            | Parameter                                                  | Max.                      | Units |
|-----------------------------------|------------------------------------------------------------|---------------------------|-------|
| $I_D$ @ $T_C = 25^\circ\text{C}$  | Continuous Drain Current, $V_{GS}$ @ 10V (Silicon Limited) | 99①                       | A     |
| $I_D$ @ $T_C = 100^\circ\text{C}$ | Continuous Drain Current, $V_{GS}$ @ 10V (Silicon Limited) | 70①                       |       |
| $I_D$ @ $T_C = 25^\circ\text{C}$  | Continuous Drain Current, $V_{GS}$ @ 10V (Package Limited) | 50                        |       |
| $I_{DM}$                          | Pulsed Drain Current ②                                     | 396                       |       |
| $P_D$ @ $T_C = 25^\circ\text{C}$  | Maximum Power Dissipation                                  | 143                       | W     |
|                                   | Linear Derating Factor                                     | 0.95                      | W/°C  |
| $V_{GS}$                          | Gate-to-Source Voltage                                     | ± 16                      | V     |
| $E_{AS}$                          | Single Pulse Avalanche Energy (Thermally Limited) ③        | 170                       | mJ    |
| $I_{AR}$                          | Avalanche Current ②                                        | See Fig. 14, 15, 22a, 22b | A     |
| $E_{AR}$                          | Repetitive Avalanche Energy ②                              |                           | mJ    |
| $dv/dt$                           | Peak Diode Recovery ④                                      | 22                        | V/ns  |
| $T_J$                             | Operating Junction and                                     | -55 to + 175              | °C    |
| $T_{STG}$                         | Storage Temperature Range                                  |                           |       |
|                                   | Soldering Temperature, for 10 seconds (1.6mm from case)    | 300                       |       |

**Thermal Resistance**

| Symbol          | Parameter                         | Typ. | Max. | Units |
|-----------------|-----------------------------------|------|------|-------|
| $R_{\theta JC}$ | Junction-to-Case ⑤                | —    | 1.05 | °C/W  |
| $R_{\theta JA}$ | Junction-to-Ambient (PCB Mount) ⑤ | —    | 50   |       |
| $R_{\theta JA}$ | Junction-to-Ambient ⑤             | —    | 110  |       |

HEXFET® is a registered trademark of Infineon.

\*Qualification standards can be found at [www.infineon.com](http://www.infineon.com)


**Static @  $T_J = 25^\circ\text{C}$  (unless otherwise specified)**

|                                 | Parameter                            | Min. | Typ. | Max. | Units               | Conditions                                           |
|---------------------------------|--------------------------------------|------|------|------|---------------------|------------------------------------------------------|
| $V_{(BR)DSS}$                   | Drain-to-Source Breakdown Voltage    | 60   | —    | —    | V                   | $V_{GS} = 0V, I_D = 250\mu A$                        |
| $\Delta V_{(BR)DSS}/\Delta T_J$ | Breakdown Voltage Temp. Coefficient  | —    | 0.07 | —    | V/ $^\circ\text{C}$ | Reference to $25^\circ\text{C}$ , $I_D = 5mA$ ②      |
| $R_{DS(on)}$                    | Static Drain-to-Source On-Resistance | —    | 5.4  | 6.8  | $m\Omega$           | $V_{GS} = 10V, I_D = 50A$ ⑤                          |
|                                 |                                      | —    | 6.6  | 8.3  |                     | $V_{GS} = 4.5V, I_D = 50A$ ⑤                         |
| $V_{GS(th)}$                    | Gate Threshold Voltage               | 1.0  | —    | 2.5  | V                   | $V_{DS} = V_{GS}, I_D = 100\mu A$                    |
| $g_{fs}$                        | Forward Trans conductance            | 31   | —    | —    | S                   | $V_{DS} = 25V, I_D = 50A$                            |
| $R_{G(int)}$                    | Internal Gate Resistance             | —    | 0.6  | —    | $\Omega$            |                                                      |
| $I_{DSS}$                       | Drain-to-Source Leakage Current      | —    | —    | 20   | $\mu A$             | $V_{DS} = 60V, V_{GS} = 0V$                          |
|                                 |                                      | —    | —    | 250  |                     | $V_{DS} = 60V, V_{GS} = 0V, T_J = 125^\circ\text{C}$ |
| $I_{GSS}$                       | Gate-to-Source Forward Leakage       | —    | —    | 100  | nA                  | $V_{GS} = 16V$                                       |
|                                 | Gate-to-Source Reverse Leakage       | —    | —    | -100 |                     | $V_{GS} = -16V$                                      |

**Dynamic Electrical Characteristics @  $T_J = 25^\circ\text{C}$  (unless otherwise specified)**

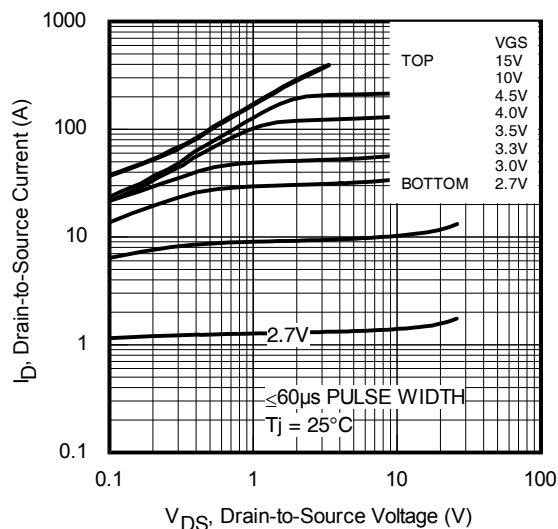
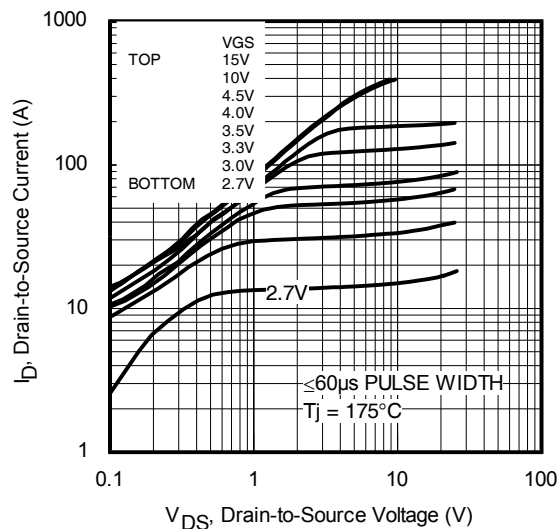
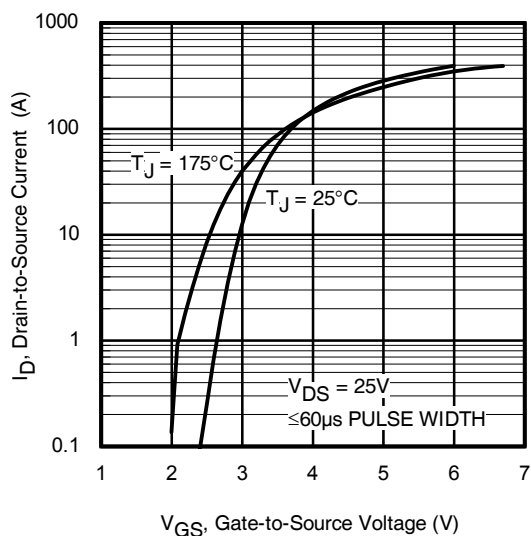
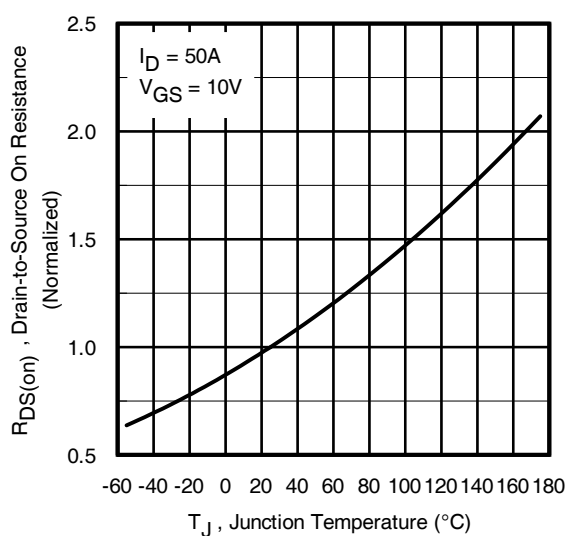
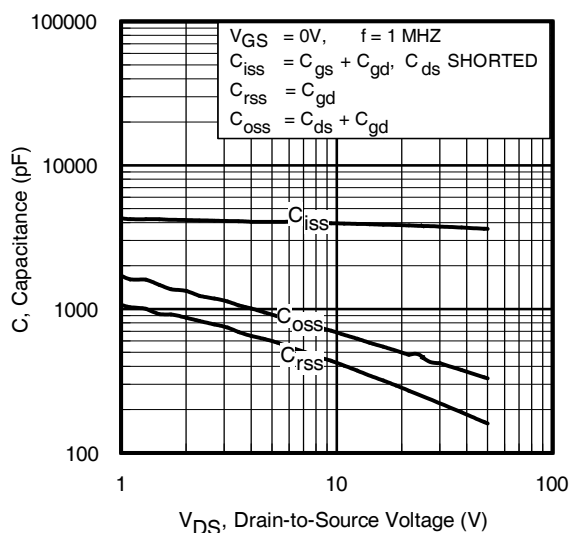
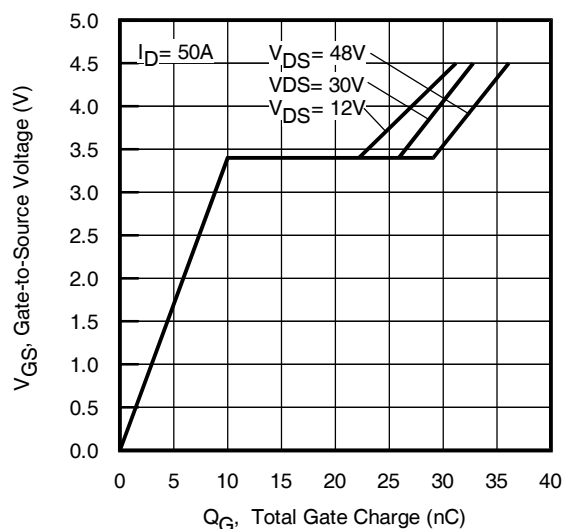
|                      |                                               |   |      |    |    |                                                                                                                               |
|----------------------|-----------------------------------------------|---|------|----|----|-------------------------------------------------------------------------------------------------------------------------------|
| $Q_g$                | Total Gate Charge                             | — | 33   | 49 | nC | $I_D = 50A$<br>$V_{DS} = 30V$<br>$V_{GS} = 4.5V$ ⑤                                                                            |
| $Q_{gs}$             | Gate-to-Source Charge                         | — | 11   | —  |    |                                                                                                                               |
| $Q_{gd}$             | Gate-to-Drain Charge                          | — | 15   | —  |    |                                                                                                                               |
| $Q_{sync}$           | Total Gate Charge Sync. ( $Q_g - Q_{gd}$ )    | — | 18   | —  |    |                                                                                                                               |
| $t_{d(on)}$          | Turn-On Delay Time                            | — | 45   | —  | ns | $V_{DD} = 39V$<br>$I_D = 50A$<br>$R_G = 7.5\Omega$<br>$V_{GS} = 4.5V$ ⑤                                                       |
| $t_r$                | Rise Time                                     | — | 216  | —  |    |                                                                                                                               |
| $t_{d(off)}$         | Turn-Off Delay Time                           | — | 43   | —  |    |                                                                                                                               |
| $t_f$                | Fall Time                                     | — | 69   | —  |    |                                                                                                                               |
| $C_{iss}$            | Input Capacitance                             | — | 3779 | —  | pF | $V_{GS} = 0V$<br>$V_{DS} = 50V$<br>$f = 1.0MHz$<br>$V_{GS} = 0V, V_{DS} = 0V$ to 48V ⑦<br>$V_{GS} = 0V, V_{DS} = 0V$ to 48V ⑧ |
| $C_{oss}$            | Output Capacitance                            | — | 332  | —  |    |                                                                                                                               |
| $C_{rss}$            | Reverse Transfer Capacitance                  | — | 163  | —  |    |                                                                                                                               |
| $C_{oss\ eff. (ER)}$ | Effective Output Capacitance (Energy Related) | — | 437  | —  |    |                                                                                                                               |
| $C_{oss\ eff. (TR)}$ | Effective Output Capacitance (Time Related)   | — | 636  | —  |    |                                                                                                                               |

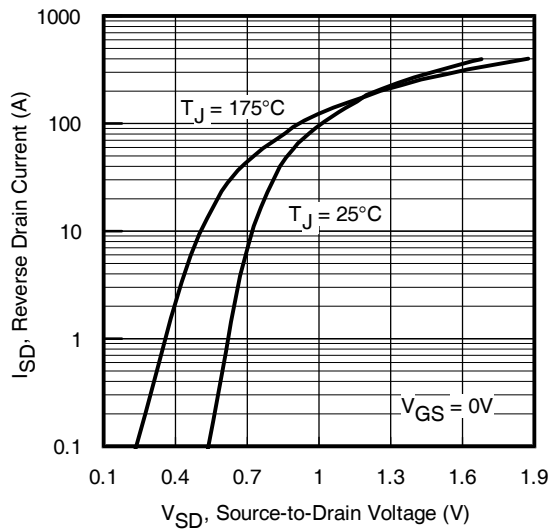
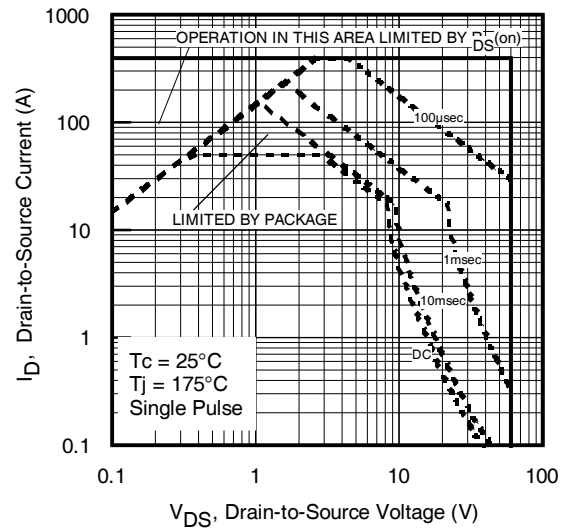
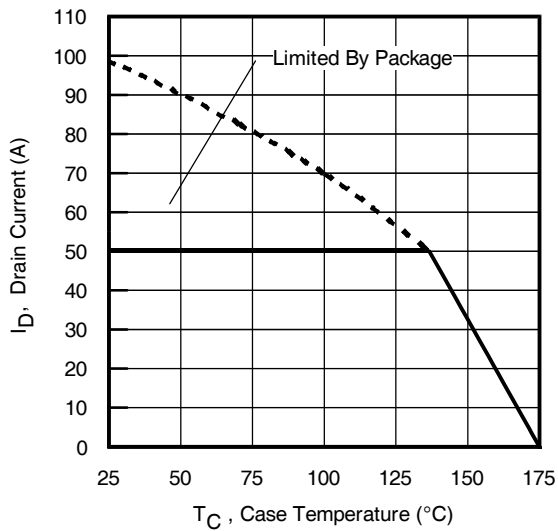
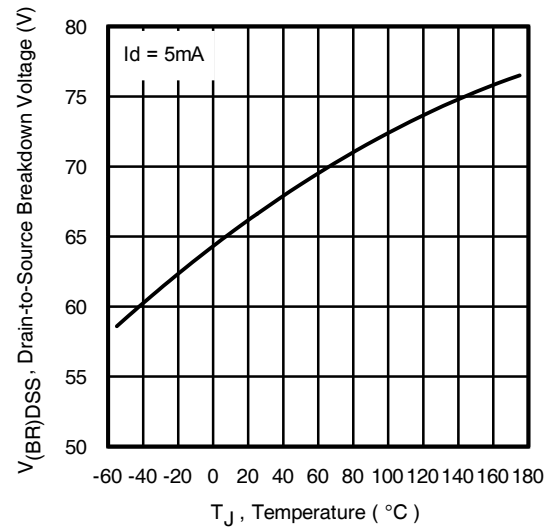
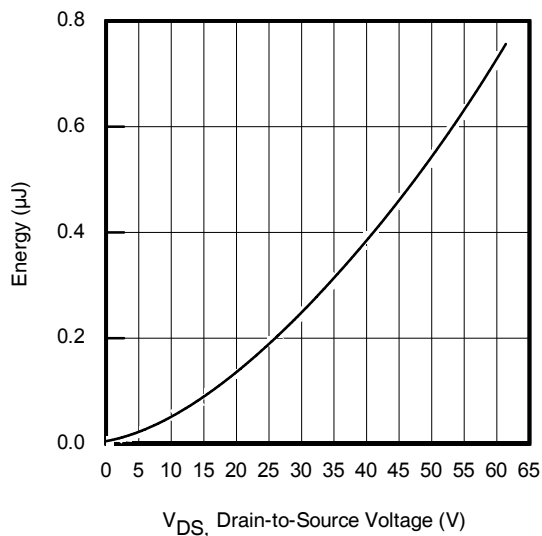
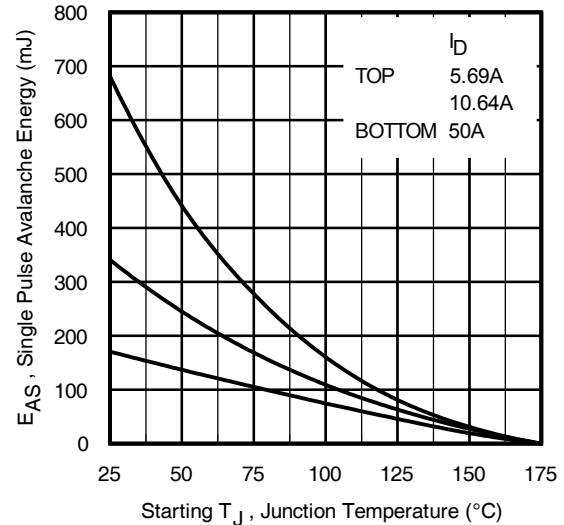
**Diode Characteristics**

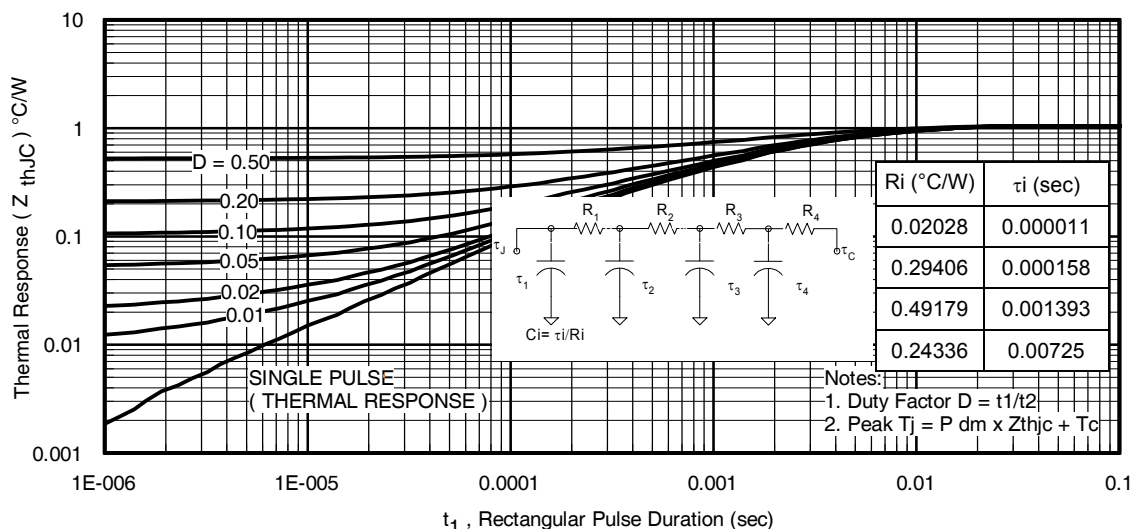
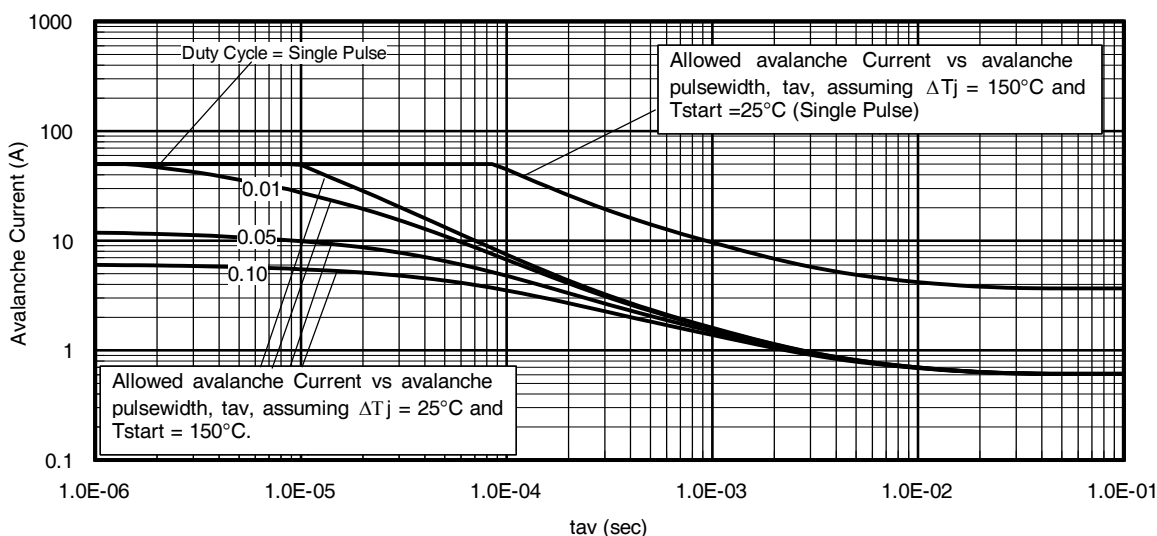
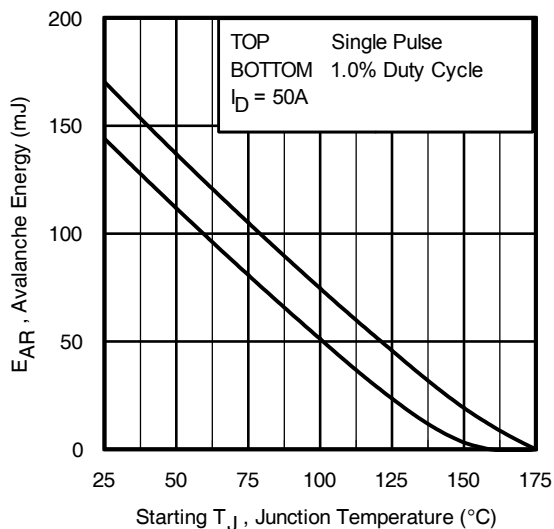
|          | Parameter                              | Min.                                                                        | Typ. | Max. | Units | Conditions                                                                                                                                           |
|----------|----------------------------------------|-----------------------------------------------------------------------------|------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| $I_S$    | Continuous Source Current (Body Diode) | —                                                                           | —    | 99   | A     | MOSFET symbol showing the integral reverse p-n junction diode.  |
| $I_{SM}$ | Pulsed Source Current (Body Diode) ①   | —                                                                           | —    | 396  |       |                                                                                                                                                      |
| $V_{SD}$ | Diode Forward Voltage                  | —                                                                           | —    | 1.3  | V     | $T_J = 25^\circ\text{C}, I_S = 50A, V_{GS} = 0V$ ⑤                                                                                                   |
| $t_{rr}$ | Reverse Recovery Time                  | —                                                                           | 27   | —    | ns    | $T_J = 25^\circ\text{C}$<br>$T_J = 125^\circ\text{C}$<br>$V_R = 51V,$<br>$I_F = 50A$<br>$di/dt = 100A/\mu s$ ⑤                                       |
|          |                                        | —                                                                           | 32   | —    |       |                                                                                                                                                      |
| $Q_{rr}$ | Reverse Recovery Charge                | —                                                                           | 31   | —    | nC    | $T_J = 25^\circ\text{C}$<br>$T_J = 125^\circ\text{C}$                                                                                                |
|          |                                        | —                                                                           | 43   | —    |       |                                                                                                                                                      |
|          |                                        | —                                                                           | 2.1  | —    | A     | $T_J = 25^\circ\text{C}$                                                                                                                             |
| $t_{on}$ | Forward Turn-On Time                   | Intrinsic turn-on time is negligible (turn-on is dominated by $L_S + L_D$ ) |      |      |       |                                                                                                                                                      |

**Notes:**

- ① Calculated continuous current based on maximum allowable junction temperature. Bond wire current limit is 50A. Note that current limitations arising from heating of the device leads may occur with some lead mounting arrangements.
- ② Repetitive rating; pulse width limited by max. junction temperature. (See fig. 11)
- ③ Limited by  $T_{Jmax}$ , starting  $T_J = 25^\circ\text{C}$ ,  $L = 0.136mH$ ,  $R_G = 25\Omega$ ,  $I_{AS} = 50A$ ,  $V_{GS} = 10V$ . Part not recommended for use above this value.
- ④  $I_{SD} \leq 50A$ ,  $di/dt \leq 1109A/\mu s$ ,  $V_{DD} \leq V_{(BR)DSS}$ ,  $T_J \leq 175^\circ\text{C}$ .
- ⑤ Pulse width  $\leq 400\mu s$ ; duty cycle  $\leq 2\%$ .
- ⑥  $C_{oss\ eff. (TR)}$  is a fixed capacitance that gives the same charging time as  $C_{oss}$  while  $V_{DS}$  is rising from 0 to 80%  $V_{DSS}$ .
- ⑦  $C_{oss\ eff. (ER)}$  is a fixed capacitance that gives the same energy as  $C_{oss}$  while  $V_{DS}$  is rising from 0 to 80%  $V_{DSS}$ .
- ⑧ When mounted on 1" square PCB (FR-4 or G-10 Material). For recommended footprint and soldering techniques refer to application note #AN-994
- ⑨  $R_\theta$  is measured at  $T_J$  approximately  $90^\circ\text{C}$ .


**Fig. 1** Typical Output Characteristics

**Fig. 2** Typical Output Characteristics

**Fig. 3** Typical Transfer Characteristics

**Fig. 4** Normalized On-Resistance vs. Temperature

**Fig 5.** Typical Capacitance vs. Drain-to-Source Voltage

**Fig 6.** Typical Gate Charge vs. Gate-to-Source Voltage


**Fig. 7** Typical Source-to-Drain Diode Forward Voltage

**Fig. 8.** Maximum Safe Operating Area

**Fig. 9** Maximum Drain Current vs. Case Temperature

**Fig 10.** Drain-to-Source Breakdown Voltage

**Fig. 11** Typical Coss Stored Energy

**Fig 12.** Maximum Avalanche Energy vs. Drain Current

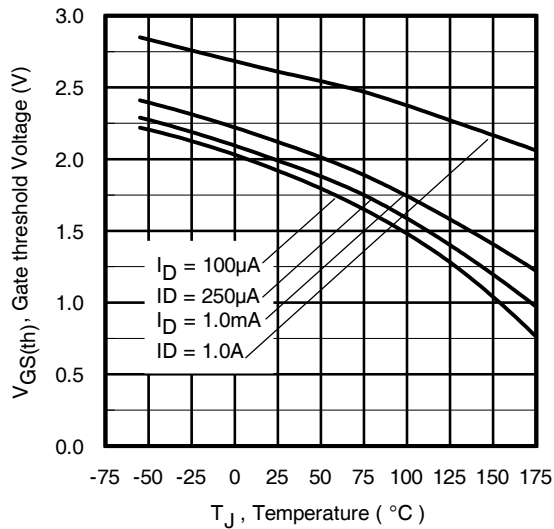
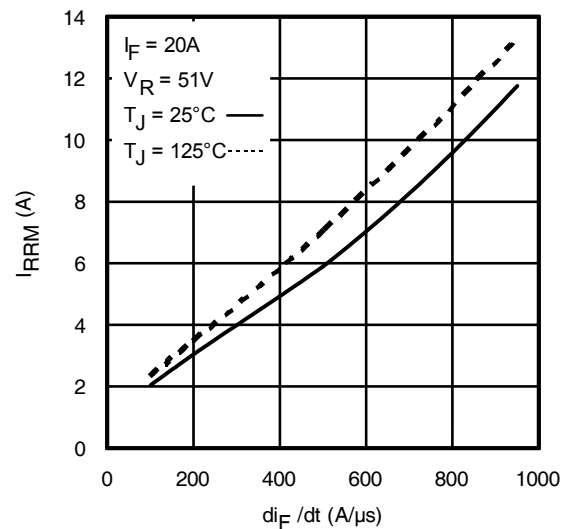
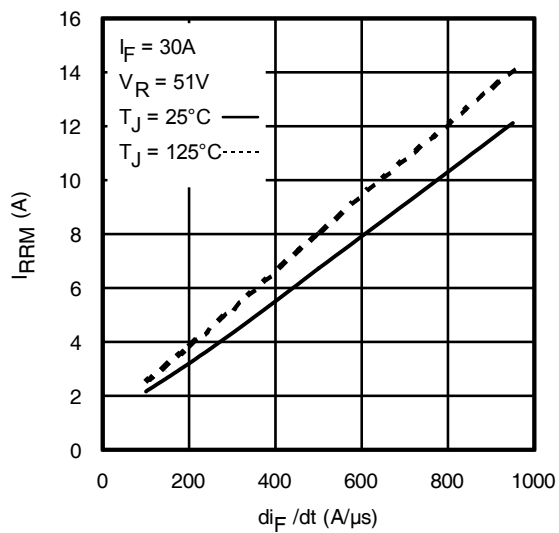
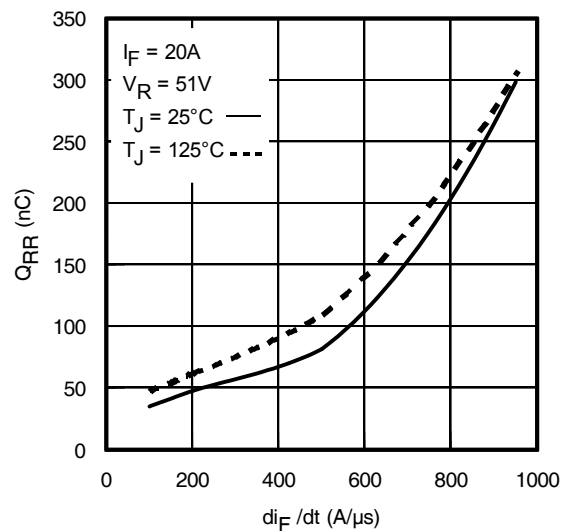
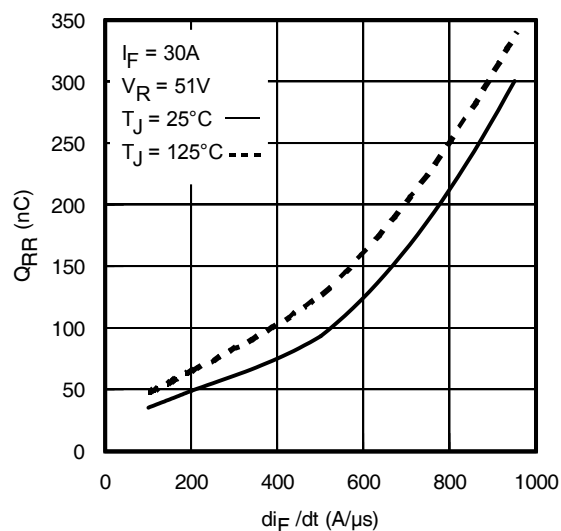

**Fig 13. Maximum Effective Transient Thermal Impedance, Junction-to-Case**

**Fig 14. Typical Avalanche Current Vs. Pulse width**

**Fig 15. Maximum Avalanche Energy Vs. Temperature**
**Notes on Repetitive Avalanche Curves , Figures 14, 15:  
 (For further info, see AN-1005 at [www.infineon.com](http://www.infineon.com))**

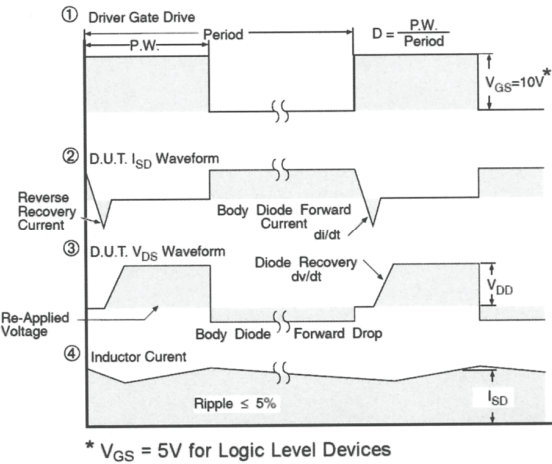
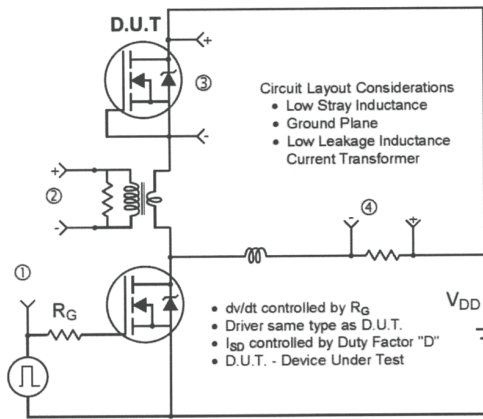
1. Avalanche failures assumption:  
 Purely a thermal phenomenon and failure occurs at a temperature far in excess of  $T_{Jmax}$ . This is validated for every part type.
2. Safe operation in Avalanche is allowed as long as  $T_{Jmax}$  is not exceeded.
3. Equation below based on circuit and waveforms shown in Figures 22a, 22b.
4.  $P_D(ave)$  = Average power dissipation per single avalanche pulse.
5.  $BV$  = Rated breakdown voltage (1.3 factor accounts for voltage increase during avalanche).
6.  $I_{av}$  = Allowable avalanche current.
7.  $\Delta T$  = Allowable rise in junction temperature, not to exceed  $T_{Jmax}$  (assumed as  $25^\circ\text{C}$  in Figure 13, 14).  
 $t_{av}$  = Average time in avalanche.  
 $D$  = Duty cycle in avalanche =  $t_{av} \cdot f$   
 $Z_{thJC}(D, t_{av})$  = Transient thermal resistance, see Figures 13)

$$P_D(ave) = 1/2 (1.3 \cdot BV \cdot I_{av}) = \Delta T / Z_{thJC}$$

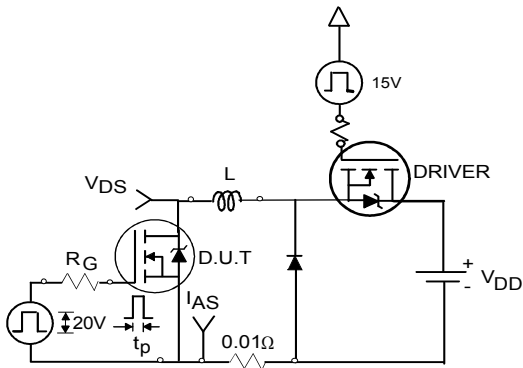
$$I_{av} = 2\Delta T / [1.3 \cdot BV \cdot Z_{thJC}]$$

$$E_{AS(AR)} = P_D(ave) \cdot t_{av}$$



**Fig 16.** Threshold Voltage vs. Temperature

**Fig. 17 -** Typical Recovery Current vs.  $di_F/dt$ 

**Fig. 18 -** Typical Recovery Current vs.  $di_F/dt$ 

**Fig. 19 -** Typical Stored Charge vs.  $di_F/dt$ 

**Fig. 20 -** Typical Stored Charge vs.  $di_F/dt$

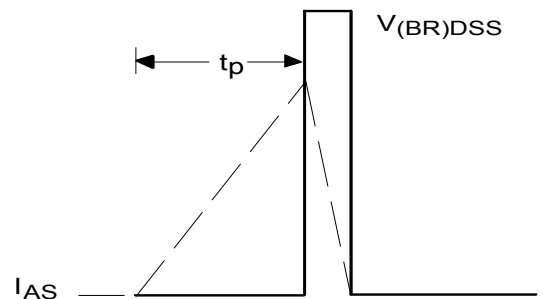


**Fig 21. Peak Diode Recovery  $dv/dt$  Test Circuit for N-Channel HEXFET® Power MOSFETs**




**Fig 22a. Unclamped Inductive Test Circuit**




**Fig 22b. Unclamped Inductive Waveforms**

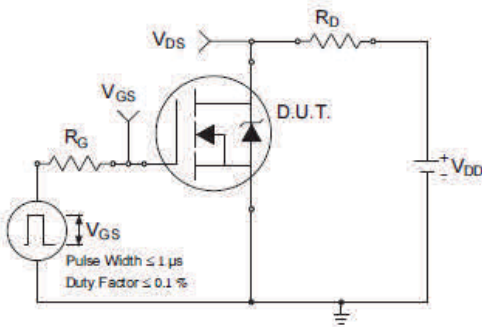


**Fig 23a. Switching Time Test Circuit**

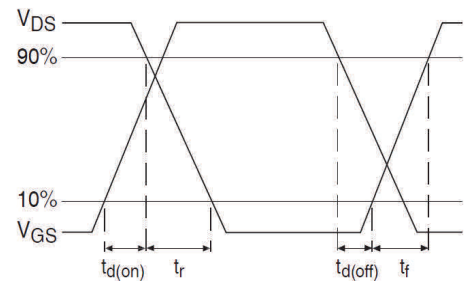

**Fig 23b. Switching Time Waveforms**

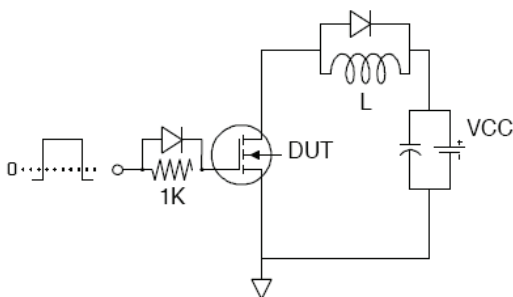


**Fig 24a. Gate Charge Test Circuit**

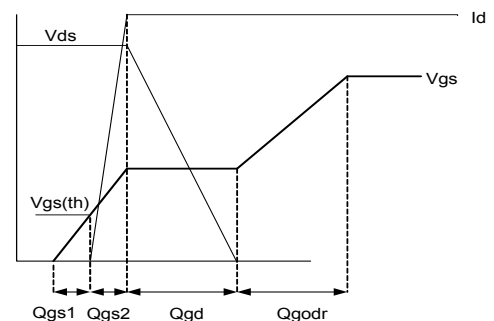

**Fig 24b. Gate Charge Waveform**
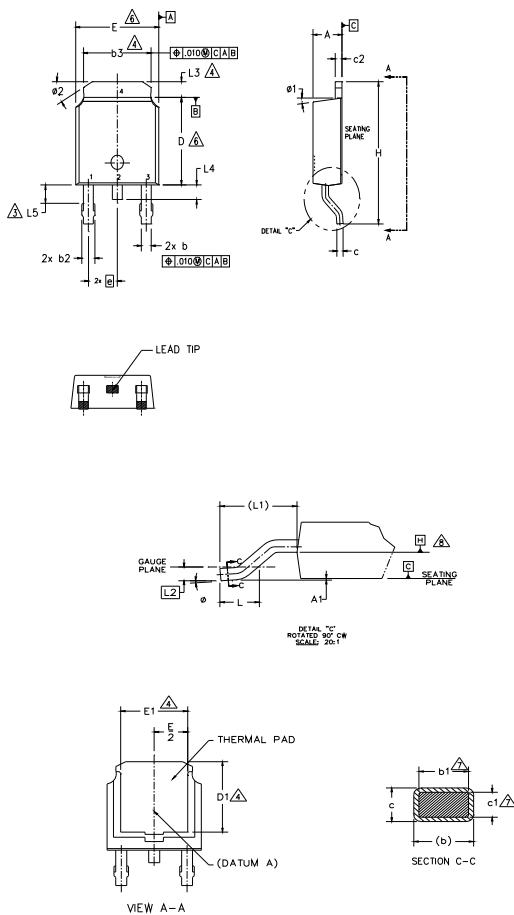
## D-Pak (TO-252AA) Package Outline (Dimensions are shown in millimeters (inches))



### NOTES:

- 1.- DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994
- 2.- DIMENSION ARE SHOWN IN INCHES [MILLIMETERS]
- 3.- LEAD DIMENSION UNCONTROLLED IN L5.
- 4.- DIMENSION D1, E1, L3 & b3 ESTABLISH A MINIMUM MOUNTING SURFACE FOR THERMAL PAD.
- 5.- SECTION C-C DIMENSIONS APPLY TO THE FLAT SECTION OF THE LEAD BETWEEN .005 AND 0.10 [0.13 AND 0.25] FROM THE LEAD TIP.
- 6.- DIMENSION D & E DO NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED .005 [0.13] PER SIDE. THESE DIMENSIONS ARE MEASURED AT THE OUTMOST EXTREMES OF THE PLASTIC BODY.
- 7.- DIMENSION b1 & c1 APPLIED TO BASE METAL ONLY.
- 8.- DATUM A & B TO BE DETERMINED AT DATUM PLANE H.
- 9.- OUTLINE CONFORMS TO JEDEC OUTLINE TO-252AA.

| SYMBOL | DIMENSIONS  |       |           |      | NOTES |
|--------|-------------|-------|-----------|------|-------|
|        | MILLIMETERS |       | INCHES    |      |       |
|        | MIN.        | MAX.  | MIN.      | MAX. |       |
| A      | 2.18        | 2.39  | .086      | .094 |       |
| A1     | —           | 0.13  | —         | .005 |       |
| b      | 0.64        | 0.89  | .025      | .035 |       |
| b1     | 0.65        | 0.79  | .025      | .031 | 7     |
| b2     | 0.76        | 1.14  | .030      | .045 |       |
| b3     | 4.95        | 5.46  | .195      | .215 | 4     |
| c      | 0.46        | 0.61  | .018      | .024 |       |
| c1     | 0.41        | 0.56  | .016      | .022 | 7     |
| c2     | 0.46        | 0.89  | .018      | .035 |       |
| D      | 5.97        | 6.22  | .235      | .245 | 6     |
| D1     | 5.21        | —     | .205      | —    | 4     |
| E      | 6.35        | 6.73  | .250      | .265 | 6     |
| E1     | 4.32        | —     | .170      | —    | 4     |
| e      | 2.29 BSC    |       | .090 BSC  |      |       |
| H      | 9.40        | 10.41 | .370      | .410 |       |
| L      | 1.40        | 1.78  | .055      | .070 |       |
| L1     | 2.74 BSC    |       | .108 REF. |      |       |
| L2     | 0.51 BSC    |       | .020 BSC  |      |       |
| L3     | 0.89        | 1.27  | .035      | .050 | 4     |
| L4     | —           | 1.02  | —         | .040 |       |
| L5     | 1.14        | 1.52  | .045      | .060 | 3     |
| ø      | 0°          | 10°   | 0°        | 10°  |       |
| ø1     | 0°          | 15°   | 0°        | 15°  |       |
| ø2     | 25°         | 35°   | 25°       | 35°  |       |

### LEAD ASSIGNMENTS

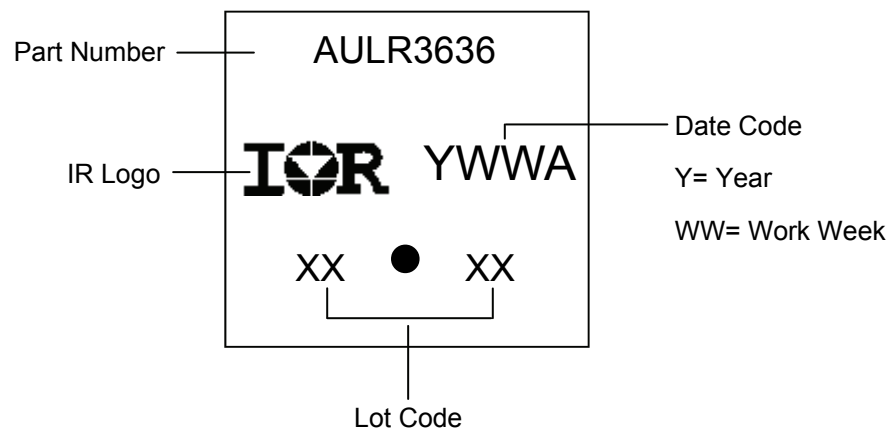
### HEXFET

- 1.- GATE
- 2.- DRAIN
- 3.- SOURCE
- 4.- DRAIN

### IGBT & CoPAK

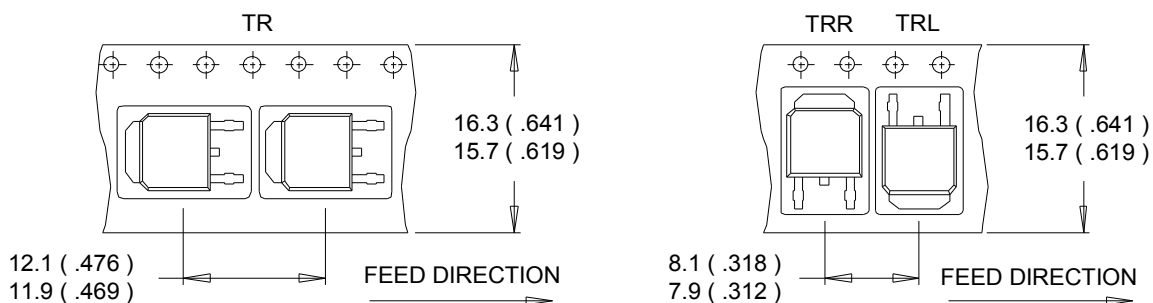
- 1.- GATE
- 2.- COLLECTOR
- 3.- EMITTER
- 4.- COLLECTOR

## D-Pak (TO-252AA) Part Marking Information

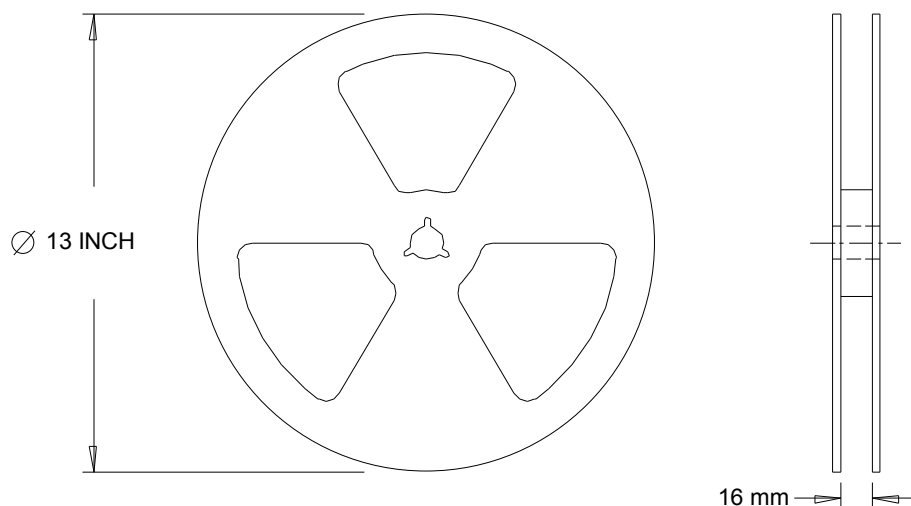


Note: For the most current drawing please refer to IR website at <http://www.irf.com/package/>



**D-Pak (TO-252AA) Tape & Reel Information** (Dimensions are shown in millimeters (inches))

**NOTES :**

1. CONTROLLING DIMENSION : MILLIMETER.
2. ALL DIMENSIONS ARE SHOWN IN MILLIMETERS ( INCHES ).
3. OUTLINE CONFORMS TO EIA-481 & EIA-541.


**NOTES :**

1. OUTLINE CONFORMS TO EIA-481.

Note: For the most current drawing please refer to IR website at <http://www.irf.com/package/>

**Qualification Information**

|                                   |                      |                                                                                                                                                                               |      |
|-----------------------------------|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|
| <b>Qualification Level</b>        |                      | Automotive<br>(per AEC-Q101)                                                                                                                                                  |      |
|                                   |                      | Comments: This part number(s) passed Automotive qualification. Infineon's Industrial and Consumer qualification level is granted by extension of the higher Automotive level. |      |
| <b>Moisture Sensitivity Level</b> |                      | D-Pak                                                                                                                                                                         | MSL1 |
| <b>ESD</b>                        | Machine Model        | Class M4 (+/- 600V) <sup>†</sup><br>AEC-Q101-002                                                                                                                              |      |
|                                   | Human Body Model     | Class H1C (+/- 2000V) <sup>†</sup><br>AEC-Q101-001                                                                                                                            |      |
|                                   | Charged Device Model | Class C5 (+/- 2000V) <sup>†</sup><br>AEC-Q101-005                                                                                                                             |      |
| <b>RoHS Compliant</b>             |                      | Yes                                                                                                                                                                           |      |

† Highest passing voltage.

**Revision History**

| Date      | Comments                                                                                                                                                                             |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 3/18/2014 | <ul style="list-style-type: none"> <li>Added "Logic Level Gate Drive" bullet in the features section on page 1</li> <li>Updated data sheet with new IR corporate template</li> </ul> |
| 4/9/2014  | <ul style="list-style-type: none"> <li>Updated package outline on page 8.</li> <li>Updated typo on the fig.19 and fig.20, unit of y-axis from "A" to "nC" on page 6.</li> </ul>      |
| 11/4/2015 | <ul style="list-style-type: none"> <li>Updated datasheet with corporate template</li> <li>Corrected ordering table on page 1.</li> </ul>                                             |

**Published by**

**Infineon Technologies AG**  
**81726 München, Germany**

© Infineon Technologies AG 2015

**All Rights Reserved.**

**IMPORTANT NOTICE**

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office ([www.infineon.com](http://www.infineon.com)).

**WARNINGS**

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А