


Space-saving SSOP 1 Form A type with built-in resistor 40V load voltage

PhotoMOS[®]
RF SSOP C×R10
Voltage-sensitive (AQY221FO2V)

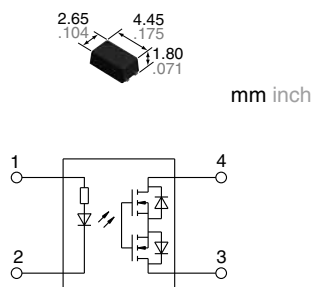

RoHS compliant


FEATURES

1. Built-in input resistor means less man-hours when mounting

The voltage-sensitive type, which eliminates the need to mount an external input resistor, is now available in a small package. Man-hours spent mounting external input resistors are cut and board designing is simplified.

2. Save space on PC board

Since the small package size remains the same while including a built-in input resistor, space on the PC board is saved. This makes it easier to incorporate space savings when designing miniature devices.

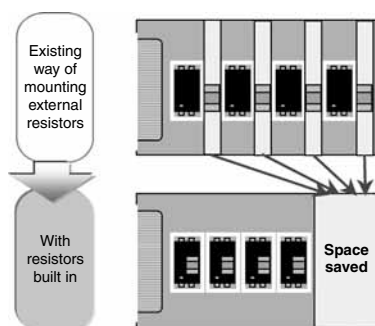

<Artistic impression of PC board space savings due to built-in resistor>

3. Both low on-resistance (R type) and low capacitance (C type) available at excellent electrical characteristics of C×R10

- R type: On resistance Typ. 0.75Ω
Output resistance Typ. 12.5pF
- C type: On resistance Typ. 9.5Ω
Output capacitance Typ. 1pF

TYPICAL APPLICATIONS

- 1. Measuring and testing equipment**
Semiconductor testing equipment, Probe cards, Datalogger, Board tester and other testing equipment.
- 2. Telecommunication and broadcasting equipment**
- 3. Medical equipment**
- 4. Multi-point recorder**
Data logger, Warming and Thermocouple, etc.

TYPES

| | Type | Output rating*1 | | Package | Part No.*2 | | Packing quantity in tape and reel |
|----------------|----------------------------|-----------------|--------------|---------|--|--|-----------------------------------|
| | | Load voltage | Load current | | Tape and reel packing style (Picked from the 1 and 4-pin side) | Tape and reel packing style (Picked from the 2 and 3-pin side) | |
| AC/DC dual use | Low on-resistance (R type) | 40 V | 0.25A | SSOP | AQY221FR2VY | AQY221FR2VW | 3,500 pcs. |
| | Low capacitance (C type) | 40 V | 0.12A | | AQY221FN2VY | AQY221FN2VW | |

Notes: *1 Indicate the peak AC and DC values.

*2 Packing quantity of 1,000 pieces is possible. Please contact our sales office.

For space reasons, the three initial letters of the part number "AQY", and the package (SSOP) indicator "V" and the packing style indicator "Y" or "W" are not marked on the device. (Ex. the label for product number AQY221FR2VY is 221FR2)

RF SSOP C×R10 Voltage-sensitive (AQY221F○2V)

RATING

1. Absolute maximum ratings (Condition: ambient temperature 25°C 77°F)

| Item | Symbol | AQY221FR2V | AQY221FN2V | Remarks | |
|-------------------------|------------------------|------------|-----------------------------|---------------------------------|-------------------------|
| Input | Input voltage | V_{IN} | 6V | | |
| | Input reverse voltage | V_{RIN} | 5V | | |
| | Power dissipation | P_{in} | 65mW | | |
| Output | Load voltage (peak AC) | V_L | 40V | | |
| | Load current | I_L | 0.25A | 0.12A | Peak AC, DC |
| | Peak load current | I_{peak} | 0.75A | 0.2A | 100ms (1shot), $V_L=DC$ |
| | Power dissipation | P_{out} | 250mW | | |
| Total power dissipation | P_T | 300mW | | | |
| I/O isolation voltage | V_{iso} | 500Vrms | | | |
| Ambient temperature | Operating | T_{opr} | -40 to +85°C -40 to +185°F | (Non-icing at low temperatures) | |
| | Storage | T_{stg} | -40 to +100°C -40 to +212°F | | |


2. Electrical characteristics (Condition: ambient temperature 25°C 77°F)

| Item | Symbol | AQY221FR2V | AQY221FN2V | Condition | | |
|----------------------------------|--------------------|------------|------------|--|----------------------------------|---|
| Input | Operate voltage | Typ. | 1.3V | AQY221FR2V: $I_L = \text{Max.}$ AQY221FN2V: $I_L = 80\text{mA}$ | | |
| | | Max. | 4V | | | |
| | Turn off voltage | Min. | 0.8V | | | |
| | | Typ. | 1.3V | | | |
| Input current | Typ. | I_{IN} | 8.5mA | $V_{IN} = 5V$ | | |
| Output | On resistance | Typ. | R_{on} | 0.75Ω | 9.5Ω | AQY221FR2V: $V_{IN} = 5V, I_L = \text{Max.}$ AQY221FN2V: $V_{IN} = 5V, I_L = 80\text{mA}$ Within 1 s |
| | | Max. | | 1.25Ω | 12.5Ω | |
| | Output capacitance | Typ. | C_{out} | 12.5pF | 1pF | $V_{IN} = 0V, V_B = 0V, f = 1\text{MHz}$ |
| | | Max. | | 18pF | 1.5pF | |
| Off state leakage current | Typ. | I_{Leak} | 0.02nA | 0.01nA | $V_{IN} = 0V, V_L = \text{Max.}$ | |
| | Max. | | | *10nA | | |
| Transfer characteristics | Turn on time** | Typ. | T_{on} | 0.05ms | 0.01ms | AQY221FR2V: $V_{IN} = 5V, V_L = 10V, R_L = 40\Omega$ AQY221FN2V: $V_{IN} = 5V, V_L = 10V, R_L = 125\Omega$ |
| | | Max. | | 0.5ms | | |
| | Turn off time** | Typ. | T_{off} | 0.06ms | 0.03ms | $f = 1\text{MHz}, V_B = 0V$ |
| | | Max. | | 0.2ms | | |
| | I/O capacitance | Typ. | C_{iso} | 0.8pF | 1.5pF | $f = 1\text{MHz}, V_B = 0V$ |
| | | Max. | | | | |
| Initial I/O isolation resistance | Min. | R_{iso} | 1,000MΩ | 500V DC | | |

Note: If you wish to change the input voltage, rating or performance, please inquire with our sales.

*Available as custom orders (1 nA or less)

**Turn on/Turn off time

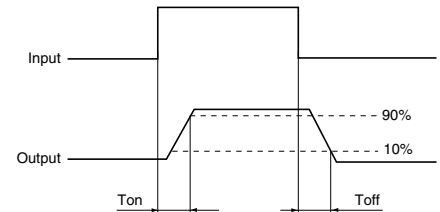

3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.

| Item | Symbol | Min. | Max. | Unit |
|---------------|-------------------------|-------|------|------|
| Input voltage | V_{IN} | 4.5 | 5.5 | V |
| AQY221FR2V | Load voltage (Peak AC) | V_L | 15 | V |
| | Continuous load current | I_L | 0.25 | A |
| AQY221FN2V | Load voltage (Peak AC) | V_L | 15 | V |
| | Continuous load current | I_L | 0.12 | A |


■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

REFERENCE DATA


1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40 to +85°C
-40 to +185°F

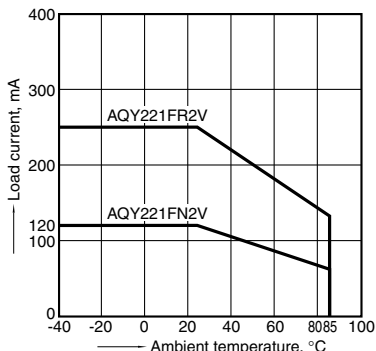


2. Load current vs. Load voltage characteristics

Ambient temperature: 25°C 77°F

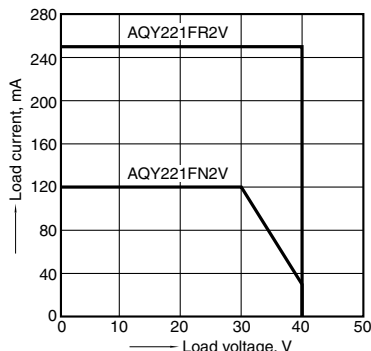


3. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 3 and 4
Input voltage: 5V; Load voltage: 10V (DC);
Continuous load current: 250mA (DC) R type,
80mA (DC) C type

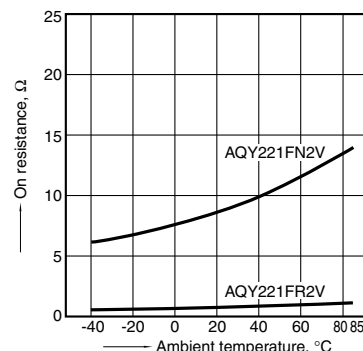


4. Turn on time vs. ambient temperature characteristics

Input voltage: 5V; Load voltage: 10V (DC);
Continuous load current: 250mA (DC) R type,
80mA (DC) C type

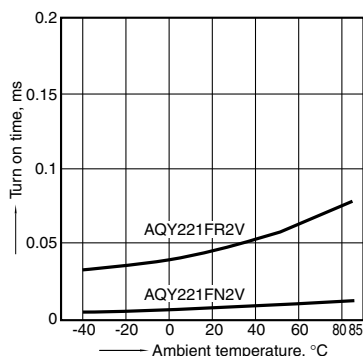


5. Turn off time vs. ambient temperature characteristics

Input voltage: 5V; Load voltage: 10V (DC);
Continuous load current: 250mA (DC) R type,
80mA (DC) C type

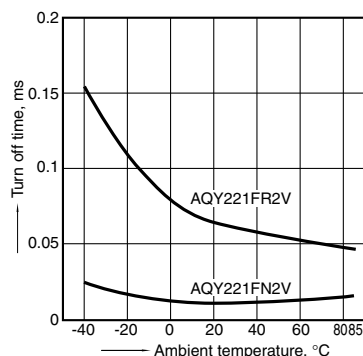


6. Operate voltage vs. ambient temperature characteristics

Load voltage: 10V (DC);
Continuous load current: 250mA (DC) R type,
80mA (DC) C type

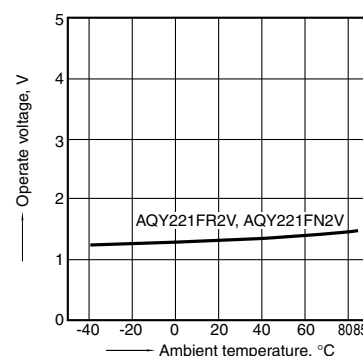


7. Turn off voltage vs. ambient temperature characteristics

Load voltage: 10V (DC);
Continuous load current: 250mA (DC) R type,
80mA (DC) C type

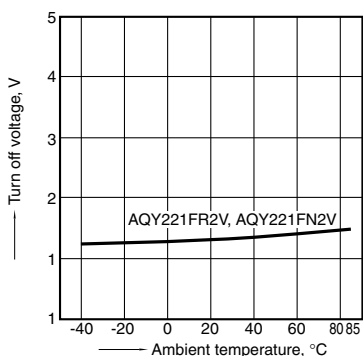


8. Input current vs. ambient temperature characteristics

Sample: All types
Input voltage: 5V

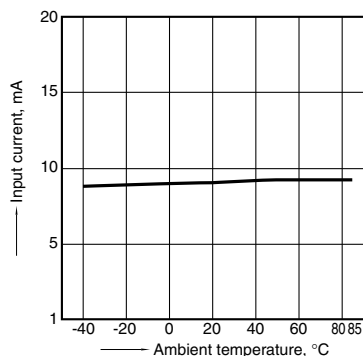

9. Current vs. voltage characteristics of output at MOS portion


Measured portion: between terminals 3 and 4
Ambient temperature: 25°C 77°F

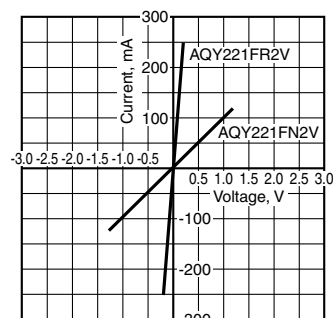

RF SSOP C×R10 Voltage-sensitive (AQY221F○2V)


10. Input current vs. input voltage characteristics

Sample: All types
Ambient temperature: 25°C 77°F
(Recommended input voltage: 5±0.5V)

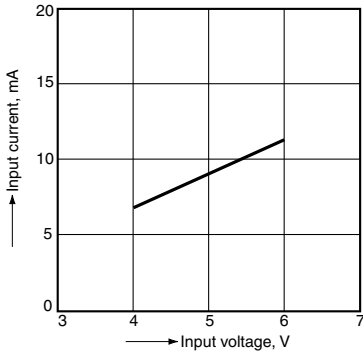


11. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 3 and 4
Ambient temperature: 25°C 77°F

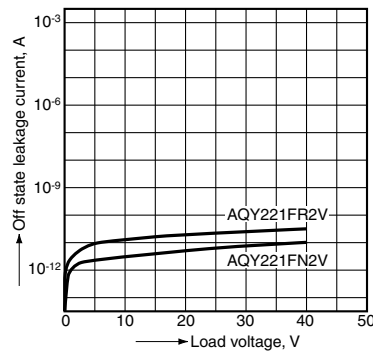


12. Turn on time vs. input voltage characteristics

Measured portion: between terminals 3 and 4
Load voltage: 10V (DC);
Continuous load current: 250mA (DC) R type,
80mA (DC) C type; Ambient temperature: 25°C 77°F

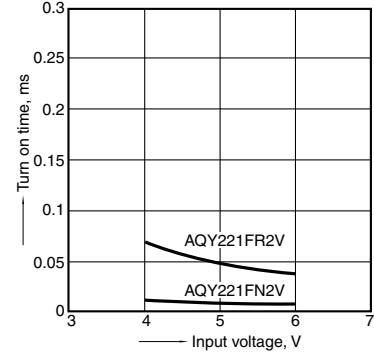


13. Turn off time vs. input voltage characteristics

Measured portion: between terminals 3 and 4
Load voltage: 10V (DC);
Continuous load current: 250mA (DC) R type,
80mA (DC) C type; Ambient temperature: 25°C 77°F

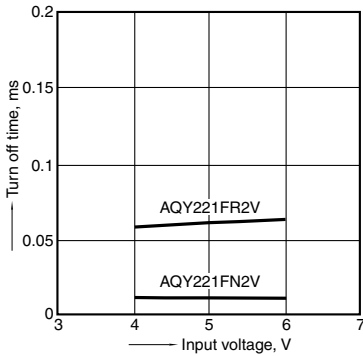


14. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 3 and 4
Frequency: 1 MHz, 30mVrms;
Ambient temperature: 25°C 77°F

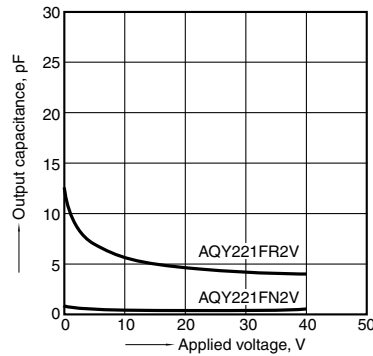


15. Isolation vs. frequency characteristics (50Ω impedance)

Measured portion: between terminals 3 and 4
Ambient temperature: 25°C 77°F

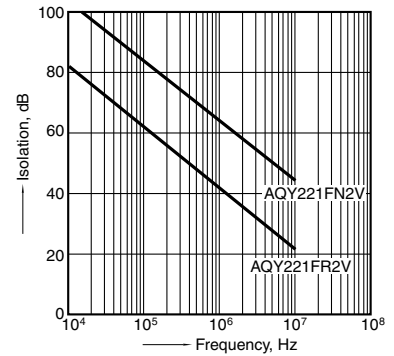

16. Insertion loss vs. frequency characteristics (50Ω impedance)

Measured portion: between terminals 3 and 4
Ambient temperature: 25°C 77°F

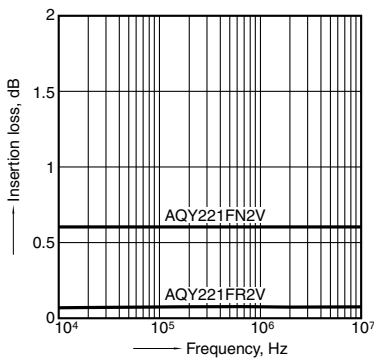

"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

*Recognized in Japan, the United States, all member states of European Union and other countries.

Please contact

Panasonic Corporation

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan
industrial.panasonic.com/ac/e/

Panasonic®

©Panasonic Corporation 2017

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

[AQY221FR2VW](#) [AQY221FR2VY](#) [AQY221FN2VW](#) [AQY221FN2VY](#) [AQY221FR2V](#) [AQY221FN2V](#) [AQY221FR2V1Y](#)
[AQY221FN2V1Y](#) [AQY221FN2V1W](#) [AQY221FR2V1W](#)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А