

SPECIFICATION

Patent Pending

Part No.	: FXP612.07.0095A
Description	: FXP612 Flexible Polymer GPS L1 / GPS L2 / GPS L5 / GALILEO / GLONASS G1 / BEIDOU Antenna
Features	: GPS L1 / GALILEO :1563-1587 MHz GPS L2 :1215-1240 MHz GPS L5 :1164-1189 MHz GLONASS G1: 1593-1610 MHz BEIDOU:1559-1591 MHz Flexible Loop Antenna 3 dBi Peak Gain-90% Efficiency Peel and Stick Dims: 76mm*47mm*0.15mm Cable Length : 95mm IPEX MHFI Connector (U.FL compatible) Patent Pending RoHS compliant



1. Introduction

The patent pending FXP612 embedded flexible antenna is a next generation GNSS antenna designed to cover working frequencies in the GPS L1/L2/L5/ GLONASS / GALILEO / BeiDou bands. This antenna features the highest efficiencies in the market, not just an incredible efficiency of 90% in GPS/GALILEO/GLONASS/BeiDou L1 bands, but also 70% efficiency in the GPS L2 and L5 bands. The FXP612 is a linear polarized antenna, but with an omni-directional radiation pattern which makes it less sensitive to device orientation. The VSWR is also extremely low, below 1.6 at all bands, this of course contributes to it's total radiation efficiency, but also means it is ideal for low power consumption applications.

This antenna is made of durable, flexible, polymer with a cable and connector for easy installation. It is designed to be mounted directly to the inner shell of a plastic housing or glass enclosure/cover. No space is needed on the PCBs of your device, but at least 20mm of minimum clearance is required from the ground-plane to achieve optimal antenna efficiency. At 76mm*47mm*0.15mm, the antenna is ultra-thin and can be applied by a simple peel and stick process, attaching securely to non-metal surfaces via 3M adhesive. It has been tuned to work directly on ABS/PC plastic housings.

Typical Applications

- Telematics
- Fleet Management
- Positioning

It is an ideal choice for any device maker that needs a solution that can work on L1 and L2 today, but also for years to come with the new L2 and L5 GPS civilian signal bands coming on stream in 2020 and beyond, and which would like to keep manufacturing costs down over the lifetime of a product. Cable type, length and connectors are customizable. For cable lengths over 200mm, it is recommended to use an active GPS/GALILEO patch antenna. Please contact your regional Taoglas sales office for support.


2. Specification

ELECTRICAL					
STANDARD	GPS L1 /GALILEO	GPS L2	GPS L5	GLONASS	BEIDOU
Operation Frequency (MHz)	1563-1587	1215-1240	1164-1189	1593-1610	1559-1591
Return Loss	-16.2	-12.6	-16.0	-20.4	-23.0
Efficiency (%)	91%	73%	70%	92%	91.5%
Peak Gain (dBi)	3.7	3.3	3.1	3.9	4.0
VSWR	1.2	1.6	1.3	1.1	1.2
Radiation Properties	Omni-Directional				
Polarization	Linear				
Impedance (Ohms)	50				
Max input Power (Watts)	5				
MECHANICAL					
Dimension	76 x 47 x 40.15 mm				
Material	FPCB				
Connector	MHFI (U.FL compatible)				
Weight	3 grams				
Cable Type	Mini-Coax 1.13 mm, Cable Length : 95mm				
ENVIRONMENTAL					
Operation Temperature	-40°C to 85°C				
Storage Temperature	-40°C to 105°C				
Humidity	Non-condensing 65°C 95% RH				


* The FXP612 antenna performance was measured with 30X30 cm ABS Plastic (2mm thickness)

3. Antenna Characteristics


3.1 Set up

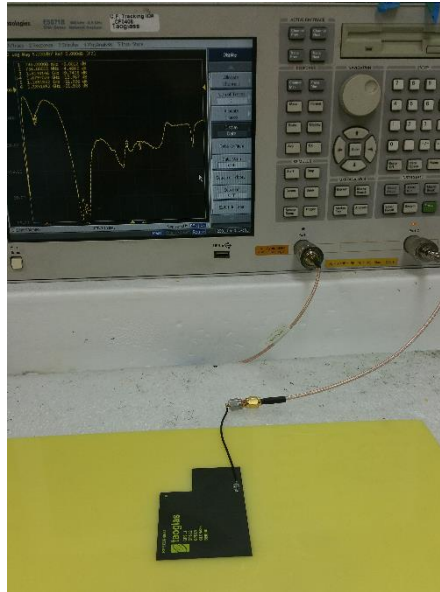


3.2 Return Loss

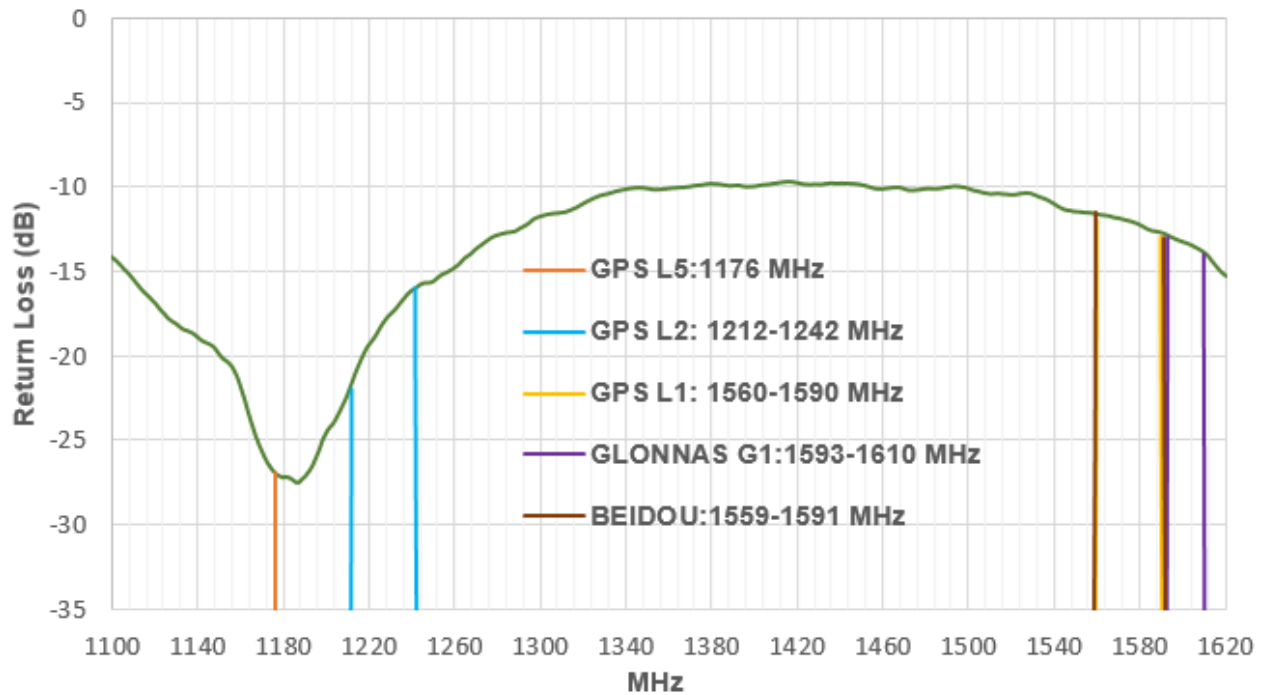


3.3 VSWR

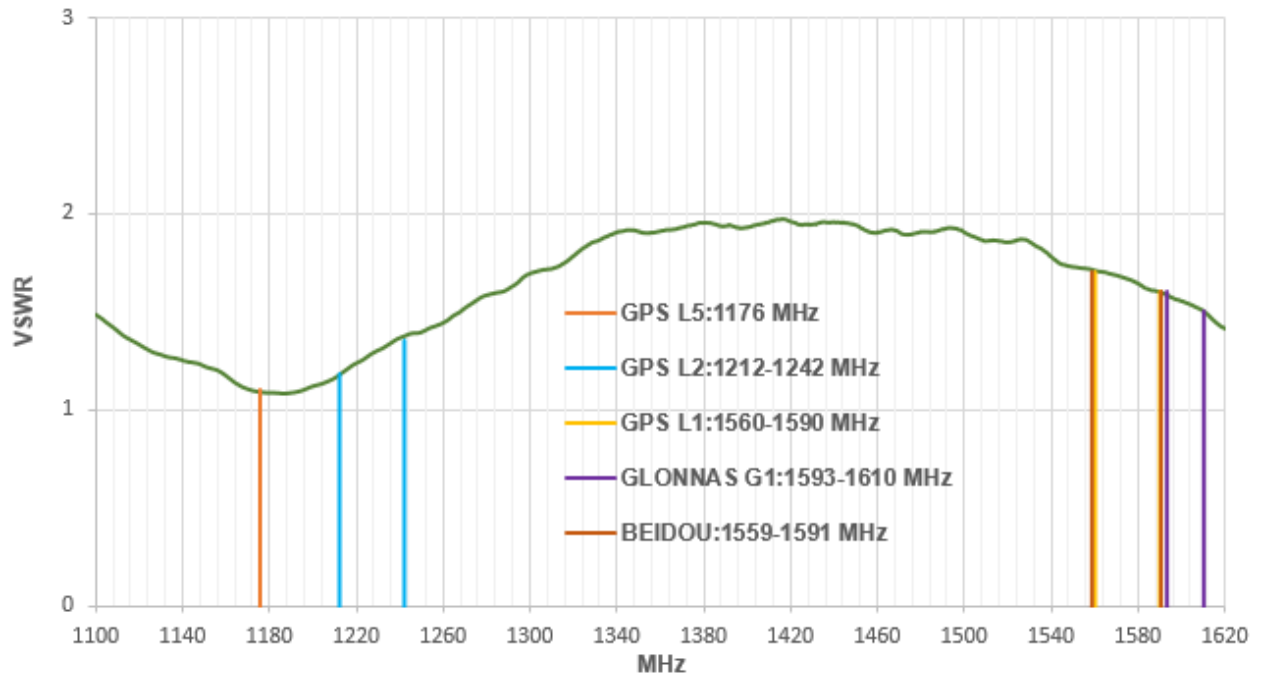

3.4 Efficiency

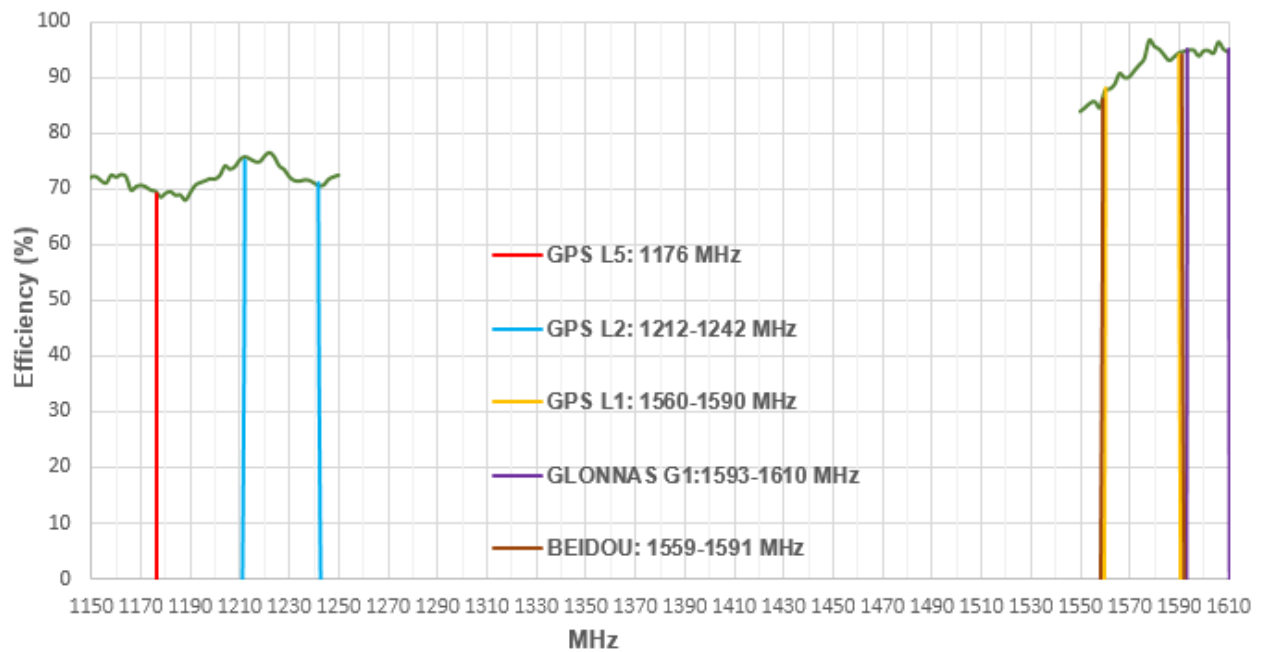


3.5 Peak Gain

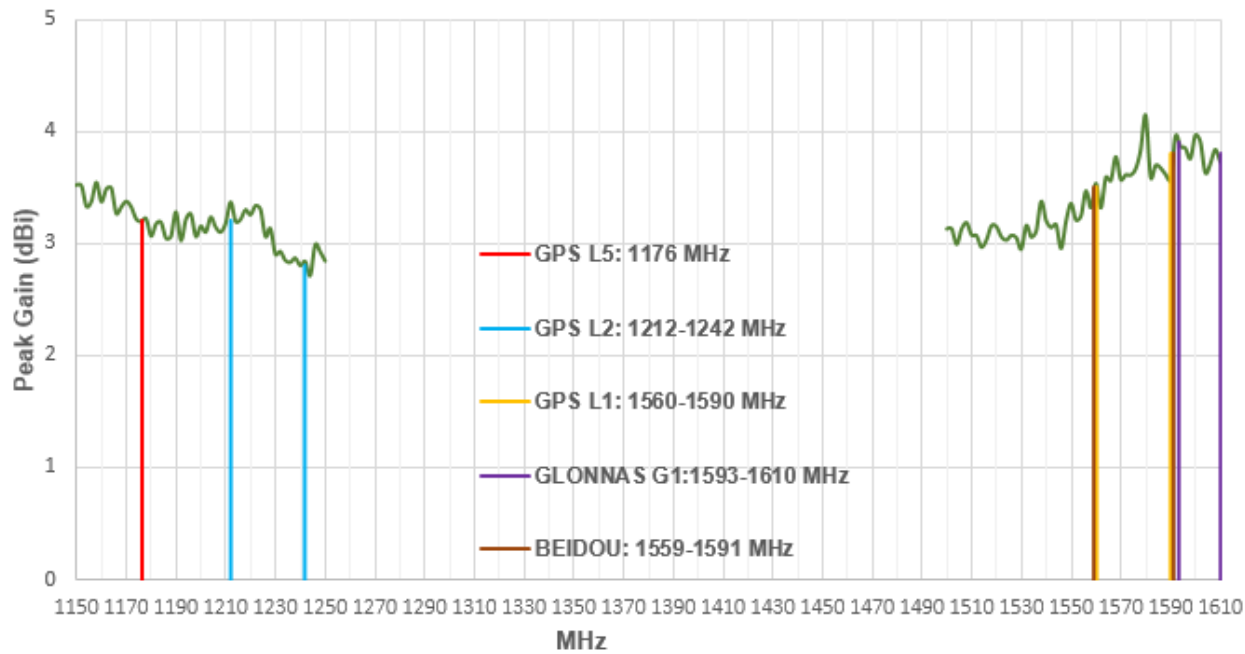


4. Antenna Radiation Pattern

4.1 Measurement Setup

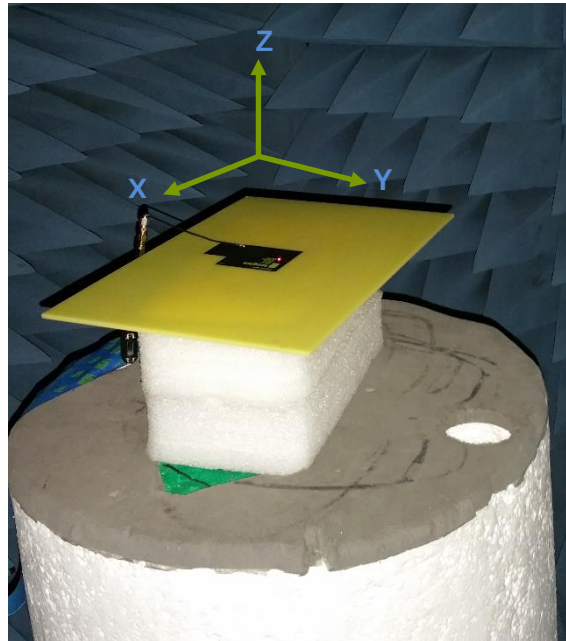


4.2 2D Radiation Pattern

4.2.1 XY Plane

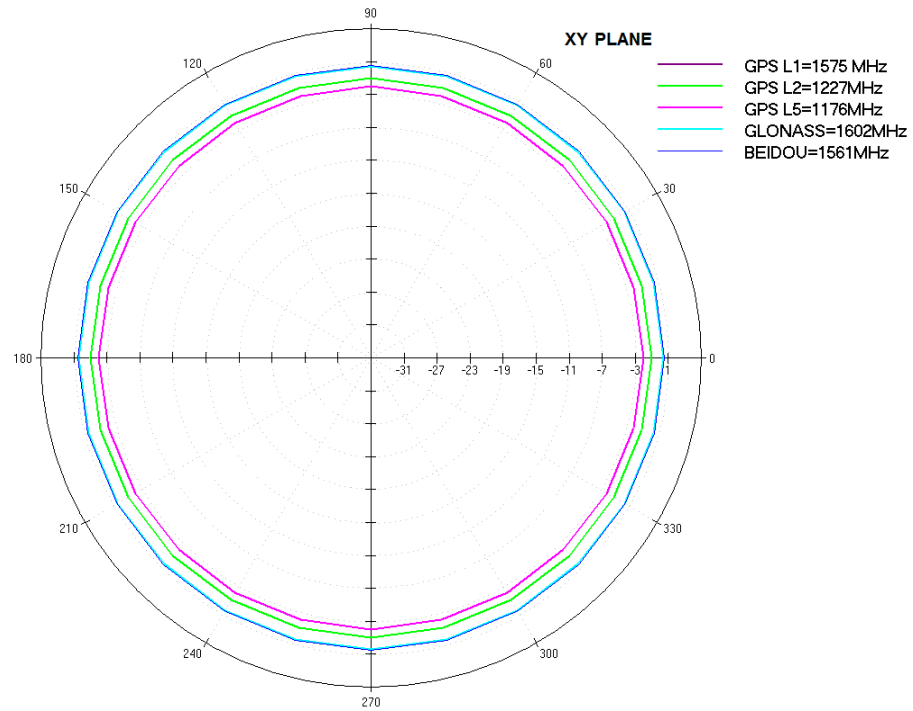


4.2.2 ZY Plane

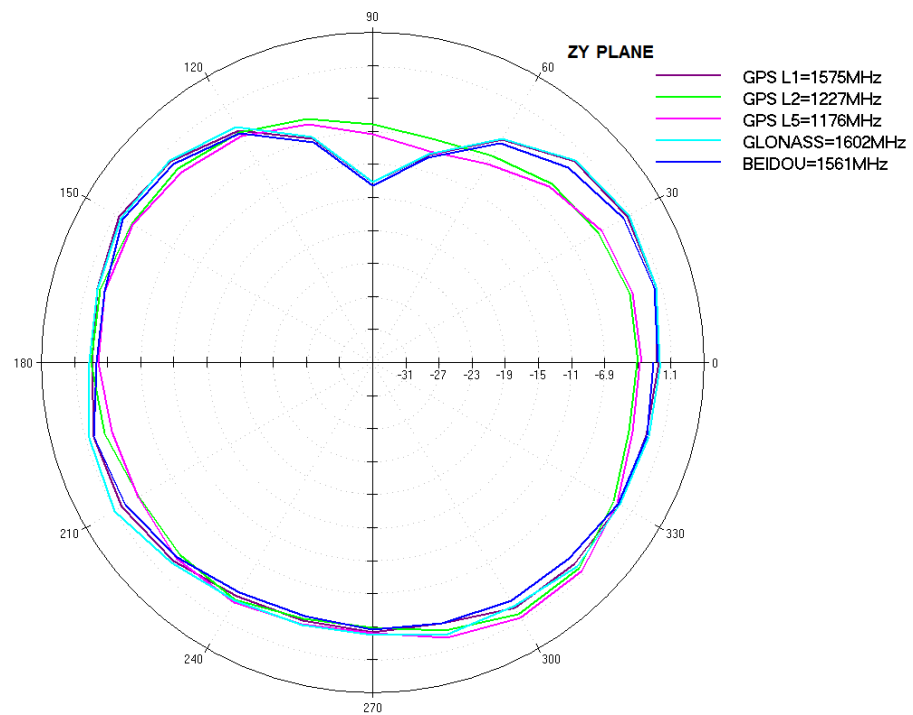


4.3 3D Radiation Pattern


4.3.1 GPS L1/GALILEO at 1575 MHz

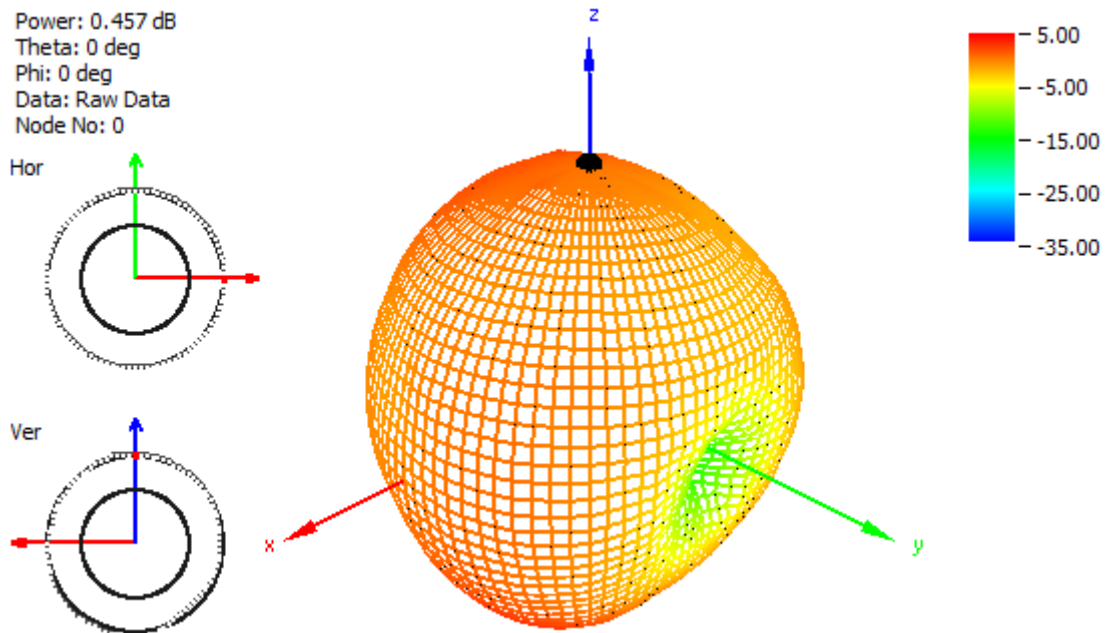


4.3.2 GPS L2 at 1227 MHz

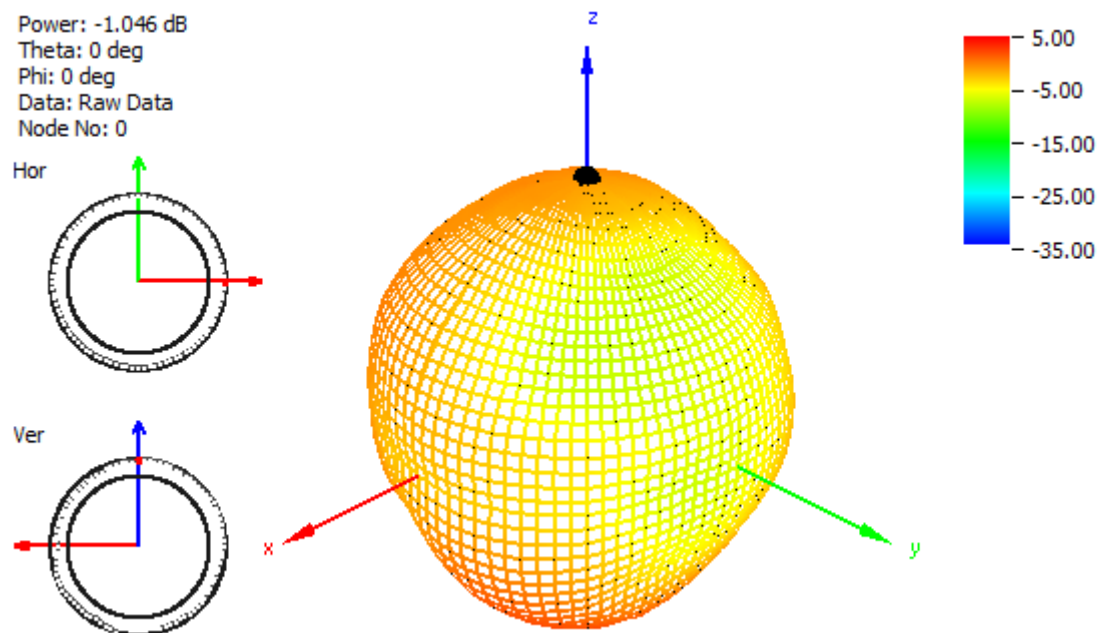


4.3.3 GPS L5 at 1176 MHz

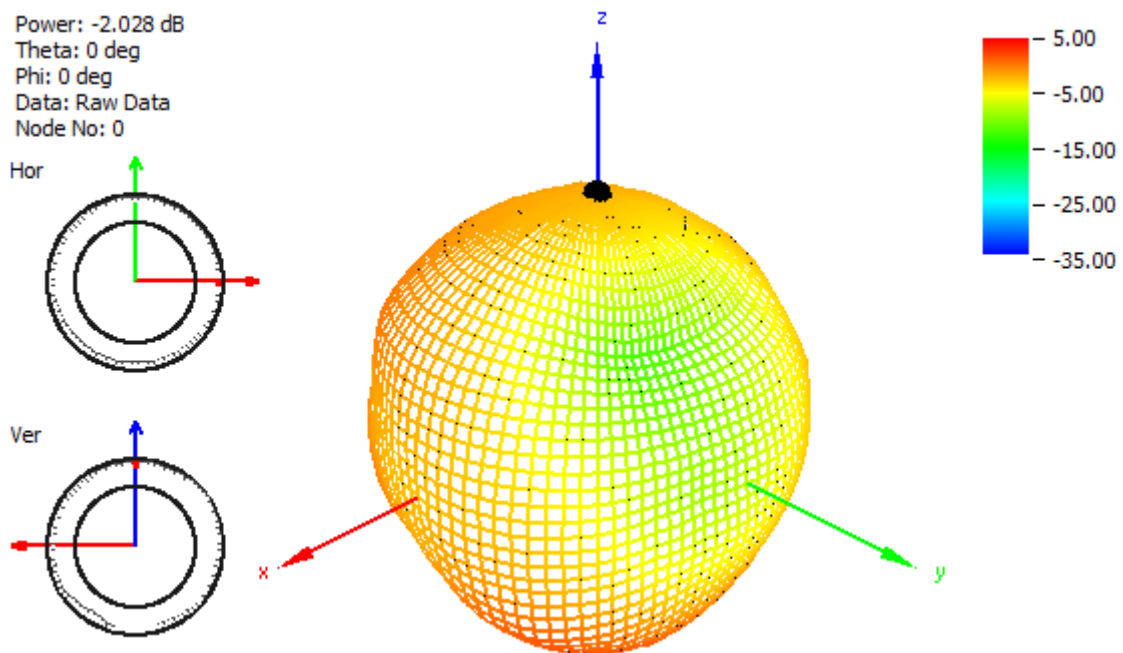


4.3.4 GLONASS at 1602 MHz

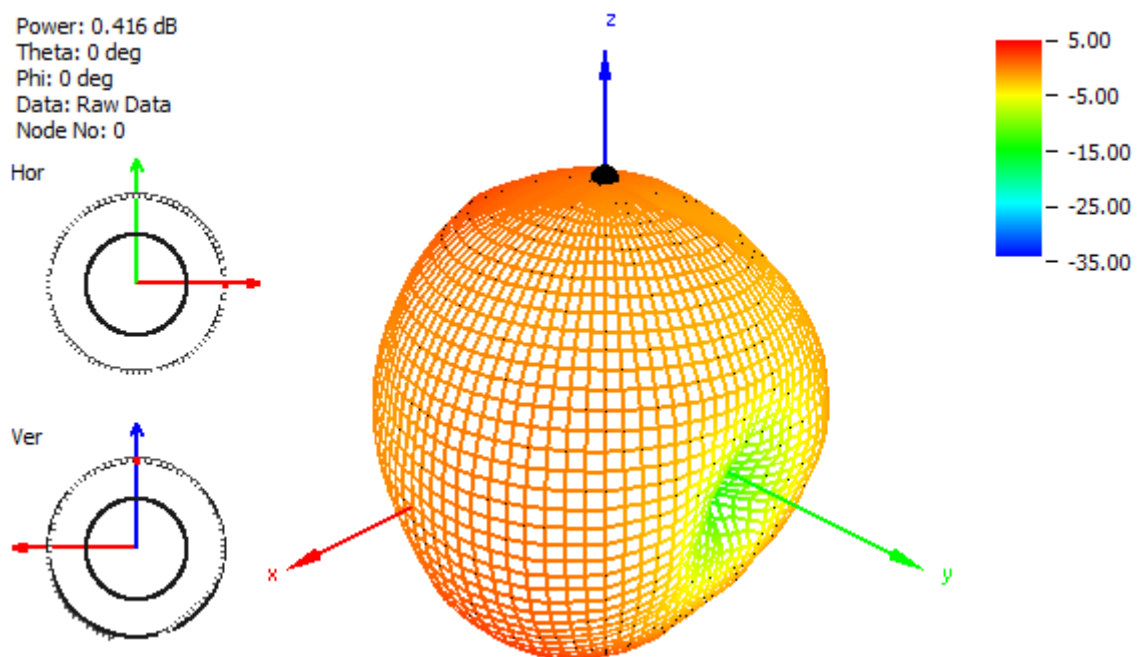

4.3.5 BEIDOU at 1561 MHz

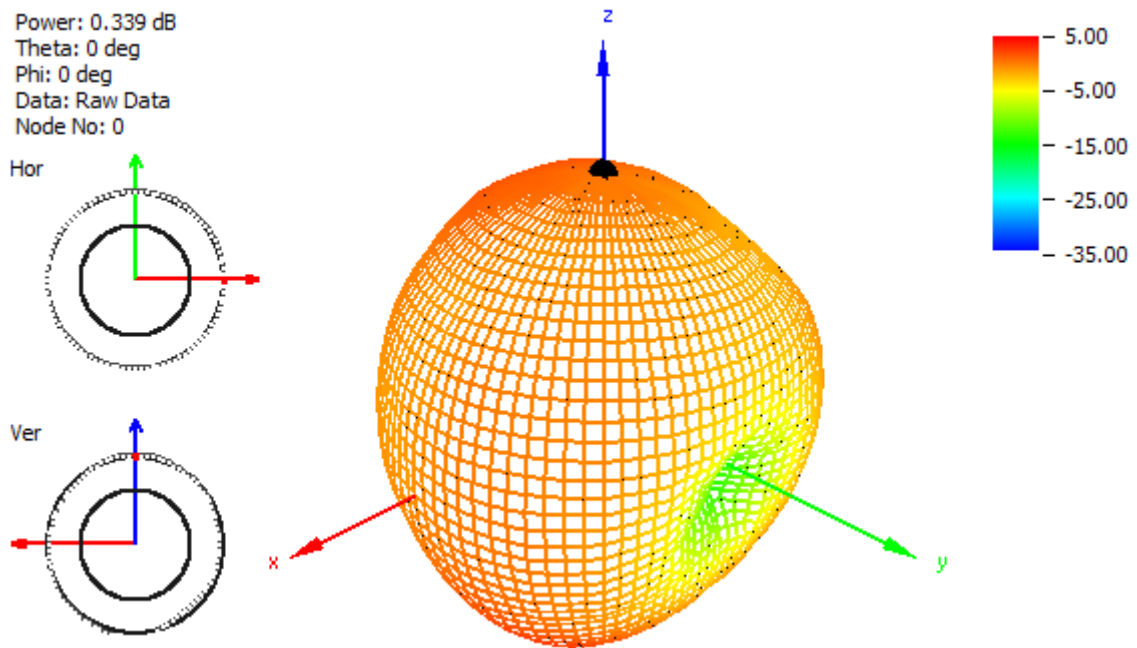

5. Mechanical Drawing (Unit: mm)

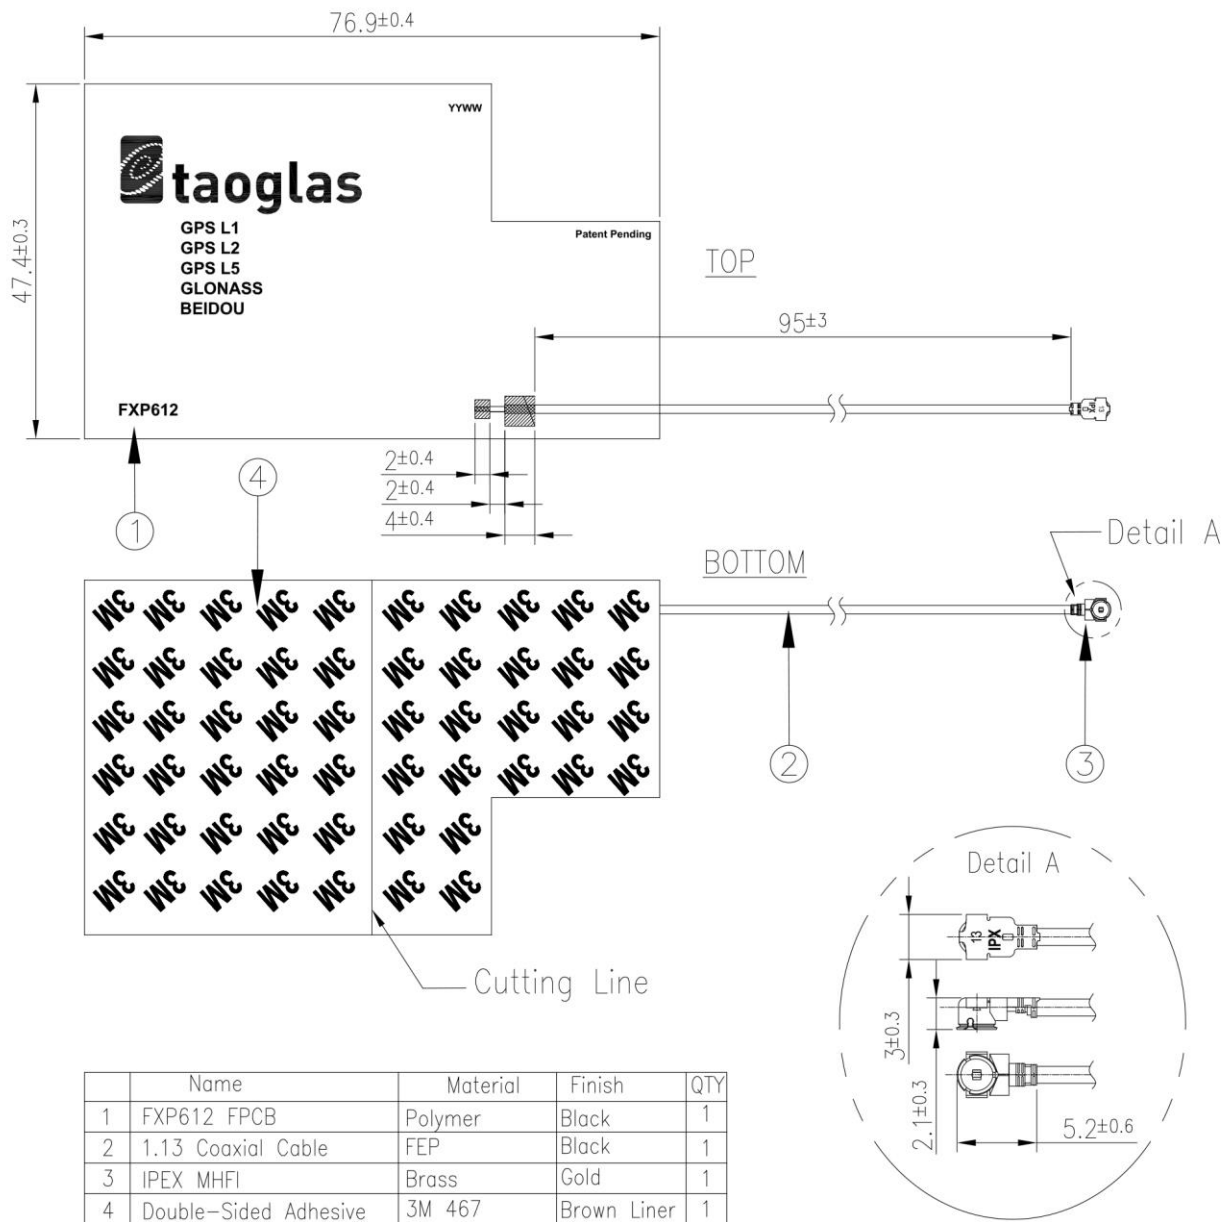


6. Packaging


FXP612.07.0095A

Packaging Specifications


100pcs FXP612.07.0095A per PE Bag
Bag Dimensions - 270 x 180mm
Weight - 207g




1000pcs FXP612.07.0095A per PE Large Bag
Bag Dimensions - 466 x 380mm
Weight - 2.1kg



5,000 pcs FXP612.07.0095A per carton
Carton - 320 x 250 x 230mm
Weight - 10.5Kg

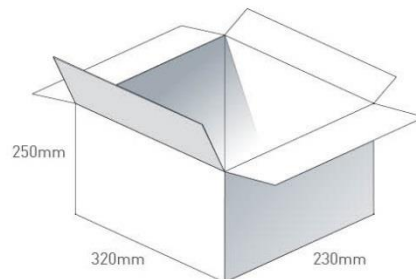


Pallet Dimensions 960 x 1000 x 1300mm
60 Cartons per Pallet
12 Cartons per layer
5 Layers

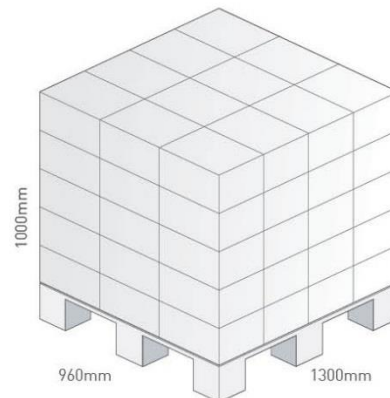

7. Application Note

The MA612 antenna performance with different cable lengths.

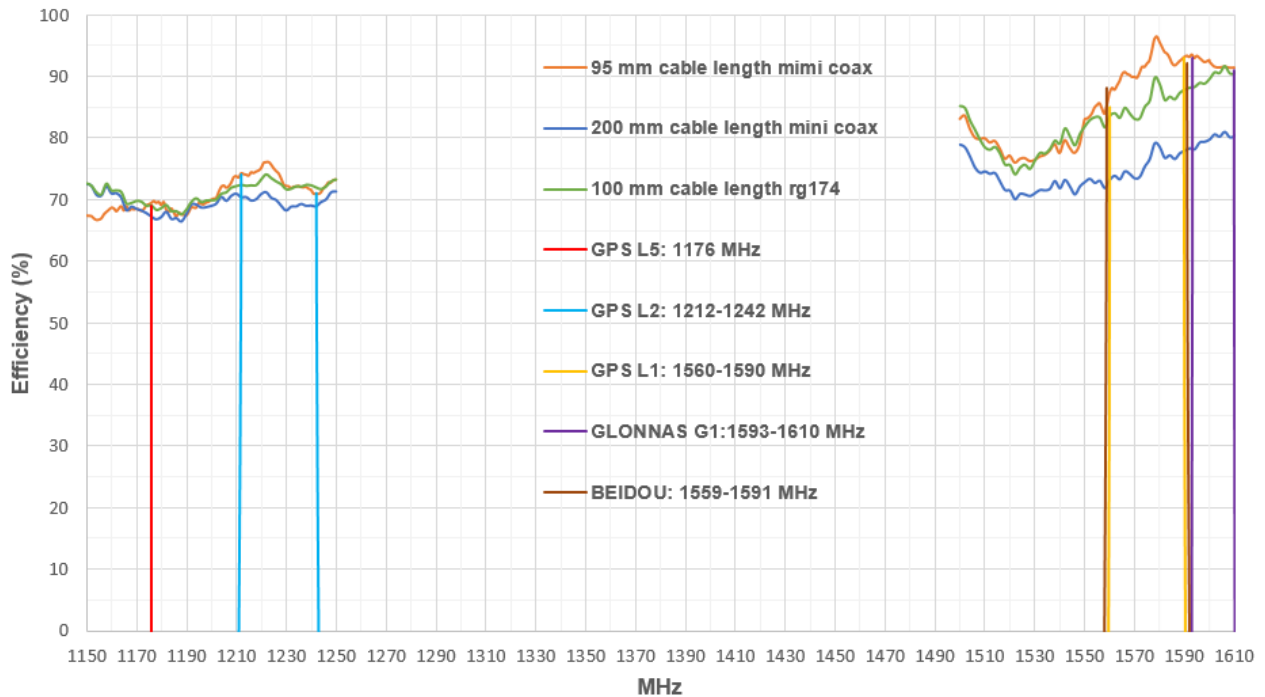

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А