

### Description

The AH5798 is a single chip solution for driving single-coil brushless direct current (BLDC) fans and motors. The integrated full-bridge driver output stage uses soft switching to minimize audible switching noise and electromagnetic interference (EMI) providing a low noise solution.

To help protect the motor coil, the AH5798 provides Rotor Lock Protection which shuts down output drive if rotor lock is detected. The device automatically re-starts when the rotor lock is removed. Over temperature shutdown provides thermal protection for the device.

A Tachometer output is provided by open-drain Frequency Generator (FG) Pin which allows external interface to monitor motor rotation or speed. The FG output is the magnetic change frequency.


The AH5798 is available in space saving SOT89-5L and thinner TSOT25 packages.

### Features

- Supports single-coil full-wave DC fan drivers
- Built-in Hall sensor and input amplifier
- Operating Voltage: 1.8V to 5.5V
- Soft switching for low noise DC fan motor applications
- Rotor Lock Protection (Lock detection, output shutdown and automatic re-start)
- Thermal protection
- Tachometer (FG) output
- No external timing capacitor - Reduces the numbers of external components required
- Low profile packages: SOT89-5L and TSOT25
- “Green” Molding Compound


### Pin Assignments

( Top View )

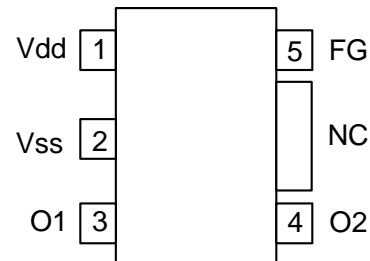

SOT89-5L

( Top View )

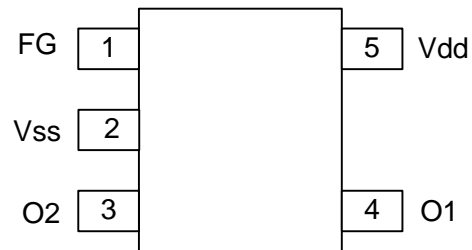


TSOT25

### Applications

- 3.3V / 5V Min. BLDC Cooling Fans
- Netbook/ Notebook BLDC fans
- Low Voltage/ Low Power BLDC Motors

**Typical Application Circuit**

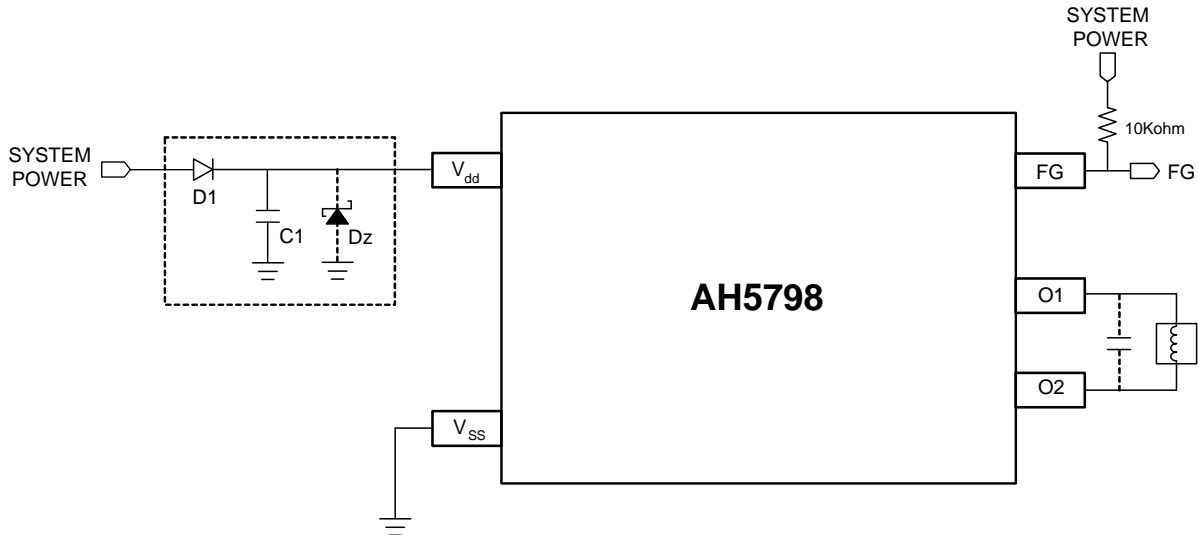

- \* Reverse connection of power supply may damage the device. To prevent reverse power damage, a protection (reverse blocking) Diode D1 is needed between power supply and V<sub>dd</sub> terminal. If a reverse power protection diode D1 is used, there is no current return path to power supply, so it is necessary to follow measures such as below.
- Connect Dz (Zener diode) between V<sub>dd</sub> and V<sub>ss</sub> terminal, to prevent voltage exceeding the absolute maximum rating of the device.
  - Connect a capacitor C1 between V<sub>dd</sub> and V<sub>ss</sub> terminal, to complete the current return path to power supply.


The AH5798 has an open-drain tachometer FG output that follows the magnetic change frequency. Typically, a pull-up resistor of 10kΩ is recommended from FG pin to the supply voltage.

**Pin Descriptions**


| Pin Name | Description                    |
|----------|--------------------------------|
| Vdd      | Power Supply Pin               |
| Vss      | Ground Pin                     |
| O1       | Output Driving & Sinking Pin 1 |
| O2       | Output Driving & Sinking Pin 2 |
| NC       | No Connection                  |
| FG       | Frequency Generator (Note 1)   |

Notes: 1. The FG is the same as the magnetic change frequency.

**Functional Block Diagram**

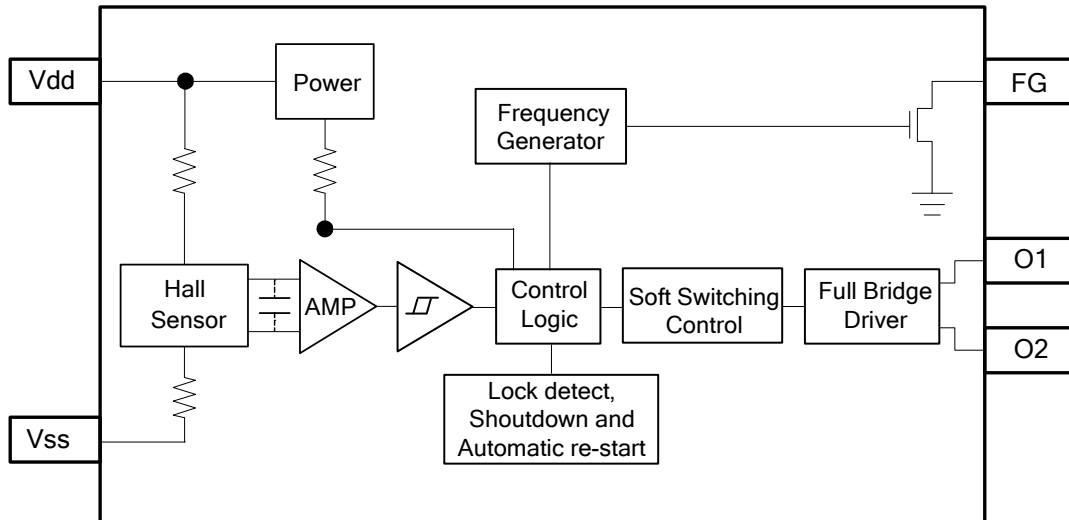


**Operating**

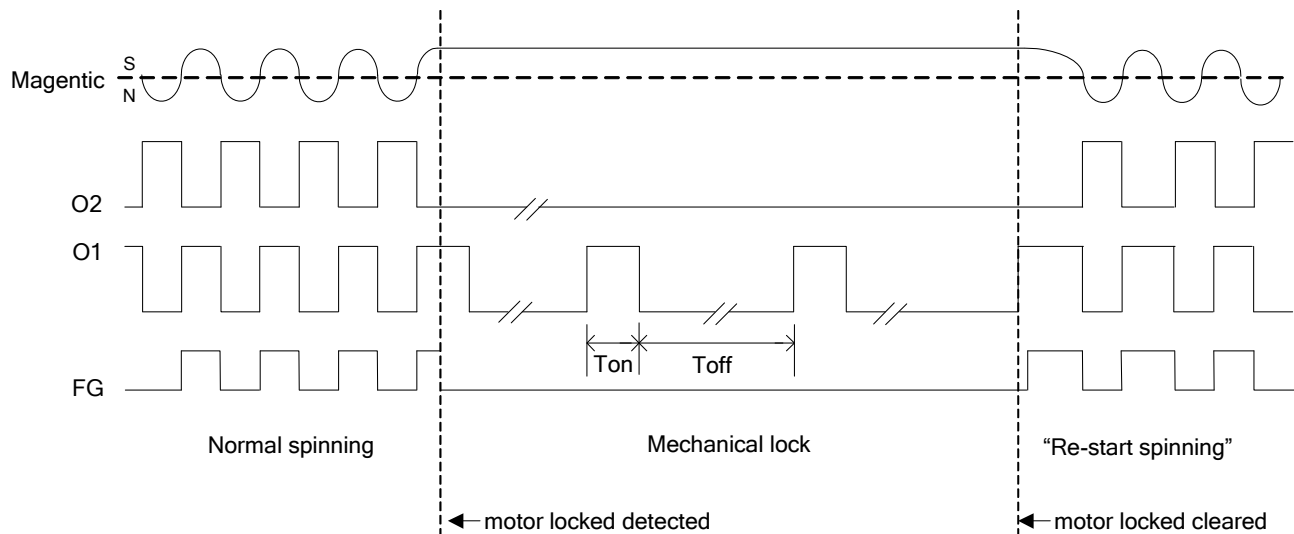

- Notes:
2. In "Normal spinning", the FG changes its state at each rising edge of O1.
  3. When the motor locks with South pole at the Hall element, O2 is kept on "L" and O1 is a clock with Ton/Toff ratio. When motor locks with North pole at the Hall element, O1 is kept on "L", O2 is a clock with Ton/Toff ratio.
  4. When "Re-start spinning" occurs, the motor speed ramps up to the "Normal Spinning" speed from zero. Speed ramp-up profile depends on motor characteristics.


### Soft Switching

AH5798 employs soft switching of output drive at commutation to reduce audible noise and EMI for low noise applications.

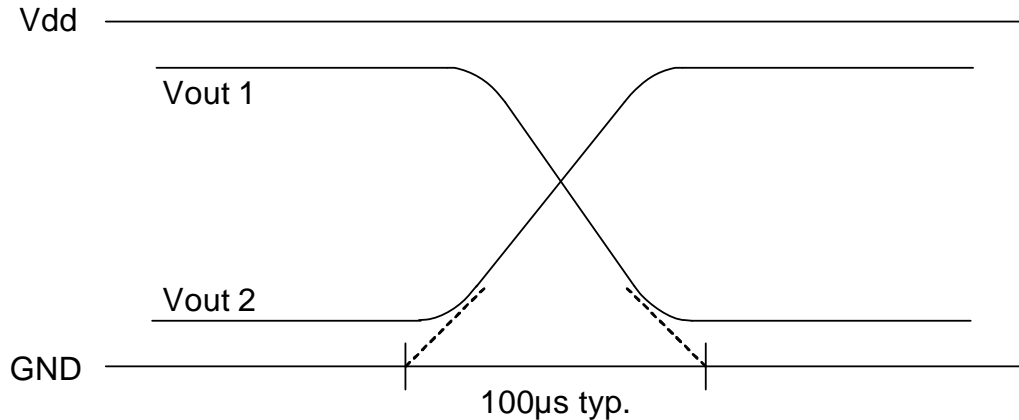

### Absolute Maximum Ratings ( $T_A = 25^\circ\text{C}$ , unless otherwise noted)

| Symbol               | Parameter                                       | Rating    | Unit             |
|----------------------|---|-----------|------------------|
| Vdd                  | Supply voltage                                  | 6         | V                |
| $I_{O(\text{PEAK})}$ | Maximum Output Current (Peak)                   | 800       | mA               |
| $P_D$                | Power Dissipation                               | SOT89-5L  | 800              |
|                      |   | TSOT25    | 520              |
| $T_{ST}$             | Storage Temperature Range                       | -65 ~ 150 | $^\circ\text{C}$ |
| $\theta_{JA}$        | Thermal Resistance Junction-to-Ambient (Note 5) | SOT89-5L  | 156              |
|                      |   | TSOT25    | 240              |

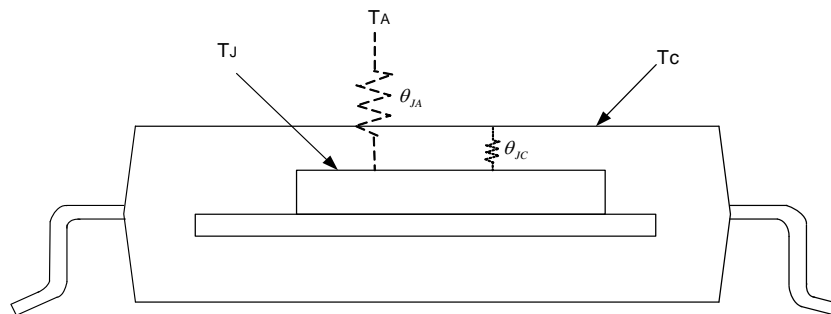

Notes: 5.  $\theta_{JA}$  should be confirmed with heat sink thermal resistance. If there is no heat sink contact,  $\theta_{JA}$  will almost be the same as  $\theta_{JC}$ .

### Recommended Operating Conditions ( $T_A = 25^\circ\text{C}$ )

| Symbol | Parameter                           | Conditions | Min | Max | Unit             |
|--------|-------------------------------------|------------|-----|-----|------------------|
| Vdd    | Supply Voltage                      | Operating  | 1.8 | 5.5 | $^\circ\text{C}$ |
| $T_A$  | Operating Ambient Temperature Range | Operating  | -40 | 105 | V                |

### Electrical Characteristics ( $T_A = 25^\circ\text{C}$ , $V_{DD} = 5\text{V}$ )

| Symbol     | Parameter                       | Test Conditions          | Min | Typ. | Max | Unit |
|------------|---------------------------------|--------------------------|-----|------|-----|------|
| $I_{DD}$   | Supply Current                  | No Load                  | -   | 5    | -   | mA   |
| $V_{OH}$   | Output Voltage High             | $I_{OUT} = 300\text{mA}$ | 4.4 | 4.65 | -   | V    |
| $V_{OL}$   | Output Voltage Low              | $I_{OUT} = 300\text{mA}$ | -   | 0.35 | 0.6 | V    |
| $T_{SW}$   | Output Switching Slope Duration | 50Ω load on out1/out2    | -   | 100  | -   | μs   |
| $I_{LEAK}$ | FG Output Leakage Current       |                          | -   | -    | 5   | μA   |
| $V_{FGOL}$ | FG Output Voltage Low           | $I_{FG} = 5\text{mA}$    | -   | -    | 0.4 | V    |
| $T_{ON}$   | On Time                         |                          | 350 | 500  | 650 | ms   |
| $R_{DR}$   | Duty Ratio                      | $T_{OFF} / T_{ON}$       | -   | 10   | -   |      |





### Magnetic Characteristics ( $T_A = 25^\circ\text{C}$ , $V_{DD} = 1.8\text{V} \sim 5\text{V}$ , Note 6)

(1mT = 10 G)

| Symbol   | Parameter     | Min | Typ. | Max | Unit |
|----------|---------------|-----|------|-----|------|
| $B_{op}$ | Operate Point | 10  | 25   | 50  | G    |
| $B_{rp}$ | Release Point | -50 | -25  | -10 | G    |
| $B_{hy}$ | Hysteresis    | -   | 50   | -   | G    |

Notes: 6. The magnetic characteristics may vary with supply voltage, operating temperature and after soldering.


**Operating Characteristics**

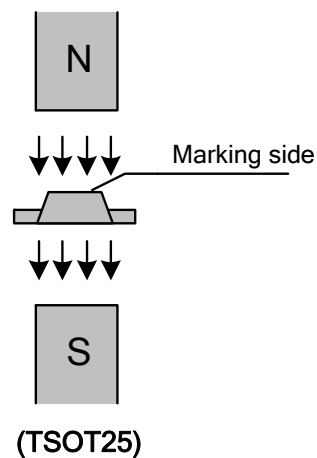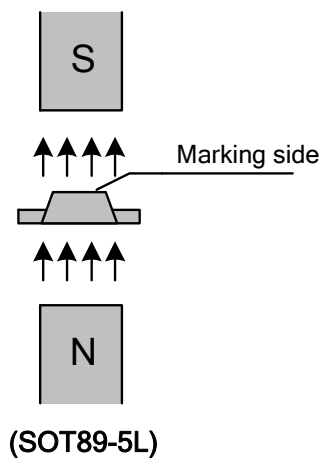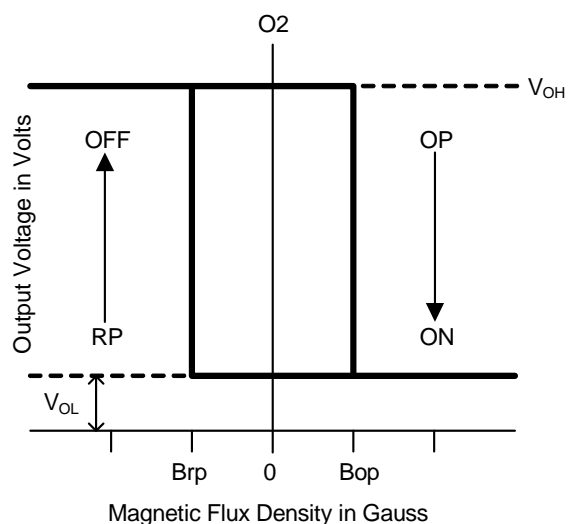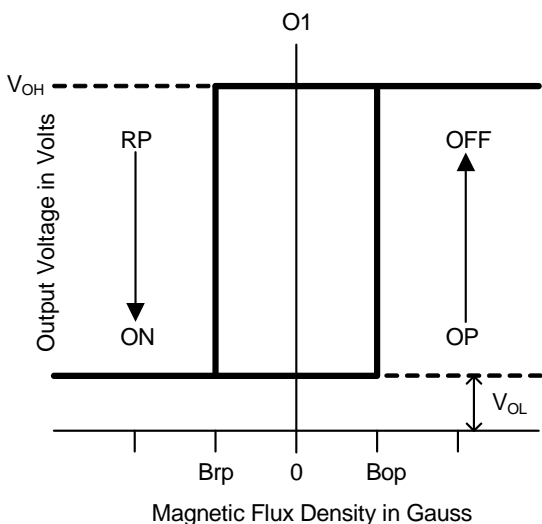

**Performance Characteristics**


**(1) SOT89-5L**

|                           |            |            |            |            |            |            |            |            |            |            |
|---------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| <b>T<sub>A</sub> (°C)</b> | <b>25</b>  | <b>50</b>  | <b>60</b>  | <b>70</b>  | <b>75</b>  | <b>80</b>  | <b>85</b>  | <b>90</b>  | <b>95</b>  | <b>100</b> |
| P <sub>D</sub> (mW)       | 800        | 640        | 576        | 512        | 480        | 448        | 416        | 384        | 352        | 320        |
| <b>T<sub>A</sub> (°C)</b> | <b>105</b> | <b>110</b> | <b>115</b> | <b>120</b> | <b>125</b> | <b>130</b> | <b>135</b> | <b>140</b> | <b>145</b> | <b>150</b> |
| P <sub>D</sub> (mW)       | 288        | 256        | 224        | 192        | 160        | 128        | 96         | 64         | 32         | 0          |

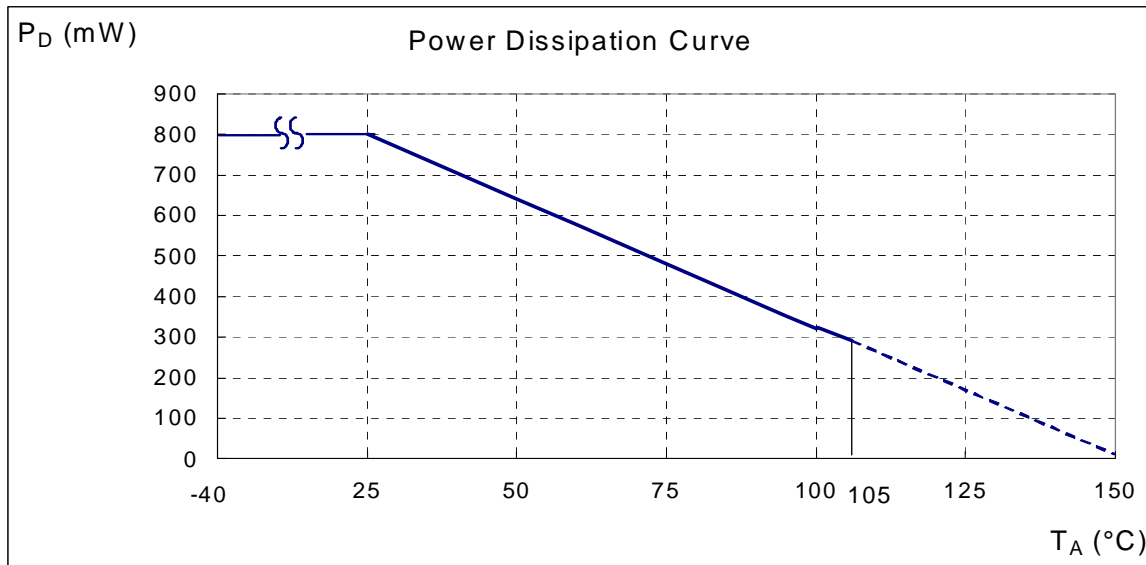


**(2) TSOT25**

|                           |            |            |            |            |            |            |            |            |            |            |
|---------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| <b>T<sub>A</sub> (°C)</b> | <b>25</b>  | <b>50</b>  | <b>60</b>  | <b>70</b>  | <b>75</b>  | <b>80</b>  | <b>85</b>  | <b>90</b>  | <b>95</b>  | <b>100</b> |
| P <sub>D</sub> (mW)       | 520        | 417        | 375        | 333        | 313        | 292        | 271        | 250        | 230        | 208        |
| <b>T<sub>A</sub> (°C)</b> | <b>105</b> | <b>110</b> | <b>115</b> | <b>120</b> | <b>125</b> | <b>130</b> | <b>135</b> | <b>140</b> | <b>145</b> | <b>150</b> |
| P <sub>D</sub> (mW)       | 188        | 167        | 146        | 125        | 104        | 83         | 63         | 42         | 21         | 0          |

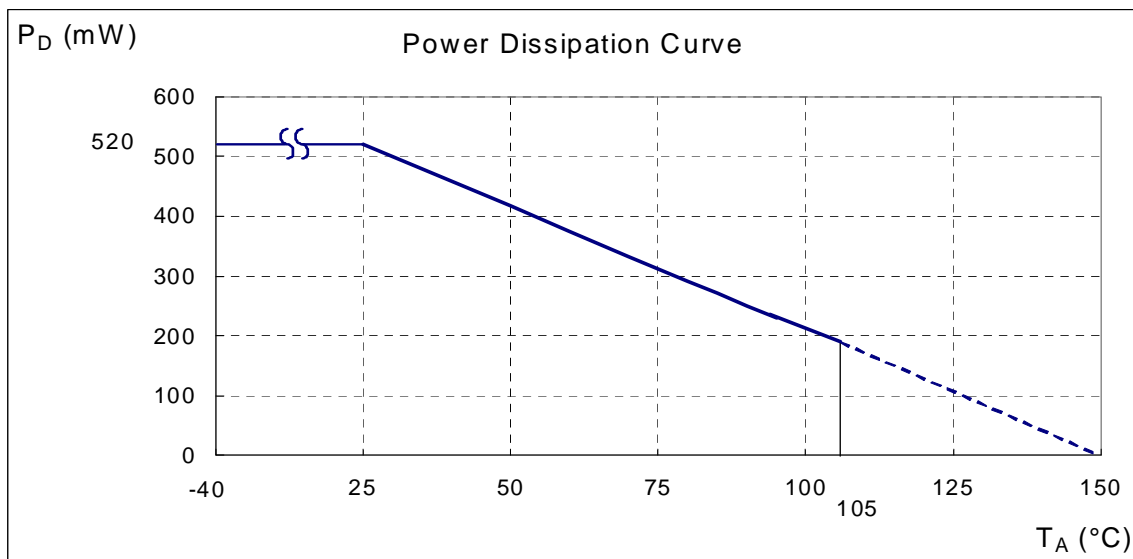

### Ordering Information

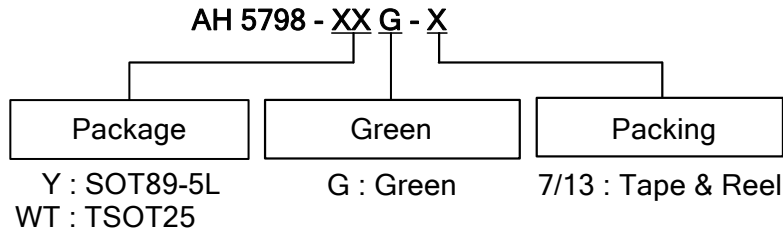


| Device       | Package Code | Packaging (Note 7 & 8) | 7"/13" Tape and Reel |                    |
|--------------|--------------|------------------------|----------------------|--------------------|
|              |              |                        | Quantity             | Part Number Suffix |
| AH5798-YG-13 | Y            | SOT89-5L               | 2500/Tape & Reel     | -13                |
| AH5798-WTG-7 | WT           | TSOT25                 | 3000/Tape & Reel     | -7                 |

Notes: 7. Pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>  
 8. EU Directive 2002/95/EC (RoHS). All applicable RoHS exemptions applied. Please visit our website at [http://www.diodes.com/products/lead\\_free.html](http://www.diodes.com/products/lead_free.html)

### Marking Information


#### (1) SOT89-5L



XX : Identification code  
Y : Year : 0~9  
W : Week : A~Z : 1~26 week;  
 a~z : 27~52 week;  
 z represents 52 and 53 week  
X : Internal code  
 A~Z : Green

| Part Number | Package  | Identification Code |
|-------------|----------|---------------------|
| AH5798-YG   | SOT89-5L | K4                  |

#### (2) TSOT25




XX : Identification code  
Y : Year 0~9  
W : Week : A~Z : 1~26 week;  
 a~z : 27~52 week;  
 z represents 52 and 53 week  
X : A~Z : Green

| Part Number | Package | Identification Code |
|-------------|---------|---------------------|
| AH5798-WTG  | TSOT25  | K4                  |



**Package Outline Dimensions (All Dimensions in mm)**


(1) Package type: SOT89-5L

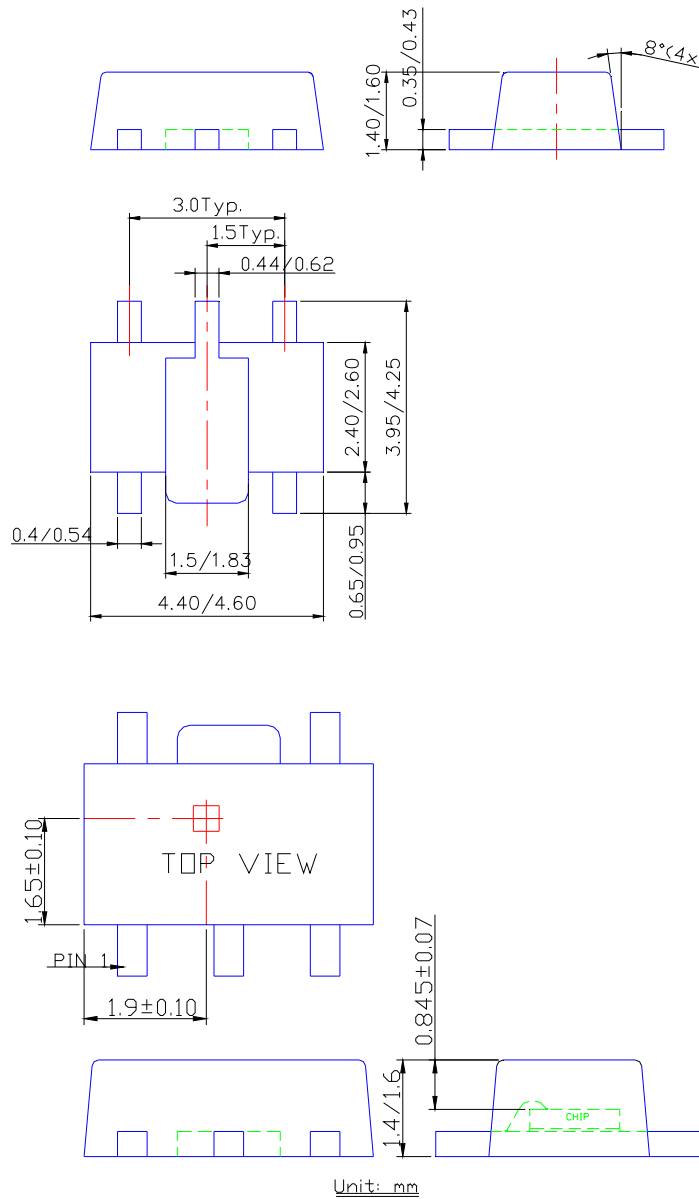


**Sensor Location**

**Package Outline Dimensions (Continued)**

**(2) Package type: TSOT25**

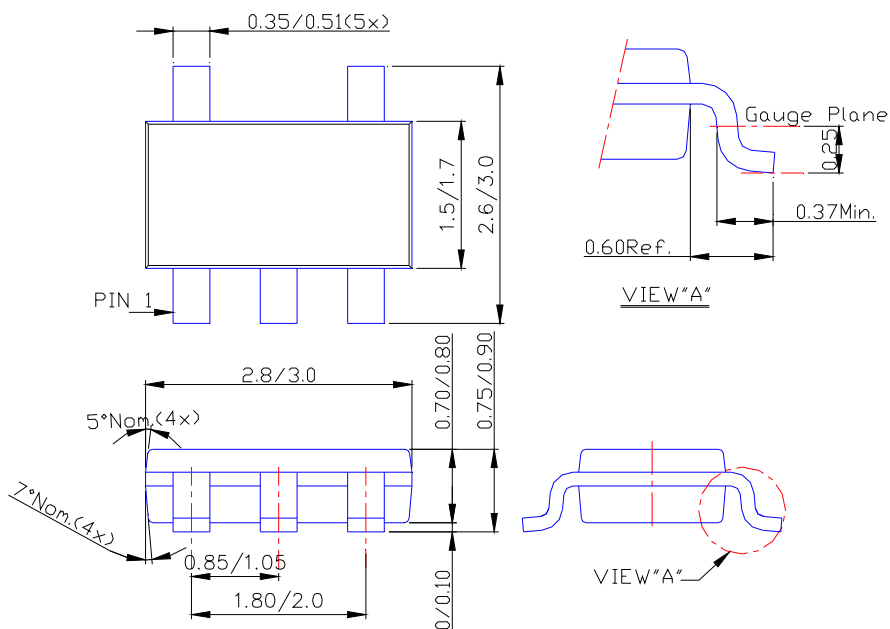

TSOT25L Package

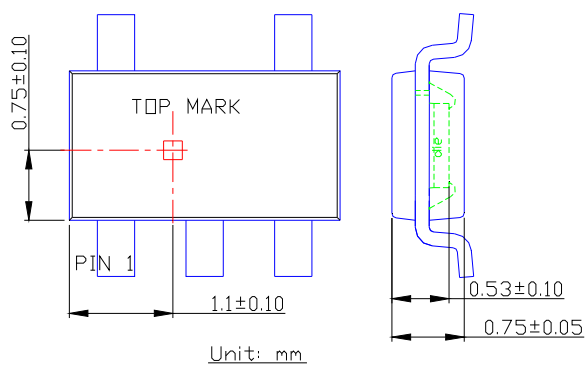

**Sensor Location**

**SINGLE PHASE HALL EFFECT LATCH SMART  
FAN MOTOR CONTROLLER****IMPORTANT NOTICE**

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.

Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

**LIFE SUPPORT**

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

A. Life support devices or systems are devices or systems which:

1. are intended to implant into the body, or
2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.

B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2010, Diodes Incorporated

[www.diodes.com](http://www.diodes.com)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А