


**MCR8DSM, MCR8DSN**

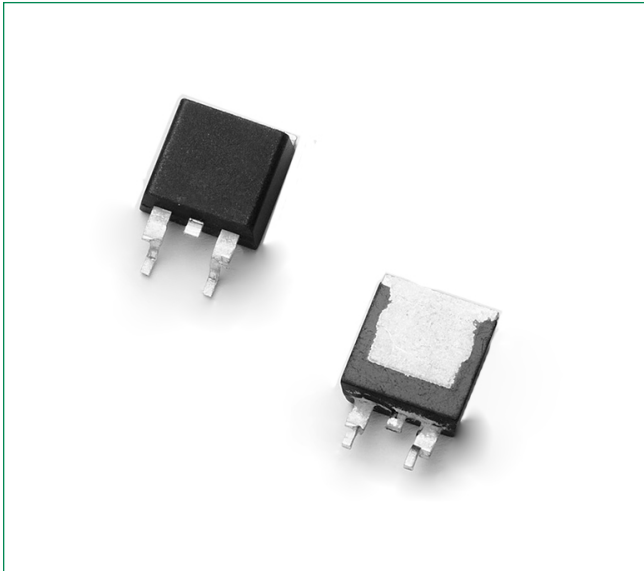


**Description**

Designed for high volume, low cost, industrial and consumer applications such as motor control; process control; temperature, light and speed control.


**Features**

- Small Size
- Passivated Die for Reliability and Uniformity
- Low Level Triggering and Holding Characteristics
- Available in Two Package Styles Surface Mount Lead Form – Case 369C Miniature Plastic Package – Straight Leads – Case 369
- Epoxy Meets UL 94 V-0 @ 0.125 in
- ESD Ratings: Human Body Model, 3B > 8000 V Machine Model, C > 400V
- Pb-Free Packages are Available

**Pin Out**



**Functional Diagram**



**Additional Information**



Datasheet



Resources



Samples

### Maximum Ratings ( $T_J = 25^\circ\text{C}$ unless otherwise noted)

Rating		Symbol	Value	Unit
Peak Repetitive Off-State Voltage (Note 1) ( $T_J = -40$ to $110^\circ\text{C}$ , Sine Wave, 50 to 60 Hz)	MCR8DSM	$V_{\text{DRM}}$	600	V
	MCR8DSN	$V_{\text{RRM}}$	800	
On-State RMS Current (180° Conduction Angles; $T_C = 90^\circ\text{C}$ )		$I_{\text{T (RMS)}}$	8.0	A
Average On-State Current (180° Conduction Angles; $T_C = 90^\circ\text{C}$ )		$I_{\text{T(AV)}}$	5.1	A
Peak Non-Repetitive Surge Current (1/2 Cycle, Sine Wave 60 Hz, $T_J = 110^\circ\text{C}$ )		$I_{\text{TSM}}$	90	A
Circuit Fusing Consideration ( $t = 8.3$ ms)		$I^2t$	34	A <sup>2</sup> sec
Forward Peak Gate Power (Pulse Width $\leq 10$ $\mu\text{sec}$ , $T_C = 90^\circ\text{C}$ )		$P_{\text{GM}}$	5.0	W
Forward Average Gate Power ( $t = 8.3$ msec, $T_C = 90^\circ\text{C}$ )		$P_{\text{GM(AV)}}$	0.5	W
Forward Peak Gate Current (Pulse Width $\leq 10$ $\mu\text{sec}$ , $T_C = 90^\circ\text{C}$ )		$I_{\text{GM}}$	2.0	A
Operating Junction Temperature Range		$T_J$	-40 to 110	$^\circ\text{C}$
Storage Temperature Range		$T_{\text{stg}}$	-40 to 150	$^\circ\text{C}$

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

- $V_{\text{DRM}}$  and  $V_{\text{RRM}}$  for all types can be applied on a continuous basis. Ratings apply for zero or negative gate voltage; however, positive gate voltage shall not be applied concurrent with negative potential on the anode. Blocking voltages shall not be tested with a constant current source such that the voltage ratings of the devices are exceeded.

### Thermal Characteristics

Rating	Symbol	Value	Unit
Thermal Resistance, Junction-to-Case	$R_{\theta\text{JC}}$	2.2	$^\circ\text{C/W}$
Thermal Resistance, Junction-to-Ambient	$R_{\theta\text{JA}}$	88	
Thermal Resistance, Junction-to-Ambient (Note 2)	$R_{\theta\text{JA}}$	80	
Maximum Lead Temperature for Soldering Purposes 1/8" from Case for 10 Seconds	$T_L$	260	$^\circ\text{C}$

### Electrical Characteristics - OFF ( $T_J = 25^\circ\text{C}$ unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
Peak Repetitive Forward or Reverse Blocking Current (Note 3) ( $V_{\text{AK}} = \text{Rated } V_{\text{DRM}}$ or $V_{\text{RRM}}$ , $R_{\text{GK}} = 1.0$ k $\Omega$ )	$T_J = 25^\circ\text{C}$	$I_{\text{DRM}}$ $I_{\text{RRM}}$	-	-	10	$\mu\text{A}$
	$T_J = 110^\circ\text{C}$		-	-	500	

### Electrical Characteristics - ON ( $T_J = 25^\circ\text{C}$ unless otherwise noted; Electricals apply in both directions)

Characteristic		Symbol	Min	Typ	Max	Unit
Peak Reverse Gate Blocking Voltage ( $I_{\text{GR}} = 10$ $\mu\text{A}$ )		$V_{\text{GRM}}$	10	12.5	18	V
Peak Reverse Gate Blocking Current ( $V_{\text{GR}} = 10$ V)		$I_{\text{RGM}}$	-	-	1.2	$\mu\text{A}$
Peak Forward On-State Voltage (Note 4) ( $I_{\text{TM}} = 16$ A)		$V_{\text{TM}}$	-	1.4	1.8	V
Gate Trigger Current (Continuous dc) (Note 5) ( $V_{\text{AK}} = 12$ Vdc, $R_L = 100$ $\Omega$ )	$(T_J = 25^\circ\text{C})$	$I_{\text{GT}}$	5.0	12	200	$\mu\text{A}$
	$(T_J = -40^\circ\text{C})$		-	-	300	
Gate Trigger Voltage (Continuous dc) ( $V_D = 12$ V, $R_L = 100$ $\Omega$ ) (Note 5)	$(T_J = 25^\circ\text{C})$	$V_{\text{GT}}$	0.45	0.65	1.0	V
	$(T_J = -40^\circ\text{C})$		-	-	1.5	
	$(T_J = 110^\circ\text{C})$		0.2	-	-	
Holding Current ( $V_D = 12$ V, Initiating Current = 200 mA, $R_{\text{GK}} = 1$ k $\Omega$ )	$(T_J = 25^\circ\text{C})$	$I_{\text{H}}$	0.5	1.0	6.0	mA
	$(T_J = -40^\circ\text{C})$		-	-	10	
Latching Current ( $V_D = 12$ V, IG = 2.0 mA, $R_{\text{GK}} = 1$ k $\Omega$ )	$(T_J = 25^\circ\text{C})$	$I_{\text{L}}$	0.5	1.0	6.0	mA
	$(T_J = -40^\circ\text{C})$		-	-	10	
Total Turn-On Time (Source Voltage = 12 V, $R_S = 6.0$ k $\Omega$ , IT = 16 A(pk), $R_{\text{GK}} = 1.0$ k $\Omega$ ) (VD = Rated $V_{\text{DRM}}$ , Rise Time = 20 ns, Pulse Width = 10 $\mu\text{s}$ )		tgt	-	2.0	5.0	$\mu\text{s}$

### Dynamic Characteristics

Characteristic	Symbol	Min	Typ	Max	Unit
Critical Rate of Rise of Off-State Voltage ( $V_D = 0.67 \times \text{Rated } V_{DRM}$ , Exponential Waveform, $R_{GK} = 1.0 \text{ k}\Omega$ , $T_J = 110^\circ\text{C}$ )	dv/dt	2.0	10	-	V/ $\mu\text{s}$

- Surface mounted on minimum recommended pad size.
- Ratings apply for negative gate voltage or  $R_{GK} = 1.0 \text{ k}\Omega$ . Devices shall not have a positive gate voltage concurrently with a negative voltage on the anode. Devices should not be tested with a constant current source for forward and reverse blocking capability such that the voltage applied exceeds the rated blocking voltage.
- Pulse Test; Pulse Width  $\leq 2.0 \text{ msec}$ , Duty Cycle  $\leq 2\%$ .
- $R_{GK}$  current not included in measurements.

### Voltage Current Characteristic of SCR

Symbol	Parameter
$V_{DRM}$	Peak Repetitive Forward Off State Voltage
$I_{DRM}$	Peak Forward Blocking Current
$V_{RRM}$	Peak Repetitive Reverse Off State Voltage
$I_{RRM}$	Peak Reverse Blocking Current
$V_{TM}$	Maximum On State Voltage
$I_H$	Holding Current

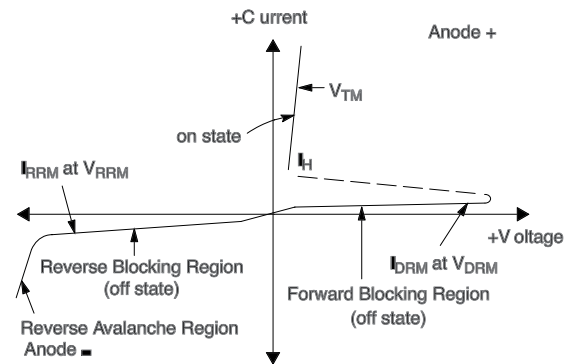


Figure 1. Average Current Derating

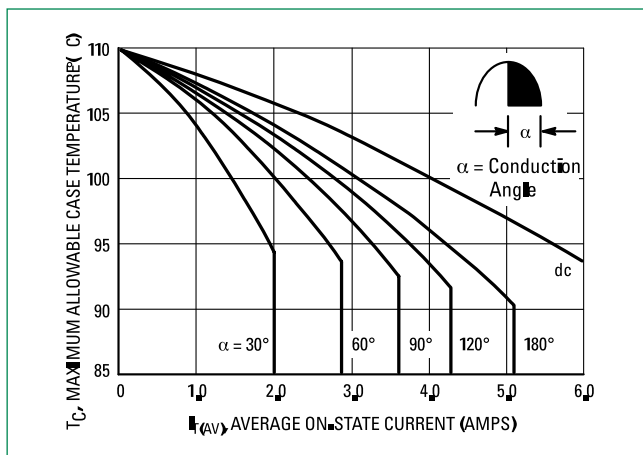


Figure 2. On-State Power Dissipation

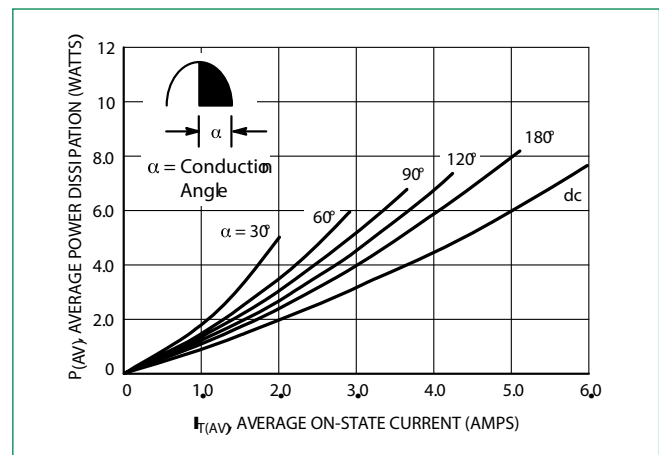


Figure 3. On-State Characteristics

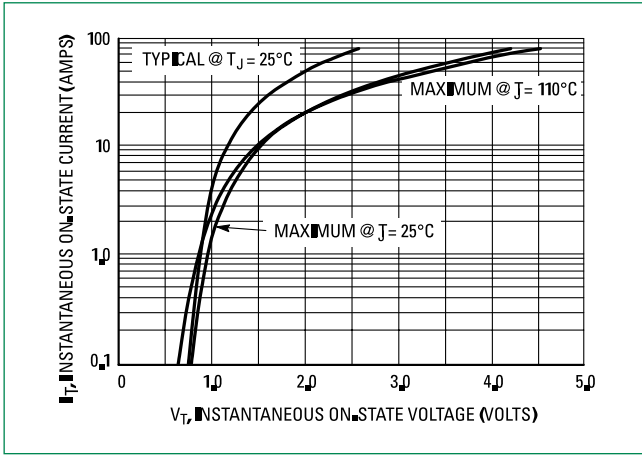


Figure 4. Transient Thermal Response

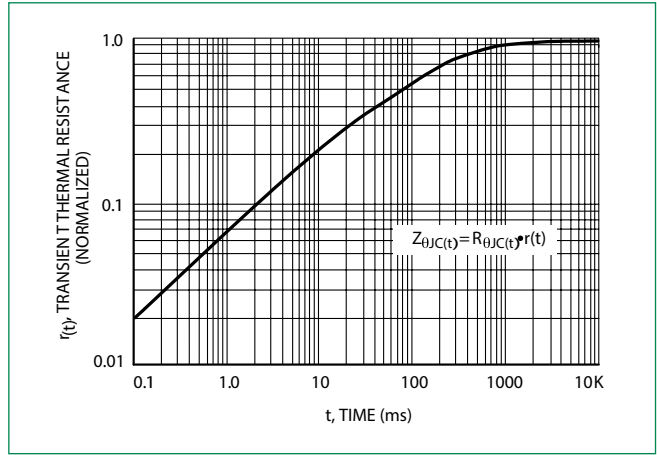


Figure 5. Typical Gate Trigger Current vs. Junction Temperature

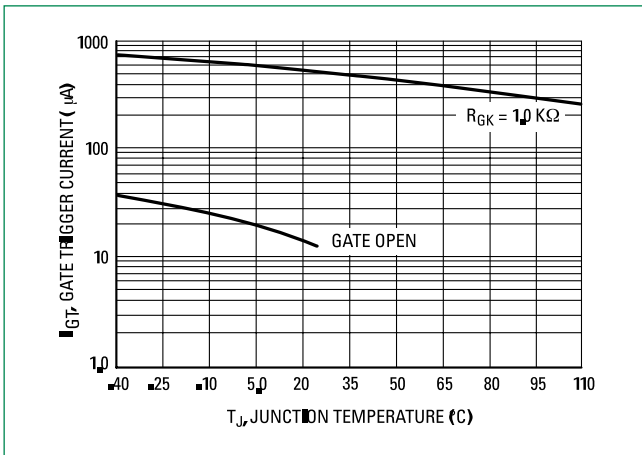


Figure 6. Typical Gate Trigger Voltage vs. Junction Temperature

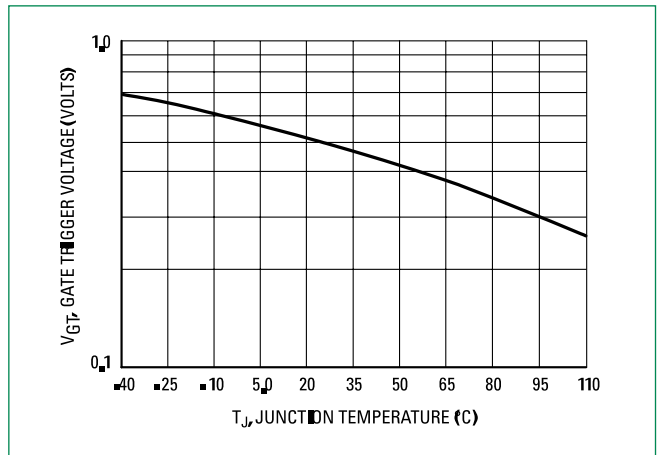


Figure 7. Typical Holding Current vs. Junction Temperature



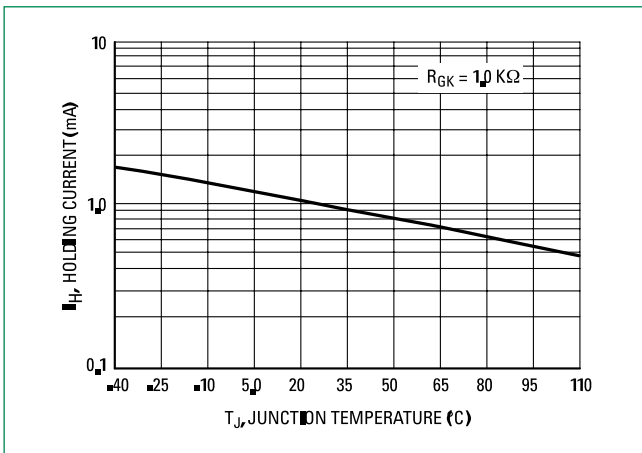



Figure 8. Typical Latching Current vs. Junction Temperature

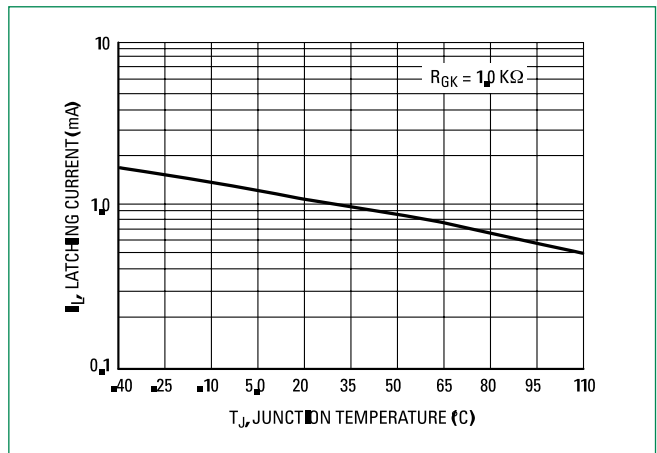


**Figure 9. Holding Current versus Gate–Cathode Resistance**

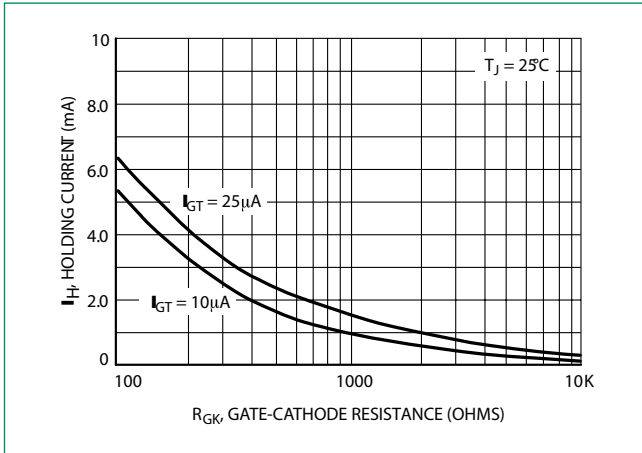


**Figure 10. Exponential Static dv/dt vs Gate–Cathode Resistance and Junction Temperature**

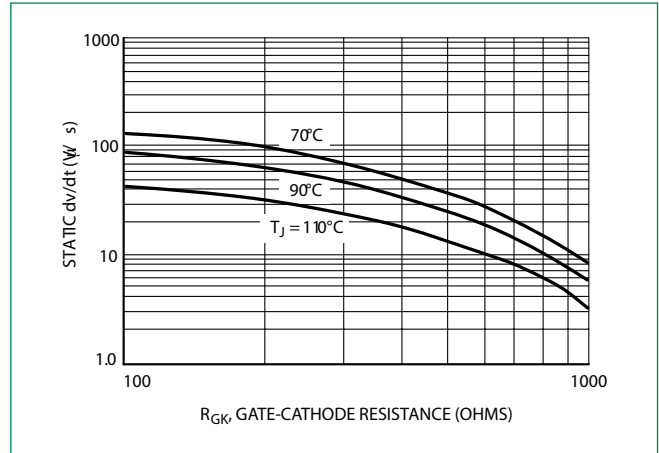


**Figure 11. Exponential Static dv/dt vs Gate–Cathode Resistance and Peak Voltage**

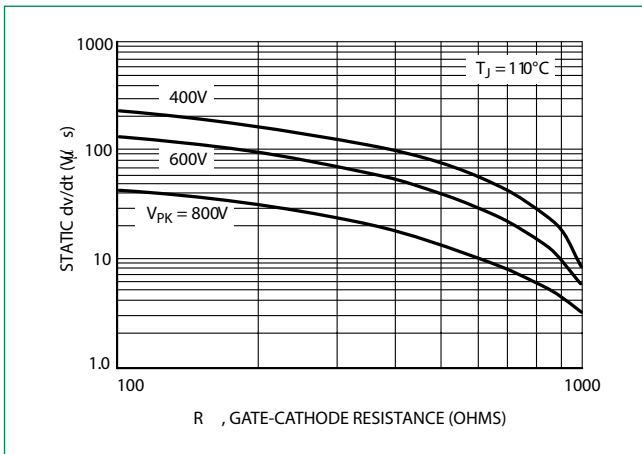


**Figure 12. Exponential Static dv/dt vs Gate–Cathode Resistance and Gate Trigger Current Sensitivity**

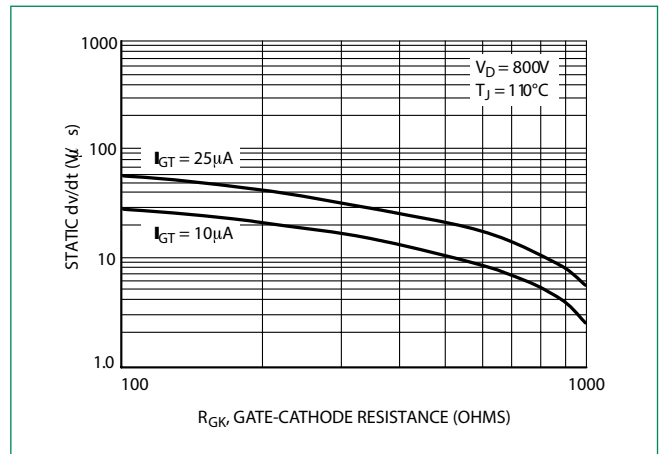


### Dimensions

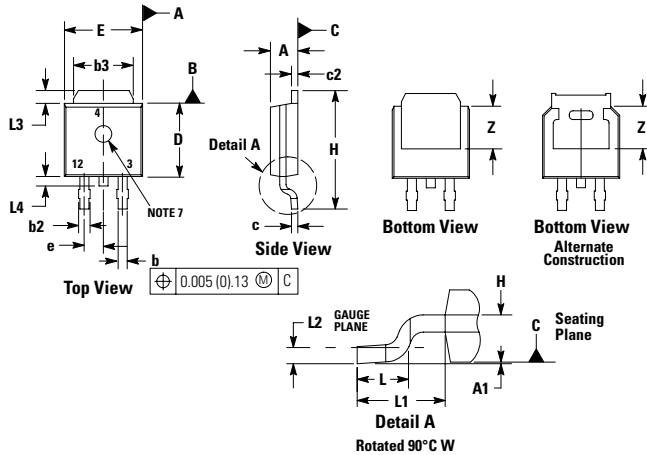


### Soldering Footprint

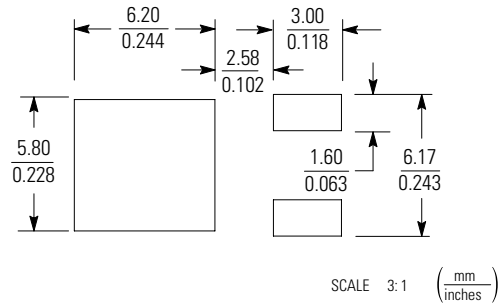

### Part Marking System



**DPAK-3**  
**Case 369C**  
**Style 6**



CR8DSx = Device Code  
 x =D, M, or N  
 Y =Year  
 M =Month  
 A =Assembly Site  
 XX =Lot Serial Code  
 G =Pb-Free Package

Dim	Inches		Millimeters	
	Min	Max	Min	Max
A	0.087	0.094	2.20	2.40
A1	0.000	0.005	0.00	0.12
b	0.022	0.030	0.55	0.75
b2	0.026	0.033	0.65	0.85
b3	0.209	0.217	5.30	5.50
c	0.019	0.023	0.49	0.59
c2	0.019	0.023	0.49	0.59
D	0.213	0.224	5.40	5.70
E	0.252	0.260	6.40	6.60
e	0.091		2.30	
H	0.374	0.406	9.50	10.30
L	0.058	0.070	1.47	1.78
L1	0.114		2.90	
L2	0.020		0.51	
L3	0.053	0.065	1.35	1.65
L4	0.028	0.039	0.70	1.00
Z	0.154	-	3.90	-

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
 2. CONTROLLING DIMENSION: INCH.

STYLE 6:  
 PIN 1. MT1  
 2. MT2  
 3. GATE  
 4. MT2

### Pin Assignment

1	Cathode
2	Anode
3	Gate
4	Anode

### Ordering Information

Device	Package	Shipping
MCR8DSMT4	DPAK	2500/Tape & Reel
MCR8DSMT4G	DPAK (Pb-Free)	
MCR8DSNT4	DPAK	
MCR8DSNT4G	DPAK (Pb-Free)	

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».



## JONHON

«**JONHON**» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«**FORSTAR**» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А