

# 135 $\mu$ A, 14nV/ $\sqrt{\text{Hz}}$ , Rail-to-Rail Output Precision Op Amp with Shutdown

## FEATURES

- 35 $\mu$ V Maximum Offset Voltage
- 110pA Maximum Input Bias Current
- 135 $\mu$ A Supply Current
- Rail-to-Rail Output Swing
- 12 $\mu$ A Supply Current in Shutdown
- 120dB Minimum Voltage Gain ( $V_S = \pm 15\text{V}$ )
- 0.8 $\mu\text{V}/^\circ\text{C}$  Maximum  $V_{OS}$  Drift
- 14nV/ $\sqrt{\text{Hz}}$  Input Noise Voltage
- 2.7V to  $\pm 18\text{V}$  Supply Voltage Operation
- Operating Temperature Range:  $-40^\circ\text{C}$  to  $85^\circ\text{C}$
- Space Saving 3mm  $\times$  3mm DFN Package

## APPLICATIONS

- Thermocouple Amplifiers
- Precision Photo Diode Amplifiers
- Instrumentation Amplifiers
- Battery-Powered Precision Systems

## DESCRIPTION

The LT<sup>®</sup>6010 op amp combines low noise and high precision input performance with low power consumption and rail-to-rail output swing.

Input offset voltage is trimmed to less than 35 $\mu\text{V}$ . The low drift and excellent long-term stability guarantee a high accuracy over temperature and over time. The 110pA maximum input bias current and 120dB minimum voltage gain further maintain this precision over operating conditions.


The LT6010 works on any power supply voltage from 2.7V to 36V, and draws only 135 $\mu\text{A}$  of supply current on a 5V supply. A power saving shutdown feature reduces supply current to 12 $\mu\text{A}$ . The output voltage swings to within 40mV of either supply rail, making the amplifier a good choice for low voltage single supply operation.

The LT6010 is fully specified at 5V and  $\pm 15\text{V}$  supplies and from  $-40^\circ\text{C}$  to  $85^\circ\text{C}$ . The device is available in SO-8 and space-saving 3mm  $\times$  3mm DFN packages. This op amp is also available in dual (LT6011) and quad (LT6012) packages.


 LTC and LT are registered trademarks of Linear Technology Corporation.

## TYPICAL APPLICATION

Single Supply Current Source for Platinum RTD

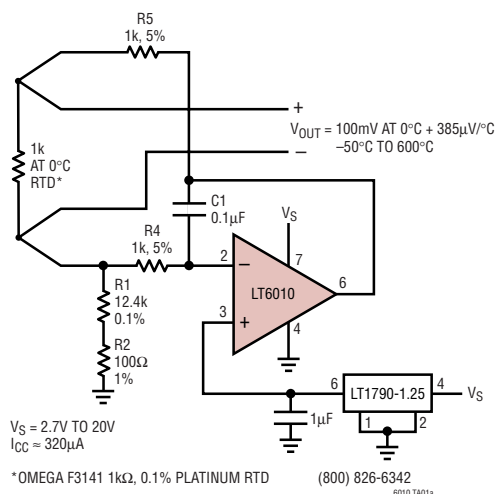

Distribution of Offset Voltage Drift


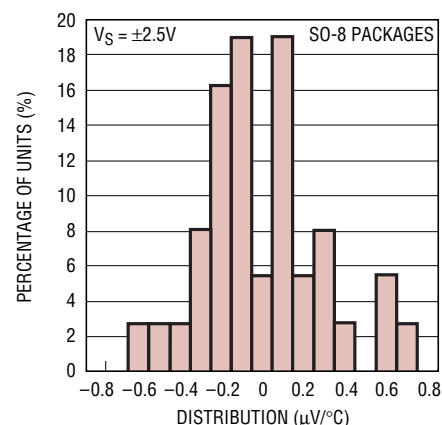


# LT6010

## ABSOLUTE MAXIMUM RATINGS (Note 1)

|                                               |                   |                                            |                |
|-----------------------------------------------|-------------------|--------------------------------------------|----------------|
| Total Supply Voltage ( $V^+$ to $V^-$ ) ..... | 40V               | Maximum Junction Temperature               |                |
| Differential Input Voltage (Note 2) .....     | 10V               | DD Package .....                           | 125°C          |
| Input Voltage, Shutdown Voltage .....         | $V^+$ to $V^-$    | SO-8 Package .....                         | 150°C          |
| Input Current (Note 2) .....                  | $\pm 10\text{mA}$ | Storage Temperature Range                  |                |
| Output Short-Circuit Duration (Note 3) .....  | Indefinite        | DD Package .....                           | -65°C to 125°C |
| Operating Temperature Range (Note 4) ..       | -40°C to 85°C     | SO-8 Package .....                         | -65°C to 150°C |
| Specified Temperature Range (Note 5) ...      | -40°C to 85°C     | Lead Temperature (Soldering, 10 sec) ..... | 300°C          |

## PACKAGE/ORDER INFORMATION

|                                                                                                                                                                                                                                                                                                                                    |                                                    |                                                                                                                                                                                                                             |                                                    |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|
|  <p>DD PACKAGE<br/>8-LEAD (3mm x 3mm) PLASTIC DFN</p> <p><math>T_{JMAX} = 125^\circ\text{C}</math>, <math>\theta_{JA} = 160^\circ\text{C/W}</math><br/>UNDERSIDE METAL INTERNALLY CONNECTED TO <math>V^-</math><br/>(PCB CONNECTION OPTIONAL)</p> | ORDER PART NUMBER                                  |  <p>S8 PACKAGE<br/>8-LEAD PLASTIC SO</p> <p><math>T_{JMAX} = 150^\circ\text{C}</math>, <math>\theta_{JA} = 190^\circ\text{C/W}</math></p> | ORDER PART NUMBER                                  |
|                                                                                                                                                                                                                                                                                                                                    | LT6010CDD<br>LT6010IDD<br>LT6010ACDD<br>LT6010AIDD |                                                                                                                                                                                                                             | LT6010CS8<br>LT6010IS8<br>LT6010ACS8<br>LT6010AIS8 |
|                                                                                                                                                                                                                                                                                                                                    | DD PART MARKING*                                   |                                                                                                                                                                                                                             | S8 PART MARKING                                    |
|                                                                                                                                                                                                                                                                                                                                    | LADU                                               |                                                                                                                                                                                                                             | 6010<br>6010I<br>6010A<br>6010AI                   |

\*Temperature grades are identified by a label on the shipping container.  
Consult LTC Marketing for parts specified with wider operating temperature ranges.

## ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ .  $V_S = 5\text{V}$ ,  $0\text{V}$ ;  $V_{CM} = 2.5\text{V}$ ;  $R_L$  to  $0\text{V}$ ;  $\text{SHDN} = 0.2\text{V}$ , unless otherwise specified. (Note 5)

| SYMBOL                   | PARAMETER                           | CONDITIONS                                      | MIN | TYP | MAX | UNITS                        |
|--------------------------|-------------------------------------|-------------------------------------------------|-----|-----|-----|------------------------------|
| $V_{OS}$                 | Input Offset Voltage (Note 7)       | LT6010AS8                                       |     | 10  | 35  | $\mu\text{V}$                |
|                          |                                     | $T_A = 0^\circ\text{C}$ to $70^\circ\text{C}$   | ●   |     | 60  | $\mu\text{V}$                |
|                          |                                     | $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ | ●   |     | 75  | $\mu\text{V}$                |
|                          |                                     | LT6010S8                                        |     | 20  | 55  | $\mu\text{V}$                |
|                          |                                     | $T_A = 0^\circ\text{C}$ to $70^\circ\text{C}$   | ●   |     | 85  | $\mu\text{V}$                |
|                          |                                     | $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ | ●   |     | 110 | $\mu\text{V}$                |
|                          |                                     | LT6010ADD                                       |     | 20  | 60  | $\mu\text{V}$                |
|                          |                                     | $T_A = 0^\circ\text{C}$ to $70^\circ\text{C}$   | ●   |     | 85  | $\mu\text{V}$                |
| $\Delta V_{OS}/\Delta T$ | Input Offset Voltage Drift (Note 6) | LT6010AS8, LT6010S8                             | ●   | 0.2 | 0.8 | $\mu\text{V}/^\circ\text{C}$ |
|                          |                                     | LT6010ADD, LT6010DD                             | ●   | 0.2 | 1.3 | $\mu\text{V}/^\circ\text{C}$ |
|                          |                                     |                                                 |     |     |     |                              |
|                          |                                     |                                                 |     |     |     |                              |

sn6010 6010fs

**ELECTRICAL CHARACTERISTICS**

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ .  $V_S = 5\text{V}$ ,  $0\text{V}$ ;  $V_{CM} = 2.5\text{V}$ ;  $R_L$  to  $0\text{V}$ ;  $\text{SHDN} = 0.2\text{V}$ , unless otherwise specified. (Note 5)

| SYMBOL    | PARAMETER                                                 | CONDITIONS                                               | MIN | TYP | MAX       | UNITS                  |
|-----------|-----------------------------------------------------------|----------------------------------------------------------|-----|-----|-----------|------------------------|
| $I_{OS}$  | Input Offset Current (Note 7)                             | LT6010AS8                                                |     | 20  | 110       | pA                     |
|           |                                                           | $T_A = 0^\circ\text{C to } 70^\circ\text{C}$             | ●   |     | 150       | pA                     |
|           |                                                           | $T_A = -40^\circ\text{C to } 85^\circ\text{C}$           | ●   |     | 200       | pA                     |
|           |                                                           | LT6010S8                                                 |     | 40  | 200       | pA                     |
|           |                                                           | $T_A = 0^\circ\text{C to } 70^\circ\text{C}$             | ●   |     | 300       | pA                     |
|           |                                                           | $T_A = -40^\circ\text{C to } 85^\circ\text{C}$           | ●   |     | 400       | pA                     |
|           |                                                           | LT6010ADD                                                |     | 20  | 200       | pA                     |
|           |                                                           | $T_A = 0^\circ\text{C to } 70^\circ\text{C}$             | ●   |     | 300       | pA                     |
| $I_B$     | Input Bias Current (Note 7)                               | $T_A = -40^\circ\text{C to } 85^\circ\text{C}$           | ●   |     | 400       | pA                     |
|           |                                                           | LT6010AS8                                                |     | 20  | $\pm 110$ | pA                     |
|           |                                                           | $T_A = 0^\circ\text{C to } 70^\circ\text{C}$             | ●   |     | $\pm 150$ | pA                     |
|           |                                                           | $T_A = -40^\circ\text{C to } 85^\circ\text{C}$           | ●   |     | $\pm 200$ | pA                     |
|           |                                                           | LT6010S8                                                 |     | 40  | $\pm 200$ | pA                     |
|           |                                                           | $T_A = 0^\circ\text{C to } 70^\circ\text{C}$             | ●   |     | $\pm 300$ | pA                     |
|           |                                                           | $T_A = -40^\circ\text{C to } 85^\circ\text{C}$           | ●   |     | $\pm 400$ | pA                     |
|           |                                                           | LT6010ADD                                                |     | 20  | $\pm 200$ | pA                     |
|           | Input Noise Voltage                                       | $T_A = 0^\circ\text{C to } 70^\circ\text{C}$             | ●   |     | $\pm 300$ | pA                     |
|           |                                                           | $T_A = -40^\circ\text{C to } 85^\circ\text{C}$           | ●   |     | $\pm 400$ | pA                     |
|           |                                                           | LT6010DD                                                 |     | 40  | $\pm 300$ | pA                     |
|           |                                                           | $T_A = 0^\circ\text{C to } 70^\circ\text{C}$             | ●   |     | $\pm 400$ | pA                     |
|           |                                                           | $T_A = -40^\circ\text{C to } 85^\circ\text{C}$           | ●   |     | $\pm 500$ | pA                     |
|           |                                                           | Input Noise Voltage                                      |     | 400 |           | nV <sub>p-p</sub>      |
|           |                                                           | Input Noise Voltage Density                              |     | 14  |           | nV/ $\sqrt{\text{Hz}}$ |
|           |                                                           | Input Noise Current Density                              |     | 0.1 |           | pA/ $\sqrt{\text{Hz}}$ |
| $R_{IN}$  | Input Resistance                                          | Common Mode, $V_{CM} = 1\text{V to } 3.8\text{V}$        |     | 10  | 120       | G $\Omega$             |
|           |                                                           | Differential                                             |     |     | 20        | M $\Omega$             |
| $C_{IN}$  | Input Capacitance                                         |                                                          |     | 4   |           | pF                     |
| $V_{CM}$  | Input Voltage Range (Positive)                            | Guaranteed by CMRR                                       | ●   | 3.8 | 4         | V                      |
|           | Input Voltage Range (Negative)                            | Guaranteed by CMRR                                       | ●   |     | 0.7       | V                      |
| CMRR      | Common Mode Rejection Ratio                               | $V_{CM} = 1\text{V to } 3.8\text{V}$                     | ●   | 107 | 135       | dB                     |
|           | Minimum Supply Voltage                                    | Guaranteed by PSRR                                       | ●   |     | 2.4       | V                      |
| PSRR      | Power Supply Rejection Ratio                              | $V_S = 2.7\text{V to } 36\text{V}$ , $V_{CM} = 1/2V_S$   | ●   | 112 | 135       | dB                     |
| $A_{VOL}$ | Large-Signal Voltage Gain                                 | $R_L = 10\text{k}$ , $V_{OUT} = 1\text{V to } 4\text{V}$ | ●   | 300 | 2000      | V/mV                   |
|           |                                                           | $R_L = 2\text{k}$ , $V_{OUT} = 1\text{V to } 4\text{V}$  | ●   | 250 | 2000      | V/mV                   |
| $V_{OUT}$ | Maximum Output Swing (Positive, Referred to $V^+$ )       | No Load, 50mV Overdrive                                  | ●   | 35  | 55        | mV                     |
|           |                                                           | $I_{SOURCE} = 1\text{mA}$ , 50mV Overdrive               | ●   | 120 | 170       | mV                     |
|           | Maximum Output Swing (Negative, Referred to $0\text{V}$ ) | No Load, 50mV Overdrive                                  | ●   | 40  | 55        | mV                     |
|           |                                                           | $I_{SINK} = 1\text{mA}$ , 50mV Overdrive                 | ●   | 150 | 225       | mV                     |
|           |                                                           |                                                          |     |     | 275       | mV                     |

**ELECTRICAL CHARACTERISTICS**

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ .  $V_S = 5\text{V}$ ,  $0\text{V}$ ;  $V_{CM} = 2.5\text{V}$ ;  $R_L$  to  $0\text{V}$ ;  $\text{SHDN} = 0.2\text{V}$ , unless otherwise specified. (Note 5)

| SYMBOL        | PARAMETER                             | CONDITIONS                                                   | MIN        | TYP  | MAX  | UNITS            |
|---------------|---------------------------------------|--------------------------------------------------------------|------------|------|------|------------------|
| $I_{SC}$      | Output Short-Circuit Current (Note 3) | $V_{OUT} = 0\text{V}$ , 1V Overdrive (Source)                | 10<br>4    | 14   |      | mA<br>mA         |
|               |                                       | $V_{OUT} = 5\text{V}$ , -1V Overdrive (Sink)                 | 10<br>4    | 21   |      | mA<br>mA         |
| SR            | Slew Rate                             | $A_V = -10$ , $R_F = 50\text{k}$ , $R_G = 5\text{k}$         |            | 0.09 |      | V/ $\mu\text{s}$ |
|               |                                       | $T_A = 0^\circ\text{C}$ to $70^\circ\text{C}$                | 0.05       |      |      | V/ $\mu\text{s}$ |
|               |                                       | $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$              | 0.04       |      |      | V/ $\mu\text{s}$ |
| GBW           | Gain Bandwidth Product                | $f = 10\text{kHz}$                                           | 250<br>225 | 330  |      | kHz<br>kHz       |
|               |                                       |                                                              |            |      |      |                  |
| $t_s$         | Settling Time                         | $A_V = -1$ , 0.01%, $V_{OUT} = 1.5\text{V}$ to $3.5\text{V}$ |            | 45   |      | $\mu\text{s}$    |
| $t_r$ , $t_f$ | Rise Time, Fall Time                  | $A_V = 1$ , 10% to 90%, 0.1V Step                            |            | 1    |      | $\mu\text{s}$    |
| $I_{SHDN}$    | SHDN Pin Current                      | $\text{SHDN} \leq V^- + 0.2\text{V}$ (On)                    |            |      | 0.25 | $\mu\text{A}$    |
|               |                                       | $\text{SHDN} = V^- + 2.0\text{V}$ (Off)                      |            | 15   | 25   | $\mu\text{A}$    |
| $t_{SHDN}$    | SHDN Turn-On, Turn-Off Time           | $\text{SHDN} = V^-$ (On) to $V^- + 2.0\text{V}$ (Off)        |            | 25   |      | $\mu\text{s}$    |
|               |                                       | $\text{SHDN} = V^- + 2.0\text{V}$ (Off) to $V^-$ (On)        |            | 25   |      | $\mu\text{s}$    |
| $I_S$         | Supply Current                        | $\text{SHDN} \leq V^- + 0.2\text{V}$ (On)                    |            | 135  | 150  | $\mu\text{A}$    |
|               |                                       | $T_A = 0^\circ\text{C}$ to $70^\circ\text{C}$                |            |      | 190  | $\mu\text{A}$    |
|               |                                       | $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$              |            |      | 210  | $\mu\text{A}$    |
|               |                                       | $\text{SHDN} = V^- + 2.0\text{V}$ (Off)                      |            | 12   | 25   | $\mu\text{A}$    |
|               |                                       |                                                              |            |      | 50   | $\mu\text{A}$    |

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ .  $V_S = \pm 15\text{V}$ ,  $V_{CM} = 0\text{V}$ ,  $R_L$  to  $0\text{V}$ ;  $\text{SHDN} = -14.8\text{V}$ , unless otherwise specified. (Note 5)

| SYMBOL                   | PARAMETER                           | CONDITIONS                                      | MIN | TYP | MAX | UNITS         |
|--------------------------|-------------------------------------|-------------------------------------------------|-----|-----|-----|---------------|
| $V_{OS}$                 | Input Offset Voltage (Note 7)       | LT6010AS8                                       |     | 10  | 60  | $\mu\text{V}$ |
|                          |                                     | $T_A = 0^\circ\text{C}$ to $70^\circ\text{C}$   |     |     | 80  | $\mu\text{V}$ |
|                          |                                     | $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ |     |     | 110 | $\mu\text{V}$ |
|                          |                                     | LT6010S8                                        |     | 20  | 85  | $\mu\text{V}$ |
|                          |                                     | $T_A = 0^\circ\text{C}$ to $70^\circ\text{C}$   |     |     | 120 | $\mu\text{V}$ |
|                          |                                     | $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ |     |     | 160 | $\mu\text{V}$ |
|                          |                                     | LT6010ADD                                       |     | 20  | 85  | $\mu\text{V}$ |
|                          |                                     | $T_A = 0^\circ\text{C}$ to $70^\circ\text{C}$   |     |     | 105 | $\mu\text{V}$ |
| $\Delta V_{OS}/\Delta T$ | Input Offset Voltage Drift (Note 6) | $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ |     |     | 135 | $\mu\text{V}$ |
|                          |                                     | LT6010DD                                        |     | 30  | 110 | $\mu\text{V}$ |
|                          |                                     | $T_A = 0^\circ\text{C}$ to $70^\circ\text{C}$   |     |     | 145 | $\mu\text{V}$ |
|                          |                                     | $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ |     |     | 185 | $\mu\text{V}$ |
| $I_{OS}$                 | Input Offset Current (Note 7)       | LT6010AS8                                       |     | 20  | 110 | pA            |
|                          |                                     | $T_A = 0^\circ\text{C}$ to $70^\circ\text{C}$   |     |     | 150 | pA            |
|                          |                                     | $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ |     |     | 200 | pA            |
|                          |                                     | LT6010S8                                        |     | 40  | 200 | pA            |
|                          |                                     | $T_A = 0^\circ\text{C}$ to $70^\circ\text{C}$   |     |     | 300 | pA            |
|                          |                                     | $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ |     |     | 400 | pA            |
|                          |                                     | LT6010ADD                                       |     | 20  | 200 | pA            |
|                          |                                     | $T_A = 0^\circ\text{C}$ to $70^\circ\text{C}$   |     |     | 300 | pA            |
|                          |                                     | $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ |     |     | 400 | pA            |

**ELECTRICAL CHARACTERISTICS**

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ .  $V_S = \pm 15\text{V}$ ,  $V_{CM} = 0\text{V}$ ,  $R_L$  to  $0\text{V}$ ;  $\text{SHDN} = -14.8\text{V}$ , unless otherwise specified. (Note 5)

| SYMBOL    | PARAMETER                                           | CONDITIONS                                                   | MIN | TYP        | MAX        | UNITS                  |
|-----------|-----------------------------------------------------|--------------------------------------------------------------|-----|------------|------------|------------------------|
| $I_{OS}$  | Input Offset Current (Note 7)                       | LT6010DD                                                     |     | 40         | 300        | pA                     |
|           |                                                     | $T_A = 0^\circ\text{C to } 70^\circ\text{C}$                 | ●   |            | 400        | pA                     |
|           |                                                     | $T_A = -40^\circ\text{C to } 85^\circ\text{C}$               | ●   |            | 500        | pA                     |
| $I_B$     | Input Bias Current (Note 7)                         | LT6010AS8                                                    |     | 20         | $\pm 110$  | pA                     |
|           |                                                     | $T_A = 0^\circ\text{C to } 70^\circ\text{C}$                 | ●   |            | $\pm 150$  | pA                     |
|           |                                                     | $T_A = -40^\circ\text{C to } 85^\circ\text{C}$               | ●   |            | $\pm 200$  | pA                     |
|           |                                                     | LT6010S8                                                     |     | 40         | $\pm 200$  | pA                     |
|           |                                                     | $T_A = 0^\circ\text{C to } 70^\circ\text{C}$                 | ●   |            | $\pm 300$  | pA                     |
|           |                                                     | $T_A = -40^\circ\text{C to } 85^\circ\text{C}$               | ●   |            | $\pm 400$  | pA                     |
|           |                                                     | LT6010ADD                                                    |     | 20         | $\pm 200$  | pA                     |
|           |                                                     | $T_A = 0^\circ\text{C to } 70^\circ\text{C}$                 | ●   |            | $\pm 300$  | pA                     |
|           |                                                     | $T_A = -40^\circ\text{C to } 85^\circ\text{C}$               | ●   |            | $\pm 400$  | pA                     |
|           |                                                     | LT6010DD                                                     |     | 40         | $\pm 300$  | pA                     |
|           |                                                     | $T_A = 0^\circ\text{C to } 70^\circ\text{C}$                 | ●   |            | $\pm 400$  | pA                     |
|           |                                                     | $T_A = -40^\circ\text{C to } 85^\circ\text{C}$               | ●   |            | $\pm 500$  | pA                     |
|           | Input Noise Voltage                                 | 0.1Hz to 10Hz                                                |     | 400        |            | nV <sub>p-p</sub>      |
| $e_n$     | Input Noise Voltage Density                         | $f = 1\text{kHz}$                                            |     | 13         |            | nV/ $\sqrt{\text{Hz}}$ |
| $i_n$     | Input Noise Current Density                         | $f = 1\text{kHz}$                                            |     | 0.1        |            | pA/ $\sqrt{\text{Hz}}$ |
| $R_{IN}$  | Input Resistance                                    | Common Mode, $V_{CM} = \pm 13.5\text{V}$                     |     | 50         | 400        | G $\Omega$             |
|           |                                                     | Differential                                                 |     |            | 20         | M $\Omega$             |
| $C_{IN}$  | Input Capacitance                                   |                                                              |     | 4          |            | pF                     |
| $V_{CM}$  | Input Voltage Range                                 | Guaranteed by CMRR                                           | ●   | $\pm 13.5$ | $\pm 14$   | V                      |
| CMRR      | Common Mode Rejection Ratio                         | $V_{CM} = -13.5\text{V to } 13.5\text{V}$                    |     | 115        | 135        | dB                     |
|           |                                                     |                                                              | ●   | 112        |            | dB                     |
|           | Minimum Supply Voltage                              | Guaranteed by PSRR                                           | ●   | $\pm 1.2$  | $\pm 1.35$ | V                      |
| PSRR      | Power Supply Rejection Ratio                        | $V_S = \pm 1.35\text{V to } \pm 18\text{V}$                  | ●   | 112        | 135        | dB                     |
| $A_{VOL}$ | Large-Signal Voltage Gain                           | $R_L = 10\text{k}, V_{OUT} = -13.5\text{V to } 13.5\text{V}$ |     | 1000       | 2000       | V/mV                   |
|           |                                                     |                                                              | ●   | 600        |            | V/mV                   |
|           |                                                     | $R_L = 5\text{k}, V_{OUT} = -13.5\text{V to } 13.5\text{V}$  |     | 500        | 1500       | V/mV                   |
|           |                                                     |                                                              | ●   | 300        |            | V/mV                   |
| $V_{OUT}$ | Maximum Output Swing (Positive, Referred to $V^+$ ) | No Load, 50mV Overdrive                                      |     | 45         | 80         | mV                     |
|           |                                                     |                                                              | ●   |            | 100        | mV                     |
|           | $I_{SOURCE} = 1\text{mA}$ , 50mV Overdrive          |                                                              |     | 140        | 195        | mV                     |
|           |                                                     |                                                              | ●   |            | 240        | mV                     |
|           | Maximum Output Swing (Negative, Referred to 0V)     | No Load, 50mV Overdrive                                      |     | 45         | 80         | mV                     |
|           |                                                     |                                                              | ●   |            | 100        | mV                     |
|           | $I_{SINK} = 1\text{mA}$ , 50mV Overdrive            |                                                              |     | 150        | 250        | mV                     |
|           |                                                     |                                                              | ●   |            | 300        | mV                     |
| $I_{SC}$  | Output Short-Circuit Current (Note 3)               | $V_{OUT} = 0\text{V}$ , 1V Overdrive (Source)                |     | 10         | 15         | mA                     |
|           |                                                     |                                                              | ●   | 5          |            | mA                     |
|           |                                                     | $V_{OUT} = 0\text{V}$ , -1V Overdrive (Sink)                 |     | 10         | 20         | mA                     |
|           |                                                     |                                                              | ●   | 5          |            | mA                     |

## ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ .  $V_S = \pm 15\text{V}$ ,  $V_{CM} = 0\text{V}$ ,  $R_L$  to  $0\text{V}$ ;  $\text{SHDN} = -14.8\text{V}$ , unless otherwise specified. (Note 5)

| SYMBOL            | PARAMETER                   | CONDITIONS                                                                                                                                                                               | MIN                  | TYP      | MAX                           | UNITS                                                                             |
|-------------------|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|----------|-------------------------------|-----------------------------------------------------------------------------------|
| SR                | Slew Rate                   | $A_V = -10$ , $R_F = 50\text{k}$ , $R_G = 5\text{k}$<br>$T_A = 0^\circ\text{C}$ to $70^\circ\text{C}$<br>$T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$                                 | 0.08<br>0.07<br>0.05 | 0.11     |                               | $\text{V}/\mu\text{s}$<br>$\text{V}/\mu\text{s}$<br>$\text{V}/\mu\text{s}$        |
| GBW               | Gain Bandwidth Product      | $f = 10\text{kHz}$                                                                                                                                                                       | 275<br>250           | 350      |                               | $\text{kHz}$<br>$\text{kHz}$                                                      |
| $t_s$             | Settling Time               | $A_V = -1$ , $0.01\%$ , $V_{OUT} = 0\text{V}$ to $10\text{V}$                                                                                                                            |                      | 85       |                               | $\mu\text{s}$                                                                     |
| $t_r$ , $t_f$     | Rise Time, Fall Time        | $A_V = 1$ , $10\%$ to $90\%$ , $0.1\text{V}$ Step                                                                                                                                        |                      | 1        |                               | $\mu\text{s}$                                                                     |
| $I_{\text{SHDN}}$ | SHDN Pin Current            | $\text{SHDN} \leq V^- + 0.2\text{V}$ (On)<br>$\text{SHDN} = V^- + 2.0\text{V}$ (Off)                                                                                                     | ●<br>●               |          | 0.25<br>15<br>25              | $\mu\text{A}$<br>$\mu\text{A}$<br>$\mu\text{A}$                                   |
| $t_{\text{SHDN}}$ | SHDN Turn-On, Turn-Off Time | $\text{SHDN} = V^-$ (On) to $V^- + 2.0\text{V}$ (Off)<br>$\text{SHDN} = V^- + 2.0\text{V}$ (Off) to $V^-$ (On)                                                                           |                      | 25<br>25 |                               | $\mu\text{s}$<br>$\mu\text{s}$                                                    |
| $I_S$             | Supply Current              | $\text{SHDN} \leq V^- + 0.2\text{V}$ (On)<br>$T_A = 0^\circ\text{C}$ to $70^\circ\text{C}$<br>$T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$<br>$\text{SHDN} = V^- + 2.0\text{V}$ (Off) | ●<br>●               | 260      | 330<br>380<br>400<br>18<br>50 | $\mu\text{A}$<br>$\mu\text{A}$<br>$\mu\text{A}$<br>$\mu\text{A}$<br>$\mu\text{A}$ |

**Note 1:** Absolute Maximum Ratings are those beyond which the life of the device may be impaired.

**Note 2:** The inputs are protected by back-to-back diodes and internal series resistors. If the differential input voltage exceeds  $10\text{V}$ , the input current must be limited to less than  $10\text{mA}$ .

**Note 3:** A heat sink may be required to keep the junction temperature below absolute maximum ratings.

**Note 4:** Both the LT6010C and LT6010I are guaranteed functional over the operating temperature range of  $-40^\circ\text{C}$  to  $85^\circ\text{C}$ .

**Note 5:** The LT6010C is guaranteed to meet the specified performance


from  $0^\circ\text{C}$  to  $70^\circ\text{C}$  and is designed, characterized and expected to meet specified performance from  $-40^\circ\text{C}$  to  $85^\circ\text{C}$  but is not tested or QA sampled at these temperatures. The LT6010I is guaranteed to meet specified performance from  $-40^\circ\text{C}$  to  $85^\circ\text{C}$ .

**Note 6:** This parameter is not 100% tested.

**Note 7:** The specifications for  $V_{OS}$ ,  $I_B$  and  $I_{OS}$  depend on the grade and on the package. The following table clarifies the notations used in the specification table:


|             | Standard Grade | A Grade   |
|-------------|----------------|-----------|
| S8 Package  | LT6010S8       | LT6010AS8 |
| DFN Package | LT6010DD       | LT6010ADD |

## TYPICAL PERFORMANCE CHARACTERISTICS

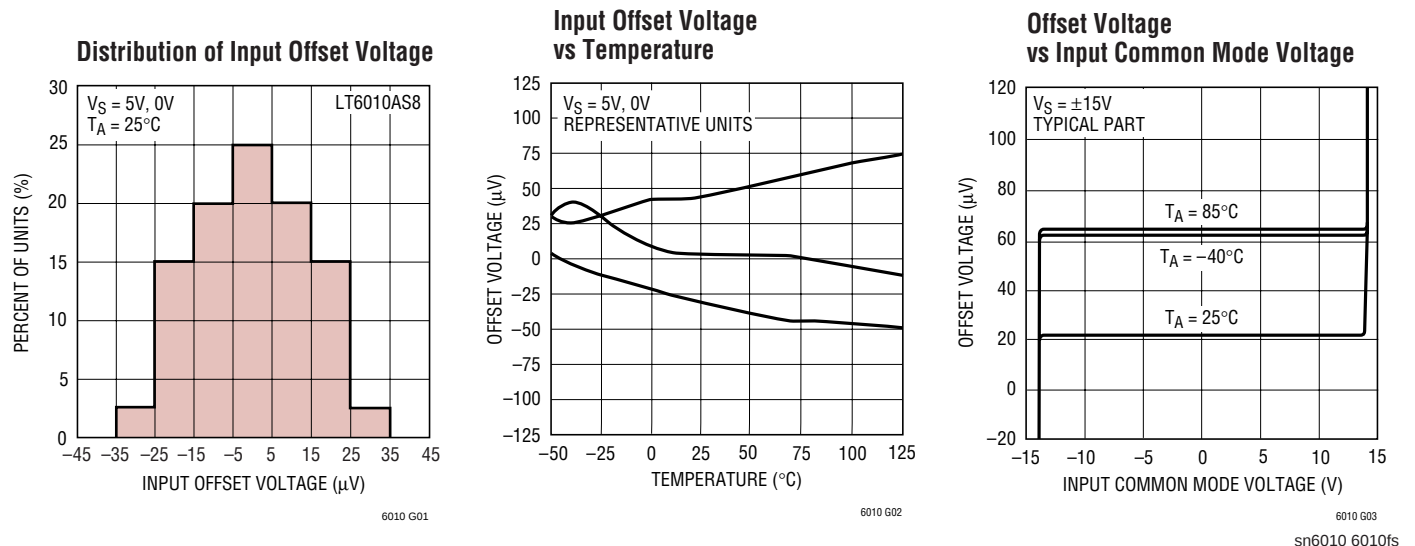


# TYPICAL PERFORMANCE CHARACTERISTICS

Input Bias Current vs Temperature

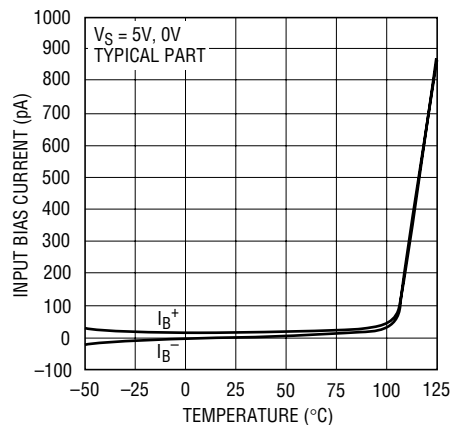


6010 G04

Input Bias Current vs Input Common Mode Voltage

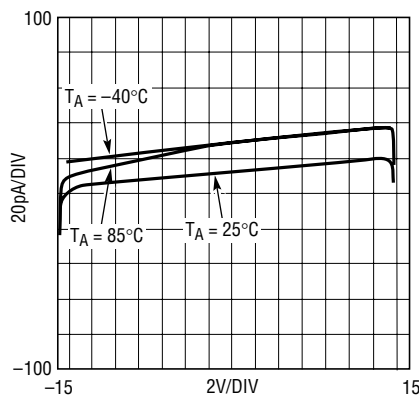


6010 G05

$e_n$ ,  $i_n$  vs Frequency

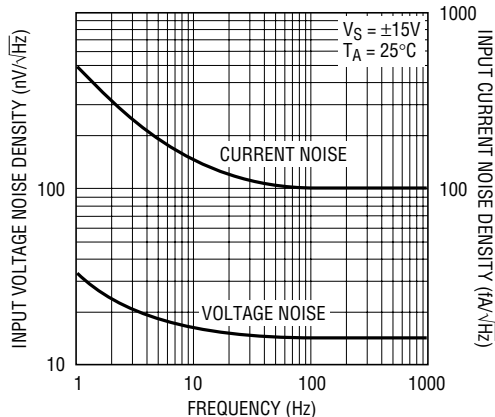


6010 G06

Total Input Noise vs Source Resistance

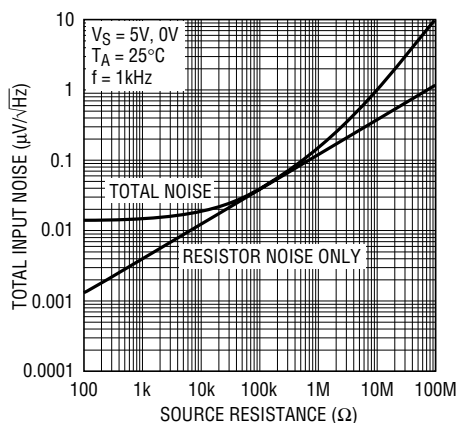


6010 G07

0.1Hz to 10Hz Noise

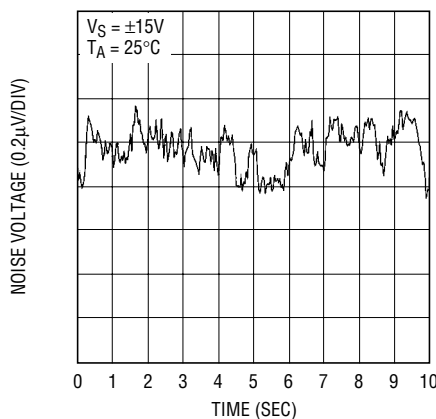


6010 G08

0.01Hz to 1Hz Noise

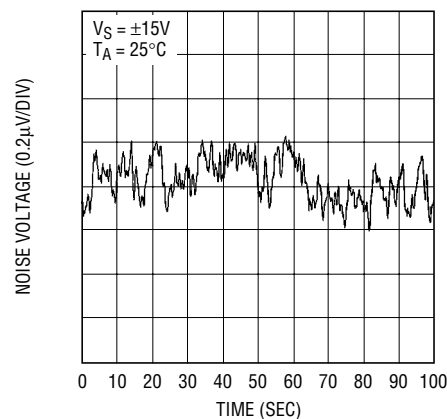


6010 G09

Output Voltage Swing vs Temperature

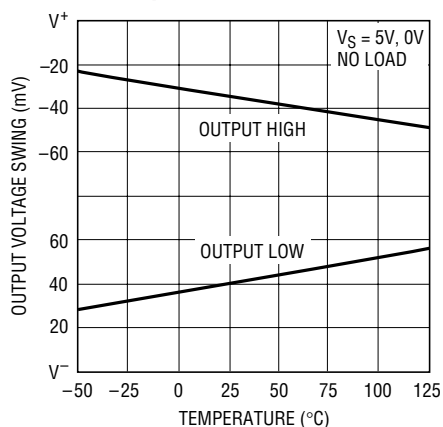


6010 G10

Output Saturation Voltage vs Load Current (Output High)

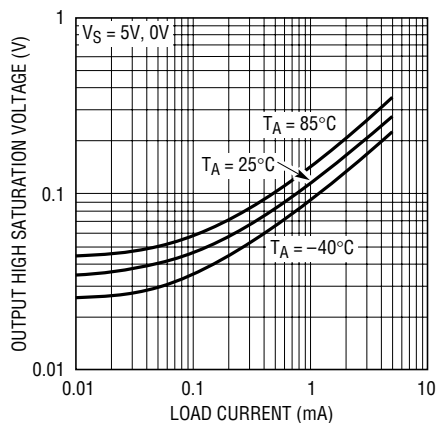

6010 G11


Output Saturation Voltage vs Load Current (Output Low)

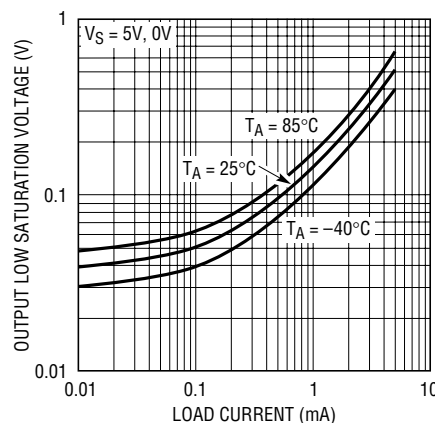


6010 G12

# TYPICAL PERFORMANCE CHARACTERISTICS


Supply Current vs Supply Voltage

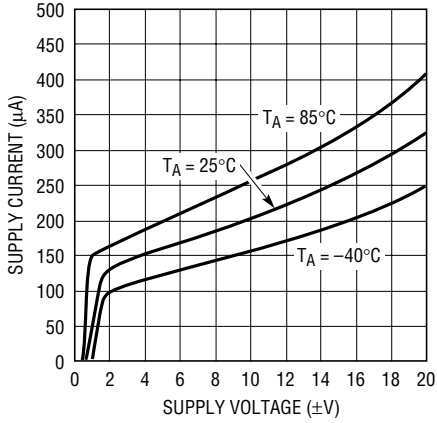


Warm-Up Drift

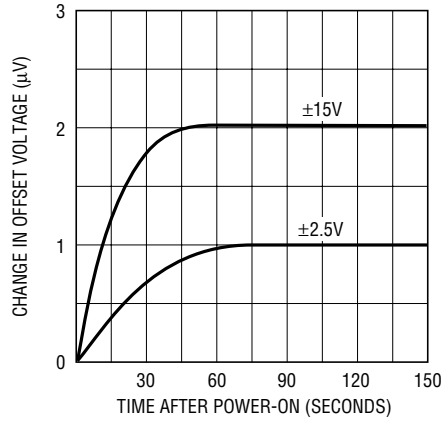


THD + Noise vs Frequency

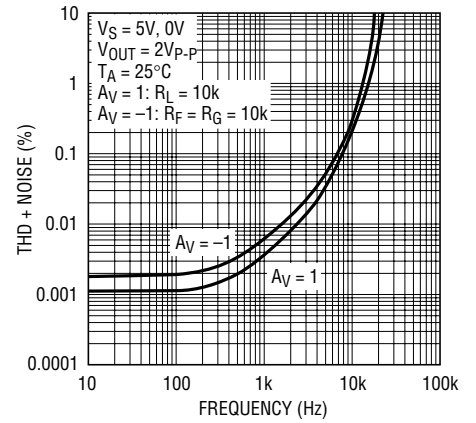


THD + Noise vs Frequency

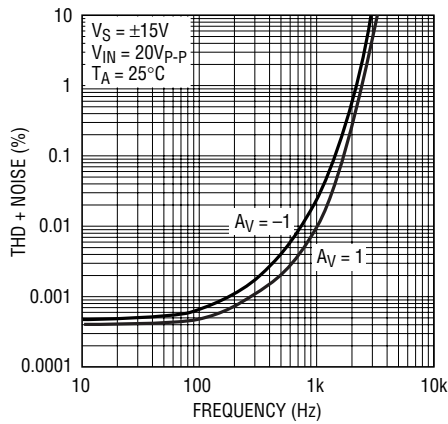


Settling Time vs Output Step

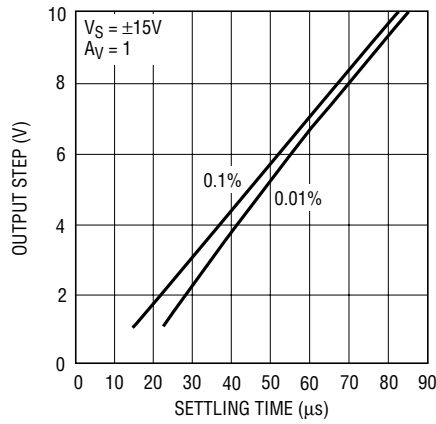


Settling Time vs Output Step

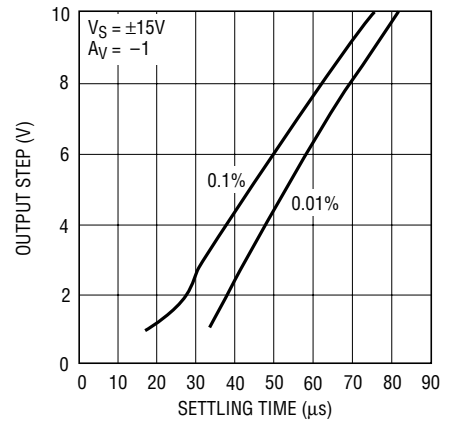










CMRR vs Frequency

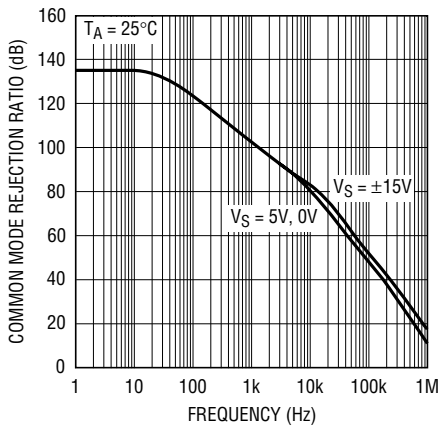

PSRR vs Frequency

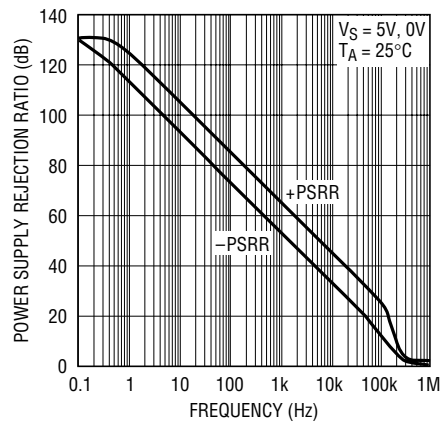

# TYPICAL PERFORMANCE CHARACTERISTICS

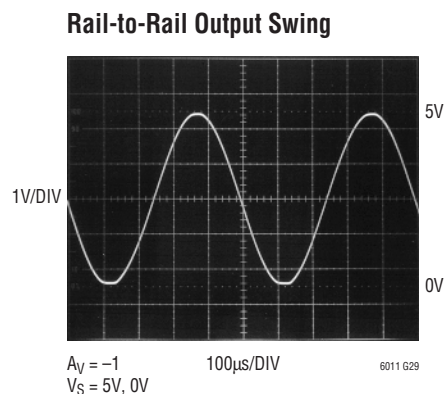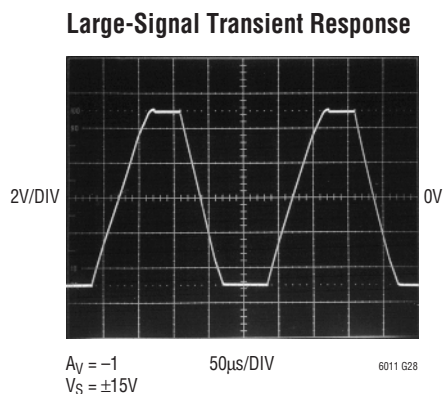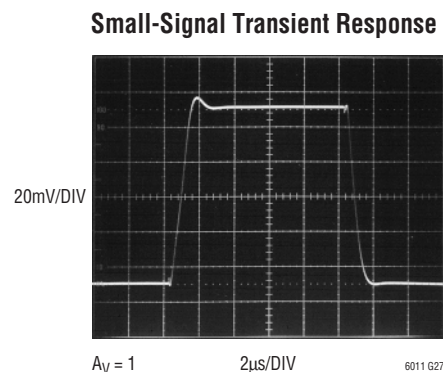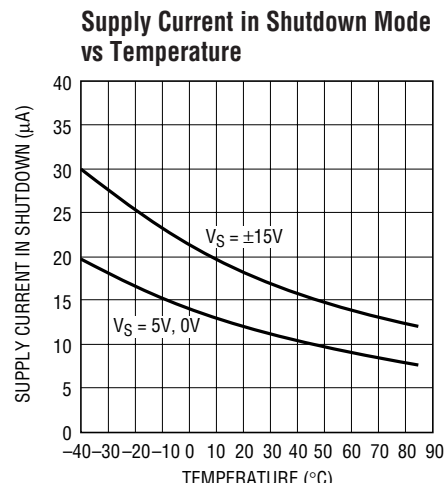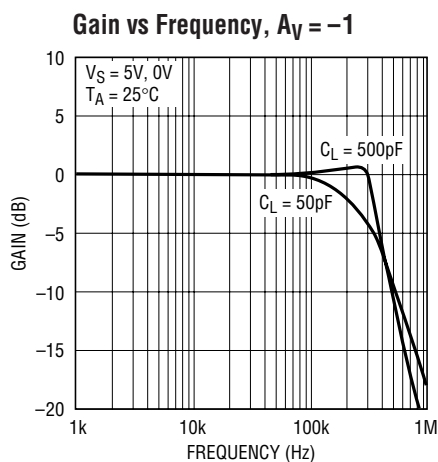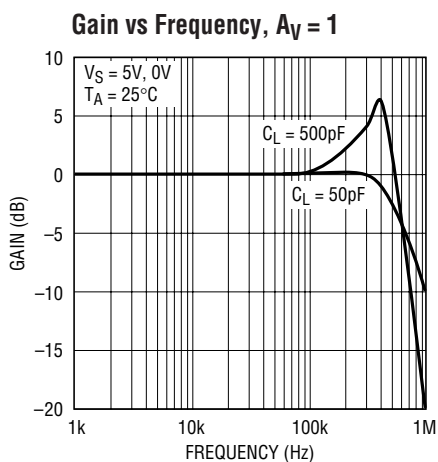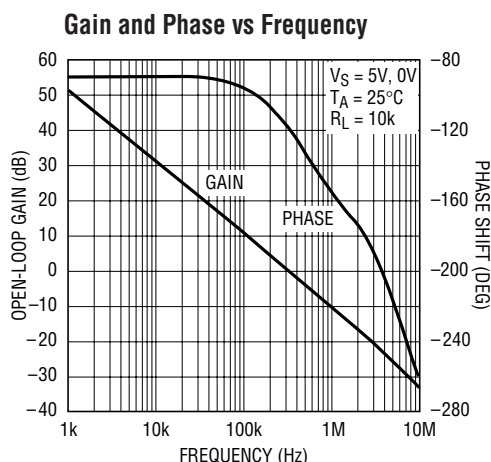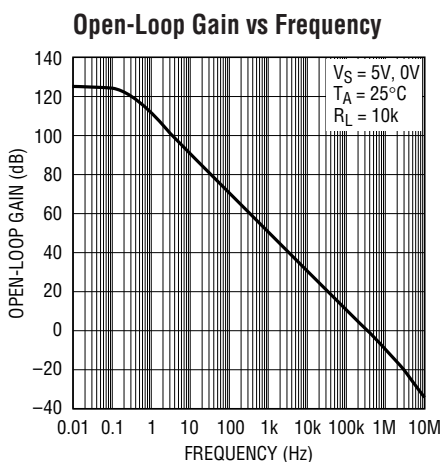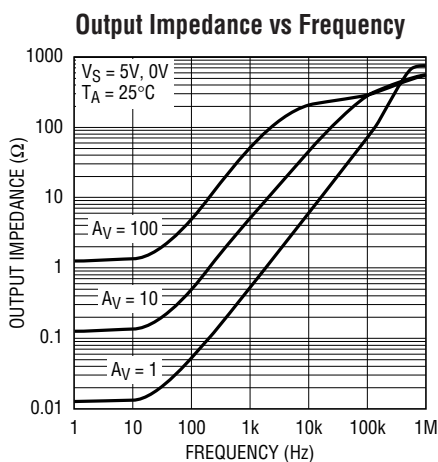

## APPLICATIONS INFORMATION

### Preserving Input Precision

Preserving the input accuracy of the LT6010 requires that the applications circuit and PC board layout do not introduce errors comparable to or greater than the 20 $\mu$ V typical offset of the amplifier. Temperature differentials across the input connections can generate thermocouple voltages of 10's of microvolts, so the connections to the input leads should be short, close together, and away from heat dissipating components. Air currents across the board can also generate temperature differentials.

The extremely low input bias currents (20pA typical) allow high accuracy to be maintained with high impedance sources and feedback resistors. The LT6010 low input bias currents are obtained by a cancellation circuit on-chip. The input bias currents are permanently trimmed at wafer testing to a low level. Do not try to balance the input resistances in each input lead; instead, keep the resistance at either input as low as possible for maximum accuracy.

Leakage currents on the PC board can be higher than the LT6010's input bias current. For example, 10G $\Omega$  of leakage between a 15V supply lead and an input lead will generate 1.5nA! Surround the input leads by a guard ring, driven to the same potential as the input common mode, to avoid excessive leakage in high impedance applications.

### Input Protection

The LT6010 features on-chip back-to-back diodes between the input devices, along with 500 $\Omega$  resistors in series with either input. This internal protection limits the input current to approximately 10mA (the maximum

allowed) for a 10V differential input voltage. Use additional external series resistors to limit the input current to 10mA in applications where differential inputs of more than 10V are expected. For example, a 1k resistor in series with each input provides protection against 30V differential voltage.

### Input Common Mode Range

The LT6010 output is able to swing nearly to each power supply rail (rail-to-rail out), but the input stage is limited to operating between  $V^- + 1V$  and  $V^+ - 1.2V$ . Exceeding this common mode range will cause the gain to drop to zero, however no phase reversal will occur.

### Total Input Noise

The LT6010 amplifier contributes negligible noise to the system when driven by sensors (sources) with impedance between 20k $\Omega$  and 1M $\Omega$ . Throughout this range, total input noise is dominated by the 4kTR<sub>S</sub> noise of the source. If the source impedance is less than 20k $\Omega$ , the input voltage noise of the amplifier starts to contribute with a minimum noise of 14nV/ $\sqrt{\text{Hz}}$  for very low source impedance. If the source impedance is more than 1M $\Omega$ , the input current noise of the amplifier, multiplied by this high impedance, starts to contribute and eventually dominate. Total input noise spectral density can be calculated as:

$$v_{n(\text{TOTAL})} = \sqrt{e_n^2 + 4kTR_S + (i_n R_S)^2}$$

where  $e_n = 14\text{nV}/\sqrt{\text{Hz}}$ ,  $i_n = 0.1\text{pA}/\sqrt{\text{Hz}}$  and  $R_S$  the total impedance at the input, including the source impedance.

# APPLICATIONS INFORMATION

## Offset Voltage Adjustment

The input offset voltage of the LT6010 and its drift with temperature are permanently trimmed at wafer testing to the low level as specified in the electrical characteristic. However, if further adjustment of  $V_{OS}$  is desired, nulling with a 50k potentiometer is possible and will not degrade drift with temperature. Trimming to a value other than zero

creates a drift of  $(V_{OS}/300\mu V)\mu V/^{\circ}C$ , e.g., if  $V_{OS}$  is adjusted to  $300\mu V$ , the change in drift will be  $1\mu V/^{\circ}C$ . The adjustment range with a 50k pot is approximately  $\pm 0.9mV$  (see Figures 1A and 1B). The sensitivity and resolution of the nulling can be improved by using a smaller pot in conjunction with fixed resistors. The configuration shown has an approximate nulling range of  $\pm 150\mu V$  (see Figures 2A and 2B).

### Standard Adjustment

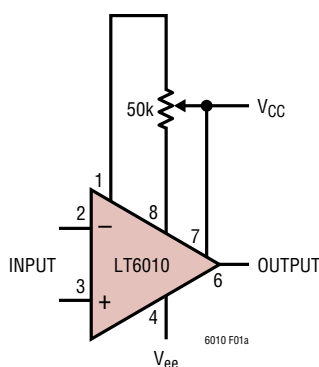


Figure 1A

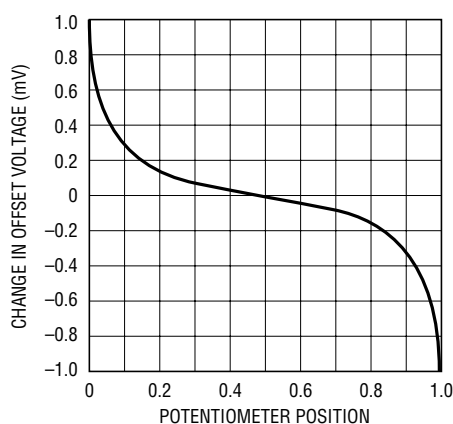


Figure 1B

### Improved Sensitivity Adjustment

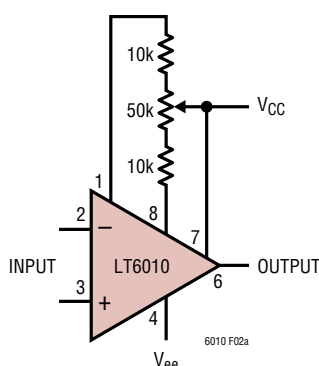


Figure 2A

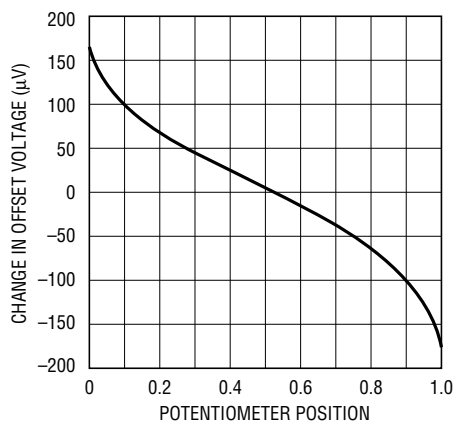


Figure 2B

## APPLICATIONS INFORMATION

### Shutdown


The LT6010 can be put into shutdown mode to conserve power. When the SHDN pin is biased at less than 0.2V above the negative supply, the part operates normally. When pulled 2V or more above  $V^-$ , the supply current drops to about 12 $\mu$ A, shutting down the op amp.

The output of the LT6010 op amp is not isolated from the inputs while in shutdown mode. Therefore, this shutdown feature cannot be used for multiplexing applications.

There is an internal 85k resistor at the SHDN pin. If the SHDN voltage source is more than 2V above the negative supply, an external series resistor can be placed between the source and SHDN pin to reduce SHDN pin current (see Figure 3). For an example of suggested values see Table 1. The resistors listed ensure that the voltage at the SHDN pin is 2V above the negative supply.

**Table 1**

| $V_{SHDN}$ (V) | $R_{SHDN}$ (k $\Omega$ ) |
|----------------|--------------------------|
| 2              | NONE                     |
| 3              | 77k                      |
| 4              | 153k                     |
| 5              | 230k                     |

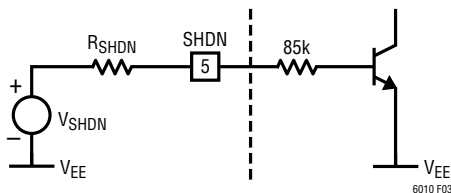


**Figure 3**

### Capacitive Loads

The LT6010 can drive capacitive loads up to 500pF in unity gain. The capacitive load driving capability increases as the amplifier is used in higher gain configurations. A small series resistance between the output and the load further increases the amount of capacitance that the amplifier can drive.


### Rail-to-Rail Operation

The LT6010 outputs can swing to within millivolts of either supply rail, but the inputs cannot. However, for most op amp configurations, the inputs need to swing less than the outputs. Figure 4 shows the basic op amp configurations, lists what happens to the op amp inputs and specifies whether or not the op amp must have rail-to-rail inputs. Select a rail-to-rail input op amp only when really necessary, because the input precision specifications are usually inferior.

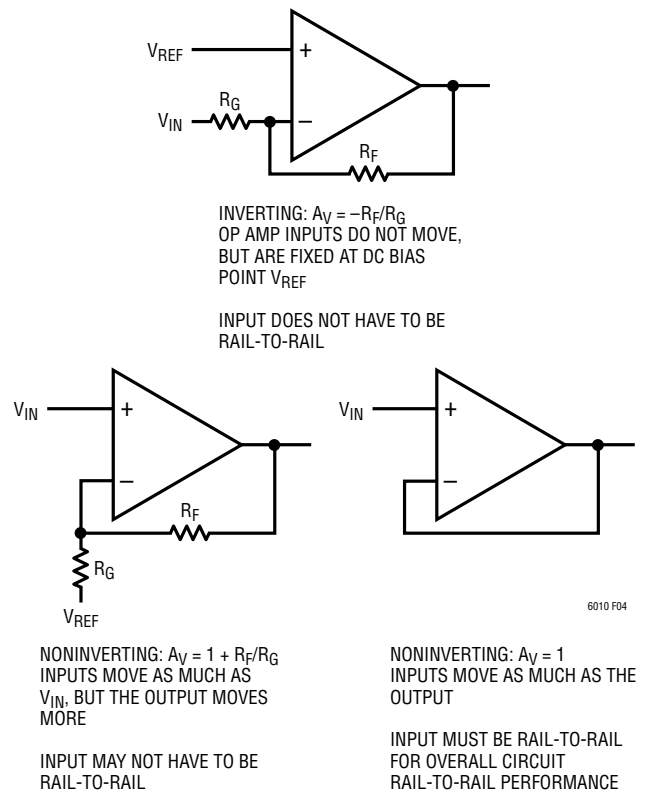


**Figure 4. Some Op Amp Configurations Do Not Require Rail-to-Rail Inputs to Achieve Rail-to-Rail Outputs**

# SIMPLIFIED SCHEMATIC


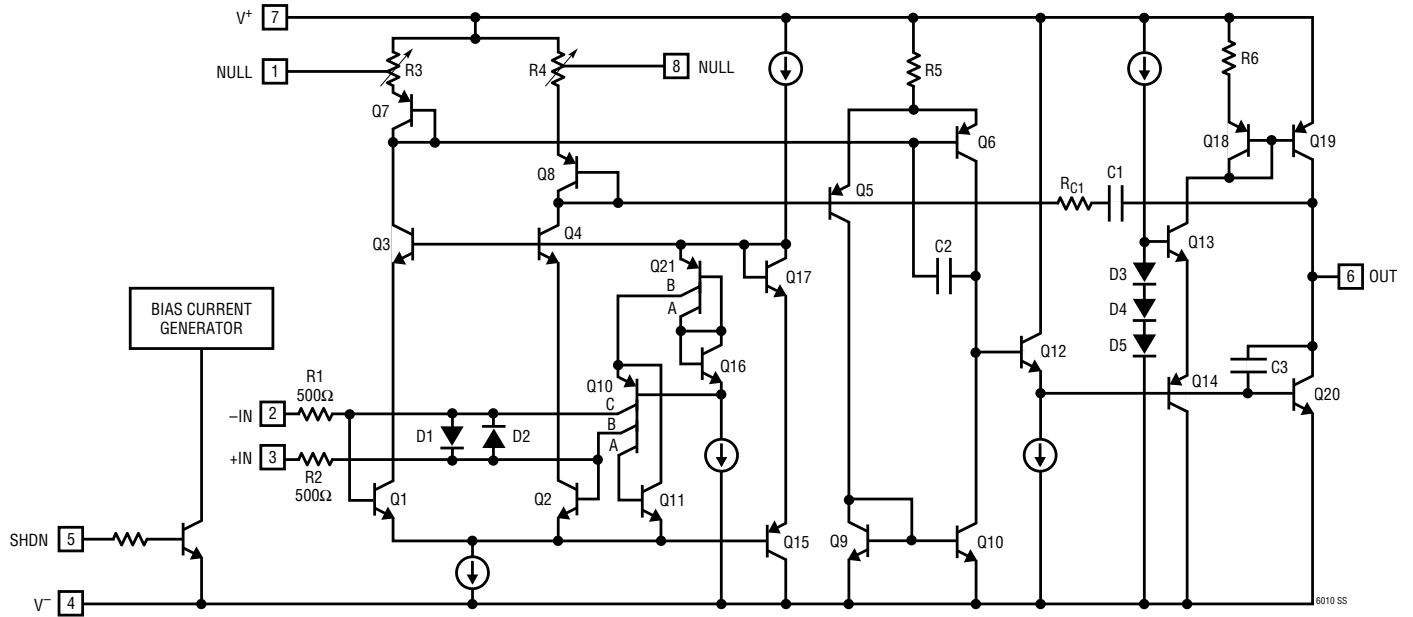


## PACKAGE DESCRIPTION

### DD Package 8-Lead Plastic DFN (3mm × 3mm) (Reference LTC DWG # 05-08-1698)

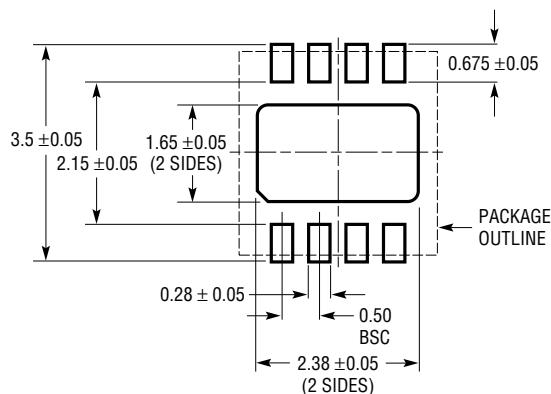

RECOMMENDED SOLDER PAD PITCH AND DIMENSIONS

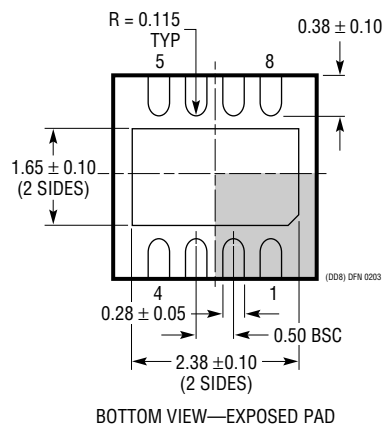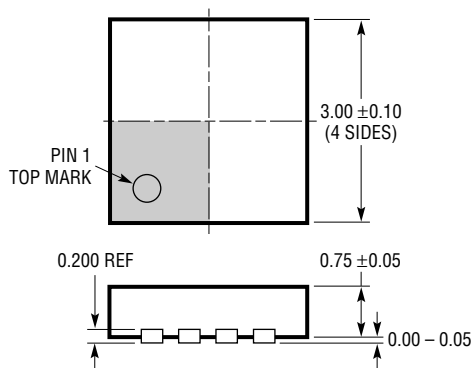


#### NOTE:

1. DRAWING TO BE MADE A JEDEC PACKAGE OUTLINE MO-229 VARIATION OF (WEED-1)
2. ALL DIMENSIONS ARE IN MILLIMETERS
3. DIMENSIONS OF EXPOSED PAD ON BOTTOM OF PACKAGE DO NOT INCLUDE MOLD FLASH. MOLD FLASH, IF PRESENT, SHALL NOT EXCEED 0.15mm ON ANY SIDE
4. EXPOSED PAD SHALL BE SOLDER PLATED

## PACKAGE DESCRIPTION

### S8 Package 8-Lead Plastic Small Outline (Narrow .150 Inch) (Reference LTC DWG # 05-08-1610)

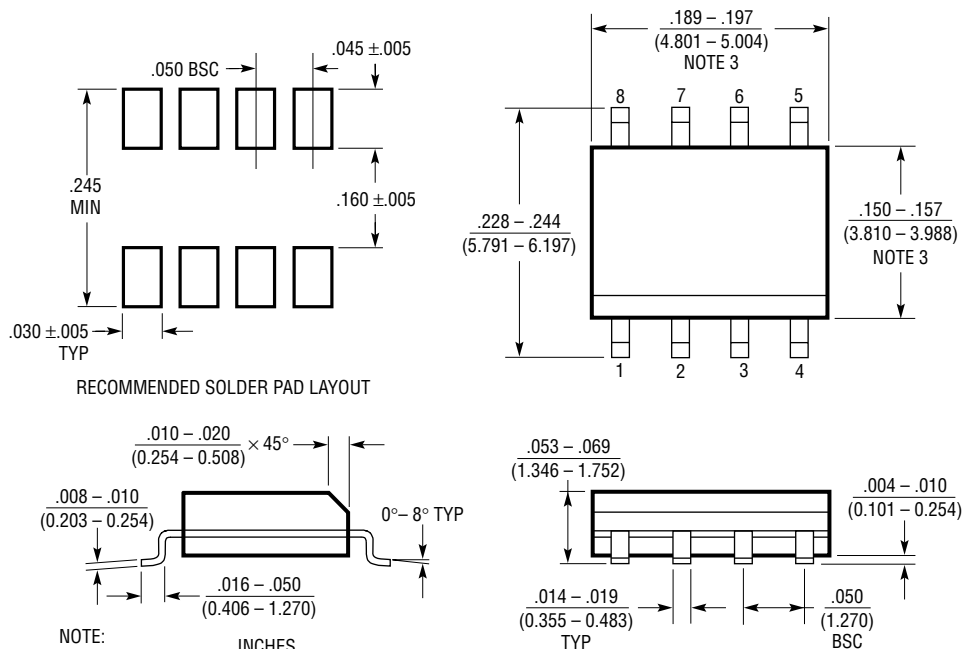


- NOTE:
1. DIMENSIONS IN  $\frac{\text{INCHES}}{\text{MILLIMETERS}}$
  2. DRAWING NOT TO SCALE
  3. THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.  
MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .006" (0.15mm)

S08 0303

TYPICAL APPLICATION

Precision JFET Input Transimpedance Photodiode Amplifier

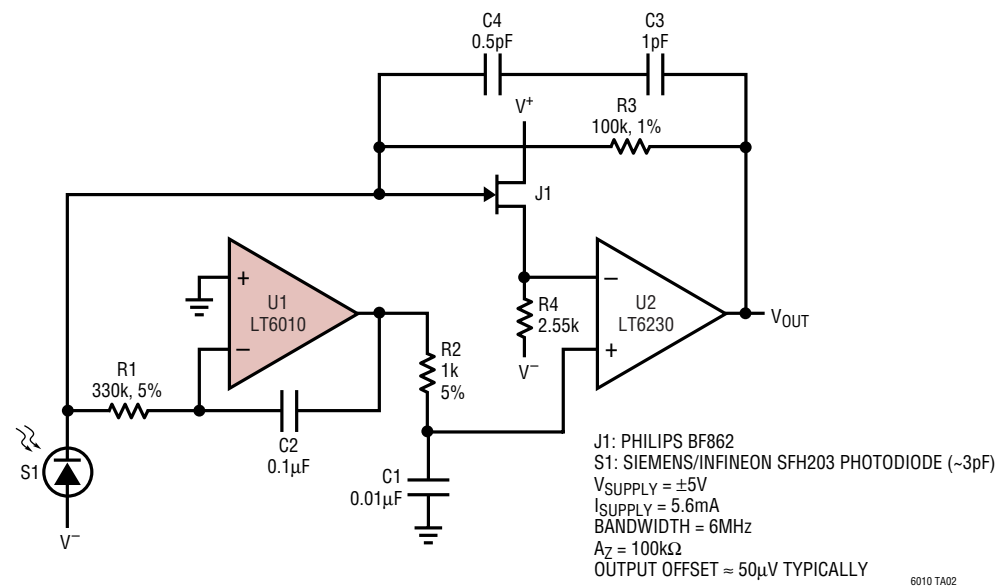

6010 TA02

RELATED PARTS

| PART NUMBER | DESCRIPTION                                         | COMMENTS                       |
|-------------|-----------------------------------------------------|--------------------------------|
| LT6011/6012 | Dual/Quad Precision Op Amps                         | 135µA, Rail-to-Rail Output     |
| LT1001      | Low Power, Picoamp Input Precision Op Amp           | 250pA Input Bias Current       |
| LT1880      | Rail-to-Rail Output, Picoamp Input Precision Op Amp | C <sub>LOAD</sub> up to 1000pF |

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А