

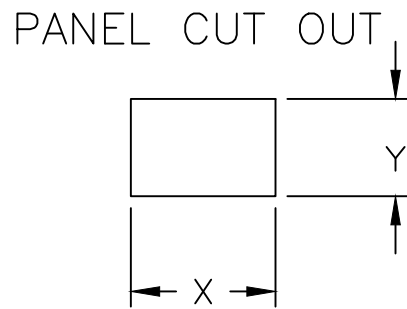
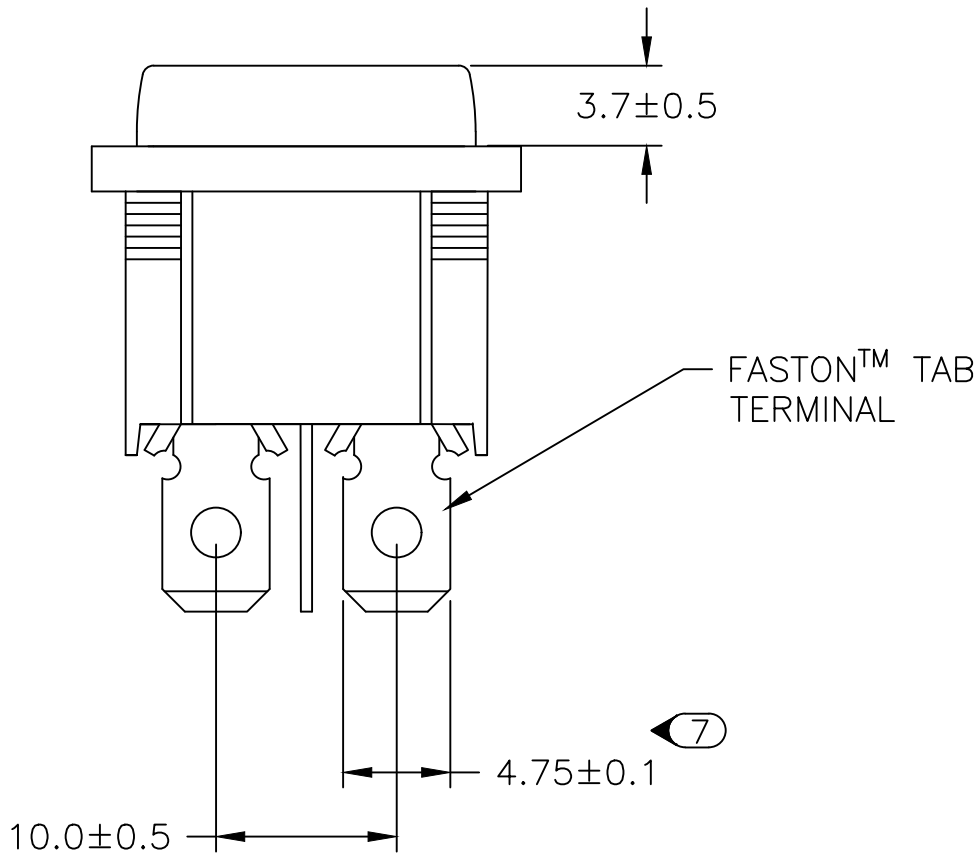
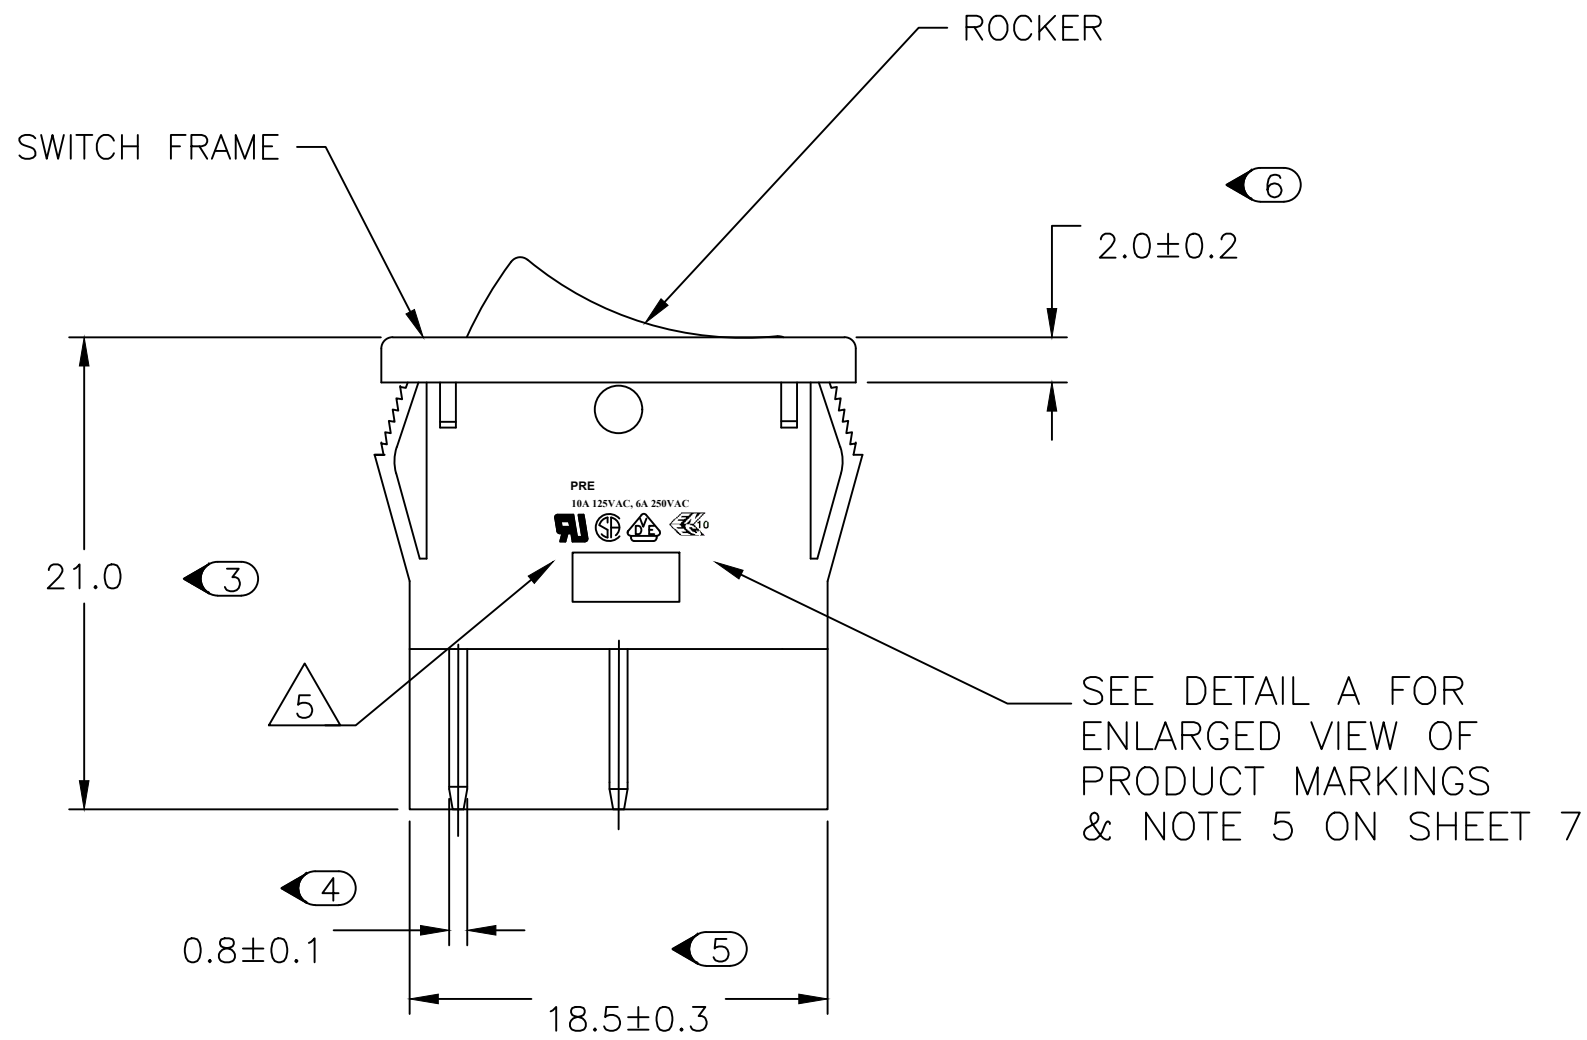


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	E	REVISED PER ECO-10-025607	21DEC10	HMR	MW
	E1	REVISED PER ECO-16-017354	10MAR2017	RK	AS

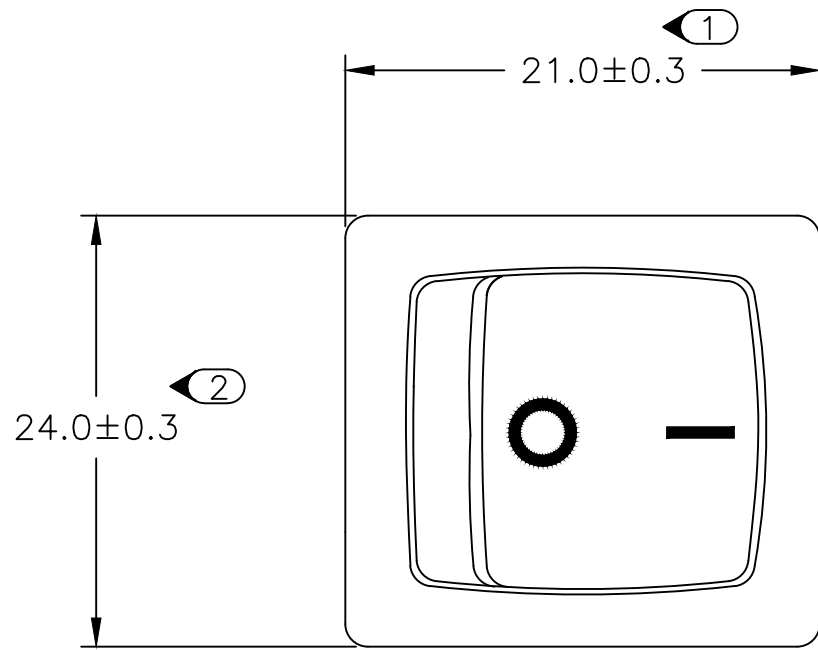


2.00-3.00	20.20	22.20
1.25-2.00	19.60	22.20
0.75-1.25	19.40	22.20
PANEL THICKNESS	X	Y

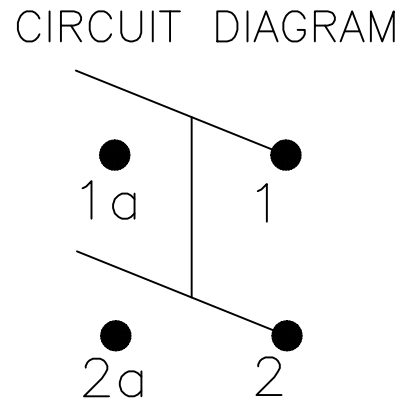





PRODUCT MARKING
DETAIL A



TYCO ELECTRONICS LOGO
PER TEC-202-36


 1634200-2 SHOWN ON-OFF

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN SA008712 2-4-07	 TE Connectivity			
DIMENSIONS: mm		CHK —				
		APVD —	NAME POWER ROCKER SWITCH 19,4MM X 22,2mm PANEL SIZE DPST, NON-ILLUMINATED			
		PRODUCT SPEC —	—			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC —	SIZE A2	CAGE CODE 00779	DRAWING NO C-1634200	RESTRICTED TO —
MATERIAL —		WEIGHT —	CUSTOMER DRAWING			
ANGLES FINISH —		SCALE 3:1	SHEET 1 of 7	REV E1		

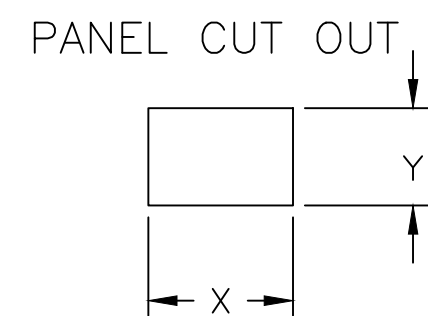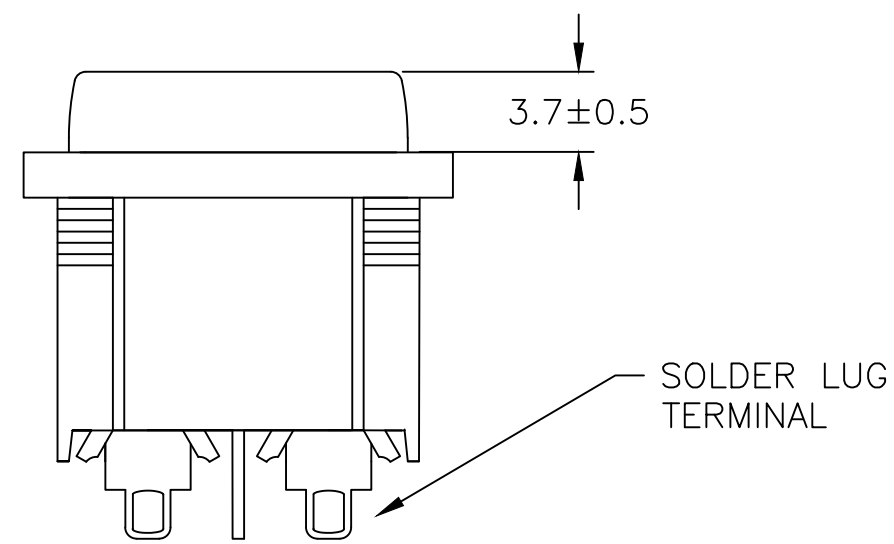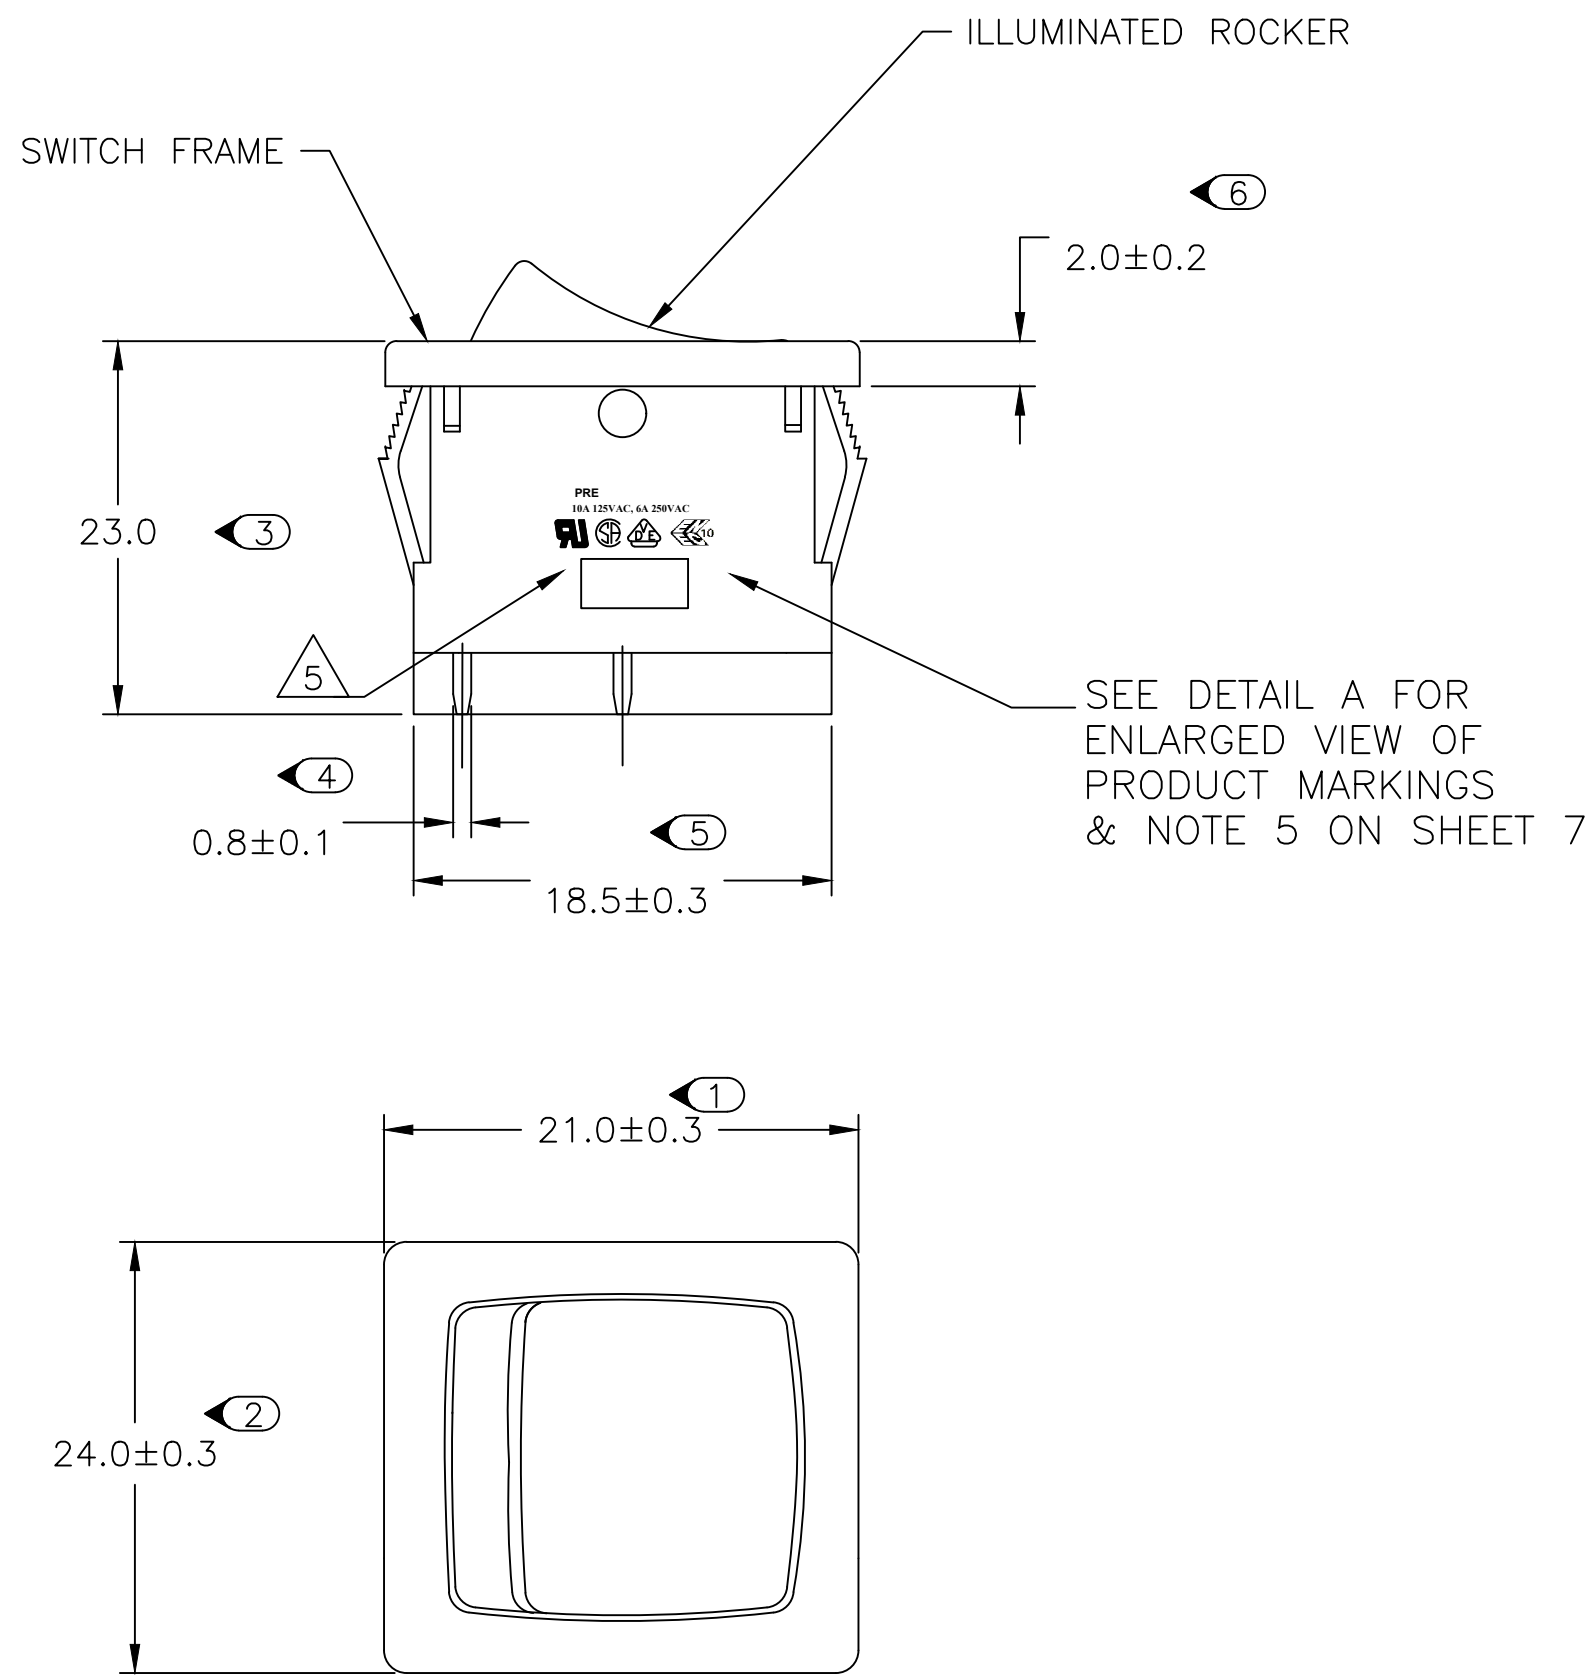


2.00–3.00	20.20	22.20
1.25–2.00	19.60	22.20
0.75–1.25	19.40	22.20
PANEL THICKNESS	X	Y

CIRCUIT DIAGRAM



PRODUCT MARKING
DETAIL A



PRE
10A 125VAC, 6A 250VAC



TYCO ELECTRONICS LOGO
PER TEC-202-36


7 OBSOLETE 1634200-8 SHOWN ON-OFF ILLUMINATED

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN SA008712 2-4-07	TE Connectivity			
DIMENSIONS: mm		CHK —	NAME POWER ROCKER SWITCH 19,4MM X 22,2mm PANEL SIZE DPST, NON-ILLUMINATED			
		APVD —				
		PRODUCT SPEC —				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC —	SIZE A2	CAGE CODE 00779	DRAWING NO C-1634200	RESTRICTED TO —
MATERIAL —		WEIGHT —	CUSTOMER DRAWING			
		SCALE 3:1	SHEET 2 of 7	REV E1		

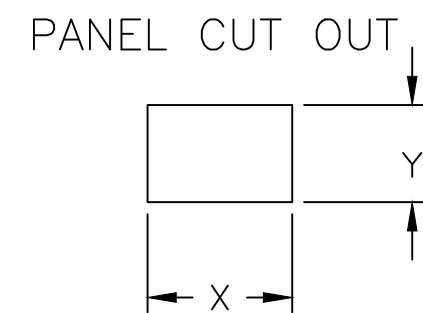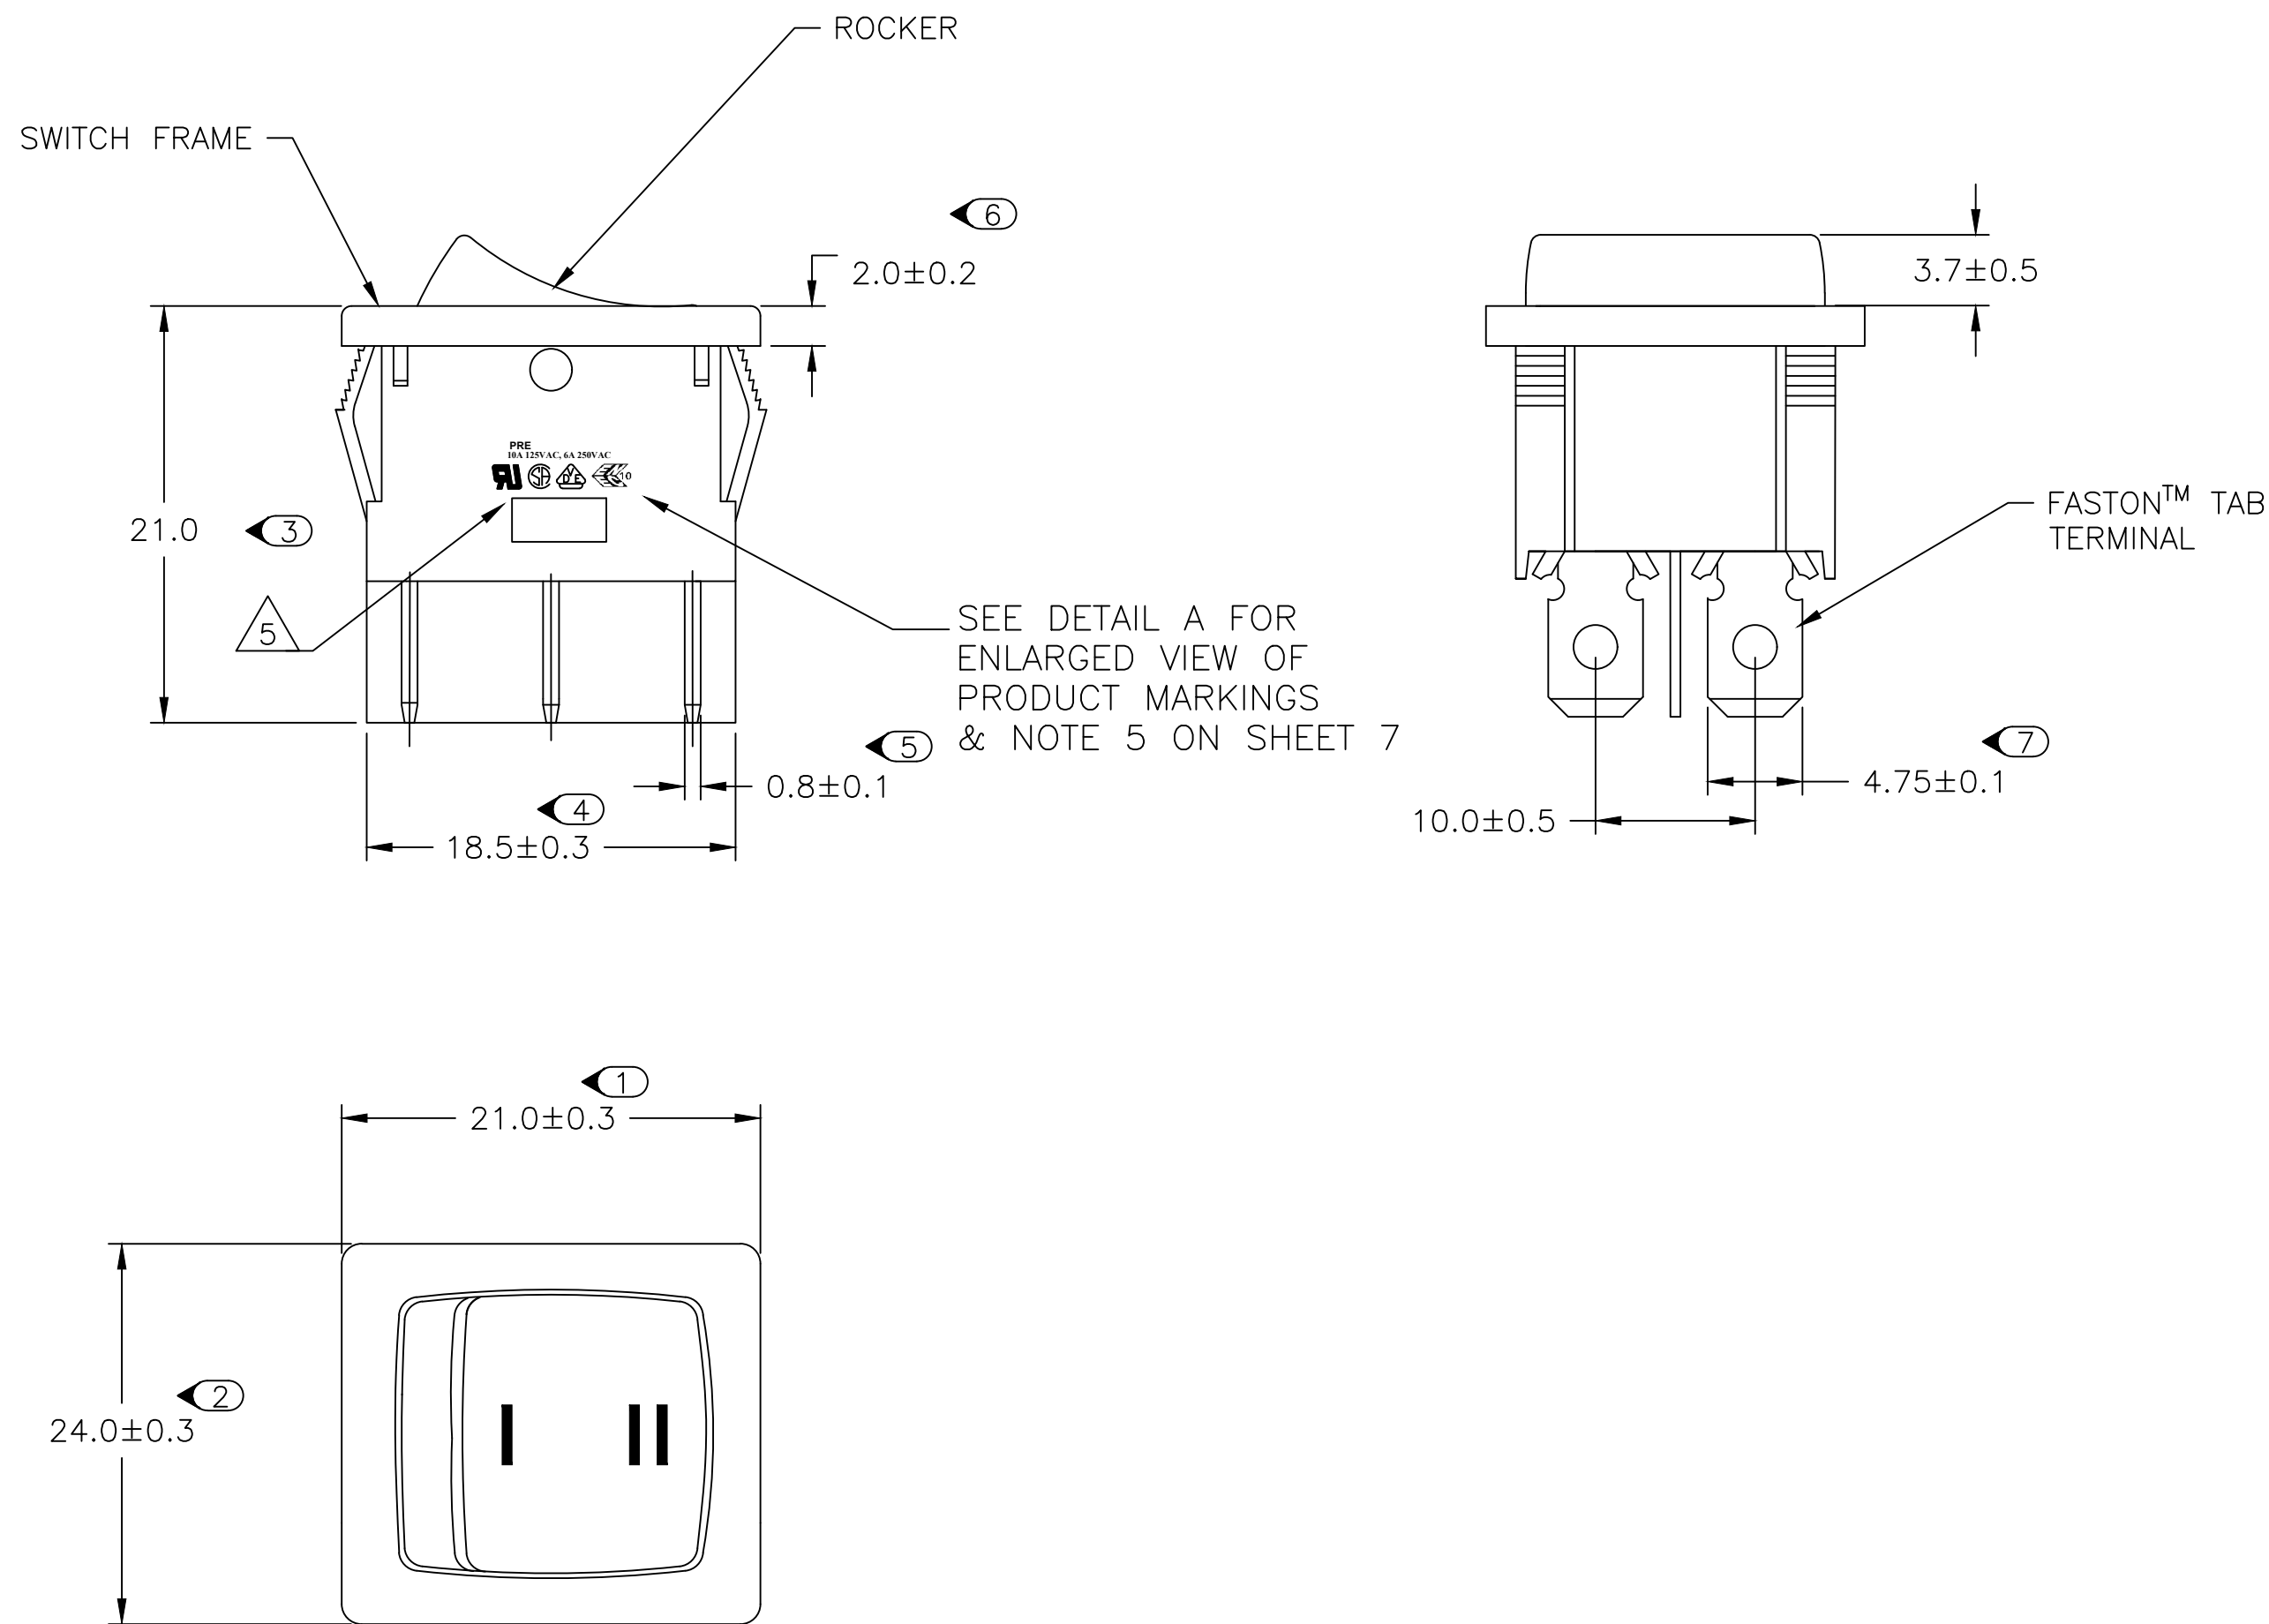


2.00–3.00	20.20	22.20
1.25–2.00	19.60	22.20
0.75–1.25	19.40	22.20
PANEL THICKNESS	X	Y

CIRCUIT DIAGRAM

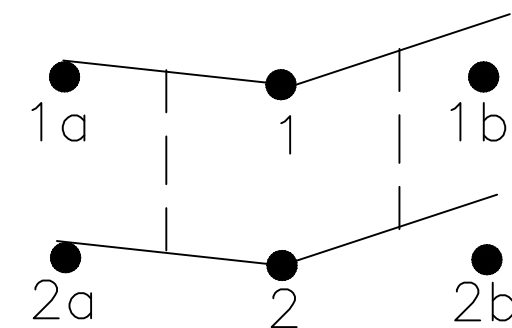

PRODUCT MARKING
DETAIL A



PRE
10A 125VAC, 6A 250VAC



TYCO ELECTRONICS LOGO
PER TEC-202-36


8 1-1634200-2 SHOWN ON-ON

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN SA008712 2-4-07	TE Connectivity			
DIMENSIONS: mm		CHK —				
		APVD —	NAME POWER ROCKER SWITCH 19,4MM X 22,2mm PANEL SIZE DPST, NON-ILLUMINATED			
		PRODUCT SPEC —	SIZE A2			
MATERIAL —		APPLICATION SPEC —	CAGE CODE 00779		DRAWING NO 1634200	
		WEIGHT —	RESTRICTED TO —			
		CUSTOMER DRAWING	SCALE 3:1		SHEET 3 of 7	REV E1

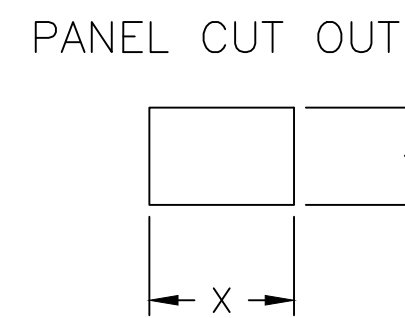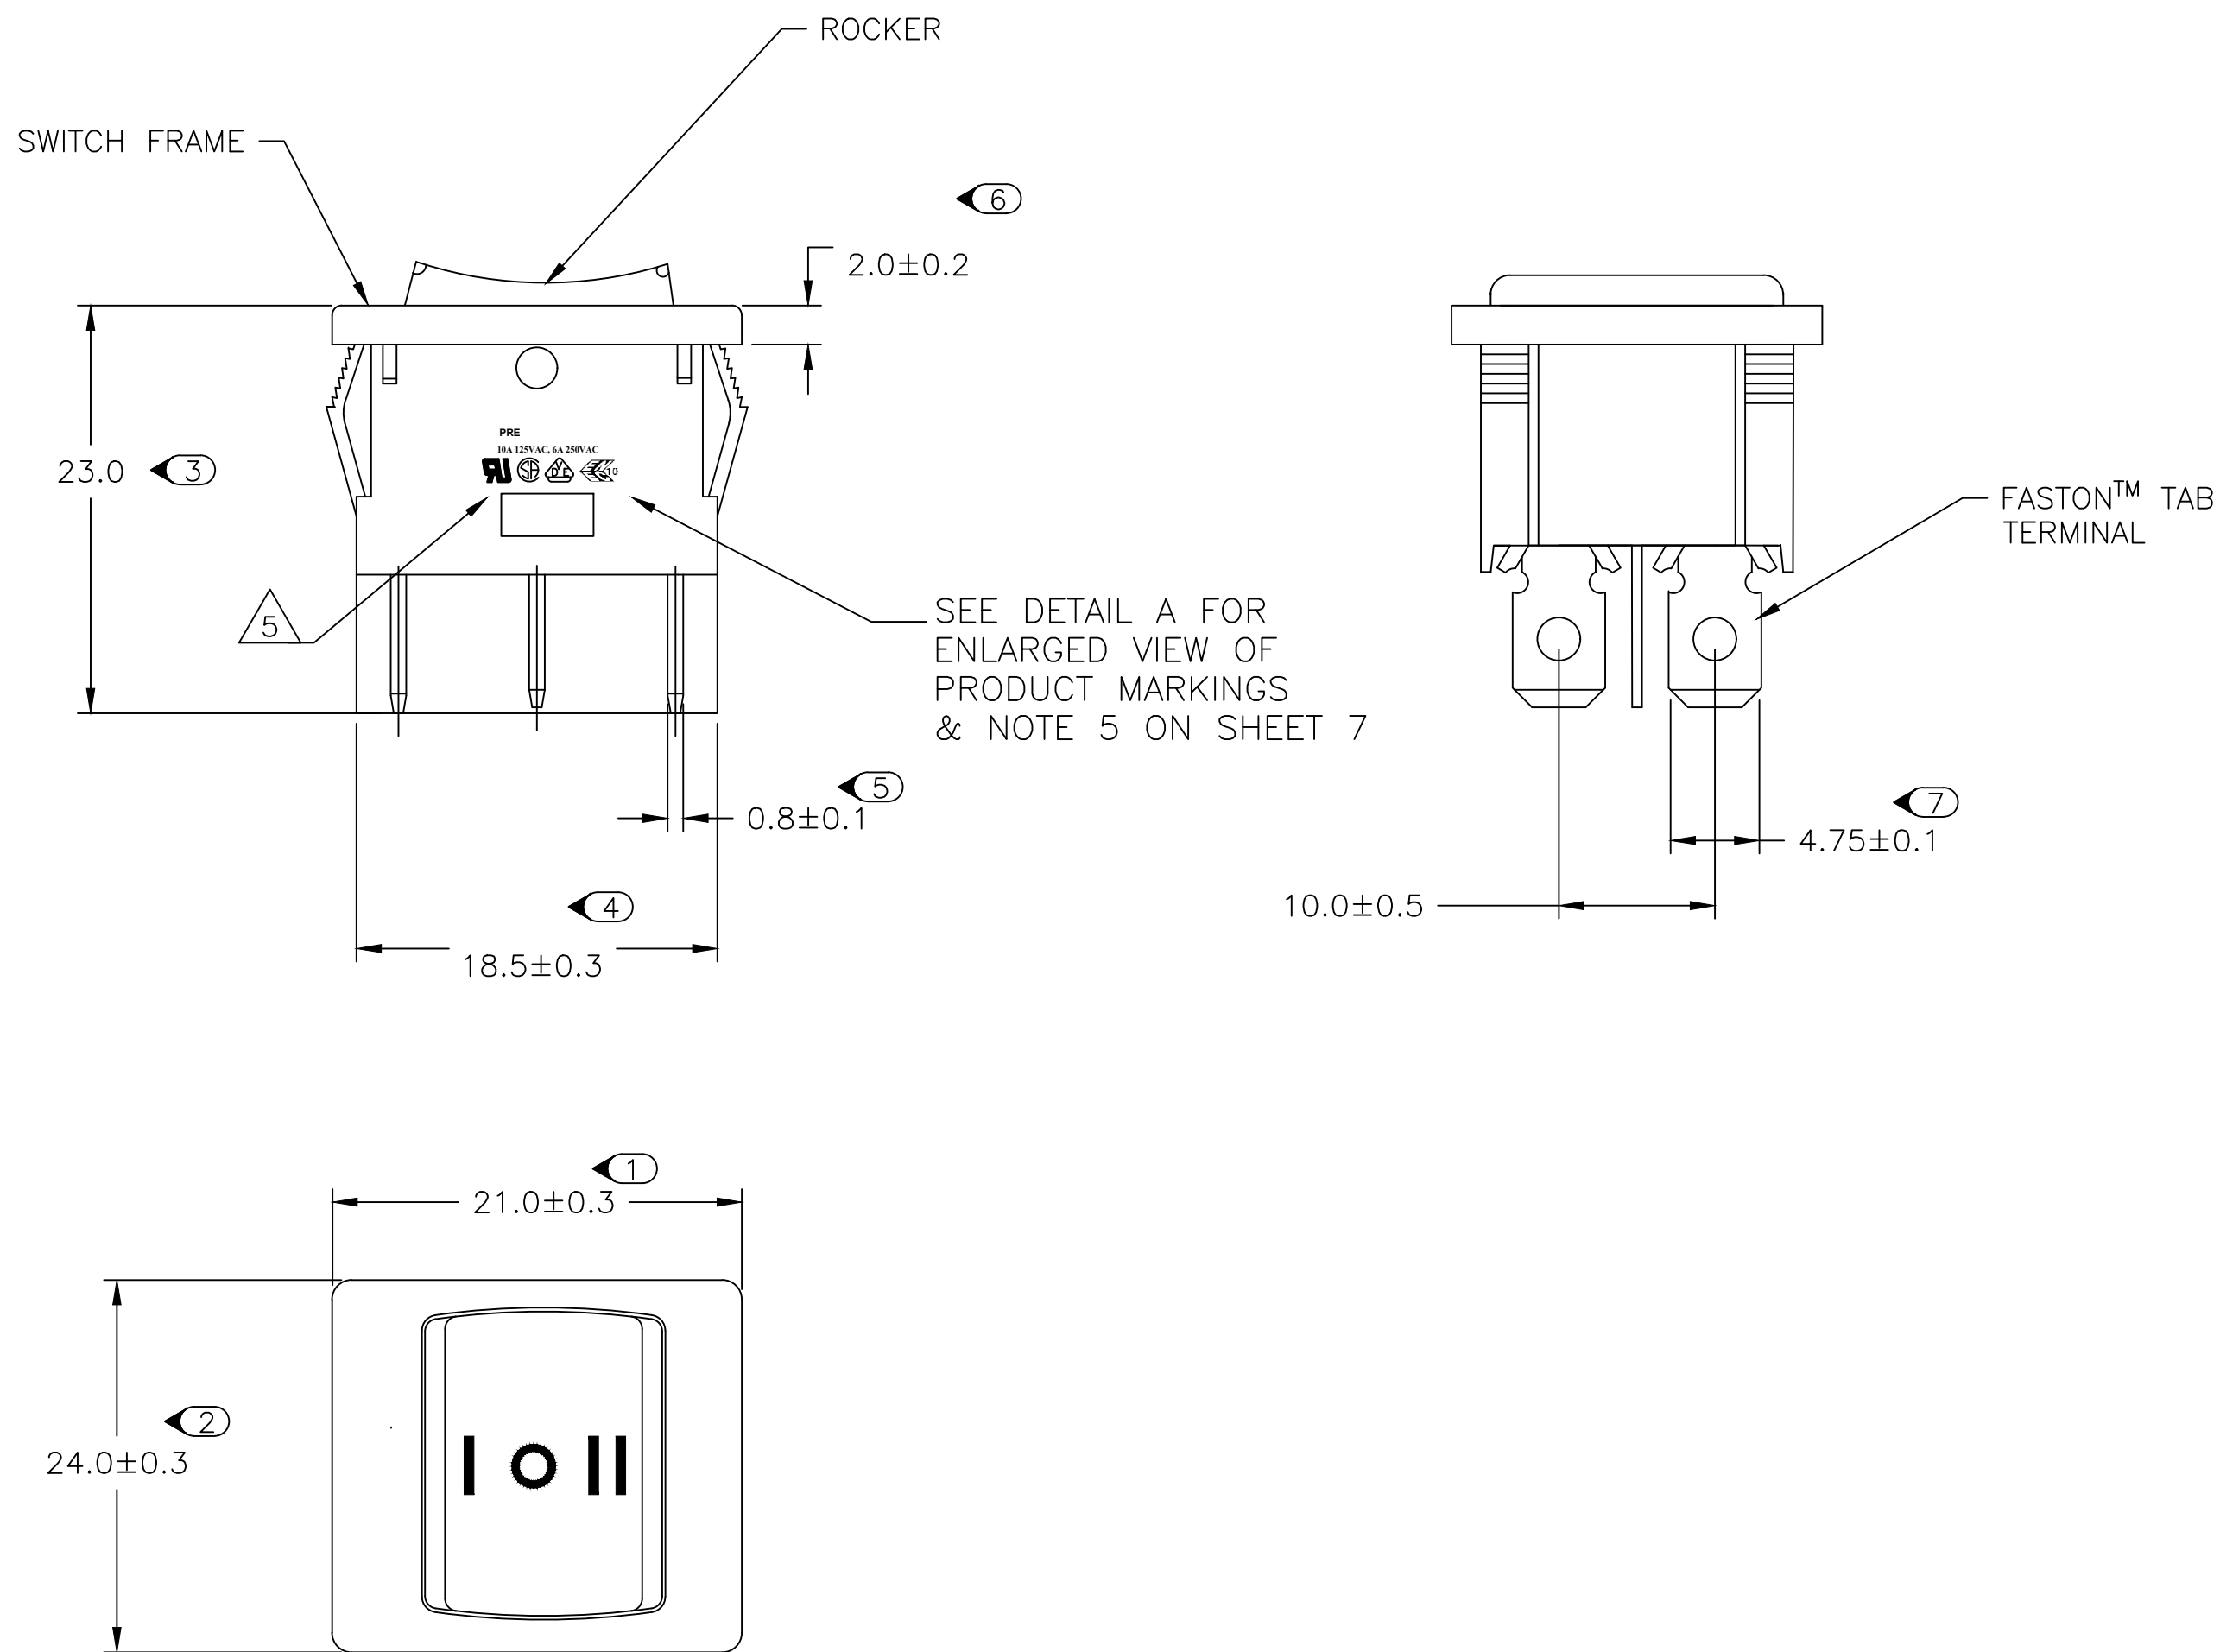


2.00–3.00	20.20	22.20
1.25–2.00	19.60	22.20
0.75–1.25	19.40	22.20
PANEL THICKNESS	X	Y

CIRCUIT DIAGRAM

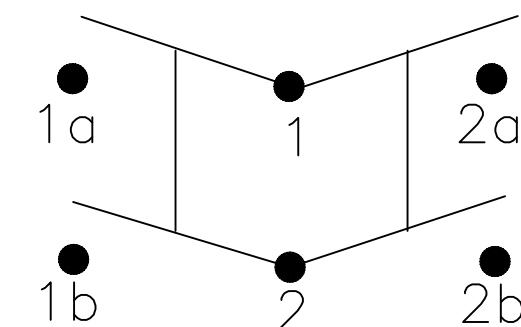

PRODUCT MARKING
DETAIL A


PRE
10A 125VAC, 6A 250VAC






TYCO ELECTRONICS LOGO
PER TEC-202-36



9 1-1634200-7 SHOWN ON-OFF-ON

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN SA008712 2-4-07	TE Connectivity			
DIMENSIONS: mm		CHK —	NAME POWER ROCKER SWITCH 19,4MM X 22,2mm PANEL SIZE DPST, NON-ILLUMINATED			
		APVD —				
		PRODUCT SPEC —				
		APPLICATION SPEC —	SIZE A2		CAGE CODE 00779	DRAWING NO 1634200
		MATERIAL —	WEIGHT —		RESTRICTED TO —	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CUSTOMER DRAWING		SCALE 3:1	SHEET 4 of 7	REV E1

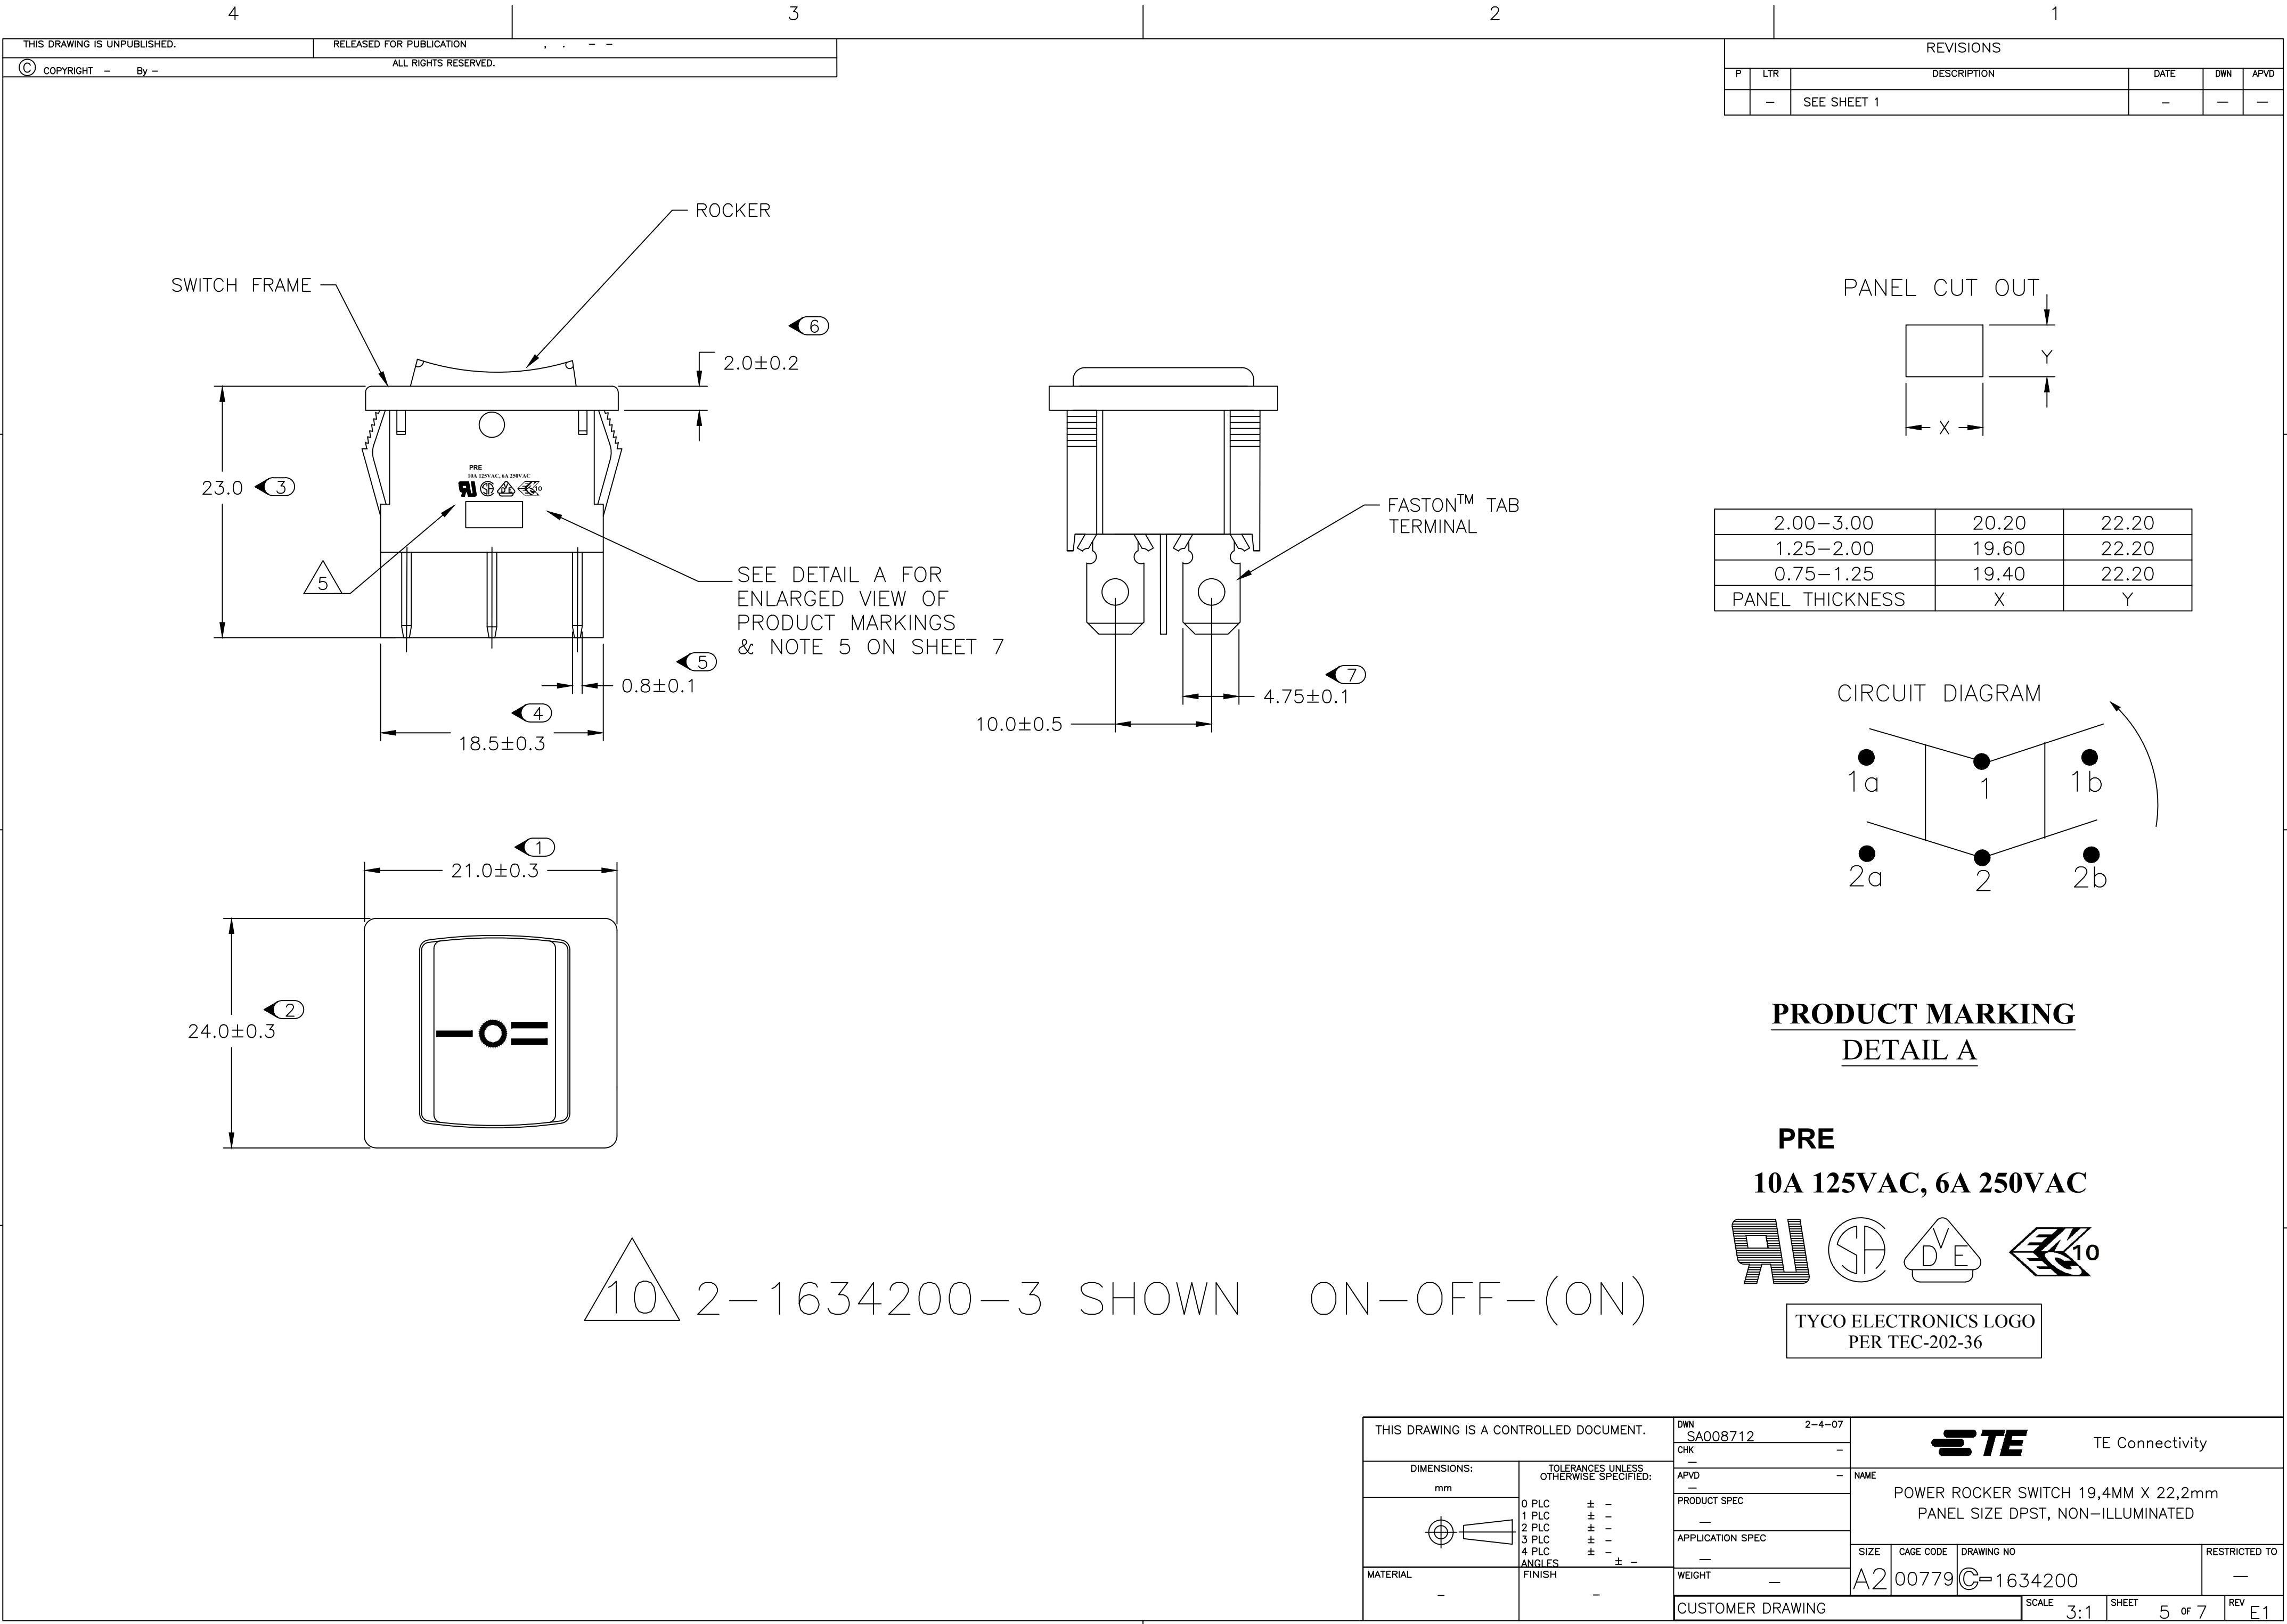

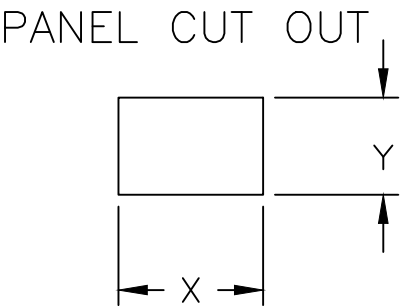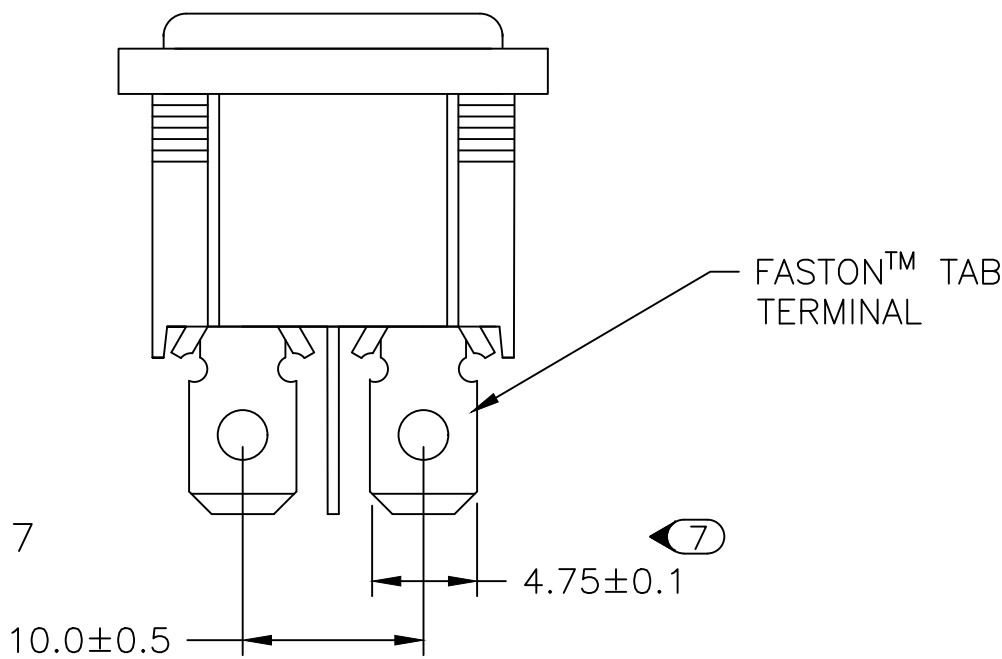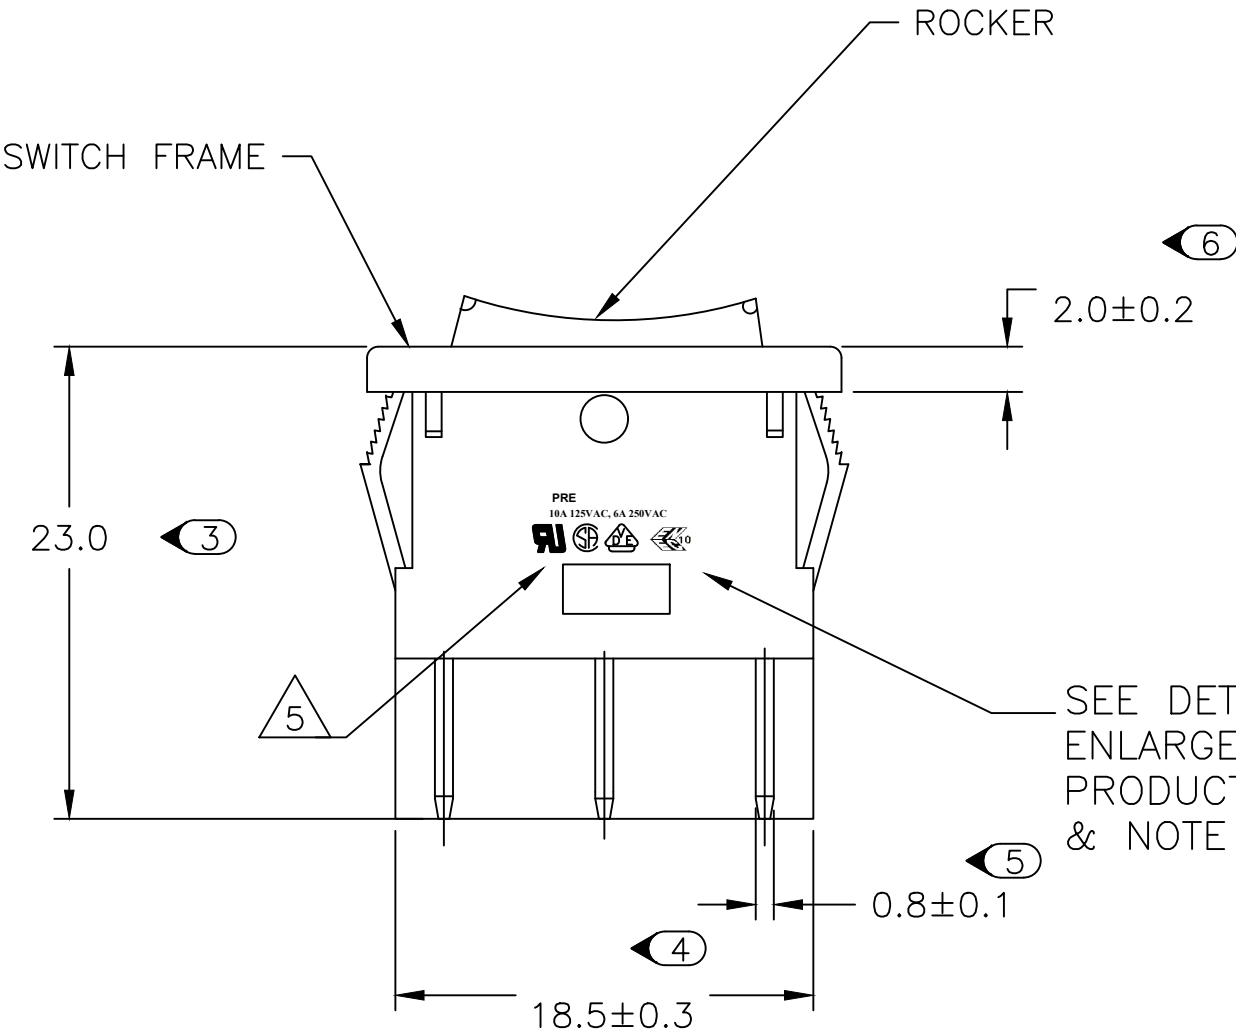


2.00–3.00	20.20	22.20
1.25–2.00	19.60	22.20
0.75–1.25	19.40	22.20
PANEL THICKNESS	X	Y

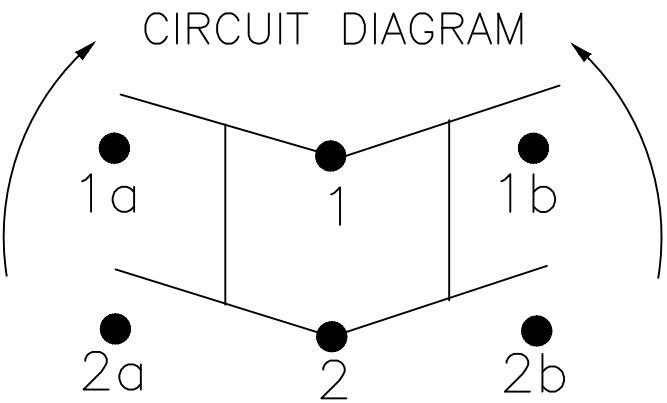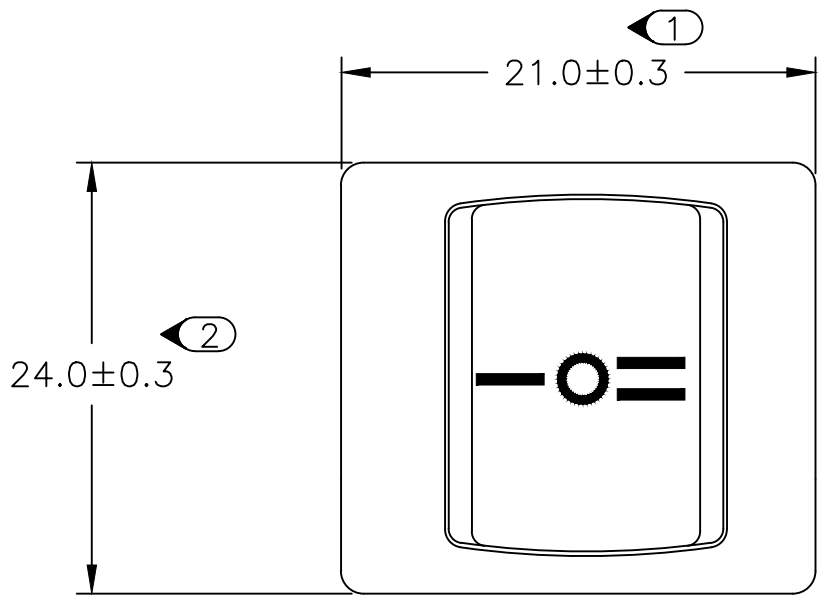

PRODUCT MARKING
DETAIL A

PRE
10A 125VAC, 6A 250VAC



TYCO ELECTRONICS LOGO
PER TEC-202-36

11 2-1634200-6 SHOWN (ON)-OFF-(ON)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN SA008712 2-4-07	TE Connectivity			
DIMENSIONS: mm		CHK -				
		APVD -	NAME POWER ROCKER SWITCH 19,4MM X 22,2mm PANEL SIZE DPST, NON-ILLUMINATED			
		PRODUCT SPEC -	SIZE A2			
MATERIAL -		APPLICATION SPEC -	CAGE CODE 00779			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH -		WEIGHT -	DRAWING NO C-1634200			
		CUSTOMER DRAWING	RESTRICTED TO -			
		SCALE 3:1	SHEET 6 of 7		REV E1	

ALCOSWITCH PART NUMBER

1 MATERIALS:
HOUSING FRAME: NYLON 66.
ACTUATOR: NYLON 66/ PC(ILLUMINATED)
TERMINALS C1100R-1/2H WITH SILVER PLATED CONTACTS
AgALLOY

2 FINISH:
TERMINAL, ACTIVE CONTACTOR: 1.0μm [.000039] SILVER
PLUNGER: 3.0μm[.000118] NICKEL

3 ELECTRICAL SPECIFICATIONS:
CONTACT RESISTANCE : 50m ohm Max
DIELECTRIC STRENGTH : AC 1500V, 1 MINUTE
OPERATION TEMPERATURE: -20°C~85°C
INSULATION R: DC 500V 100M ohm MIN

4 CURRENT AND VOLTAGE 10A@125VAC/6A@250VAC

5 ELECTRICAL RATINGS, APPROVED AGENCY LOGOS,
TE LOGO PER TEC-202-36 APPROXIMATELY AS SHOWN
AND PART NUMBER CAN APPEAR ON EITHER SIDE
(FOR FULL DETAIL SEE INDIVIDUAL DRAWING)

6 ON-OFF, WITH OPAQUE, SINGLE-COLOR ROCKER BUTTON.

7 ON-OFF, WITH TRANSPARENT, LAMP-ILLUMINATED ROCKER
BUTTON.

8 ON-ON, WITH OPAQUE, SINGLE-COLOR ROCKER BUTTON.

9 ON-OFF-ON, WITH OPAQUE, SINGLE-COLOR ROCKER BUTTON.

10 ON-OFF-(ON), WITH OPAQUE, SINGLE-COLOR ROCKER
BUTTON.

 (ON)-OFF-(ON), WITH OPAQUE, SINGLE-COLOR ROCKER
BUTTON.

12  REFER TO QIP DIMENSIONAL REPORT

13 2002/95/EC/(RoHS) COMPLIANT

 COMPONENT RECOGNIZED TO EUROPEAN STANDARDS (ENEC, PENDING VDE). MARKS LICENSE No. 40006757

$X_1 X_2$	X_3	X_4	$X_5 X_6$		$X_7 X_8$	X_9		$X_{10} X_{11}$	X_{12}	X_{13}	X_{14}
-----------	-------	-------	-----------	--	-----------	-------	--	-----------------	----------	----------	----------

SWITCH TYPE: X1 X2 = PR - POWER ROCKER

NOMINAL PANEL CUT OUT SIZE: $X_3 = \underline{E} - 19.4 \times 22.2 \text{ [.764} \times \text{.874]}$

NUMBER OF POLES: $X_4 = \underline{D}$ - DOUBLE

SWITCH FUNCTION: $X_5 X_6 =$

$\frac{A1}{B1}$	— $\frac{6}{7}$
$\frac{D1}{D3}$	— $\frac{8}{9}$
$\frac{D4}{D5}$	— $\frac{10}{11}$

CURRENT RATING: $X_7X_8 = \underline{07} - \triangle 4$

TERMINAL TYPE: X₉ = F - FASTON™ TAB
 L - SOLDER LUG

FRAME COLOR: X10 = B - BLACK
 W - WHITE

ROCKER COLOR: $X_{11} = \begin{matrix} \underline{B} & - & \text{BLACK} \\ \underline{G} & - & \text{GREEN} \\ \underline{R} & - & \text{RED} \\ \underline{W} & - & \text{WHITE} \end{matrix}$

SECONDARY ROCKER COLOR: X₁₂ = Ø - NOT APPLICABLE

B - BLACK

G — GREEN

$\overline{R} = \text{RED}$

W - WHITE

LEGEND TEXT PATTERN: $X_{13} =$

<u>Ø</u>	<u>B</u>	<u>C</u>	<u>D</u>	<u>E</u>	<u>F</u>	<u>G</u>
						

LEGEND TEXT COLOR: $X_{14} = \emptyset$ – NOT APPLICABLE

G - GREEN

R - RED

B – BLACK

$\bar{W}$ — WHITE

	1	PRED A1-07F-BB000	1634200-1
	1	PRED A1-07F-BB0BW	1634200-2
	1	PRED A1-07F-BB0CW	1634200-3
OBSOLETE	1	PRED A1-07L-BB000	1634200-4
	1	PRED A1-07L-BB0BW	1634200-5
	1	PRED A1-07L-BB0CW	1634200-6
	2	PRED B1-07F-BR000	1634200-7
	2	PRED B1-07L-BR000	1634200-8
	2	PRED B1-07F-BG000	1634200-9
OBSOLETE	2	PRED B1-07L-BG000	1-1634200-0
	3	PRED D1-07F-BB000	1-1634200-1
	3	PRED D1-07F-BB0DW	1-1634200-2
	3	PRED D1-07F-BB0EW	1-1634200-3
OBSOLETE	3	PRED D1-07L-BB000	1-1634200-4
	3	PRED D1-07L-BB0DW	1-1634200-5
	3	PRED D1-07L-BB0EW	1-1634200-6
	4	PRED D3-07F-BB0FW	1-1634200-7
	4	PRED D3-07F-BB0GW	1-1634200-8
OBSOLETE	4	PRED D3-07L-BB0FW	1-1634200-9
	4	PRED D3-07L-BB0GW	2-1634200-0
	5	PRED D4-07F-BB000	2-1634200-1
	5	PRED D4-07F-BB0FW	2-1634200-2
	5	PRED D4-07F-BB0GW	2-1634200-3
OBSOLETE	6	PRED D5-07F-BB000	2-1634200-4
	6	PRED D5-07F-BB0FW	2-1634200-5
	6	PRED D5-07F-BB0GW	2-1634200-6
	SHEET REF	ALCOSWITCH PART NUMBER.	TE PART NUMBER.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN SA008712		2-4-07		 TE Connectivity	
DIMENSIONS:		CHK —		—			
mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		POWER ROCKER SWITCH 19,4MM X 22,2mm PANEL SIZE DPST, NON-ILLUMINATED	
		0 PLC ± —		APVD —		PRODUCT SPEC —	
		1 PLC ± —		—		—	
		2 PLC ± —		APPLICATION SPEC		—	
		3 PLC ± —		—		—	
4 PLC ± —		ANGLES ± —		SIZE		CAGE CODE	
MATERIAL		FINISH		WEIGHT		DRAWING NO	
—		—		—		A2 00779 C=1634200	
				CUSTOMER DRAWING		RESTRICTED TO	
						—	
				SCALE		SHEET	
				3:1		7 of 7	
						REV	
						E1	

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А