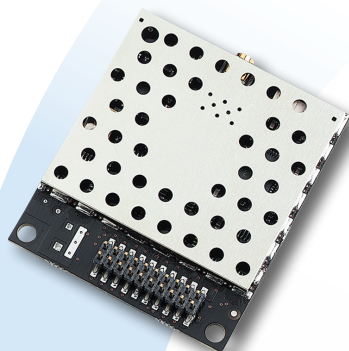


**THE FASTEST WAY TO WIRELESS**

Laird Technologies' compact AC4490 900MHz radio modules replace miles of cable in harsh industrial environments. Using field-proven FHSS technology that needs no additional site licensing*, AC4490s reject interference, enable co-located system operation, provide a full range of output power, and maintain data integrity.

The AC4490 features include drop-in installation and a number of on-the-fly control commands, providing OEMs with a versatile interface for any application. They can be used as direct cable replacements, requiring no special host software for communication. All frequency hopping, synchronization, and RF system data transmission/reception is performed by the module.

This radio module can achieve open field ranges in excess of 20 miles, has high propagation in the 900 MHz band, and includes options for 1W power transmission and a sensitive low noise amplifier in the receive chain.

AC4490 modules are socket-compatible with Laird Technologies' 2.4GHz AC4424 modules, enabling OEMs to design once and subsequently interchange radios to accommodate new markets, regulations, and environments. Developer tools and comprehensive technical support are available to aid integration. Contact Laird Technologies to help you find the best fit for your application.

FEATURES

- Lowest cost one-watt module available
- "Long range" mode enables 20 miles
- High 900MHz data rate: 32 kbps
- Small form factor: 1.65 x 1.9 inches
- Operates in -40°C to +80°C temp range
- Variable output power: 10mW to 1000mW
- Simple Configuration

MARKETS

- Recreation
- Utility Management
- Commercial Buildings
- Fleet Telemetry
- Field Surveillance

global solutions: local support™

USA: +1.800.492.2320

Europe: +44.1628.858.940

Asia: +852.2268.6567

wirelessinfo@lairdtech.com

www.lairdtech.com/wireless

FLEXIBLE RF PROTOCOL

Laird Technologies' embedded transparent protocol simplifies the OEM's integration process by utilizing drop-in installation. As each radio module receives raw data, it manages its over-the-air protocol to assure successful communication. Headers, data packet length, and CRCs are not required. The RF232 supports simple cable-replacement to complex peer-to-peer configurations, broadcast communication to all radio modules or address packets to a specific destination using unique MAC addresses embedded in each radio module.

SPECIFICATIONS


Parameter	AC4490(LR)-1000
Interface	20-pin mini connector
Frequency (software selectable)	902-928 MHz (U.S)**
Modulation	FHSS FSK
Serial interface options	3V TTL
Serial interface data rate	Up to 115.2 Kbps
Output power (w/ 3dBi antenna)	10mW-1000mW variable
Current consumption††	650 mA typical
Channels	Up to 32 (U.S.)**
Security	One-byte system ID, DES
Voltage	pin 10: 3.3V-5.5V pin 11: 3.3V +/-3%
Sensitivity	AC4490-1000: -100 dB AC4490LR-1000: -110 dB (Long Range mode)
Range	Up to 20 miles (32 km)
Temperature	-40° to +80°C
Humidity (non-condensing)	10% to 90%
Dimensions	1.90 x 1.65 x 0.20" (49 x 42 x 5 mm)
Weight	< 0.75 oz (< 21 g)
Antenna	External dipole

*The 900MHz frequency band is approved in the Americas and Australia as an unlicensed spectrum subject to approval by device.

**For products and specifications suited to non-U.S. countries (e.g. Australia and Europe), please contact Laird Technologies directly.

†Although AC4490 radios will not talk to AC4424 radios, socket-compatibility allows for interchanging the modules network-wide.

††Current consumption assumes 50% transmitter on-time.



The details contained within the document are subject to change. Download the product specification from www.lairdtech.com/wireless for the most current specification.

RF PROTOCOL MODES

- Communication
 - Unicast (one-to-one addressing)
 - Broadcast (one-to-multiple addressing)
- Acknowledgement mode (ACK)
 - API with hardware and/or software
 - ACK indication
- One-beacon mode
- Dynamic radio data table:
 - Retains data from up to 12 radio modules

INTERFACE PROTOCOL

- On-the-fly radio module configuration:
 - Destination address
 - RF transmit power
 - Co-located servers
 - RF channel
 - Broadcast/addressed
- Raw data or transmit/receive API
- 9-bit serial interface mode
- Long range mode, enables sensitivity control
- Generic A/D, D/A generic I/Os
- Variable baud rate
- RF packet size, timeout control
- Onboard temperature sensor
- Handshaking, CTS/RTS, full modem-mode available
- In-range indicator
- Error detection
 - Onboard CRC
 - Duplicate packet filtering
- Data encryption standard (DES)

LWS-SPEC-AC4490 0109

Any information furnished by Laird Technologies and its agents is believed to be accurate and reliable. Responsibility for the use and application of Laird Technologies materials rests with the end user since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability, or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies terms and conditions of sale in effect from time to time, a copy of which will be furnished upon request. For further information please visit our website at www.lairdtech.com. Alternatively contact: wirelessinfo@lairdtech.com. Bluetooth® is a trademark owned by Bluetooth SIG, Inc., USA and licensed to Laird Technologies.

© 2009 All Rights Reserved. Laird Technologies is a registered trademark of Laird Technologies, Inc..

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А