

# NON-ISOLATED DC/DC CONVERTERS

2.5V Input 0.9V-1.65V/10A Output



## x7AH-10J Series

- Non-Isolated
- Low profile package (7.82mm)
- Fixed frequency (300KHz)
- Under-voltage lockout (UVLO)
- Remote On/Off
- Short circuit protection
- Over current protection
- Trim Function



## Description

The Bel x7AH-10Jxx0 is part of the low cost non-isolated DC/DC power converter series. The modules use a SMD or SIP package for ease of layout and space savings. The output is closely regulated and the efficiency of 1.5V output is typically 88% at full load. Typical features include remote on/off, input under voltage lockout, over current protection and short circuit protection.

## Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Part Number Surface Mount	Part Number Vertical Mount
1.5V	2.5V	10A	15W	88%	S7AH-10J150	V7AH-10J150
1.2V	2.5V	10A	12W	83%	S7AH-10J120	V7AH-10J120
1.0V	2.5V	10A	10W	80%	S7AH-10J100	V7AH-10J100

**Note:** Add "0" suffix at the end of the model number to indicate "Tube Packaging", and "R" for "Reel Packaging", and "G" for "Tray Packaging".

## Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	-0.3V	-	6V	
Output Enable Terminal Voltage	-0.3V	-	7V	
Ambient Temperature	-40°C	-	85°C	
Storage Temperature	-40°C	-	105°C	

## Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage	2.25V	2.5V	2.75V	
Input Current (no load)	-	75mA	-	
Input Current (full load)				
Vo=1.5V	-	6.8A	-	
Vo=1.2V	-	5.6A	-	
Vo=1.0V	-	4.9A	-	
Remote Off Input Current	-	4mA	8mA	
Input Reflected Ripple Current (pk-pk)	-	80mA	150mA	Tested with simulated source impedance of 500nH, 5Hz to 20MHz; with a 270uF/16V with ESR=0.018 ohm max, at 100KHz at 25°C
Input Reflected Ripple Current (RMS)	-	25mA	50mA	
I <sup>2</sup> t Inrush Current Transient	-	0.04A <sup>2</sup> s	0.10A <sup>2</sup> s	
Turn on Voltage Threshold	2V	2.1V	2.15V	
Turn off Voltage Threshold	1.8V	2V	2.15V	

# NON-ISOLATED DC/DC CONVERTERS

2.5V Input 0.9V-1.65V/10A Output



## Output Specifications

Parameter		Min	Typ	Max	Notes	
Output Voltage Set Point	Vo=1.5V	1.470V	1.5V	1.530V	Test conditions: Vin=2.5V, Io=full load	
	Vo=1.2V	1.176V	1.2V	1.224V		
	Vo=1.0V	0.980V	1.0V	1.020V		
Line Regulation	Vo=1.5V	-	2mV	5mV		
	Vo=1.2V	-	2mV	5mV		
	Vo=1.0V	-	2mV	5mV		
Load Regulation	Vo=1.5V	-	5mV	10mV		
	Vo=1.2V	-	5mV	10mV		
	Vo=1.0V	-	5mV	10mV		
Regulation Over Temperature (-40°C to +85°C)	Vo=1.5V	-	13mV	25mV		
	Vo=1.2V	-	10mV	20mV		
	Vo=1.0V	-	9mV	20mV		
Output Current		0A	-	10A		
Current Limit Threshold		13A	-	25A		
Short Circuit Surge Transient	Vo=1.5V	-	0.5A <sup>2</sup> s	1.5A <sup>2</sup> s		
	Vo=1.2V	-	0.5A <sup>2</sup> s	1.5A <sup>2</sup> s		
	Vo=1.0V	-	0.5A <sup>2</sup> s	1.5A <sup>2</sup> s		
Ripple and Noise (RMS)		-	15mV	25mV	Test conditions: 0-20MHz BW, with a 1uF ceramic capacitor at the output.	
Ripple and Noise (pk-pk)		-	50mV	100mV		
Turn on Time		-	1mS	2mS		
Overshoot at Turn on		-	0%	3%		
Output Capacitance		220uF	-	4000uF		
<b>Transient Response</b>						
50% ~ 100% Max Load	Overshoot	Vo=1.5V	-	90mV	125mV	Test conditions: di/dt = 0.5A/uS; Vin = 2.5V; with a 220uF tantalum capacitor at the output.
	Settling Time		-	30uS	60uS	
100% ~ 50% Max Load	Overshoot		-	90mV	125mV	
	Settling Time		-	30uS	60uS	
50% ~ 100% Max Load	Overshoot	Vo=1.2V	-	80mV	120mV	
	Settling Time		-	30uS	60uS	
100% ~ 50% Max Load	Overshoot		-	80mV	120mV	
	Settling Time		-	30uS	60uS	
50% ~ 100% Max Load	Overshoot	Vo=1.0V	-	80mV	120mV	
	Settling Time		-	30uS	60uS	
100% ~ 50% Max Load	Overshoot		-	80mV	120mV	
	Settling Time		-	30uS	60uS	

**Note:** All specifications are typical at nominal input, full load at 25°C unless otherwise stated.

# NON-ISOLATED DC/DC CONVERTERS

2.5V Input 0.9V-1.65V/10A Output



## General Specifications

Parameter	Min	Typ	Max	Notes
Efficiency				Measured at Vin=2.5V, full load and Ta=25°C.
Vo=1.5V	85%	88%	-	
Vo=1.2V	83%	86%	-	
Vo=1.0V	79%	82%	-	
Switching Frequency	250KHz	300KHz	350KHz	
Output Trim Range	90%Vo	-	110%Vo	
MTBF	4,447,157 hours			Calculated Per Bell Core TR-332 (Io = Nominal; Ta = 25°C)
Dimensions (surface mount)				
Inches (L x W x H)	0.78 x 0.70 x 0.32			
Millimeters (L x W x H)	19.81 x 17.78 x 8.13			
Dimensions (vertical)				
Inches (L x W x H)	0.70 x 0.308 x 0.65			
Millimeters (L x W x H)	17.78 x 7.82 x 16.51			
Weight	-	4.7g	-	

## Control Specifications



Parameter	Min	Typ	Max	Notes
<b>Remote On/Off</b>				
Signal Low (Unit Off)	0V	-	0.5V	Remote on/off pin open, the module is on.
Signal High (Unit On)	2V	-	5.5V	

## Output Trim Equations

Equations for calculating the trim resistor (in kΩ) given the desired adjusted voltage (Vadj) and the nominal output voltage of the converter (Vnom) are shown below. The Trim Down resistor should be connected between the Trim pin and Vout. The Trim Up resistor should be connected between the Trim pin and Ground. Only one of the resistors should be used for any given application.

$$R_{TrimDown} = \frac{A}{V_{nom} - V_{adj}} - B \qquad R_{TrimUp} = \frac{C}{V_{adj} - V_{nom}} - D$$

Vnom	A	B	C	D
1.5V	49.788	287.900	43.330	226.000
1.2V	31.241	223.900	43.330	162.000
1.0V	11.029	92.800	25.550	56.200

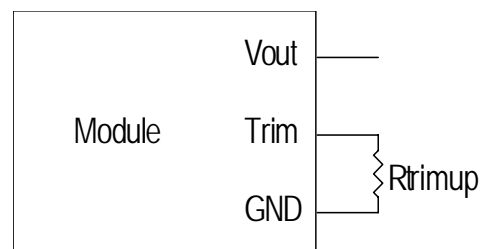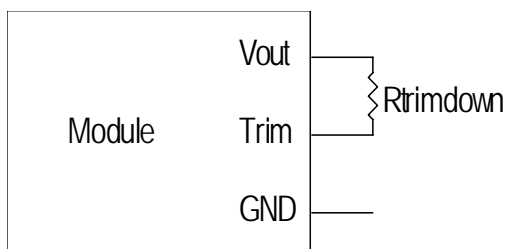


# NON-ISOLATED DC/DC CONVERTERS


2.5V Input 0.9V-1.65V/10A Output




## Efficiency Data

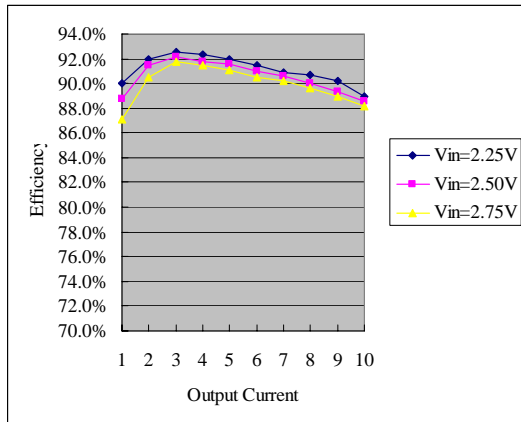

X7AH-10J150

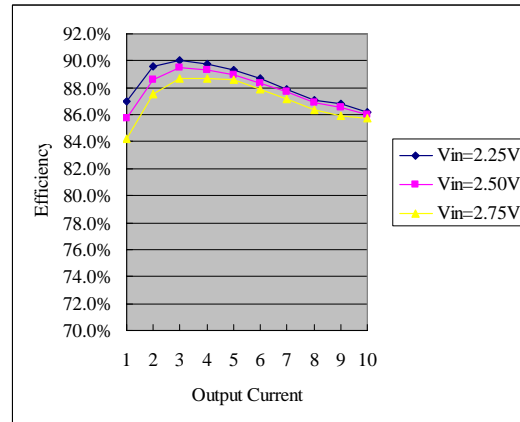


X7AH-10J120

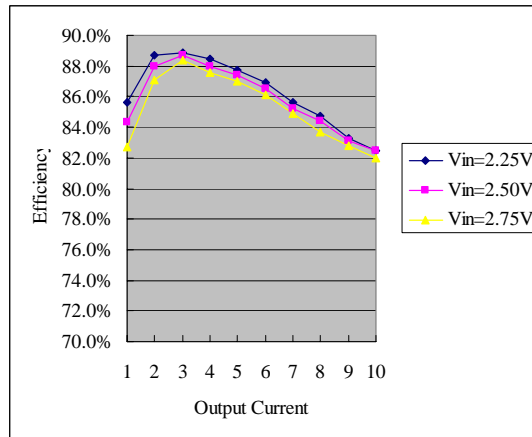

X7AH-10J100



## Thermal Derating Curve

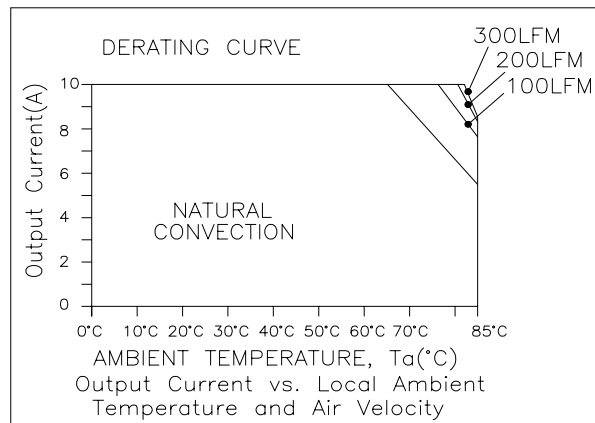

**Note:** Derating curve is for 1.2V output and tested at nominal input voltage.



# NON-ISOLATED DC/DC CONVERTERS

2.5V Input 0.9V-1.65V/10A Output

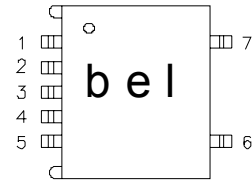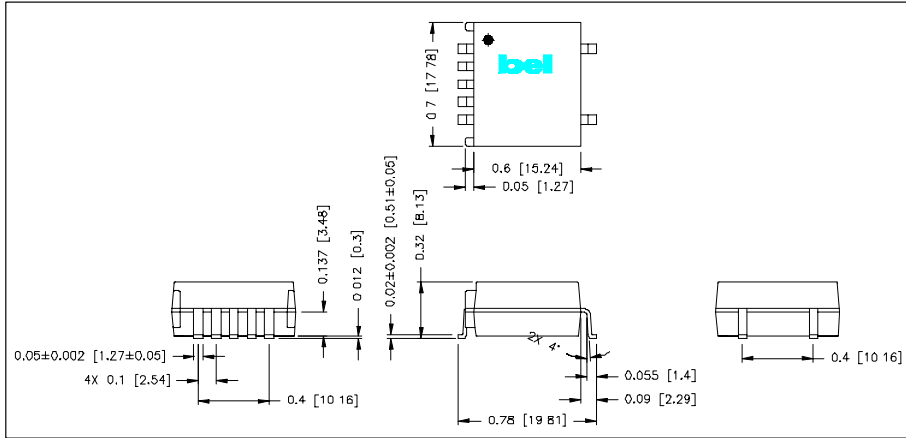

## Pin Connections

Pin	Function
1	Remote On/Off (option)
2	Vin
3	Ground
4	Vout
5	Trim (option)
6	N/A
7	N/A

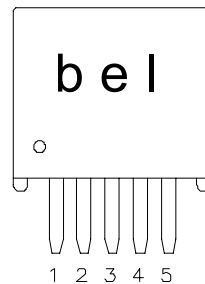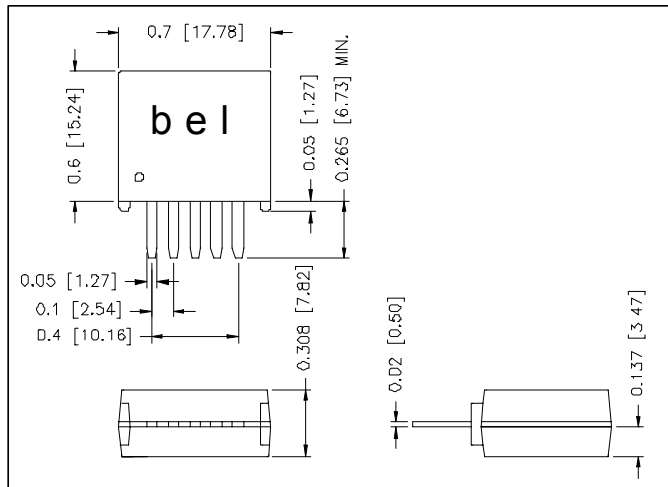

## Pin Connections

Pin	Function
1	Remote On/Off (option)
2	Vin
3	Ground
4	Vout
5	Trim (option)

©2004 Bel Fuse Inc. Specifications subject to change without notice. 120204

### CORPORATE

**Bel Fuse Inc.**  
 206 Van Vorst Street  
 Jersey City, NJ 07302  
 Tel 201-432-0463  
 Fax 201-432-9542  
[www.belfuse.com](http://www.belfuse.com)

### FAR EAST

**Bel Fuse Ltd.**  
 8F/ 8 Luk Hop Street  
 San Po Kong  
 Kowloon, Hong Kong  
 Tel 852-2328-5515  
 Fax 852-2352-3706  
[www.belfuse.com](http://www.belfuse.com)

### EUROPE

**Bel Fuse Europe Ltd.**  
 Preston Technology Management Centre  
 Marsh Lane, Suite G7, Preston  
 Lancashire, PR1 8UD, U.K.  
 Tel 44-1772-556601  
 Fax 44-1772-888366  
[www.belfuse.com](http://www.belfuse.com)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А