

PRODUCT NO.
73725

PRODUCT NUMBER CODE

73725-X X X X LF

HOUSING COLOR OPTION
0-WHITE
1-BLACK


SENSOR CONTACT OPTION
0-WITH SENSOR CONTACT
1-WITHOUT SENSOR CONTACT

SHIELD PLATING OPTION
1- 1.25μm MINIMUM NICKEL UNDERPLATE &
2.5μm MINIMUM BRIGHT TIN OVER ALL AREA.
(HOLD DOWN STYLE "A")
2- 1.25μm MINIMUM NICKEL UNDERPLATED OVER ALL;
2.5 μm MINIMUM MATTE TIN PLATED ON
HOLD DOWN AREA ONLY.(HOLD DOWN STYLE "B")
3- 1.25μm MINIMUM NICKEL UNDERPLATED OVER ALL;
2.5 μm MINIMUM MATTE TIN PLATED ON
HOLD DOWN AREA ONLY.(HOLD DOWN STYLE "A")
4- 1.25μm MINIMUM NICKEL UNDERPLATED &
2.5μm MINIMUM BRIGHT TIN OVER ALL AREA.
(HOLD DOWN STYLE "B")
5- 1.25μm MINIMUM NICKEL UNDERPLATED OVER ALL;
2.5μm MINIMUM MATTE TIN PLATED ON
HOLD DOWN AREA ONLY (HOLD DOWN STYLE "C")
6- 1.25μm MINIMUM NICKEL ONLY.
(HOLD DOWN STYLE "A")
7- 1.25μm MINIMUM NICKEL UNDERPLATED &
2.5 μm MINIMUM MATTE TIN PLATED OVER ALL.
(HOLD DOWN STYLE "A")
8- 1.25μm MINIMUM NICKEL UNDERPLATED &
2.5 μm MINIMUM MATTE TIN PLATED ALL AREA.
(HOLD DOWN STYLE "B")
9- 1.25μm MINIMUM NICKEL UNDERPLATED OVER ALL;
2.5 μm MINIMUM MATTE TIN PLATED ON
HOLD DOWN AREA ONLY (HOLD DOWN STYLE "D")
S- 1.25μm MINIMUM NICKEL ONLY.(HOLD DOWN STYLE "A").
HIGH PERFORMANCE MATERIAL
FOR 12,000 DURABILITY CYCLES
A- 1.25μm MINIMUM NICKEL PLATED OVER ALL
2.5 μm MINIMUM MATTE TIN PLATED ON HOLD DOWN AREA ONLY
(HOLD DOWN STYLE "F")
B- 1.25μm MINIMUM NICKEL PLATED OVER ALL
2.5 μm MINIMUM MATTE TIN PLATED ON HOLD DOWN AREA ONLY
(HOLD DOWN STYLE "F")


TERMINAL OPTION
50u" NI UNDERPLATE; 30u" GXT CONTACT AREA,100u" TIN TAIL AREA;
0- DIM "A": 2.29 (TERMINAL TAIL LENGTH);
1- DIM "A": 3.71 (TERMINAL TAIL LENGTH);

LEAD FREE OPTION
SEE NOTE 9


PACKAGING OPTION
B - TUBE
R - TAPE&REEL



SENSOR CONTACT




WITH SENSOR CONTACT

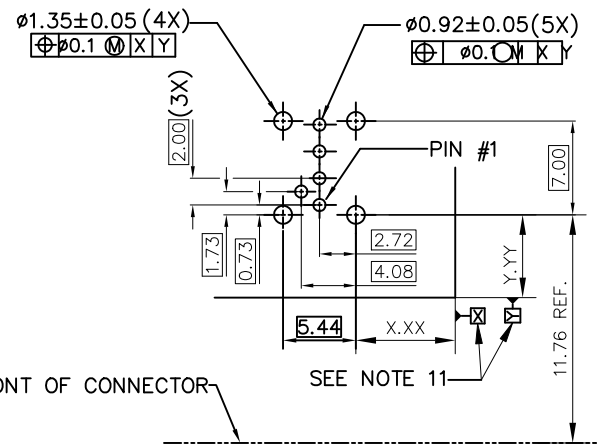

FRONT OF CONNECTOR

PC BOARD MOUNTING DIMENSIONS FOR 5 PIN

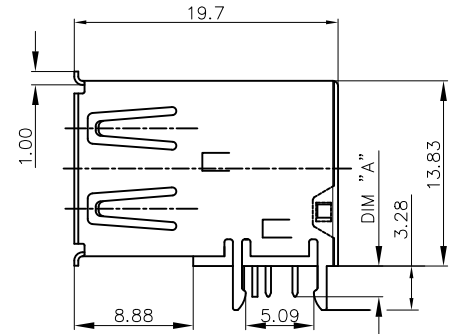

FOR 73725-X0X0B
HOLD DOWN STYLE "A"

NOTES:

- MATERIAL:
CONTACTS: COPPER ALLOY
SHIELD: COPPER ALLOY
HOUSING: UL 94V-0 THERMOPLASTIC, COLOR: SEE PRODUCT CODE
- PLATING:
CONTACTS: GOLD FLASH OVER PALLADIUM NICKEL (0.76μm MINIMUM)
IN CONTACT AREA; 2.5 μm TIN MINIMUM IN SOLDER TAIL AREA.
SHIELD: 1.27 μm MINIMUM NICKEL UNDERPLATE OVER ALL SURFACES.
(THE PLATING MEASURE POINT ON THE SHIELD HOLD DOWN AREA ONLY).
- DATUMS & BASIC DIMENSIONS TO BE DETERMINED BY CUSTOMER
- RECOMMENDED PCB BOARD THICKNESS IS 1.00 ~ 1.60mm EXCEPT 73725-1191BLF;
73725-1191BLF CAN BE USED FOR THE PCB BOARD THICKNESS 2.30 ~ 2.65mm.
- MAXIMUM PANEL THICKNESS TO BE 2.67mm IF MOUNTED BEHIND PANEL
- METAL SHELL SLIVER 0.20 MAX.
- NI PLATING DOES NOT COMPLY WITH THE USB STANDARDS
(TO BE CONTINUED)

mat'l. code				surface ¹²³		tolerance		projection		product family						
				ISO 1302 ✓		ISO 406 ISO 1101				HPL 511 USB 2.0						
ltr	ecn no	dr	date	tolerances unless otherwise specified						title						
AJ	ELX-N-27708	LZ	2017/08/15	angles		linear		.0±.30		USB UP-RIGHT RECEPT						
								.00±.20								
AD	ELX-N-012006	A.ZH	06/25/2012	0°±2°				.000±.10		scale 1:1						
AE	ELX-N-13463	A.ZH	11/14/2012	dr	PAMP		5/20/97				dwg no		sheet 1 of 4	size		
AF	ELX-N-14592	J.HAN	06/10/2013	engr	R Y LIU		5/20/97				73725		A3			
AG	ELX-N-21594	LQ	08/04/2015	chr	R Y LIU		5/20/97									
AH	ELX-N-21919	LQ	08/04/2015	appd	JENN TSAO		5/20/97									
sheet		revision										type		Product	Customer	Drawing
index		sheet														

PRODUCT NO.
73725

(CONTINUED)

8. P/N'S WITH SUFFIX "LF" ARE LEAD FREE P/N'S



FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008

FOR THE PRODUCTS WITH THE METAL SHELL PLATING NICKEL AND MATTE SN CAN WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 40 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW PROCESS; FOR THE PRODUCTS WITH METAL SHELL PLATING BRIGHT SN OR SEMI-BRIGHT SN CAN'T WITHSTAND REFLOW AND JUST CAN WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN WAVE SOLDERING PROCESS.



FOR ALL LEAD FREE P/N'S, WITH SUFFIX LF.

12. THE PRODUCT CAN BE USED FOR PIP PROCESS


13. DATUM OF CUSTOMER'S PCB LAYOUT.

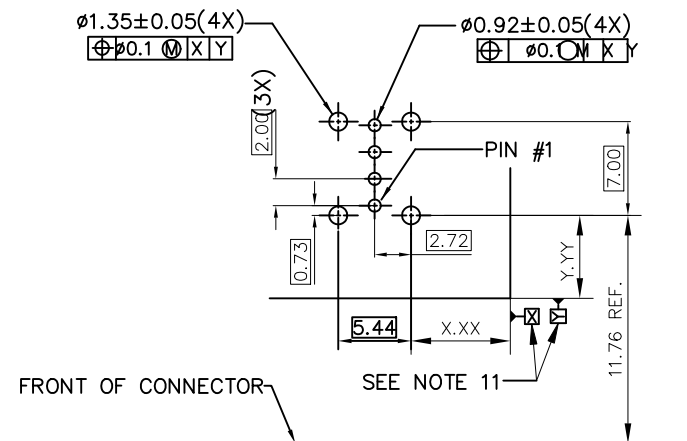

PC BOARD MOUNTING DIMENSIONS FOR 4 PIN



WITHOUT SENSOR CONTACT






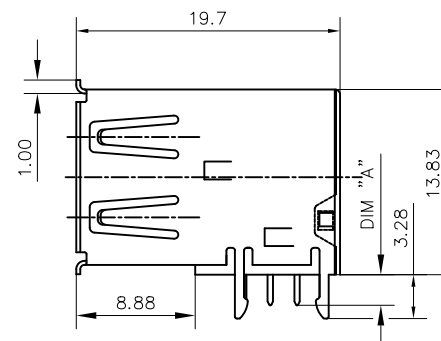


FOR 73725-X1X0B
HOLD DOWN STYLE "A"

mat'l. code				surface ¹²³ /tolerance			projection		product family		
				ISO 1302 ✓			ISO 406 ISO 1101		HPL 511 USB 2.0		
l	tr	ec	n	o	dr	date	tolerances unless otherwise specified		title		
AJ							angles		USB UP-RIGHT		
							linear		RECEPT		
							.0±.30		mm		
							.00±.20		scale 1:1		
							0°±2'				
							dr		dwg no		
							PAMP		sheet2 of 4		
							eng		size		
							R Y LIU		73725		
							chr		A3		
							R Y LIU				
							appd		type		
							JENN TSAO		Product Customer Drawing		
sheet index		revision sheet									

PRODUCT NO.


73725

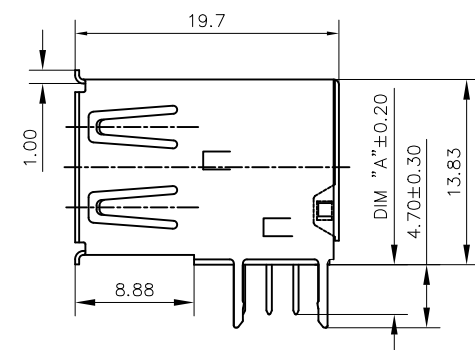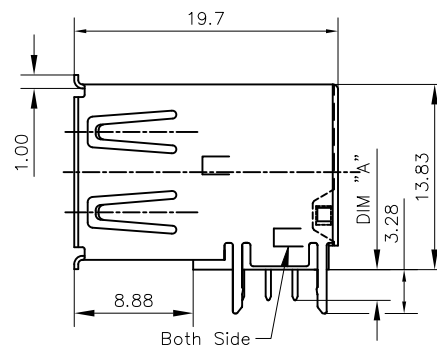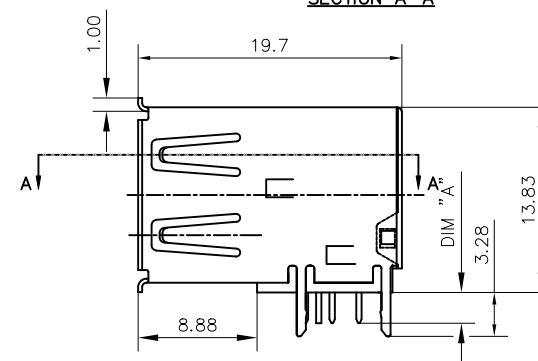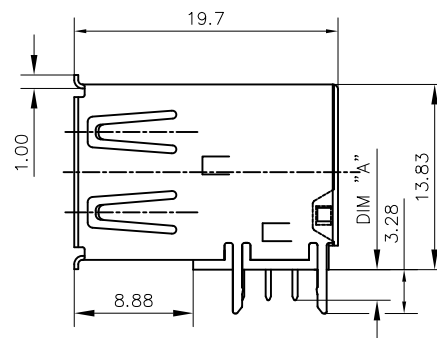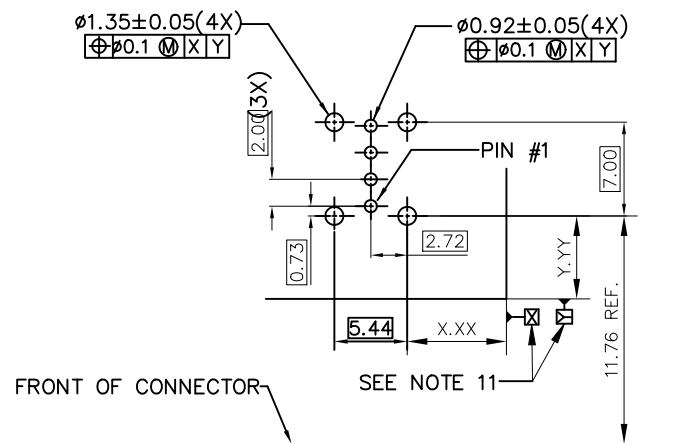


SECTION A-A

mat'l. code				surface ¹²³ /tolerance				projection		product family					
				ISO 1302 ✓ ISO 406 ISO 1101						HPL 511 USB 2.0					
ltr ecn no dr date				tolerances unless otherwise specified						title					
AJ				angles linear				mm		USB UP-RIGHT RECEPT					
				0°±2'				scale 1:1							
				dr		PAMP		5/20/97		dwg no		sheet3 of 4		size	
				eng		R Y LIU		5/20/97				73725		A3	
				chr		R Y LIU		5/20/97							
				appd		JENN TSAO		5/20/97		type		Product Customer Drawing			
sheet index		revision sheet													


PRODUCT NO.
73725

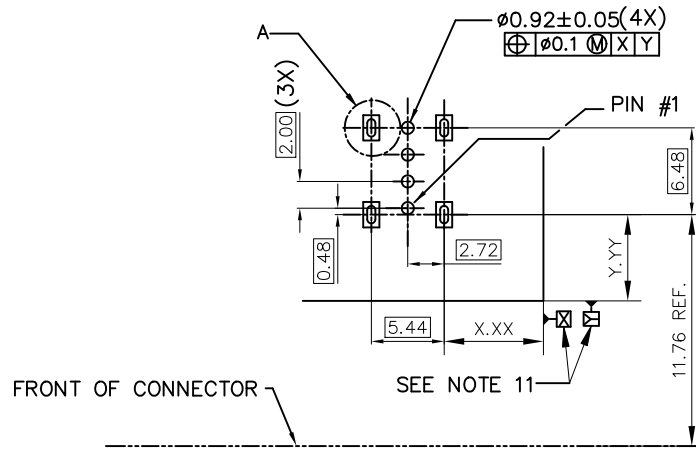

PC BOARD MOUNTING DIMENSIONS FOR 4 PIN



DETAIL A 5 : 1

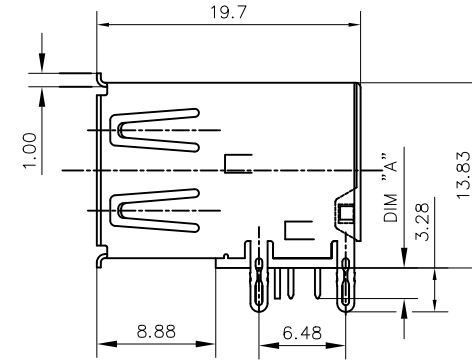

WITHOUT SENSOR CONTACT
FOR 73725-X150B
HOLD DOWN STYLE "C"

mat'l. code				surface ¹²³	tolerance	projection	product family			
				ISO 1302	ISO 406	ISO 1101	HPL 511 USB 2.0			
ltr	ecn no	dr	date	tolerances unless otherwise specified			title			
AJ				angles	linear	mm	USB UP-RIGHT RECEPT			
				0°±2°		scale 1:1				
				dr	PAMP	5/20/97	dwg no			
				engr	R Y LIU	5/20/97	sheet 4 of 4			
				chr	R Y LIU	5/20/97	73725			
				appd	JENN TSAO	5/20/97	type Product Customer Drawing			
sheet index	revision sheet									

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А