

PRODUCT NO.
73725

PRODUCT NUMBER CODE

73725-X X X X LF

HOUSING COLOR OPTION
0-WHITE
1-BLACK


SENSOR CONTACT OPTION
0-WITH SENSOR CONTACT
1-WITHOUT SENSOR CONTACT

SHIELD PLATING OPTION
1- 1.25μm MINIMUM NICKEL UNDERPLATE &
2.5μm MINIMUM BRIGHT TIN OVER ALL AREA.
(HOLD DOWN STYLE "A")
2- 1.25μm MINIMUM NICKEL UNDERPLATED OVER ALL;
2.5 μm MINIMUM MATTE TIN PLATED ON
HOLD DOWN AREA ONLY.(HOLD DOWN STYLE "B")
3- 1.25μm MINIMUM NICKEL UNDERPLATED OVER ALL;
2.5 μm MINIMUM MATTE TIN PLATED ON
HOLD DOWN AREA ONLY.(HOLD DOWN STYLE "A")
4- 1.25μm MINIMUM NICKEL UNDERPLATED &
2.5μm MINIMUM BRIGHT TIN OVER ALL AREA.
(HOLD DOWN STYLE "B")
5- 1.25μm MINIMUM NICKEL UNDERPLATED OVER ALL;
2.5μm MINIMUM MATTE TIN PLATED ON
HOLD DOWN AREA ONLY (HOLD DOWN STYLE "C")
6- 1.25μm MINIMUM NICKEL ONLY.
(HOLD DOWN STYLE "A")
7- 1.25μm MINIMUM NICKEL UNDERPLATED &
2.5 μm MINIMUM MATTE TIN PLATED OVER ALL.
(HOLD DOWN STYLE "A")
8- 1.25μm MINIMUM NICKEL UNDERPLATED &
2.5 μm MINIMUM MATTE TIN PLATED ALL AREA.
(HOLD DOWN STYLE "B")
9- 1.25μm MINIMUM NICKEL UNDERPLATED OVER ALL;
2.5 μm MINIMUM MATTE TIN PLATED ON
HOLD DOWN AREA ONLY (HOLD DOWN STYLE "D")
S- 1.25μm MINIMUM NICKEL ONLY.(HOLD DOWN STYLE "A").
HIGH PERFORMANCE MATERIAL
FOR 12,000 DURABILITY CYCLES
A- 1.25μm MINIMUM NICKEL PLATED OVER ALL
2.5 μm MINIMUM MATTE TIN PLATED ON HOLD DOWN AREA ONLY
(HOLD DOWN STYLE "F")
B- 1.25μm MINIMUM NICKEL PLATED OVER ALL
2.5 μm MINIMUM MATTE TIN PLATED ON HOLD DOWN AREA ONLY
(HOLD DOWN STYLE "F")


TERMINAL OPTION
50u" NI UNDERPLATE; 30u" GXT CONTACT AREA,100u" TIN TAIL AREA;
0- DIM "A": 2.29 (TERMINAL TAIL LENGTH);
1- DIM "A": 3.71 (TERMINAL TAIL LENGTH);

LEAD FREE OPTION
SEE NOTE 9


PACKAGING OPTION
B - TUBE
R - TAPE&REEL



SENSOR CONTACT




WITH SENSOR CONTACT

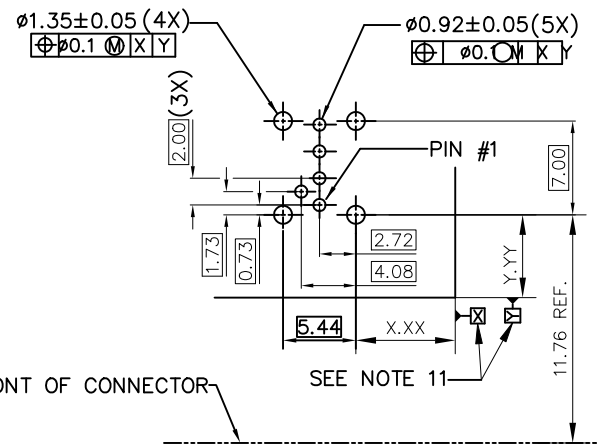

FRONT OF CONNECTOR

PC BOARD MOUNTING DIMENSIONS FOR 5 PIN

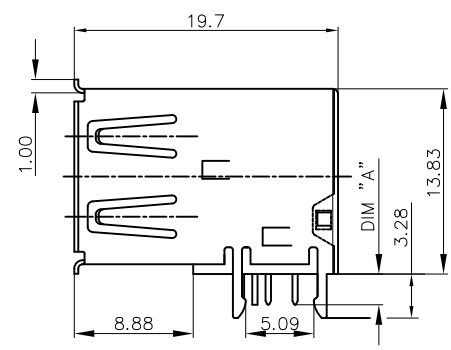

FOR 73725-X0X0B
HOLD DOWN STYLE "A"

NOTES:

- MATERIAL:
CONTACTS: COPPER ALLOY
SHIELD: COPPER ALLOY
HOUSING: UL 94V-0 THERMOPLASTIC, COLOR: SEE PRODUCT CODE
- PLATING:
CONTACTS: GOLD FLASH OVER PALLADIUM NICKEL (0.76μm MINIMUM)
IN CONTACT AREA; 2.5 μm TIN MINIMUM IN SOLDER TAIL AREA.
1.27 μm MINIMUM NICKEL UNDERPLATE OVER ALL SURFACES.
SHIELD: SEE PRODUCT NUMBER CODE.
(THE PLATING MEASURE POINT ON THE SHIELD HOLD DOWN AREA ONLY).
- DATUMS & BASIC DIMENSIONS TO BE DETERMINED BY CUSTOMER
- RECOMMENDED PCB BOARD THICKNESS IS 1.00 ~ 1.60mm EXCEPT 73725-1191BLF;
73725-1191BLF CAN BE USED FOR THE PCB BOARD THICKNESS 2.30 ~ 2.65mm.
- MAXIMUM PANEL THICKNESS TO BE 2.67mm IF MOUNTED BEHIND PANEL
- METAL SHELL SLIVER 0.20 MAX.
- NI PLATING DOES NOT COMPLY WITH THE USB STANDARDS
(TO BE CONTINUED)

mat'l. code				surface ¹²³ /tolerance		projection		product family				
				ISO 1302 ✓ ISO 406 ISO 1101				HPL 511 USB 2.0				
ltr	ecn no	dr	date	tolerances unless otherwise specified				title				
AJ	ELX-N-27706	LZ	2017/08/15	angles	linear			USB UP-RIGHT RECEPT				
AD	ELX-N-012006	A.ZH	06/25/2012	0°±2°		scale 1:1						
AE	ELX-N-13463	A.ZH	11/14/2012	dr	PAMP	5/20/97	Amphenol FCI		dwg no		sheet 1 of 4	size
AF	ELX-N-14592	J.HAN	06/10/2013	engr	R Y LIU	5/20/97			73725		A3	
AG	ELX-N-21594	LQ	08/04/2015	chr	R Y LIU	5/20/97						
AH	ELX-N-21919	LQ	08/04/2015	appd	JENN TSAO	5/20/97						
sheet		revision						type Product Customer Drawing				
index		sheet										

PRODUCT NO.
73725

(CONTINUED)

8. P/N'S WITH SUFFIX "LF" ARE LEAD FREE P/N'S



FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008

FOR THE PRODUCTS WITH THE METAL SHELL PLATING NICKEL AND MATTE SN CAN WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 40 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW PROCESS; FOR THE PRODUCTS WITH METAL SHELL PLATING BRIGHT SN OR SEMI-BRIGHT SN CAN'T WITHSTAND REFLOW AND JUST CAN WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN WAVE SOLDERING PROCESS.



FOR ALL LEAD FREE P/N'S, WITH SUFFIX LF.

12. THE PRODUCT CAN BE USED FOR PIP PROCESS


13. DATUM OF CUSTOMER'S PCB LAYOUT.

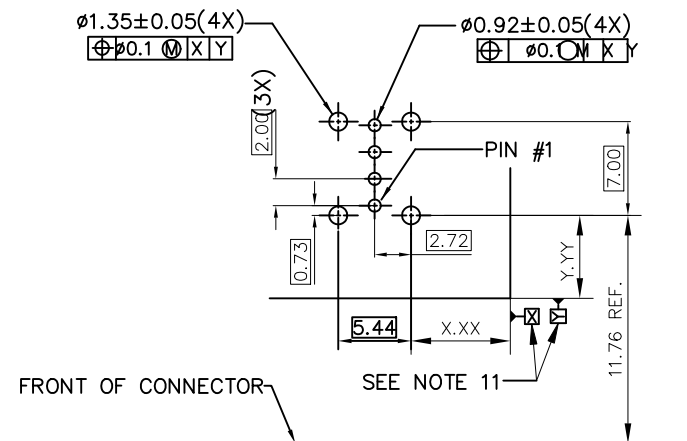

PC BOARD MOUNTING DIMENSIONS FOR 4 PIN








WITHOUT SENSOR CONTACT

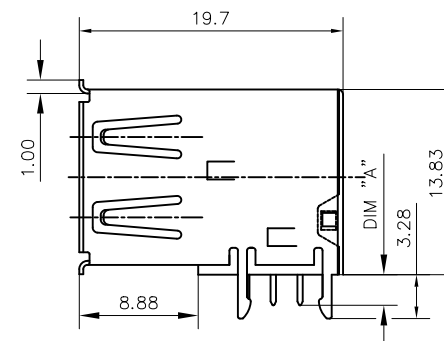


FOR 73725-X1X0B
HOLD DOWN STYLE "A"

mat'l. code				surface ¹²³ /tolerance			projection 	product family		
				ISO 1302 ✓ ISO 406 ISO 1101				HPL 511 USB 2.0		
ltr	ecn	no	dr	date			tolerances unless otherwise specified	title		
AJ							angles	USB UP-RIGHT		
							linear	RECEPT		
							.0±.30	mm		
							.00±.20	↔		
							0°±2'	scale 1: 1		
							.000±.10			
				dr	PAMP	5/20/97	Amphenol FCi	dwg no		
				eng	R Y LIU	5/20/97		sheet2 of 4		
				chr	R Y LIU	5/20/97		73725		
				app	JENN TSAO	5/20/97		A3		
sheet index		revision sheet						type Product Customer Drawing		




mat'l. code				surface ¹²³ /tolerance ISO 1302 ✓ ISO 406 ISO 1101			projection 		product family HPL 511 USB 2.0			
ltr	ecr no	dr	date	tolerances unless otherwise specified					title			
AJ				angles linear .0±.30			mm		USB UP-RIGHT RECEPT			
				0°±2' .00±.20			scale 1:1					
				0°±2' .000±.10								
				dr	PAMP	5/20/97	Amphenol FCi		dwg no		sheet3 of 4	size
				engr	R Y LIU	5/20/97			73725		A3	
				chr	R Y LIU	5/20/97						
				appd	JENN TSAO	5/20/97						
sheet index		revision sheet							type Product Customer Drawing			


PRODUCT NO.
73725

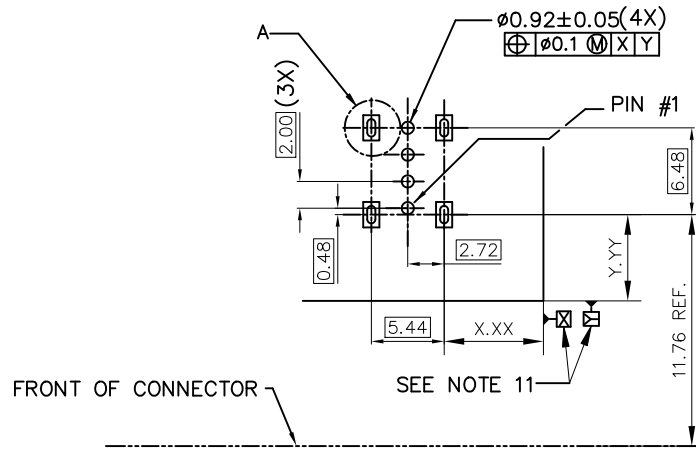

PC BOARD MOUNTING DIMENSIONS FOR 4 PIN



DETAIL A 5 : 1

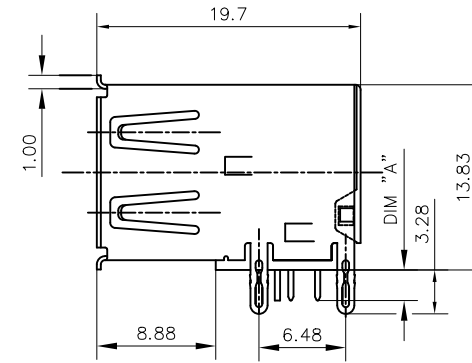

WITHOUT SENSOR CONTACT
FOR 73725-X150B
HOLD DOWN STYLE "C"

mat'l. code				surface ¹²³ /tolerance			projection 11011	product family			
				ISO 1302	ISO 406	ISO 11011		HPL 511 USB 2.0			
ltr	ecn no	dr	date	tolerances unless otherwise specified			mm	title			
AJ				angles	linear			USB UP-RIGHT RECEPT			
				0°±2°			scale 1:1				
				dr	PAMP	5/20/97	Amphenol FCI	dwg no			
				engr	R Y LIU	5/20/97		sheet 4 of 4			
				chr	R Y LIU	5/20/97		73725			
				appd	JENN TSAO	5/20/97		type Product Customer Drawing			
sheet index		revision sheet									

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А