

PRODUCT NO.
73725

PRODUCT NUMBER CODE

73725-X X X X LF

HOUSING COLOR OPTION
0-WHITE
1-BLACK

SENSOR CONTACT OPTION
0-WITH SENSOR CONTACT
1-WITHOUT SENSOR CONTACT

SHIELD PLATING OPTION
1- 1.25μm MINIMUM NICKEL UNDERPLATE & 2.5μm MINIMUM BRIGHT TIN OVER ALL AREA. (HOLD DOWN STYLE "A")
2- 1.25μm MINIMUM NICKEL UNDERPLATED OVER ALL; 2.5 μm MINIMUM MATTE TIN PLATED ON HOLD DOWN AREA ONLY.(HOLD DOWN STYLE "B")
3- 1.25μm MINIMUM NICKEL UNDERPLATED OVER ALL; 2.5 μm MINIMUM MATTE TIN PLATED ON HOLD DOWN AREA ONLY.(HOLD DOWN STYLE "A")
4- 1.25μm MINIMUM NICKEL UNDERPLATED & 2.5μm MINIMUM BRIGHT TIN OVER ALL AREA. (HOLD DOWN STYLE "B")
5- 1.25μm MINIMUM NICKEL UNDERPLATED OVER ALL; 2.5μm MINIMUM MATTE TIN PLATED ON HOLD DOWN AREA ONLY (HOLD DOWN STYLE "C")
6- 1.25μm MINIMUM NICKEL ONLY. (HOLD DOWN STYLE "A")
7- 1.25μm MINIMUM NICKEL UNDERPLATED & 2.5 μm MINIMUM MATTE TIN PLATED OVER ALL. (HOLD DOWN STYLE "A")
8- 1.25μm MINIMUM NICKEL UNDERPLATED & 2.5 μm MINIMUM MATTE TIN PLATED ALL AREA. (HOLD DOWN STYLE "B")
9- 1.25μm MINIMUM NICKEL UNDERPLATED OVER ALL; 2.5 μm MINIMUM MATTE TIN PLATED ON HOLD DOWN AREA ONLY (HOLD DOWN STYLE "D")
S- 1.25μm MINIMUM NICKEL ONLY.(HOLD DOWN STYLE "A"). HIGH PERFORMANCE MATERIAL FOR 12,000 DURABILITY CYCLES
A- 1.25μm MINIMUM NICKEL PLATED OVER ALL 2.5 μm MINIMUM MATTE TIN PLATED ON HOLD DOWN AREA ONLY (HOLD DOWN STYLE "F")
B- 1.25μm MINIMUM NICKEL PLATED OVER ALL 2.5 μm MINIMUM MATTE TIN PLATED ON HOLD DOWN AREA ONLY (HOLD DOWN STYLE "F")


TERMINAL OPTION
50u" NI UNDERPLATE; 30u" GXT CONTACT AREA,100u" TIN TAIL AREA;
0- DIM "A": 2.29 (TERMINAL TAIL LENGTH);
1- DIM "A": 3.71 (TERMINAL TAIL LENGTH);

LEAD FREE OPTION
SEE NOTE 9


PACKAGING OPTION
B - TUBE
R - TAPE&REEL



SENSOR CONTACT

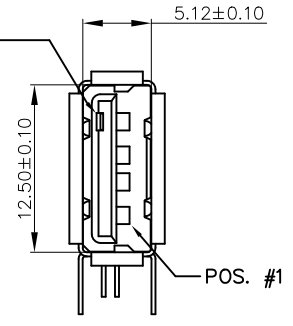


WITH SENSOR CONTACT

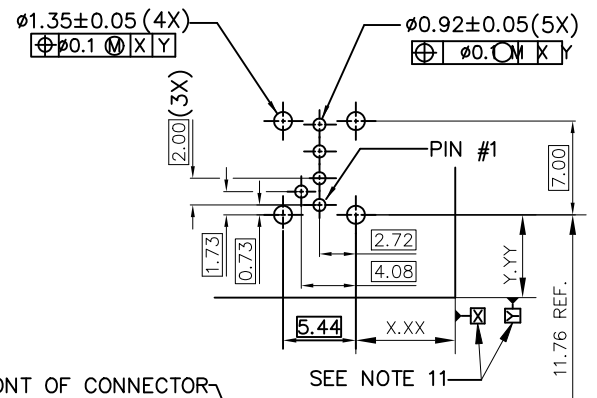

FRONT OF CONNECTOR

PC BOARD MOUNTING DIMENSIONS FOR 5 PIN

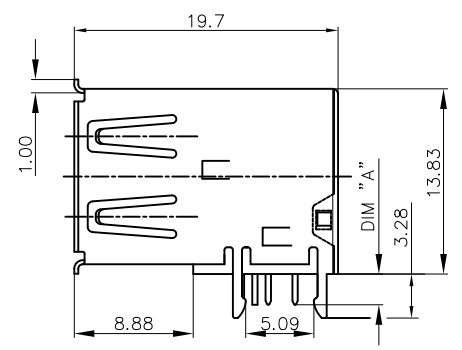


FOR 73725-X0X0B
HOLD DOWN STYLE "A"

NOTES:


- MATERIAL:
CONTACTS: COPPER ALLOY
SHIELD: COPPER ALLOY
HOUSING: UL 94V-0 THERMOPLASTIC, COLOR: SEE PRODUCT CODE
- PLATING:
CONTACTS: GOLD FLASH OVER PALLADIUM NICKEL (0.76μm MINIMUM) IN CONTACT AREA; 2.5 μm TIN MINIMUM IN SOLDER TAIL AREA.
SHIELD: 1.27 μm MINIMUM NICKEL UNDERPLATE OVER ALL SURFACES.
(THE PLATING MEASURE POINT ON THE SHIELD HOLD DOWN AREA ONLY).
- DATUMS & BASIC DIMENSIONS TO BE DETERMINED BY CUSTOMER
- RECOMMENDED PCB BOARD THICKNESS IS 1.00 ~ 1.60mm EXCEPT 73725-1191BLF; 73725-1191BLF CAN BE USED FOR THE PCB BOARD THICKNESS 2.30 ~ 2.65mm.
- MAXIMUM PANEL THICKNESS TO BE 2.67mm IF MOUNTED BEHIND PANEL
- METAL SHELL SLIVER 0.20 MAX.
- NI PLATING DOES NOT COMPLY WITH THE USB STANDARDS (TO BE CONTINUED)

mat'l. code				surface ¹²³ tolerance			projection		product family			
				ISO 1302 ✓ ISO 406 ISO 1101					HPL 511 USB 2.0			
ltr ecn no dr date				tolerances unless otherwise specified			mm		title			
AJ	ELX-N-27708	LZ	2017/08/15	angles	linear	.0±.30	mm		USB UP-RIGHT RECEPT			
AD	ELX-N-012006	A.ZH	06/25/2012	0°±2'		.00±.20	scale 1:1					
AE	ELX-N-13463	A.ZH	11/14/2012	dr	PAMP	5/20/97			dwg no		sheet 1 of 4	size
AF	ELX-N-14592	J.HAN	06/10/2013	engr	R Y LIU	5/20/97	Amphenol FCi		73725			A3
AG	ELX-N-21594	LQ	08/04/2015	chr	R Y LIU	5/20/97						
AH	ELX-N-21919	LQ	08/04/2015	appd	JENN TSAO	5/20/97			type		Product	Customer Drawing
sheet	revision											
index	sheet											

13. DATUM OF CUSTOMER'S PCB LAYOUT.



WITHOUT SENSOR CONTACT


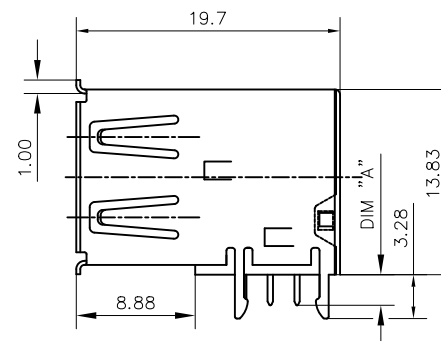


FOR 73725-X1X0B
HOLD DOWN STYLE "A"


mat'l. code				surface ¹²³ /tolerance			projection		product family			
				ISO 1302 ✓ ISO 406 ISO 1101					HPL 511 USB 2.0			
ltr	ecn	no	dr	date			tolerances unless otherwise specified		title			
AJ							angles		mm 		USB UP-RIGHT RECEPT	
							linear					
							0'±2'					
									scale 1:1			
							dr		PAMP		5/20/97	
							eng		R Y LIU		5/20/97	
							chr		R Y LIU		5/20/97	
							app		JENN TSAO		5/20/97	
sheet index		revision sheet										

PRODUCT NO.


73725

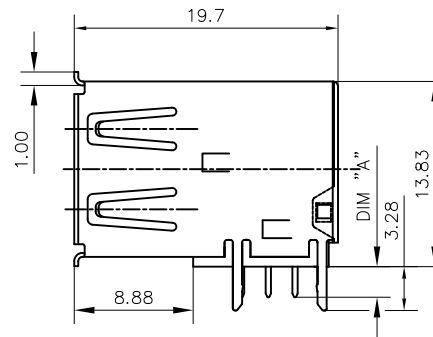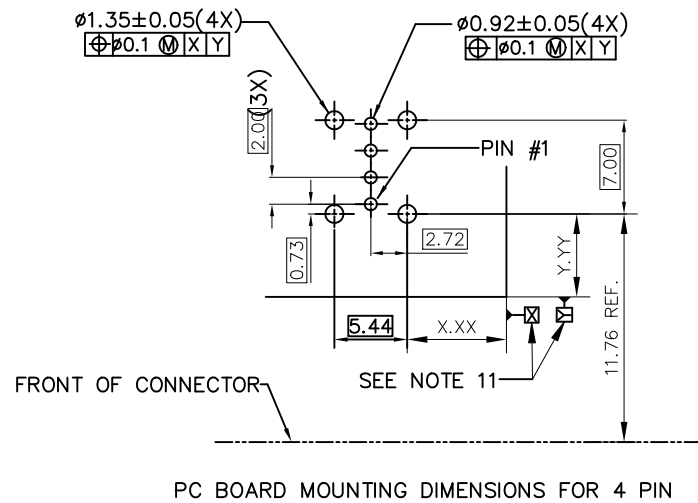


WITHOUT SENSOR CONTACT
FOR 73725-X1X0B
HOLD DOWN STYLE "B"

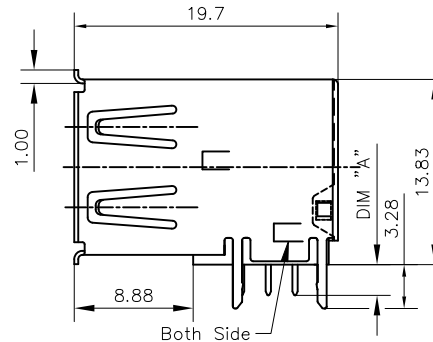


WITHOUT SENSOR CONTACT
FOR 73725-XXA0XLF
73725-XXB0XLF ONLY
HOLD DOWN STYLE "F"



SECTION A-A

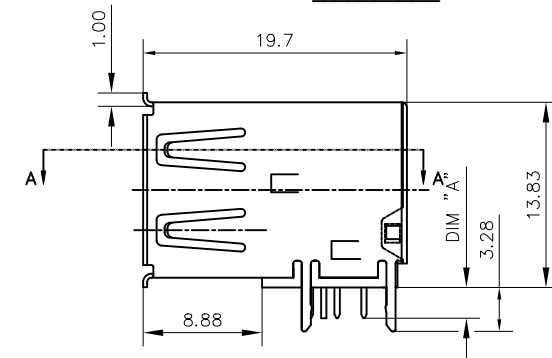


WITH SENSOR CONTACT
FOR 73725-X0X0B
HOLD DOWN STYLE "B"

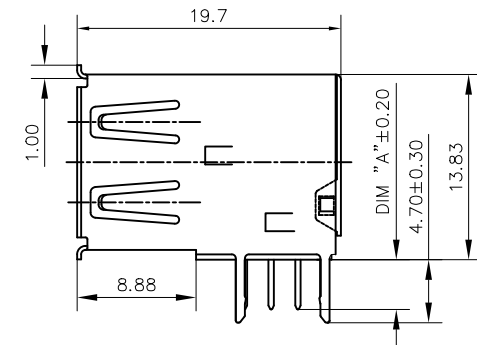



WITHOUT SENSOR CONTACT
FOR 73725-X191XLF
HOLD DOWN STYLE "D"

mat'l. code				surface ¹²³ ISO 1302 ✓		toleranceISO 406 ISO 1101		projection 		product familyHPL 511 USB 2.0			
ltr	ecn	no	dr	date		tolerances unless otherwise specified				title			
AJ						angles		linear		USB UP-RIGHT RECEPT			
						.0±.30							
						.00±.20							
						0°±2'		.000±.10		scale 1:1			
						dr		PAMP		5/20/97		dwg no	
						eng		R Y LIU		5/20/97		sheet3 of 4	
						chr		R Y LIU		5/20/97		sizeA3	
						app		JENN TSAO		5/20/97		type	
sheet index		revision sheet											

PRODUCT NO.
73725

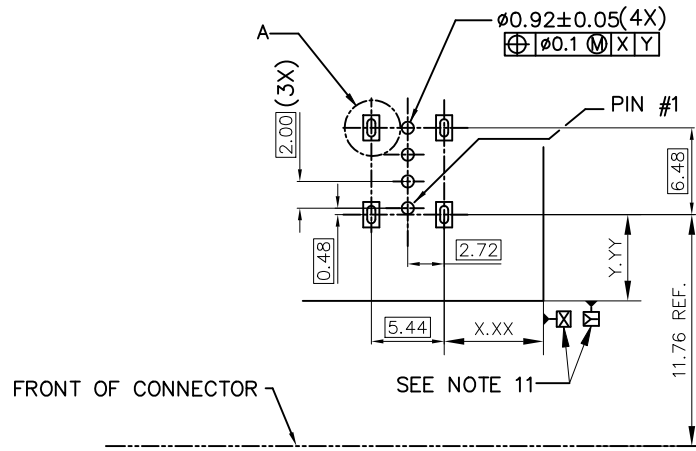

PC BOARD MOUNTING DIMENSIONS FOR 4 PIN

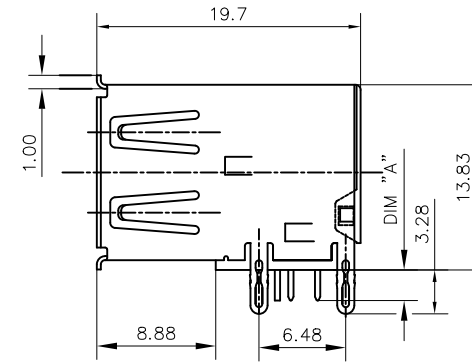

WITHOUT SENSOR CONTACT
FOR 73725-X150B
HOLD DOWN STYLE "C"

mat'l. code				surface ¹²³	tolerance	projection	product family		
				ISO 1302 ✓	ISO 406 ISO 1101		HPL 511 USB 2.0		
ltr	ecn no	dr	date	tolerances unless otherwise specified			title		
AJ				angles	.0±.30	mm	USB UP-RIGHT RECEPT		
				linear	.00±.20				
				0°±2°	.000±.10	scale 1:1			
				dr	PAMP	5/20/97	dwg no		
				engr	R Y LIU	5/20/97	sheet 4 of 4		
				chr	R Y LIU	5/20/97	73725		
				appd	JENN TSAO	5/20/97	type Product Customer Drawing		
sheet index	revision sheet								

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А