

S1D13U11 Display Controller

# **S5U13U11 Evaluation Board User Manual**

## Evaluation board/kit and Development tool important notice

---

1. This evaluation board/kit or development tool is designed for use for engineering evaluation, demonstration, or development purposes only. Do not use it for other purpose. It is not intended to meet the requirement of design for finished product.
2. This evaluation board/kit or development tool is intended for use by an electronics engineer, and it is not the product for consumer. The user should use this goods properly and safely. Seiko Epson dose not assume any responsibility and liability of any kind of damage and/or fire coursed by usage of it. User should cease to use it when any abnormal issue occurs even during proper and safe use.
3. The part used for this evaluation board/kit or development tool is changed without any notice.

## NOTICE

---

No part of this material may be reproduced or duplicated in any form or by any means without the written permission of Seiko Epson. Seiko Epson reserves the right to make changes to this material without notice. Seiko Epson does not assume any liability of any kind arising out of any inaccuracies contained in this material or due to its application or use in any product or circuit and, further, there is no representation that this material is applicable to products requiring high level reliability, such as, medical products. Moreover, no license to any intellectual property rights is granted by implication or otherwise, and there is no representation or warranty that anything made in accordance with this material will be free from any patent or copyright infringement of a third party. This material or portions thereof may contain technology or the subject relating to strategic products under the control of the Foreign Exchange and Foreign Trade Law of Japan and may require an export license from the Ministry of International Trade and Industry or other approval from another government agency.

All brands or product names mentioned herein are trademarks and/or registered trademarks of their respective companies

©SEIKO EPSON CORPORATION 2011, All rights reserved.

# Table of Contents

<b>Chapter 1 Introduction</b> . . . . .	<b>5</b>
<b>Chapter 2 Features</b> . . . . .	<b>6</b>
<b>Chapter 3 Installation and Configuration</b> . . . . .	<b>7</b>
3.1 Configuration Jumpers . . . . .	7
<b>Chapter 4 Technical Description</b> . . . . .	<b>12</b>
4.1 Power . . . . .	12
4.1.1 Power Requirements . . . . .	12
4.1.2 Voltage Regulators . . . . .	12
4.1.3 LED Backlight Voltage Regulators . . . . .	12
4.1.4 LED Backlight Power Circuit . . . . .	12
4.2 Clock . . . . .	12
4.3 Reset . . . . .	12
4.4 Wake-up Key . . . . .	13
4.5 Buzzer . . . . .	13
4.6 Touch Screen . . . . .	13
4.7 Serial Flash ROM . . . . .	13
4.8 Host CPU Interface . . . . .	14
4.9 Generic LCD Panel Interface . . . . .	15
4.10 Ortustech LCD Panel Interface . . . . .	15
4.11 Peripheral Interface . . . . .	16
<b>Chapter 5 Parts Lists</b> . . . . .	<b>17</b>
<b>Chapter 6 Schematic Diagrams</b> . . . . .	<b>20</b>
<b>Chapter 7 Board Layout</b> . . . . .	<b>24</b>
7.1 Peripheral Expansion Board . . . . .	25
<b>Chapter 8 References</b> . . . . .	<b>26</b>
8.1 Documents . . . . .	26
8.2 Document Sources . . . . .	26
<b>Chapter 9 Change Record</b> . . . . .	<b>27</b>



# Chapter 1 Introduction

This manual describes the setup and operation of the S5U13U11 Evaluation Board. This evaluation board is designed as an evaluation platform for the S1D13U11 Display Controller.

The S5U13U11 evaluation board can connect to a variety of embedded CPU boards and a personal computer via USB 2.0. This evaluation board includes a touch screen controller, serial flash ROM and buzzer. This evaluation board can connect to external devices such as LCD panel with touch screen, key matrix circuit, and expansion serial devices via connector.

This user manual is updated as appropriate. Please check the Epson Research and Development Website at [www.erd.epson.com](http://www.erd.epson.com) for the latest revision of this document before beginning any development.

We appreciate your comments on our documentation. Please contact us via email at [documentation@erd.epson.com](mailto:documentation@erd.epson.com).

This manual applies to the following evaluation boards.

- S5U13U11P00C100 (no LCD panel)
- S5U13U11P10C100 (with LCD panel)

## Chapter 2 Features

The S5U13U11 Evaluation Board includes the following features:

- S1D13U11 Display Controller (144-pin QFP)
- Integrated Silicon Solution, Inc. IS42S16800E-7TLI 128M-bit SDRAM (54-pin TSOP)
- USB mini B connector for S1D13U11 USB2.0 High-speed device port
- Headers for S1D13U11 LCD interface pins
- Built-in Ortustech TFT panel with touch screen (S5U13U11P10C100 only)
- Header for S1D13U11 GPIO, SPI and I2C pins (need to add the connector)
- Resistive type touch screen controller with SPI interface
- 1Mbit serial flash ROM with SPI interface (for configuration data storage)
- Buzzer and Wake-up key
- 24MHz oscillator
- VBUS 5V power input or external DC5V power input can be selected
- Voltage regulator with 1.8V and 3.3V
- Voltage regulator with adjustable 6~24V output, 40mA max., to provide power for LED backlight of LCD panels.
- LED backlight circuit with PWM control


## Chapter 3 Installation and Configuration

The S5U13U11 evaluation board incorporates jumpers and 0 ohm resistors which allow it to be used in a variety of different configurations.

### 3.1 Configuration Jumpers

The S5U13U11 has 15 jumpers which configure various board settings. The jumper positions for each function are shown below. JP5, JP6, JP7, JP8, JP9, JP10, JP11, JP14 and JP15 are solder bridges to reduce power noise. To change the jumper position remove the solder.

Jumper	Function	Position 1-2	Position 2-3	No Jumper
JP1	Board current measurement	Normal	—	Current measurement
JP2	Board power supply	VBUS 5V input	External DC5V	—
JP3	VBUS input signal	VBUS 5V input	External DC5V	—
JP4	Power-on reset source	VBUS 5V input	External DC5V	—
JP5	COREVDD current measurement	Normal	—	Current measurement
JP6	PLLVDV current measurement	Normal	—	Current measurement
JP7	PIOVDD current measurement	Normal	—	Current measurement
JP8	USBVDD current measurement	Normal	—	Current measurement
JP9	MIOVDD current measurement	Normal	—	Current measurement
JP10	Touch screen power	5V	3.3V ( <b>Position 1-3</b> )	—
JP11	External 3.3V current measurement	Normal	—	Current measurement
JP12	LED Backlight 12V power control	ON	—	OFF
JP13	Ortustech panel control	ON/OFF control	Always ON	—
JP14	3.3V regulator current measurement	Normal	—	Current measurement
JP15	1.8V regulator current measurement	Normal	—	Current measurement

 = Default setting

#### JP1 - Current Measurement of the S5U13U11 Evaluation Board

JP1 can be used to measure the current consumption of the S5U13U11 power supply.

When the jumper is at position 1-2, normal operation is selected.

When no jumper is installed, the current consumption for power supply can be measured by connecting an ammeter between pins 1 and 2 of the jumper.

## JP2 - Power Supply Select for the S5U13U11 Evaluation Board

JP2 can be used to select the S5U13U11 power supply.

When the jumper is at position 1-2, VBUS 5V input is selected. The external power supply is not needed.

When the jumper is at position 2-3, external DC5V input is selected. The external power supply is needed.

The supply current of VBUS is specified as a maximum 500mA in the USB specification.

## JP3 - VBUS Input Signal Select

JP3 can be used to select the signal of the S1U13U11 VBUS input pin.

When the jumper is at position 1-2, VBUS input is selected.

When the jumper is at position 2-3, external DC5V input is selected.

## JP4 - Power-on Reset Source Select

JP4 can be used to select the source of the power-on reset circuit.

When the jumper is at position 1-2, VBUS input is selected.

When the jumper is at position 2-3, external DC5V input is selected.

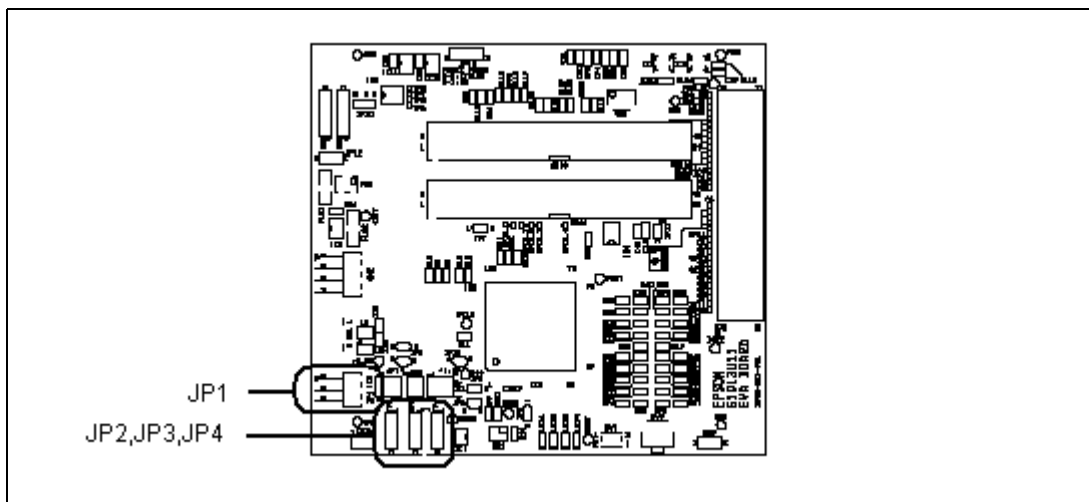


Figure 3-1: Configuration Jumper Locations (JP1, JP2, JP3, JP4)



## JP5, JP6, JP7, JP8, JP9 - Current Measurement of the S1D13U11 Power Supplies

JP5, JP6, JP7, JP8, JP9 can be used to measure the current consumption of the S1D13U11 power supplies.

When the jumper is at position 1-2, normal operation is selected.

When no jumper is installed, the current consumption for each power supplies can be measured by connecting an ammeter between pins 1 and 2 of the jumper.

The jumper associated with each power supply is as follows:

JP5 for COREVDD

JP6 for PLLVDD

JP7 for PIOVDD

JP8 for USBVDD

JP9 for MIOVDD

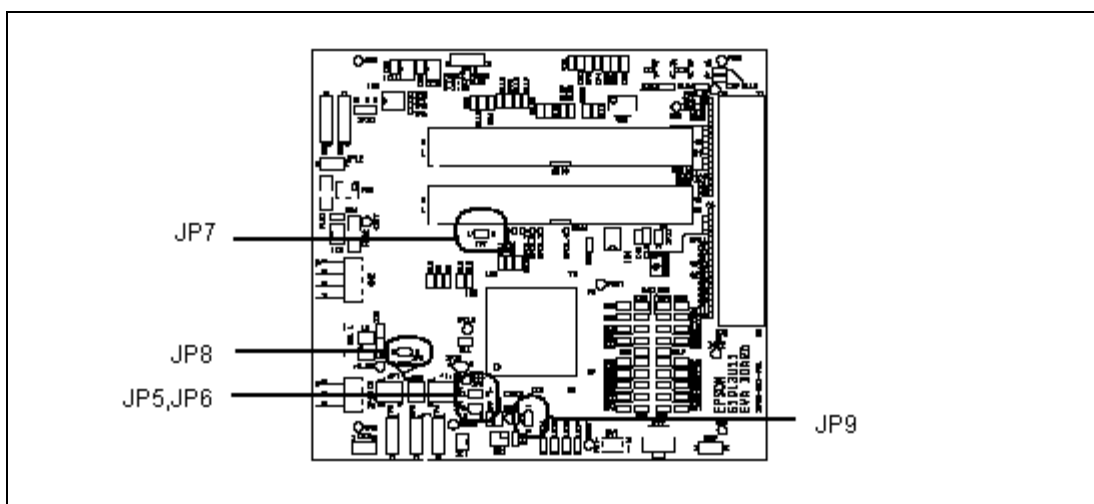


Figure 3-2: Configuration Jumper Locations (JP5, JP6, JP7, JP8, JP9)

## JP11, JP14, JP15 - Current Measurement of the On-board Power Supplies

JP11, JP14, JP15 can be used to measure the current consumption of on-board power supplies.

When the jumper is at position 1-2, normal operation is selected.


When no jumper is installed, the current consumption for each power supplies can be measured by connecting an ammeter between pins 1 and 2 of the jumper.

The jumper associated with each power supply is as follows:

JP11 for external 3.3V power

JP14 for 3.3V regulator

JP15 for 1.8V regulator

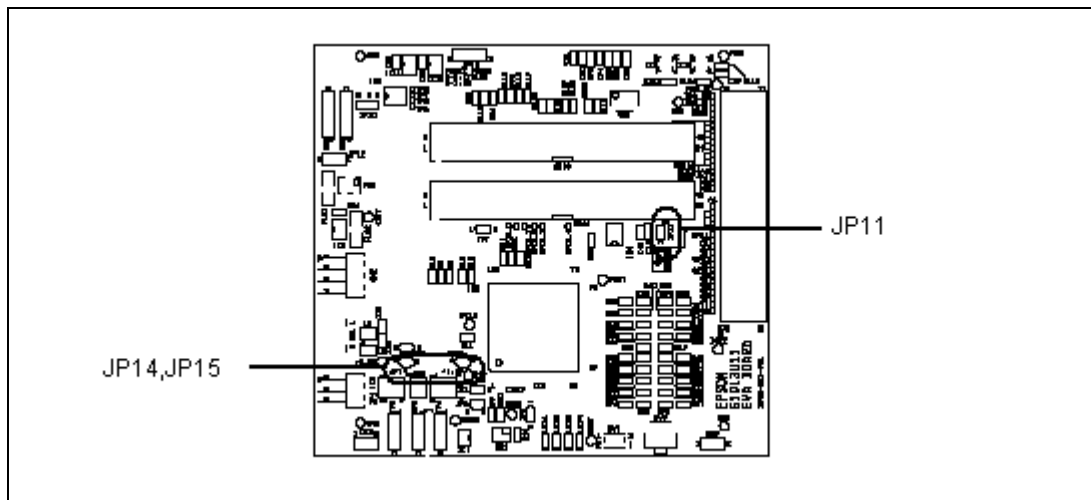

*Figure 3-3: Configuration Jumper Locations (JP11, JP14, JP15)*

### JP10 - Touch Screen Power Select

JP10 can be used to select the power of the touch screen.

When the jumper is at position 1-3, the power of touch screen signals (X+, Y+) is selected 3.3V.

When the jumper is at position 1-2, the power of touch screen signals (X+, Y+) is selected 5V.

### JP12 - LED Backlight 12V Power Control

JP12 can be used to control the LED backlight 12V power.

When the jumper is at position 1-2, the 12V power is always on.

When no jumper is installed, the 12V power is always off.

### JP13 - Ortustech Panel Power Control

JP13 can be used to control Ortustech panel power (S5U13U11P10C100 only).

When the jumper is at position 1-2, the GPO7 pin of the S1D13U11 can be used to control the Ortustech panel power.

When the jumper is at position 2-3, the Ortustech panel power is always on.

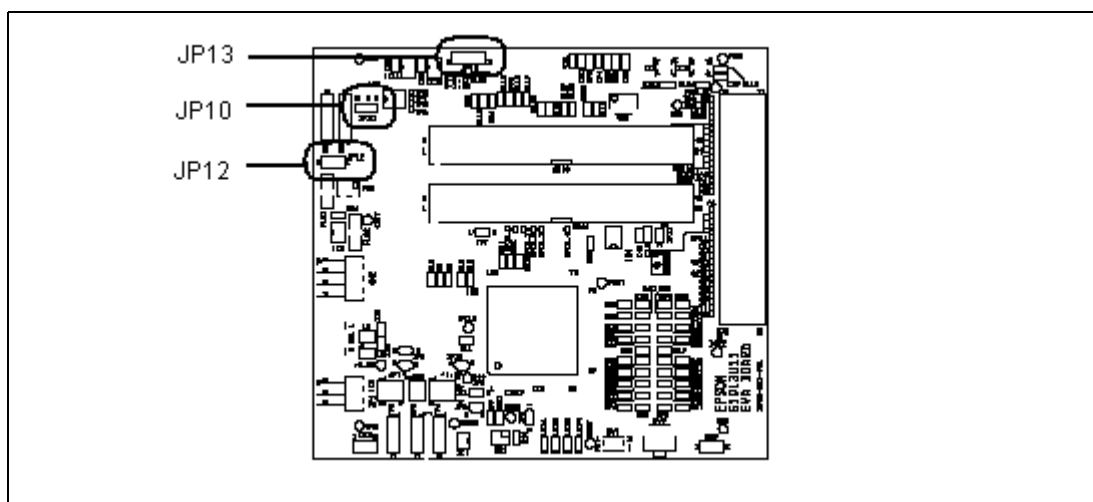


Figure 3-4: Configuration Jumper Locations (JP10, JP12, JP13)

# Chapter 4 Technical Description

## 4.1 Power

### 4.1.1 Power Requirements

The S5U13U11 evaluation board operates only by the USB bus power (VBUS 5V) of the USB cable. When the current supply of VBUS 5V is needed the power consumption over 500mA, the external DC5V power supply must be selected. Because the current supply of VBUS 5V is specified max 500mA in the USB specification.

When the external DC5V power is selected, JP2 and JP4 should be switched jumper position 2-3 and the DC5V power is supplied through the CN3 header.

### 4.1.2 Voltage Regulators

The S5U13U11 evaluation board has an on-board linear regulator (IC6, IC7) to provide the 1.8V and 3.3V power required by the S1D13U11 Display Controller.

### 4.1.3 LED Backlight Voltage Regulators

The S5U13U11 evaluation board has an on-board switching voltage regulator (IC8) to generate adjustable 6~24V, which can be used to 12V power the LED backlight on some LCD panels. When the 12V power is used, the JP12 jumper must be selected position 1-2.

### 4.1.4 LED Backlight Power Circuit

The S5U13U11 evaluation board has an on-board LED backlight power circuits (IC9, IC10). The luminous of the LED backlight can be controlled by the S1D13U11 PWM. The LED backlight power is output through the CN7 header.

## 4.2 Clock

The S5U13U11 evaluation board is operated by the on-board 24MHz oscillator (CR1).

## 4.3 Reset

The S5U13U11 evaluation board can be reset using a push-button (SW1), or on-board power-on reset circuit. The power-on reset circuit is designed the target specification which the threshold voltage is typ 2.7V and the rising delay time is typ 10ms.

## 4.4 Wake-up Key

The S5U13U11 evaluation board has a wake-up key (SW2) which is used to return from sleep mode. The wake-up key is connected to the S1D13U11 INT1 pin.

## 4.5 Buzzer

The S5U13U11 evaluation board has a buzzer (BZ1) which is used for the beep sound. The buzzer is connected to the S1D13U11 BUZZER pin.

## 4.6 Touch Screen

The S5U13U11 evaluation board has a resistive type touch screen controller (IC3). Chip select pin (S1D13U11 SS0#) and interrupt pin (S1D13U11 INT0) are connected to the LED3 and LED4.

The analog signals (X+, X-, Y+, Y-) of the touch screen controller are connected to the CN6 header.

## 4.7 Serial Flash ROM

The S5U13U11 evaluation board has a serial flash ROM (IC4) which is stored the configuration data and start-up display data.


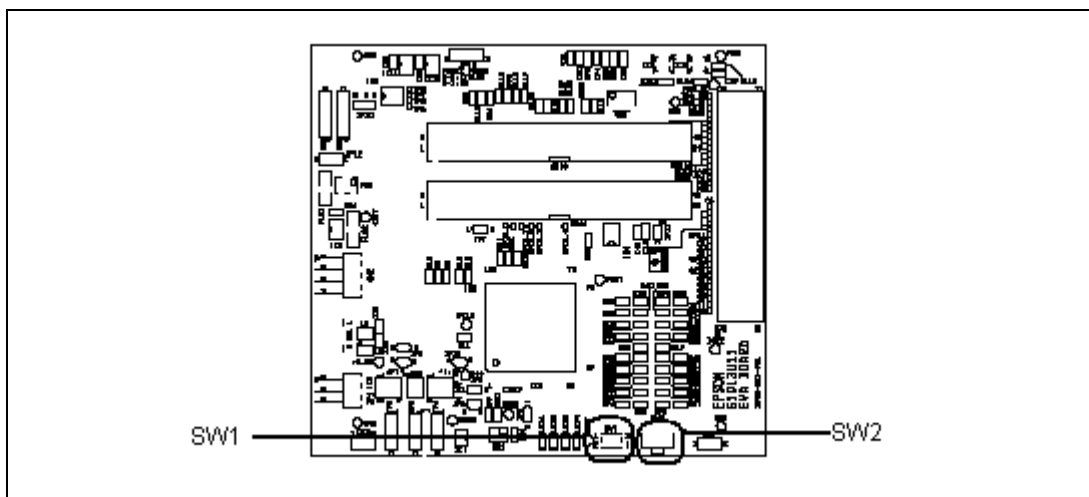


Figure 4-1: Reset Switch and Wake-up Key Locations (SW1, SW2)

## 4.8 Host CPU Interface

The S1D13U11 host interface (USB2.0 High-speed device port) is available on connector CN1 which allows the S5U13U11 evaluation board to be connected to a variety of development platforms.

The LED1 turns on when VBUS power is supplied.

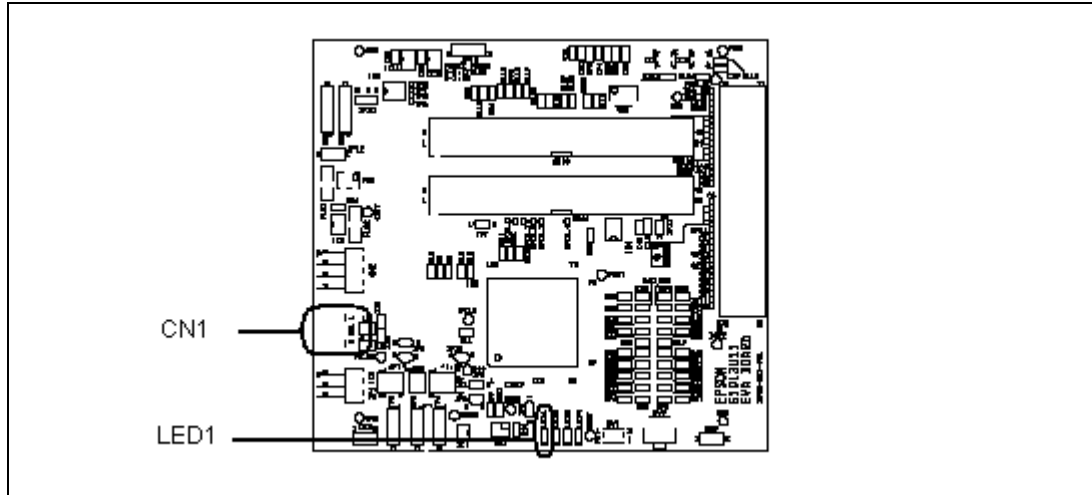

*Figure 4-2: USB Connector and LED1 Locations (CN1, LED1)*

## 4.9 Generic LCD Panel Interface

The S1D13U11 LCD interface signals are available on connectors CN10 and CN11.

Both connector are 0.1x0.1 inch 40-pin header (20x2). For the pinout of connectors CN10 and CN11, see Chapter 6, “Schematic Diagrams” on page 20.

On the evaluation board there is an adjustable 6~24V, 40mA max. power supply. This voltage is provided only on connector CN10 (it is not used elsewhere on the board). It is intended for use to power the LED backlight on some LCD panels. The voltage is adjusted by the VR2 pot.

### Note

For LCD panels that use a CCFL backlight, an external power supply must be used to provide power to the inverter for the CCFL backlight. Usually, the inverter current consumption is higher than the maximum 40mA current available from the on-board voltage regulator.

## 4.10 Ortustech LCD Panel Interface

The S1D13U11 LCD interface signals are connected to the Ortustech LCD panel (COM41T4M17XTC) by connectors CN10 and CN11 (S5U13U11P10C100 only).


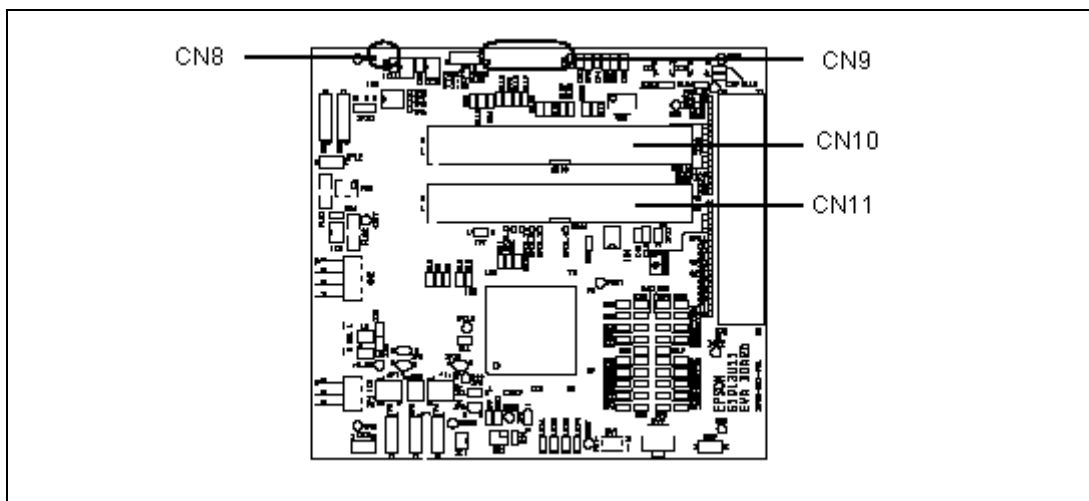


Figure 4-3: LCD Panel Connector Locations (CN8, CN9, CN10, CN11)

## 4.11 Peripheral Interface

The S1D13U11 peripheral interface signals are available on connector CN4. Connector CN4 is 0.1x0.1 inch 40-pin header (20x2). For the pinout of connectors CN4, see Chapter 6, “Schematic Diagrams” on page 20.

The S5U13U11P00C100 evaluation board has a SPI interface, I2C interface, GPIO interface and Key-scan interface.

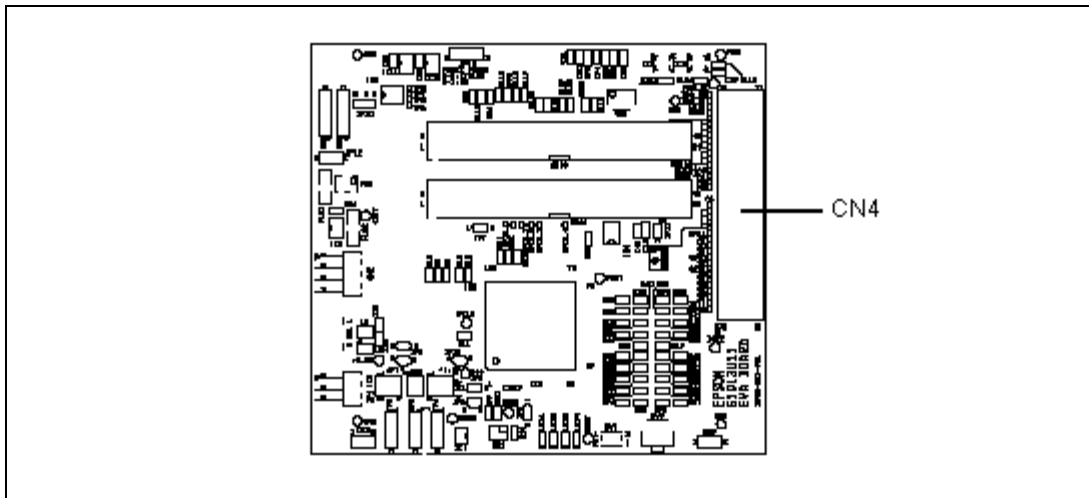

*Figure 4-4: Peripheral Connector Location (CN4 : no assembly)*



## Chapter 5 Parts Lists

Table 5-1: Parts Lists

Quantity	Value	Reference	Part	Manufacturer
1	-	BZ1	PKLCS1212E2000-R1	Murata
6	1u	C1,C21,C64*,C80*,C81*,C87**	GRM188F11C105ZA01	Murata
1	2200p	C2	UMK107B222KZ	Taiyo Yuden
25	0.01u	C3,C8,C11,C13,C16,C18,C20,C24, C26,C28,C30,C33,C35,C38,C40, C42,C44,C48,C50,C51,C53,C55, C57,C59,C61	GRM155B11E103KA	Murata
1	1000p	C5	GRM188B11H102KA01	Murata
2	9p	C9,C14	UMK107CH090DZ	Taiyo Yuden
23	0.1u	C7,C10,C12,C15,C17,C19,C22,C25, C27,C29,C32,C34,C37,C39,C41, C43,C47,C49,C52,C54,C56,C58,C60	GRM155B31C104K	Murata
4	10u	C6,C45,C83,C84	GRM21BB10J106ME01	Murata
4	10uZ-C	C62,C68,C71,C73	EMK325F106ZH	Taiyo Yuden
2	2.2u	C63*,C65*	GRM21BF11E225ZA01	Murata
2	4.7u	C66,C67*	GRM31MF11C475ZA12B	Murata
5	2.2u	C70*,C72*,C74*,C76*,C77*	GRM188B31A225KE33	Murata
3	10u	C69*,C75*,C78*	C3225JB1A106M	TDK
1	10p	C79	GRM1882C1H100JA01	Murata
1	1u	C82	GRM32RB11H105KA01B	Murata
9	0.1u	C4,C23,C31,C36,C46,C85,C86,C88, C89	GRM188R11H104JA01	Murata
1	-	CN1	54819-0572	MOLEX
1	-	CN2**	A2-4PA-2.54DS(71)	Hirose
1	-	CN4**	PS-40SD-D4T1-1	JAE
3	-	CN3,CN5**,JP12	WL-1-2	Mac8
2	-	CN6,CN7	WL-1-4	Mac8
1	-	CN8*	59453-041110EALF	FCI
1	-	CN9*	046281267202846+	Kyocera Elco
2	-	CN10,CN11	HIF3FC-40PA-2.54DSA(71)	Hirose
1	-	CR1	FA-238 (24MHz)	EPSON_QD
1	-	D1	MBR0530	Fairchild
2	-	D2,D3	1SS421	Toshiba
1	-	DM1	DF3A6.8FU	Toshiba
1	-	DM2	HRW0202B	Renesas
2	-	FLS1,FLS2	ACF451832-222	TDK
1	-	IC1	S-80927CNNB	SII
1	-	IC2	S1D13U11	EPSON
1	-	IC3	TSC2046IPW	TI

Table 5-1: Parts Lists

Quantity	Value	Reference	Part	Manufacturer
1	-	IC4	LE25FU106BMA	Sanyo
1	-	IC5	IS42S16800E	ISSI
1	-	IC6	R1170H331B	RICOH
1	-	IC7	R1170H181B	RICOH
1	-	IC8	TPS61040DBVR	TI
2	-	IC9,IC10	TPS61042DRB	TI
2	-	IC11,IC12	TC7SZ04F	Toshiba
1	-	JP1	A2-3PA-2.54DS(71)	Hirose
4	-	JP2,JP3,JP4,JP13*	WL-1-3	Mac8
4	60	L1,L2,L4,L5	BLM21PG600SN1	Murata
1	90	L3**	DLW21SN900SQ2L	Murata
1	10uH	L6	LQH32CN100K23	Murata
2	4.7uH	L7,L8	LQH32CN4R7M23L	Murata
4	-	LED1,LED2*,LED3,LED4	SML-310MTT86	ROHM
1	uctor	QF1*	NTF3055L108	OnSemicond
1	33	R1	MCR03EZJH330	ROHM
1	820	R2	MCR03EZJH821	ROHM
1	10	R3	MCR03EZJH100	ROHM
1	6.2k	R11	RR0816P-622-D	SSM
3	1k	R20,R77,R87*	MCR03EZJH102	ROHM
1	1.8k	R26	MCR03EZJH182	ROHM
2	2.2k	R36,R37	MCR03EZJH222	ROHM
100	0	R5**,R6,R7,R8,R9,R10,R12,R13, R14,R15,R16**,R17,R18,R19,R21, R22,R23,R24,R25,R27,R28,R29, R30,R31,R32,R33,R34,R35,R38, R39,R40,R41,R42,R43,R44,R45, R46,R47,R48,R49,R50,R51,R52, R53,R54,R55,R56,R57,R58,R59, R60,R61,R62,R63,R64,R65,R66, R67,R68,R69,R70,R71,R72,R73, R74,R75,R76,R78,R79,R80,R81, R82,R84,R93,R94**,R96*,R97**, R98**,R99**,R100**,R101**,R102**, R105*,R106*,R107*,R108*,R109*, R110*,R111,R114*,R117**,R118**, R119**,R120**,R121,R122,R123**, R124**,R125**,R126	MCR03EZJH000	ROHM
1	20k	R83*	RR0816P-203-D	SSM
1	100	R85*	MCR03EZJH101	ROHM
1	6.8k	R86*	RR0816P-682-D	SSM
2	10k	R89**,R115**	MCR03EZJH103	ROHM
1	820k	R90	MCR03EZJH824	ROHM
1	68k	R91	RR0816P-683-D	SSM

Table 5-1: Parts Lists

Quantity	Value	Reference	Part	Manufacturer
1	47k	R92	MCR03EZHZ473	ROHM
1	22k	R95	MCR03EZHZ223	ROHM
2	12	R103,R104	MCR03EZHZ120	ROHM
4	100k	R4,R112**,R113**,R116**	MCR03EZHZ104	ROHM
3	220	R88*,R127,R128	MCR03EZHZ221	ROHM
1	-	SW1	SKRSPACE010	ALPS
1	-	SW2	SKHLLB	ALPS
3	-	TP47,TP48,TP49	LC-33-S-Red	Mac8
4	-	TP51,TP52,TP56,TP58	ST-1-2	Mac8
8	-	TP1,TP2,TP3,TP9,TP10,TP50, TP60**,TP61	LC-33-S-Yellow	Mac8
1	10k	VR1*	RJ-5W103	Copal
1	200k	VR2	SM-42X(204)	Copal
2	-	ZD1**,ZD2**	AVRL161A6R8G	TDK
1	-	LCD panel*	COM41T4M17XTC	Ortustech

**Note**

\* not populated on S5U13U11P00C100

\*\* not populated on S5U13U11P00C100 and S5U13U11P10C100.

# Chapter 6 Schematic Diagrams

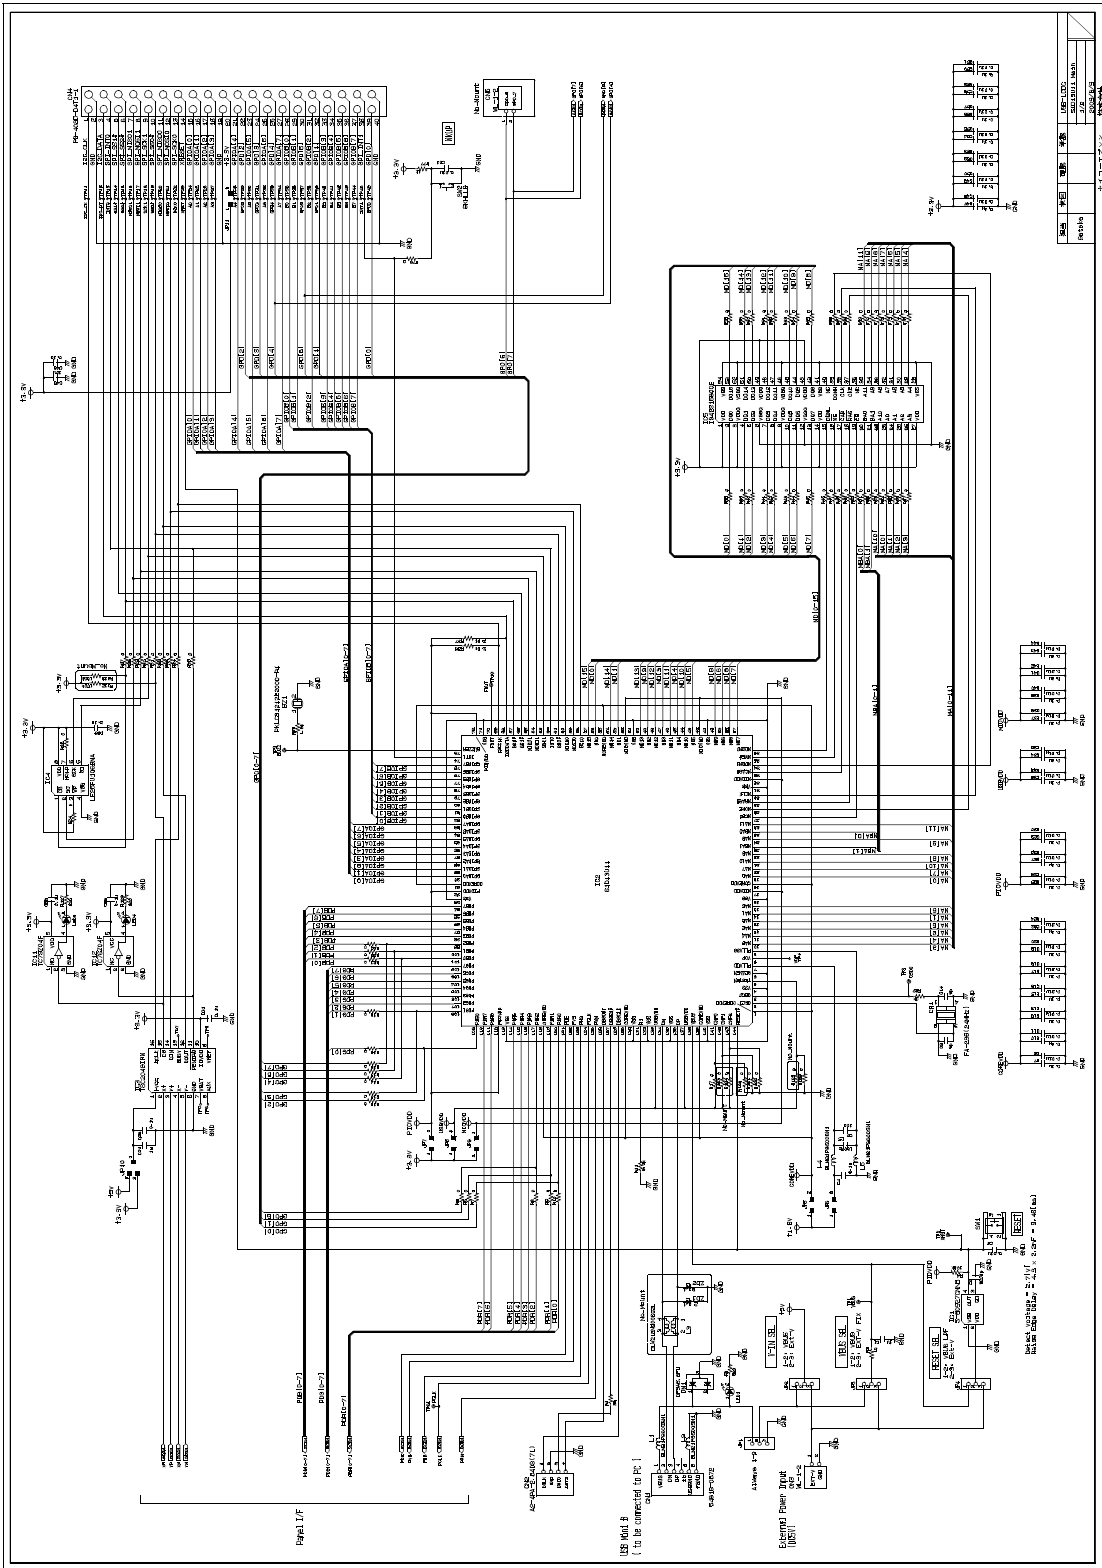


Figure 6-1: S5U13U11P00C100 Schematic Diagram (1 of 2)

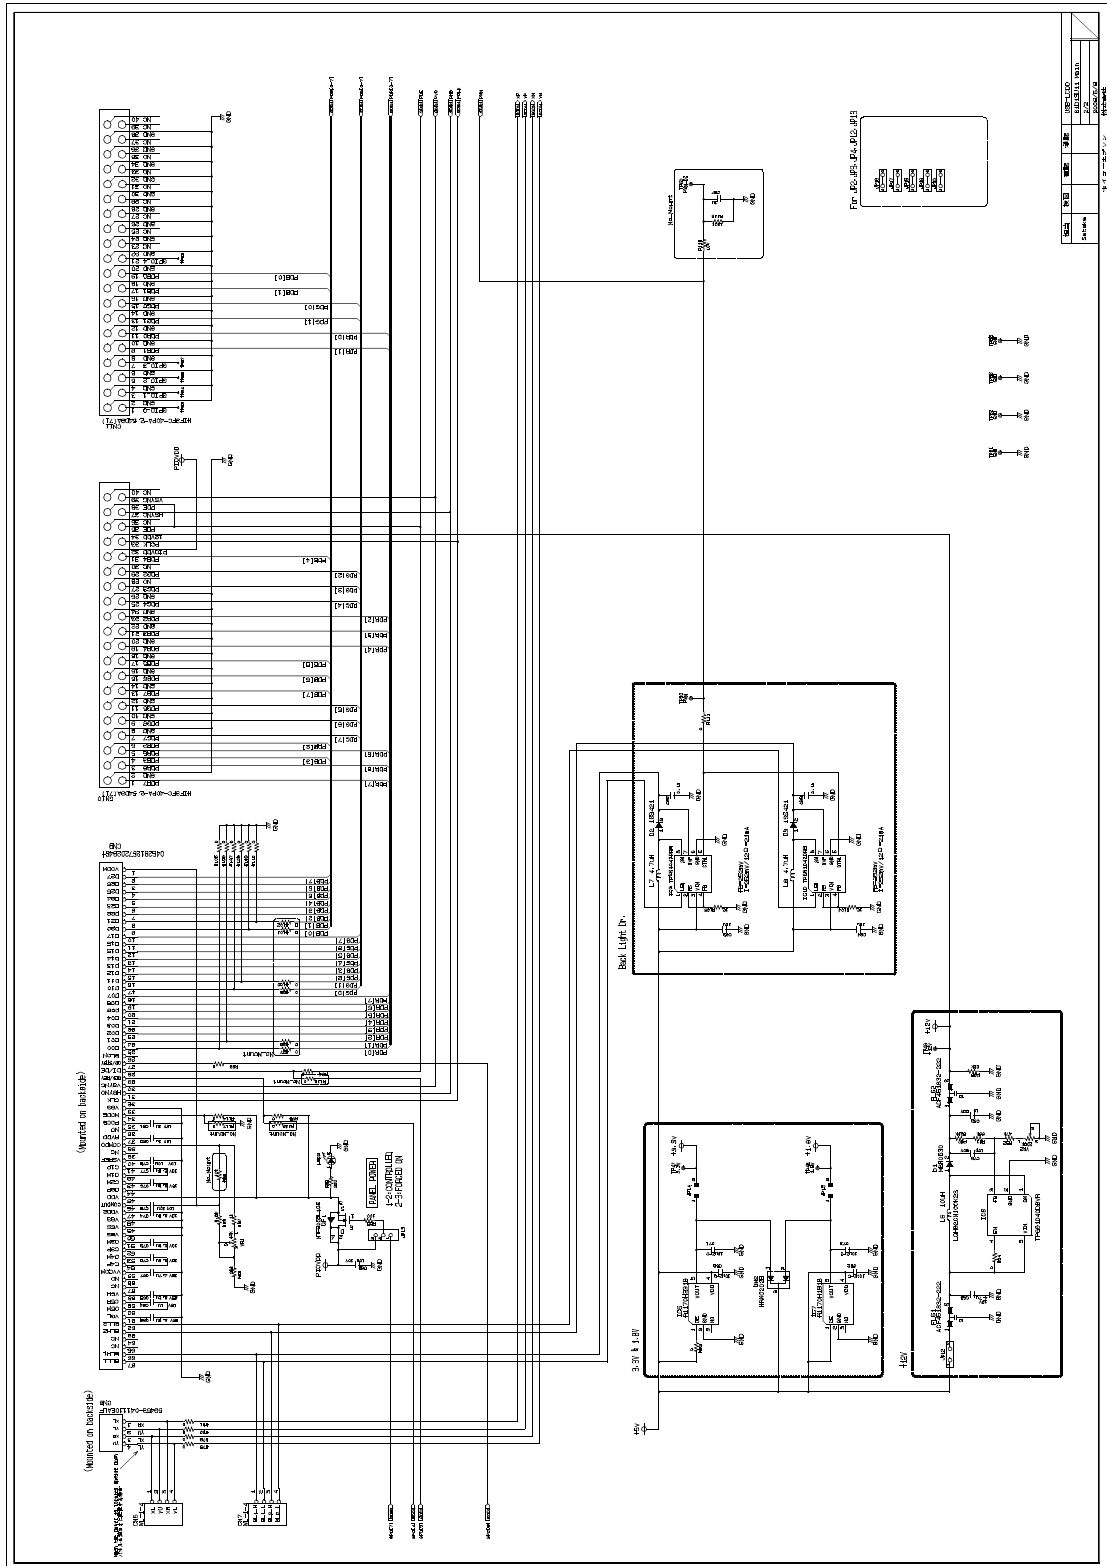
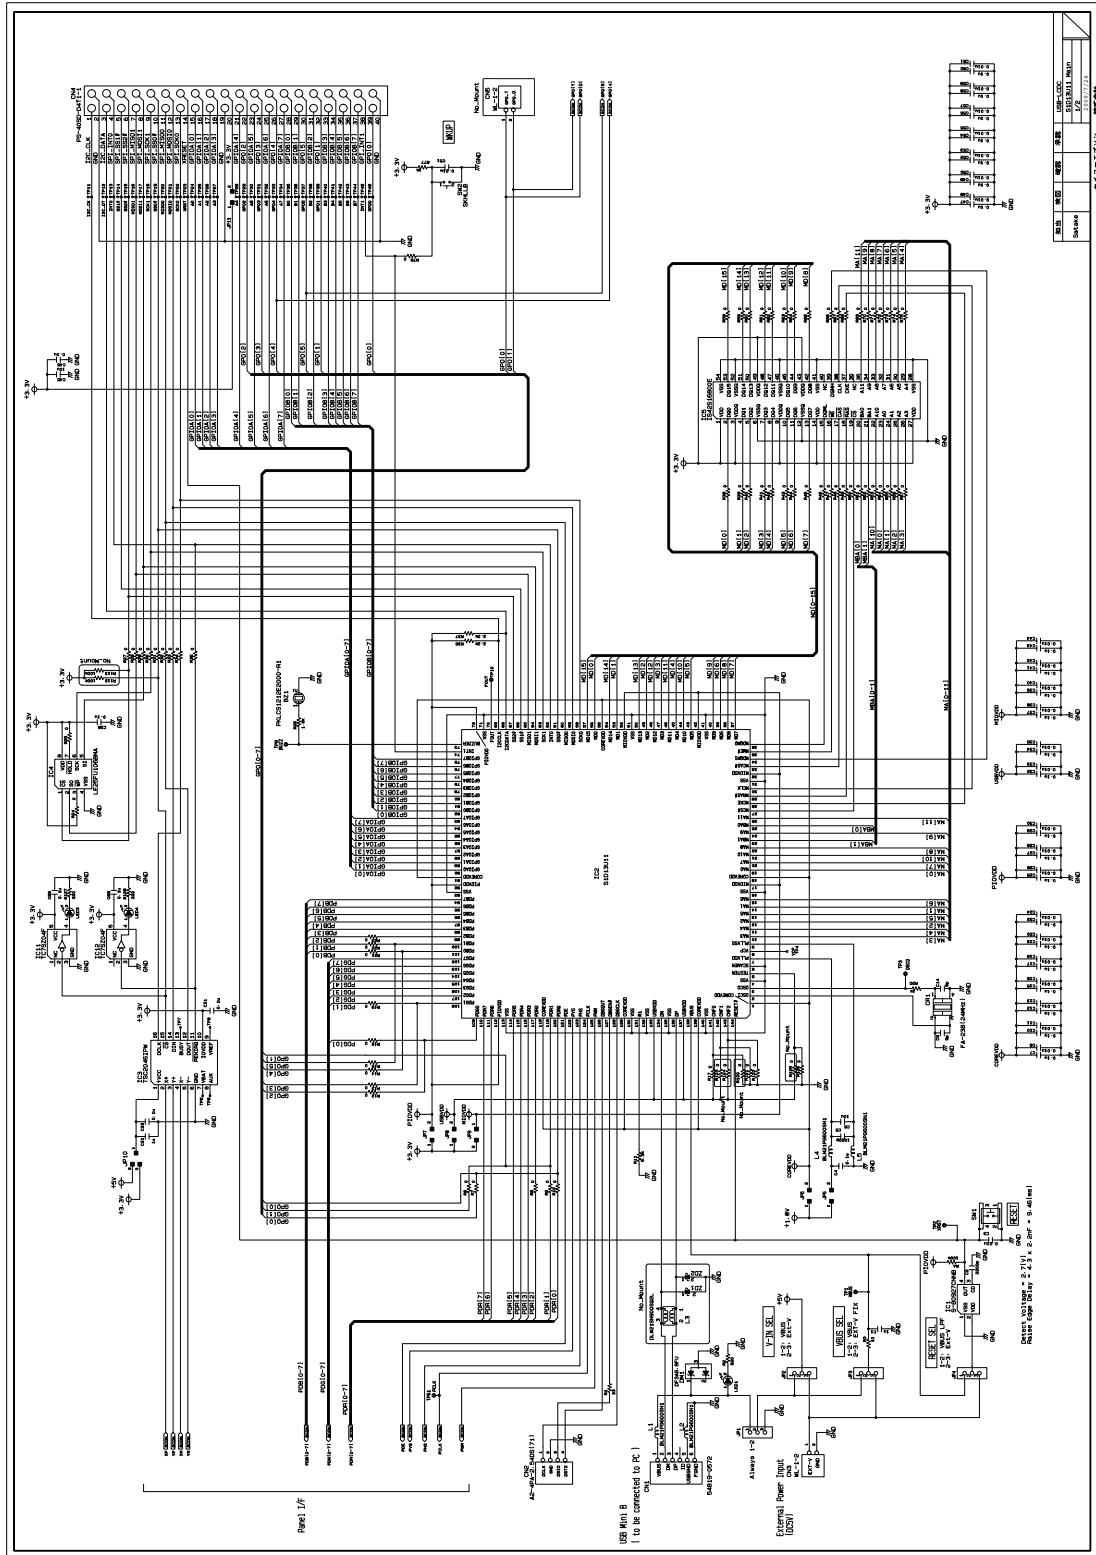


Figure 6-2: S5U13U11P00C100 Schematic Diagram (2 of 2)



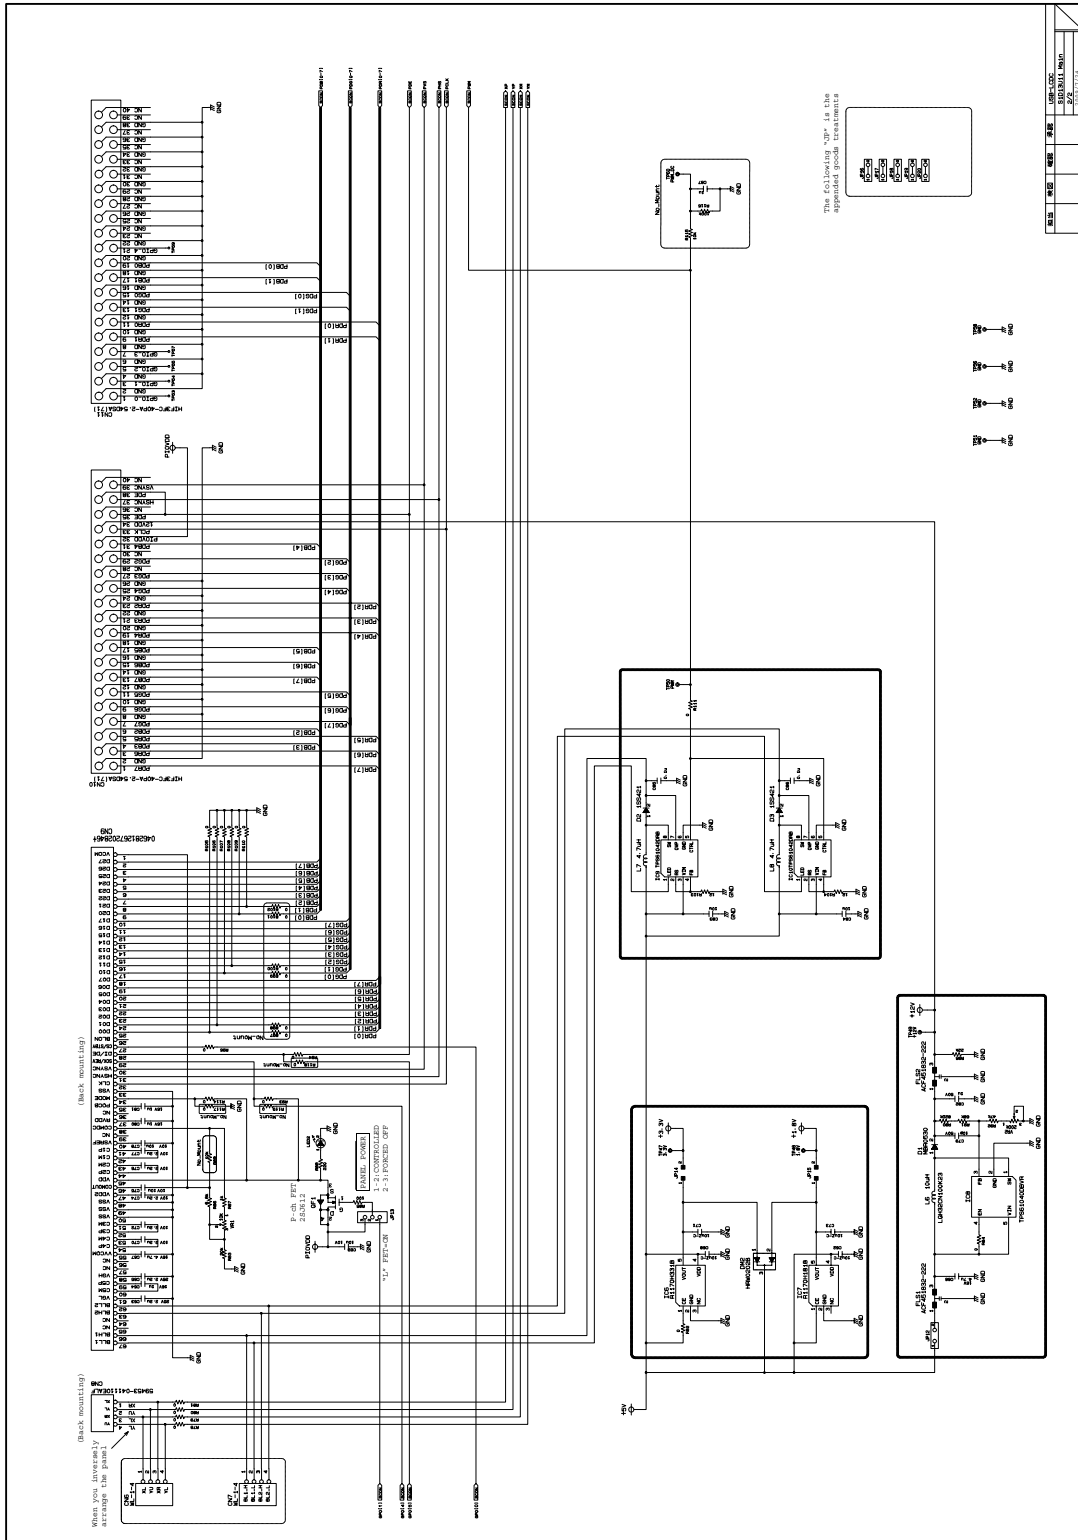


Figure 6-4: S5U13U11P10C100 Schematic Diagram (2 of 2)

# Chapter 7 Board Layout

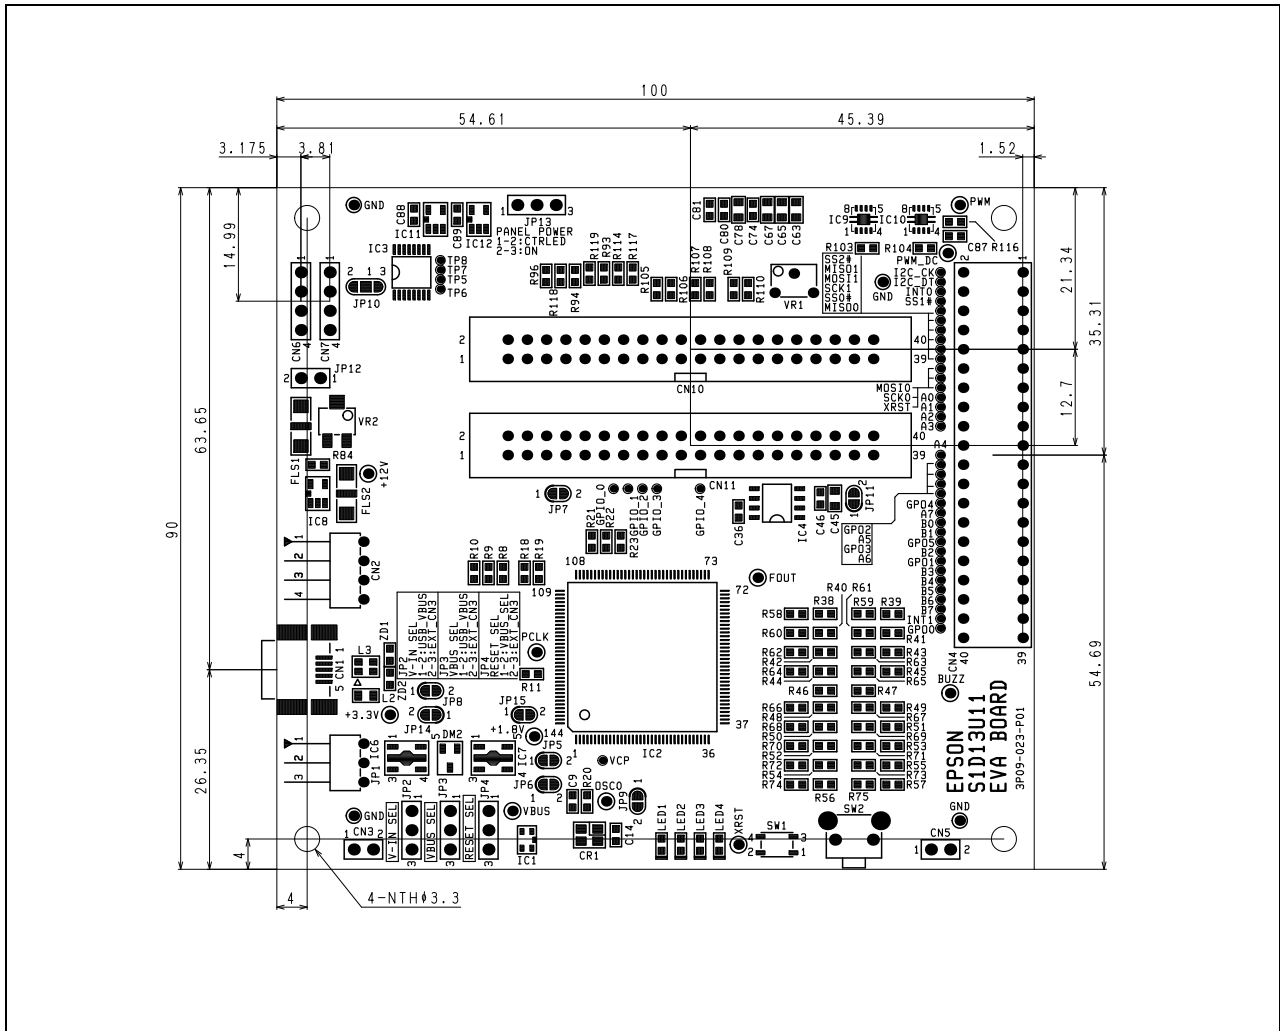


Figure 7-1: Board Layout (Top View)



## 7.1 Peripheral Expansion Board

If a peripheral expansion board is required for development, assemble connector CN4 on the S5U13U11 evaluation board. The mating connector to CN4 is PS-40PE-D4LT1-PN1 (Japan Aviation Electronics Industry, Limited). Assemble the PS-40PE-D4LT1-PN1 connector with 2mm of clearance from the PCB edge to the mold edge.

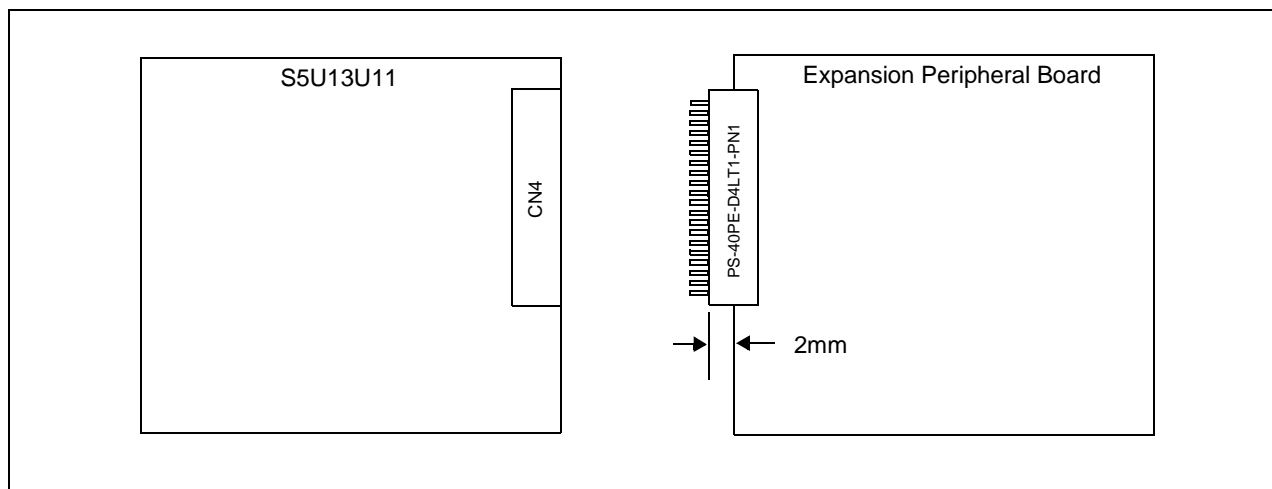


Figure 7-2: Peripheral Expansion Board Connection

## Chapter 8 References

### 8.1 Documents

- Epson Research and Development, Inc., *S1D13U11 Hardware Functional Specification*, document number X96A-A-001-xx
- Epson Research and Development, Inc., *S1D13U11 Software Functional Specification*, document number X96A-A-002-xx

### 8.2 Document Sources

- Epson Research and Development Website: <http://www.erd.epson.com>

## Chapter 9 Change Record

### **X96A-G-001-01 Revision 1.1 - Issued: April 21, 2011**

- globally replace “Casio” with “Ortustech”
- add Evaluation board/kit and Development tool important notice above Copyright notice
- chapter 6 Schematic Diagrams - add S5U13U11P10C100 Schematic Diagrams

### **X96A-G-001-01 Revision 1.0 - Issued: September 9, 2009**

- Initial release

### AMERICA

---

**EPSON ELECTRONICS AMERICA, INC.**

2580 Orchard Parkway  
San Jose, CA 95131, USA  
Phone: +1-800-228-3964 FAX: +1-408-922-0238

### EUROPE

---

**EPSON EUROPE ELECTRONICS GmbH**

Riesstrasse 15, 80992 Munich,  
GERMANY  
Phone: +49-89-14005-0 FAX: +49-89-14005-110

### ASIA

---

**EPSON (CHINA) CO., LTD.**

7F, Jinbao Bldg., No.89 Jinbao St.,  
Dongcheng District,  
Beijing 100005, CHINA  
Phone: +86-10-8522-1199 FAX: +86-10-8522-1125

**SHANGHAI BRANCH**

7F, Block B, High-Tech Bldg., 900, Yishan Road,  
Shanghai 200233, CHINA  
Phone: +86-21-5423-5577 FAX: +86-21-5423-4677

**SHENZHEN BRANCH**

12F, Dawning Mansion, Keji South 12th Road,  
Hi-Tech Park, Shenzhen 518057, CHINA  
Phone: +86-755-2699-3828 FAX: +86-755-2699-3838

**EPSON HONG KONG LTD.**

Unit 715-723, 7/F Trade Square, 681 Cheung Sha Wan Road,  
Kowloon, Hong Kong  
Phone: +852-2585-4600 FAX: +852-2827-4346

**EPSON TAIWAN TECHNOLOGY & TRADING LTD.**

14F, No. 7, Song Ren Road,  
Taipei 110, TAIWAN  
Phone: +886-2-8786-6688 FAX: +886-2-8786-6660

**EPSON SINGAPORE PTE., LTD.**

1 HarbourFront Place,  
#03-02 HarbourFront Tower One, Singapore 098633  
Phone: +65-6586-5500 FAX: +65-6271-3182

**SEIKO EPSON CORP.****KOREA OFFICE**

5F, KLI 63 Bldg., 60 Yoido-dong  
Youngdeungpo-Ku, Seoul, 150-763, KOREA  
Phone: +82-2-784-6027 FAX: +82-2-767-3677

---

**SEIKO EPSON CORP.****MICRODEVICES OPERATIONS DIVISION****Device Sales & Marketing Dept.**

421-8, Hino, Hino-shi, Tokyo 191-8501, JAPAN  
Phone: +81-42-587-5814 FAX: +81-42-587-5117

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А