

# AS3711

Product Brief

## High Current Power Management Unit for Portable Devices

### 1 General Description

The AS3711 is a compact System PMU with integrated battery charger and back light driver.

The device offers advanced power management functions. All necessary ICs and peripherals in a battery powered mobile device are supplied by the AS3711. It features 3 DCDC buck converters (4MHz), one buck controller as well as 8 low noise LDOs. The supply voltages are programmable via the serial control interface.

The three step-up converter generate voltages for e.g.the backlight, classD amplifier, USB host support or LCD display supply. Both constant voltage (for e.g. OLED supply) as well as constant current (white LED backlight) operations with three current sinks are possible. An internal voltage protection is limiting the output voltage in the case of external component failures.

AS3711 contains a linear or switching mode Li-Ion battery charger with constant current and constant voltage. The maximum charging current is 1.5A. An integrated battery switch and an optional external switch are separating the battery during charging or whenever an external power supply is present. With this switch it is also possible to operate with no or deeply discharged batteries. A programmable current limit can be used to control the maximum current used from a USB supply. Additional features are a 30V OV protection and battery temperature supervision.

The single supply voltage may vary from 2.7V to 5.5V.

### 2 Key Features

#### Power Management

##### Voltage Generation

- 4 DCDC step down regulators
  - DVM (0.6V-3.3V; 1x 1.2-1.5A, 2x 0.7-1A)
  - controller mode for 2-3A supplies
  - 50uA quiescent current
  - selectable switching frequency (4, 3 or 2MHz)
  - 2A with combined DCDC 2 & 3
- 2 analog low noise LDOs, 6 digital LDOs
  - 2x 1.2-3-3V, 6x 0.9-3.3V; 150-300mA
  - 30uA quiescent current (low power mode)
- 1 ultra low power always on LDO 2.5V, 10mA
- power supply supervision
- 4sec and 8sec emergency shut-down
- hibernation function

##### HV Backlight Driver

- 2x step up with external transistor
- voltage control mode and over-voltage protection
- 3 programmable current sinks (max. 40mA)
- e.g. 500mA@5V; 40mA@50V
- possible external PWM dimming input (DLS, CABAC)

##### Battery Charger

- prog. trickle charging (25-220mA)
- prog. constant current charging (up to 1500mA)
- prog. constant voltage charging (3.9V-4.25V)
- charger time-out and temperature supervision
- selectable current limitation for USB mode
- integrated battery switch & ideal diode (linear mode)
- external battery switch control (switching mode)
- external 30V OV protection

### General

#### Supervisor

- automatic battery monitoring with interrupt generation and selectable warning level
- automatic temperature monitoring with interrupt generation and selectable warning and shutdown levels

#### Real Time Clock

- ultra low power 32kHz oscillator
- sec and minute counter, auto wake-up
- selectable alarm (seconds or minutes)
- 32kHz clock output to peripheral
- <1uA total power consumption

#### 4 General Purpose IOs

- 10bit general purpose ADC input
- wake-up/sleep and DVM input
- PWM (DLS, CABAC) dimming input
- status output for: charger, low battery, power good and step-up overcurrent
- Q32k clock output
- interrupt output
- PWM output
- step-up feedback input

**OTP programmable BOOT Sequence**

- programmable regulator default voltages
- programmable start-up sequence

**General Purpose ADC**

- 10bit resolution
- several internal / external sources
  - VUSB, VSUP, CHGIN, VBAT
  - GPIOx, CURRx
  - XOUT32K, SENSEN\_SU1
  - chip temperature

**Control Interface**

- I2C control lines, including watchdog
- Power-Up input
- bidirectional reset, with selectable delay
- ultra low power standby mode

**Power-On Reset Circuit**


**Packaging**

QFN56 7x7mm 0.4mm pitch

**Application**

Portable Media Players, Portable Navigation Devices, E-Books, Mobile Internet Devices, Tablet PCs

Figure 1. AS3711 Block Diagram

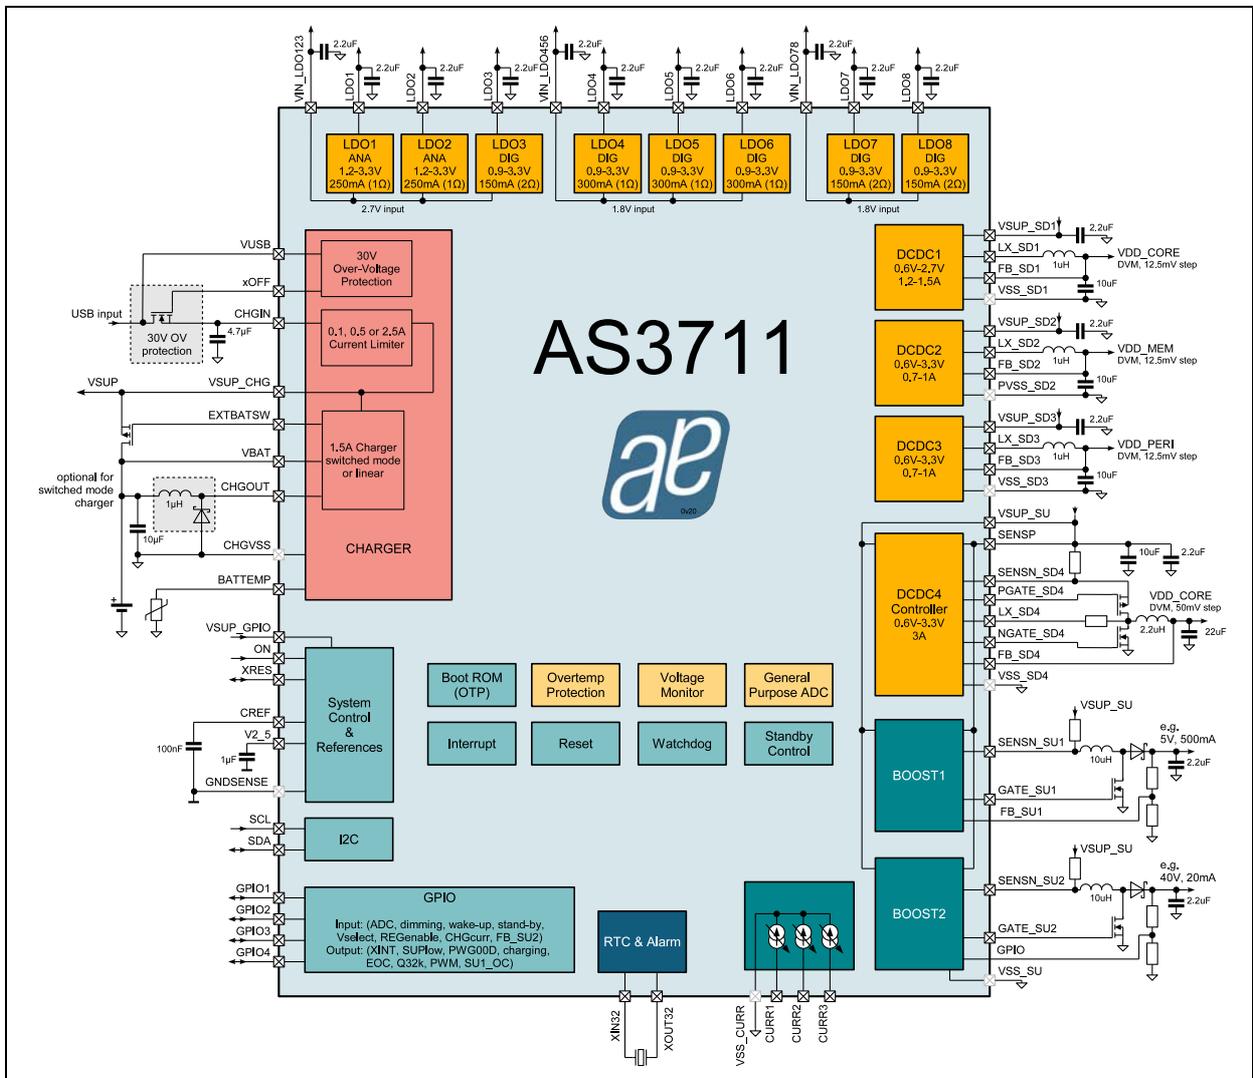

## Copyright

Copyright © 2011, austriamicrosystems AG, Schloss Premstaetten, 8141 Unterpremstaetten, Austria-Europe. Trade-marks Registered ®. All rights reserved. The material herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner.

All products and companies mentioned are trademarks or registered trademarks of their respective companies.

## Disclaimer

Devices sold by austriamicrosystems AG are covered by the warranty and patent indemnification provisions appearing in its Term of Sale. austriamicrosystems AG makes no warranty, express, statutory, implied, or by description regarding the information set forth herein or regarding the freedom of the described devices from patent infringement. austriamicrosystems AG reserves the right to change specifications and prices at any time and without notice. Therefore, prior to designing this product into a system, it is necessary to check with austriamicrosystems AG for current information. This product is intended for use in normal commercial applications. Applications requiring extended temperature range, unusual environmental requirements, or high reliability applications, such as military, medical life-support or life-sustaining equipment are specifically not recommended without additional processing by austriamicrosystems AG for each application. For shipments of less than 100 parts the manufacturing flow might show deviations from the standard production flow, such as test flow or test location.

The information furnished here by austriamicrosystems AG is believed to be correct and accurate. However, austriamicrosystems AG shall not be liable to recipient or any third party for any damages, including but not limited to personal injury, property damage, loss of profits, loss of use, interruption of business or indirect, special, incidental or consequential damages, of any kind, in connection with or arising out of the furnishing, performance or use of the technical data herein. No obligation or liability to recipient or any third party shall arise or flow out of austriamicrosystems AG rendering of technical or other services.



## Contact Information

### Headquarters

austriamicrosystems AG  
A-8141 Schloss Premstaetten, Austria

Tel: +43 (0) 3136 500 0  
Fax: +43 (0) 3136 525 01

For Sales Offices, Distributors and Representatives, please visit:

<http://www.austriamicrosystems.com/contact>

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».



## JONHON

«**JONHON**» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«**FORSTAR**» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А