

# NSS60601MZ4, NSV60601MZ4T1G, NSV60601MZ4T3G

## 60 V, 6.0 A, Low $V_{CE(sat)}$ NPN Transistor

ON Semiconductor's e<sup>2</sup>PowerEdge family of low  $V_{CE(sat)}$  transistors are surface mount devices featuring ultra low saturation voltage ( $V_{CE(sat)}$ ) and high current gain capability. These are designed for use in low voltage, high speed switching applications where affordable efficient energy control is important.

Typical applications are DC-DC converters and power management in portable and battery powered products such as cellular and cordless phones, PDAs, computers, printers, digital cameras and MP3 players. Other applications are low voltage motor controls in mass storage products such as disc drives and tape drives. In the automotive industry they can be used in air bag deployment and in the instrument cluster. The high current gain allows e<sup>2</sup>PowerEdge devices to be driven directly from PMU's control outputs, and the Linear Gain (Beta) makes them ideal components in analog amplifiers.

### Features

- NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant\*

### MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ )

| Rating                         | Symbol    | Max  | Unit |
|--------------------------------|-----------|------|------|
| Collector-Emitter Voltage      | $V_{CEO}$ | 60   | Vdc  |
| Collector-Base Voltage         | $V_{CBO}$ | 100  | Vdc  |
| Emitter-Base Voltage           | $V_{EBO}$ | 6.0  | Vdc  |
| Collector Current – Continuous | $I_C$     | 6.0  | A    |
| Collector Current – Peak       | $I_{CM}$  | 12.0 | A    |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.




ON Semiconductor®

<http://onsemi.com>

**60 VOLTS, 6.0 AMPS  
2.0 WATTS  
NPN LOW  $V_{CE(sat)}$  TRANSISTOR  
EQUIVALENT  $R_{DS(on)}$  50 mΩ**




**SOT-223  
CASE 318E  
STYLE 1**




**Schematic**

### MARKING DIAGRAM



A = Assembly Location  
Y = Year  
W = Work Week  
60601 = Specific Device Code  
■ = Pb-Free Package

### PIN ASSIGNMENT



**Top View Pinout**

### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 2 of this data sheet.

# NSS60601MZ4, NSV60601MZ4T1G, NSV60601MZ4T3G

## THERMAL CHARACTERISTICS

| Characteristic                                                                          | Symbol                           | Max         | Unit                       |
|-----------------------------------------------------------------------------------------|----------------------------------|-------------|----------------------------|
| Total Device Dissipation<br>$T_A = 25^\circ\text{C}$<br>Derate above $25^\circ\text{C}$ | $P_D$ (Note 1)                   | 800<br>6.5  | mW<br>mW/ $^\circ\text{C}$ |
| Thermal Resistance,<br>Junction-to-Ambient                                              | $R_{\theta JA}$ (Note 1)         | 155         | $^\circ\text{C}/\text{W}$  |
| Total Device Dissipation<br>$T_A = 25^\circ\text{C}$<br>Derate above $25^\circ\text{C}$ | $P_D$ (Note 2)                   | 2<br>15.6   | W<br>mW/ $^\circ\text{C}$  |
| Thermal Resistance,<br>Junction-to-Ambient                                              | $R_{\theta JA}$ (Note 2)         | 64          | $^\circ\text{C}/\text{W}$  |
| Total Device Dissipation<br>(Single Pulse < 10 sec.)                                    | $P_{D\text{single}}$<br>(Note 3) | 710         | mW                         |
| Junction and Storage Temperature Range                                                  | $T_J, T_{\text{stg}}$            | -55 to +150 | $^\circ\text{C}$           |

1. FR-4 @ 7.6 mm<sup>2</sup>, 1 oz. copper traces.
2. FR-4 @ 645 mm<sup>2</sup>, 1 oz. copper traces.
3. Thermal response.

## ORDERING INFORMATION

| Device          | Package              | Shipping <sup>†</sup> |
|-----------------|----------------------|-----------------------|
| NSS60601MZ4T1G  | SOT-223<br>(Pb-Free) | 1,000 / Tape & Reel   |
| NSV60601MZ4T1G* | SOT-223<br>(Pb-Free) | 1,000 / Tape & Reel   |
| NSS60601MZ4T3G  | SOT-223<br>(Pb-Free) | 4,000 / Tape & Reel   |
| NSV60601MZ4T3G* | SOT-223<br>(Pb-Free) | 4,000 / Tape & Reel   |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable.

# NSS60601MZ4, NSV60601MZ4T1G, NSV60601MZ4T3G

## ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25°C unless otherwise noted)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|----------------|--------|-----|-----|-----|------|
|----------------|--------|-----|-----|-----|------|

### OFF CHARACTERISTICS

|                                                                                         |                      |     |   |     |      |
|-----------------------------------------------------------------------------------------|----------------------|-----|---|-----|------|
| Collector – Emitter Breakdown Voltage<br>(I <sub>C</sub> = 10 mAdc, I <sub>B</sub> = 0) | V <sub>(BR)CEO</sub> | 60  | – | –   | Vdc  |
| Collector – Base Breakdown Voltage<br>(I <sub>C</sub> = 0.1 mAdc, I <sub>E</sub> = 0)   | V <sub>(BR)CBO</sub> | 100 | – | –   | Vdc  |
| Emitter – Base Breakdown Voltage<br>(I <sub>E</sub> = 0.1 mAdc, I <sub>C</sub> = 0)     | V <sub>(BR)EBO</sub> | 6.0 | – | –   | Vdc  |
| Collector Cutoff Current<br>(V <sub>CB</sub> = 40 Vdc, I <sub>E</sub> = 0)              | I <sub>CBO</sub>     | –   | – | 0.1 | μAdc |
| Emitter Cutoff Current<br>(V <sub>EB</sub> = 6.0 Vdc)                                   | I <sub>EBO</sub>     | –   | – | 0.1 | μAdc |

### ON CHARACTERISTICS

|                                                                                                                                                                                                                                                                                                                          |                      |                         |                               |                                           |     |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|-------------------------|-------------------------------|-------------------------------------------|-----|
| DC Current Gain (Note 4)<br>(I <sub>C</sub> = 500 mA, V <sub>CE</sub> = 2.0 V)<br>(I <sub>C</sub> = 1.0 A, V <sub>CE</sub> = 2.0 V)<br>(I <sub>C</sub> = 2.0 A, V <sub>CE</sub> = 2.0 V)<br>(I <sub>C</sub> = 6.0 A, V <sub>CE</sub> = 2.0 V)                                                                            | h <sub>FE</sub>      | 150<br>120<br>100<br>50 | –<br>–<br>–<br>–              | –<br>360<br>–<br>–                        | –   |
| Collector – Emitter Saturation Voltage (Note 4)<br>(I <sub>C</sub> = 0.1 A, I <sub>B</sub> = 2.0 mA)<br>(I <sub>C</sub> = 1.0 A, I <sub>B</sub> = 0.100 A)<br>(I <sub>C</sub> = 2.0 A, I <sub>B</sub> = 0.200 A)<br>(I <sub>C</sub> = 3.0 A, I <sub>B</sub> = 60 mA)<br>(I <sub>C</sub> = 6.0 A, I <sub>B</sub> = 0.6 A) | V <sub>CE(sat)</sub> | –<br>–<br>–<br>–<br>–   | –<br>0.045<br>0.085<br>–<br>– | 0.040<br>0.060<br>0.100<br>0.220<br>0.300 | V   |
| Base – Emitter Saturation Voltage (Note 4)<br>(I <sub>C</sub> = 1.0 A, I <sub>B</sub> = 0.1 A)                                                                                                                                                                                                                           | V <sub>BE(sat)</sub> | –                       | –                             | 0.900                                     | V   |
| Base – Emitter Turn-on Voltage (Note 4)<br>(I <sub>C</sub> = 1.0 A, V <sub>CE</sub> = 2.0 V)                                                                                                                                                                                                                             | V <sub>BE(on)</sub>  | –                       | –                             | 0.900                                     | V   |
| Cutoff Frequency<br>(I <sub>C</sub> = 500 mA, V <sub>CE</sub> = 10 V, f = 1.0 MHz)                                                                                                                                                                                                                                       | f <sub>T</sub>       | 100                     | –                             | –                                         | MHz |
| Input Capacitance (V <sub>EB</sub> = 5.0 V, f = 1.0 MHz)                                                                                                                                                                                                                                                                 | C <sub>ibo</sub>     | –                       | 400                           | –                                         | pF  |
| Output Capacitance (V <sub>CB</sub> = 10 V, f = 1.0 MHz)                                                                                                                                                                                                                                                                 | C <sub>obo</sub>     | –                       | 37                            | –                                         | pF  |

### SWITCHING CHARACTERISTICS

|                                                                                    |                |   |      |   |    |
|------------------------------------------------------------------------------------|----------------|---|------|---|----|
| Delay (V <sub>CC</sub> = 30 V, I <sub>C</sub> = 750 mA, I <sub>B1</sub> = 15 mA)   | t <sub>d</sub> | – | 85   | – | ns |
| Rise (V <sub>CC</sub> = 30 V, I <sub>C</sub> = 750 mA, I <sub>B1</sub> = 15 mA)    | t <sub>r</sub> | – | 115  | – | ns |
| Storage (V <sub>CC</sub> = 30 V, I <sub>C</sub> = 750 mA, I <sub>B1</sub> = 15 mA) | t <sub>s</sub> | – | 1350 | – | ns |
| Fall (V <sub>CC</sub> = 30 V, I <sub>C</sub> = 750 mA, I <sub>B1</sub> = 15 mA)    | t <sub>f</sub> | – | 125  | – | ns |

4. Pulsed Condition: Pulse Width = 300 msec, Duty Cycle ≤ 2%.

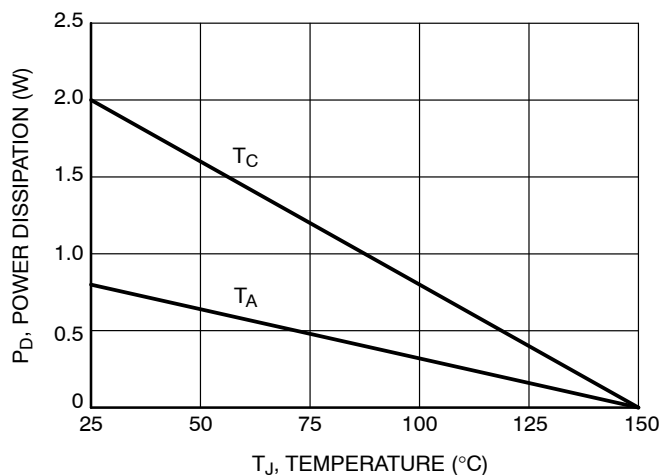


Figure 1. Power Derating

TYPICAL CHARACTERISTICS

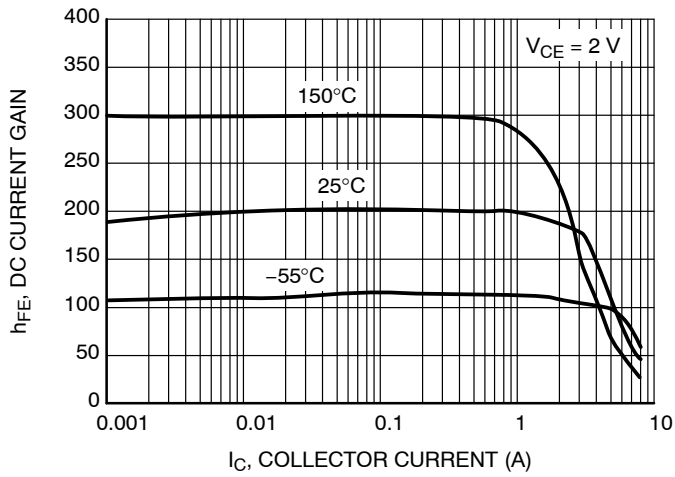


Figure 2. DC Current Gain

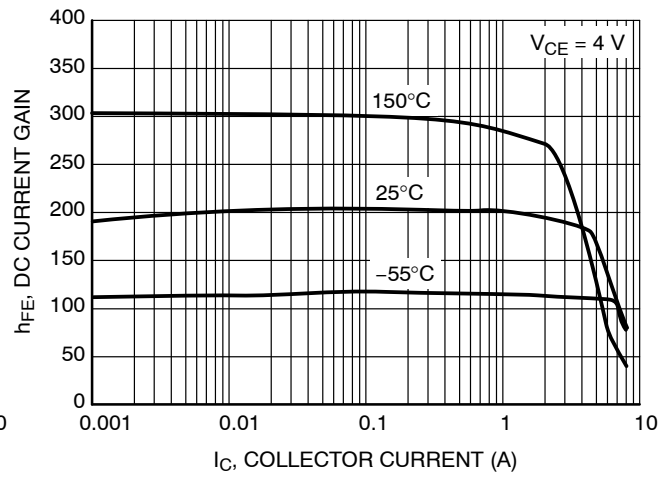


Figure 3. DC Current Gain

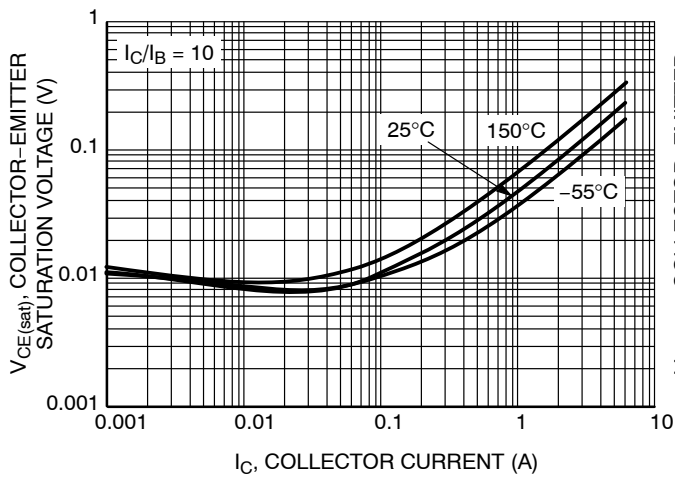


Figure 4. Collector-Emitter Saturation Voltage

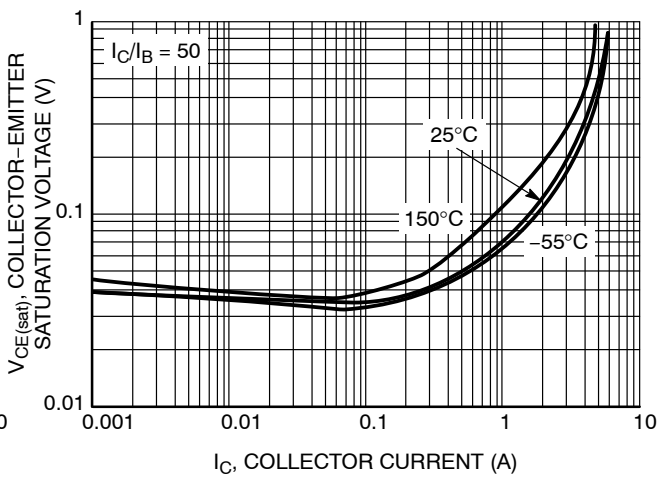


Figure 5. Collector-Emitter Saturation Voltage

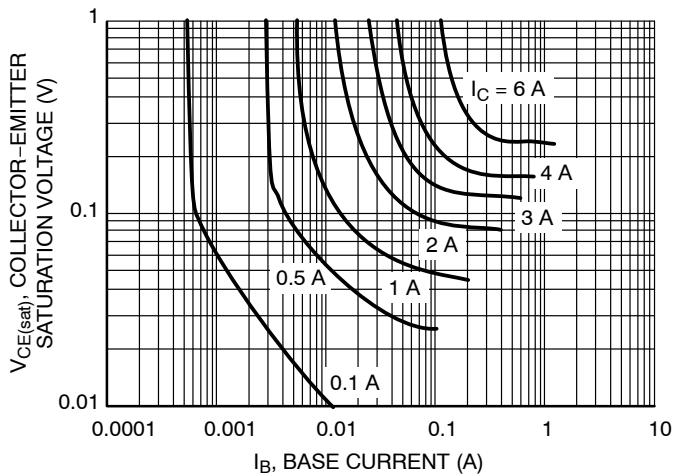


Figure 6. Collector Saturation Region

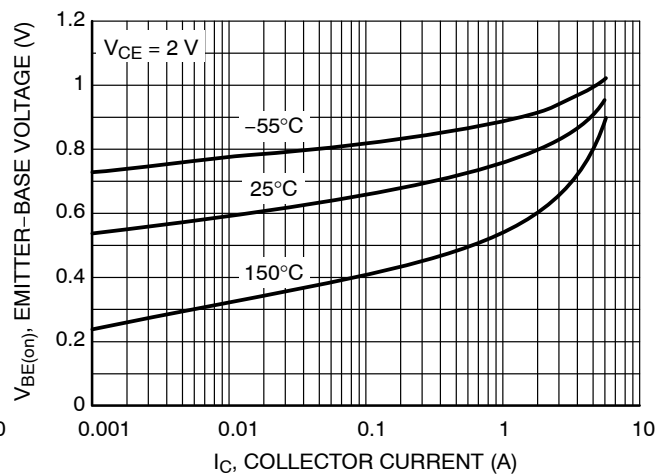


Figure 7.  $V_{BE(on)}$  Voltage

TYPICAL CHARACTERISTICS

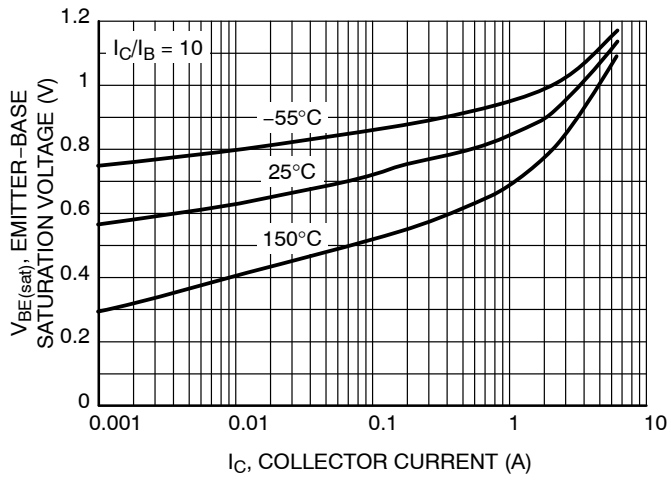


Figure 8. Base-Emitter Saturation Voltage

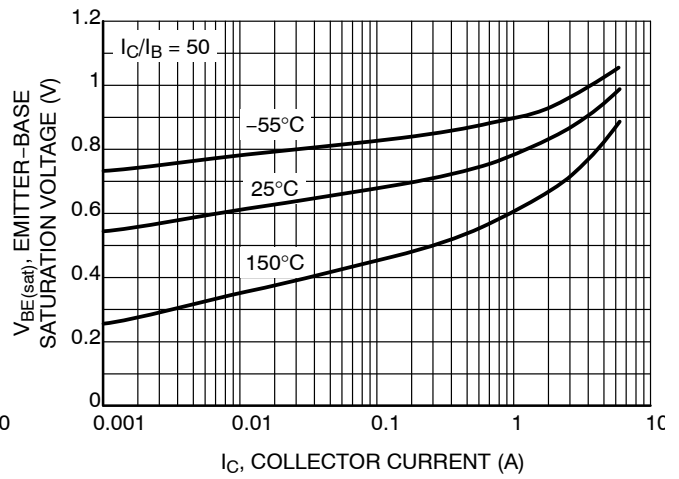


Figure 9. Base-Emitter Saturation Voltage

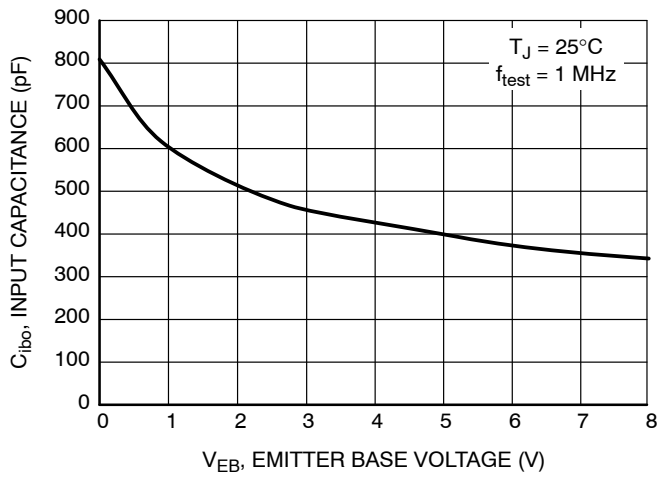


Figure 10. Input Capacitance

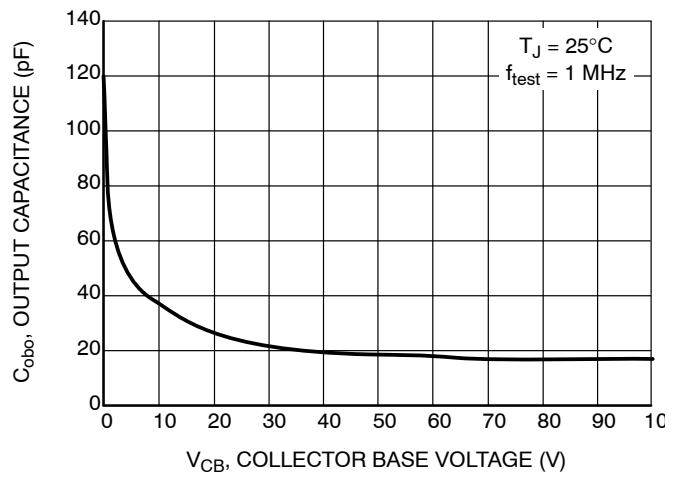


Figure 11. Output Capacitance

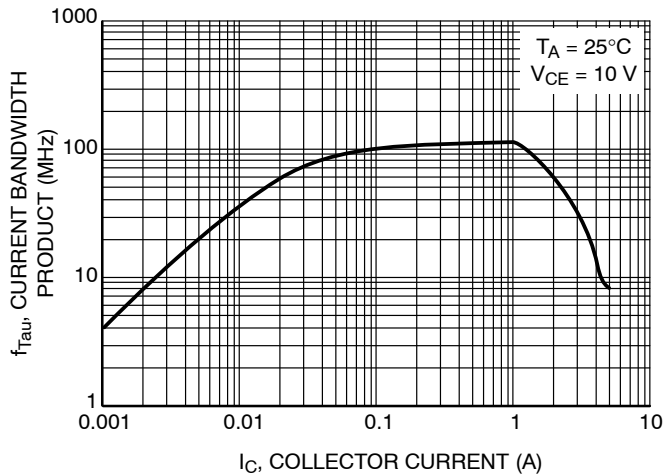


Figure 12. Current-Gain Bandwidth Product

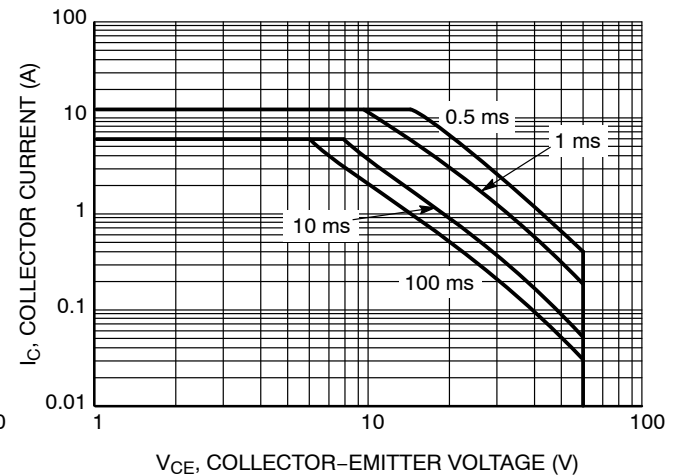


Figure 13. Safe Operating Area



# NSS60601MZ4, NSV60601MZ4T1G, NSV60601MZ4T3G

## PACKAGE DIMENSIONS

### SOT-223 (TO-261)

CASE 318E-04

ISSUE N

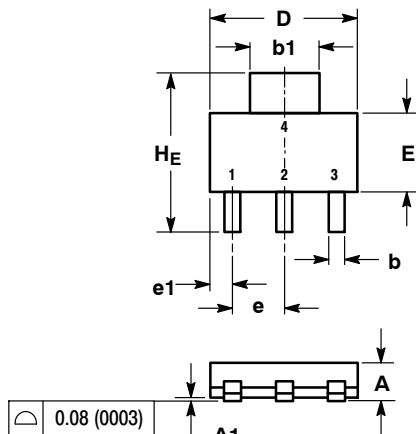

#### NOTES:


1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: INCH.

| DIM   | MILLIMETERS |      |      | INCHES |       |       |
|-------|-------------|------|------|--------|-------|-------|
|       | MIN         | NOM  | MAX  | MIN    | NOM   | MAX   |
| A     | 1.50        | 1.63 | 1.75 | 0.060  | 0.064 | 0.068 |
| A1    | 0.02        | 0.06 | 0.10 | 0.001  | 0.002 | 0.004 |
| b     | 0.60        | 0.75 | 0.89 | 0.024  | 0.030 | 0.035 |
| b1    | 2.90        | 3.06 | 3.20 | 0.115  | 0.121 | 0.126 |
| c     | 0.24        | 0.29 | 0.35 | 0.009  | 0.012 | 0.014 |
| D     | 6.30        | 6.50 | 6.70 | 0.249  | 0.256 | 0.263 |
| E     | 3.30        | 3.50 | 3.70 | 0.130  | 0.138 | 0.145 |
| e     | 2.20        | 2.30 | 2.40 | 0.087  | 0.091 | 0.094 |
| e1    | 0.85        | 0.94 | 1.05 | 0.033  | 0.037 | 0.041 |
| L     | 0.20        | ---  | ---  | 0.008  | ---   | ---   |
| L1    | 1.50        | 1.75 | 2.00 | 0.060  | 0.069 | 0.078 |
| H_E   | 6.70        | 7.00 | 7.30 | 0.264  | 0.276 | 0.287 |
| theta | 0°          | ---  | 10°  | 0°     | ---   | 10°   |

#### STYLE 1:

- PIN 1: BASE  
2. COLLECTOR  
3. EMITTER  
4. COLLECTOR

### SOLDERING FOOTPRINT\*

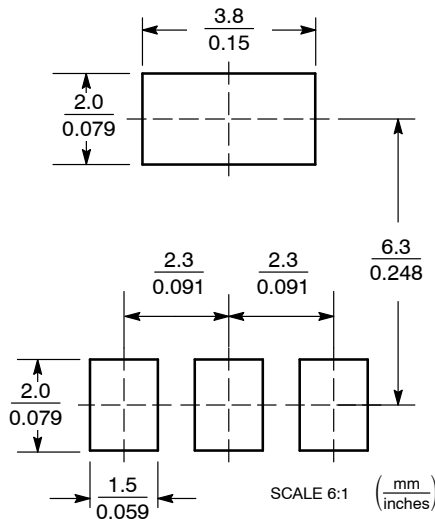

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

N. American Technical Support: 800-282-9855 Toll Free  
USA/Canada

Europe, Middle East and Africa Technical Support:  
Phone: 421 33 790 2910

Japan Customer Focus Center  
Phone: 81-3-5817-1050

ON Semiconductor Website: [www.onsemi.com](http://www.onsemi.com)

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local  
Sales Representative

NSS60601MZ4/D

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А