
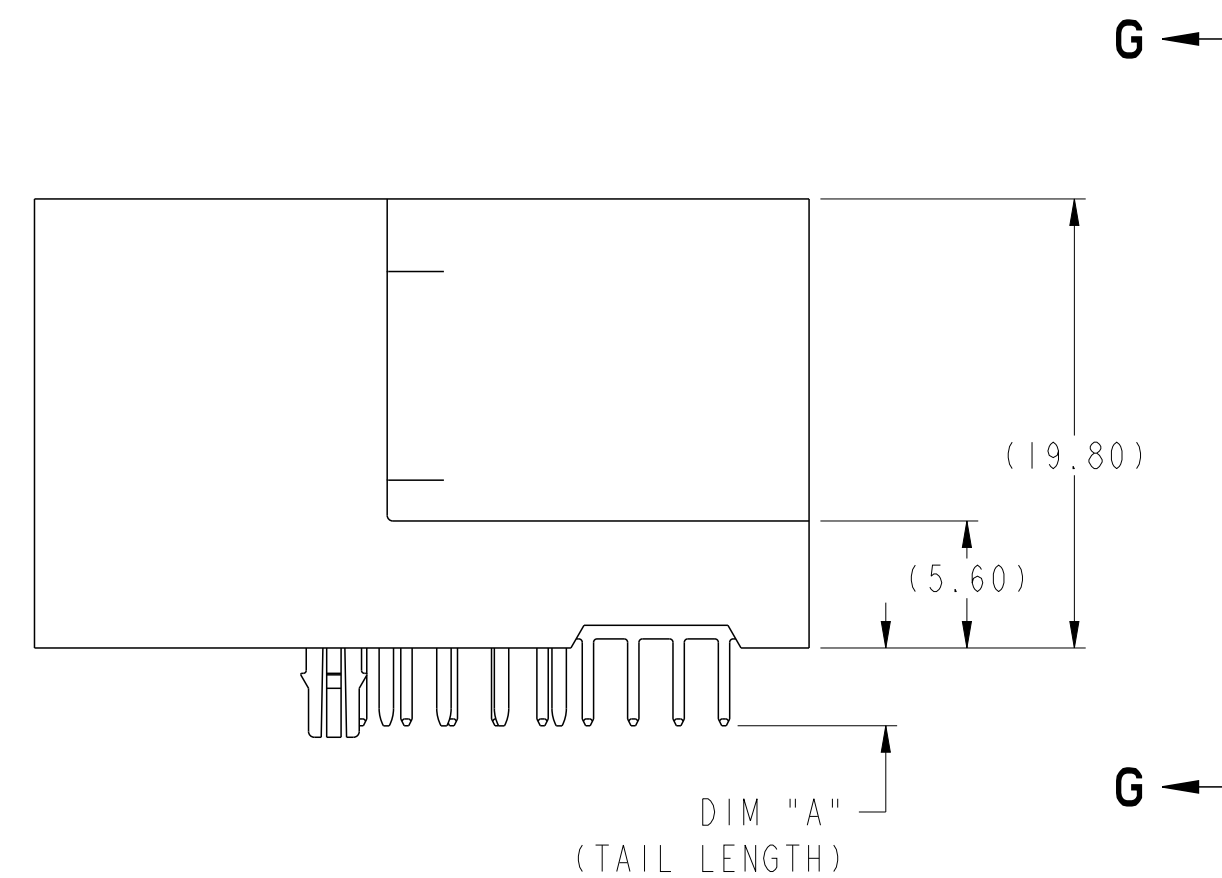
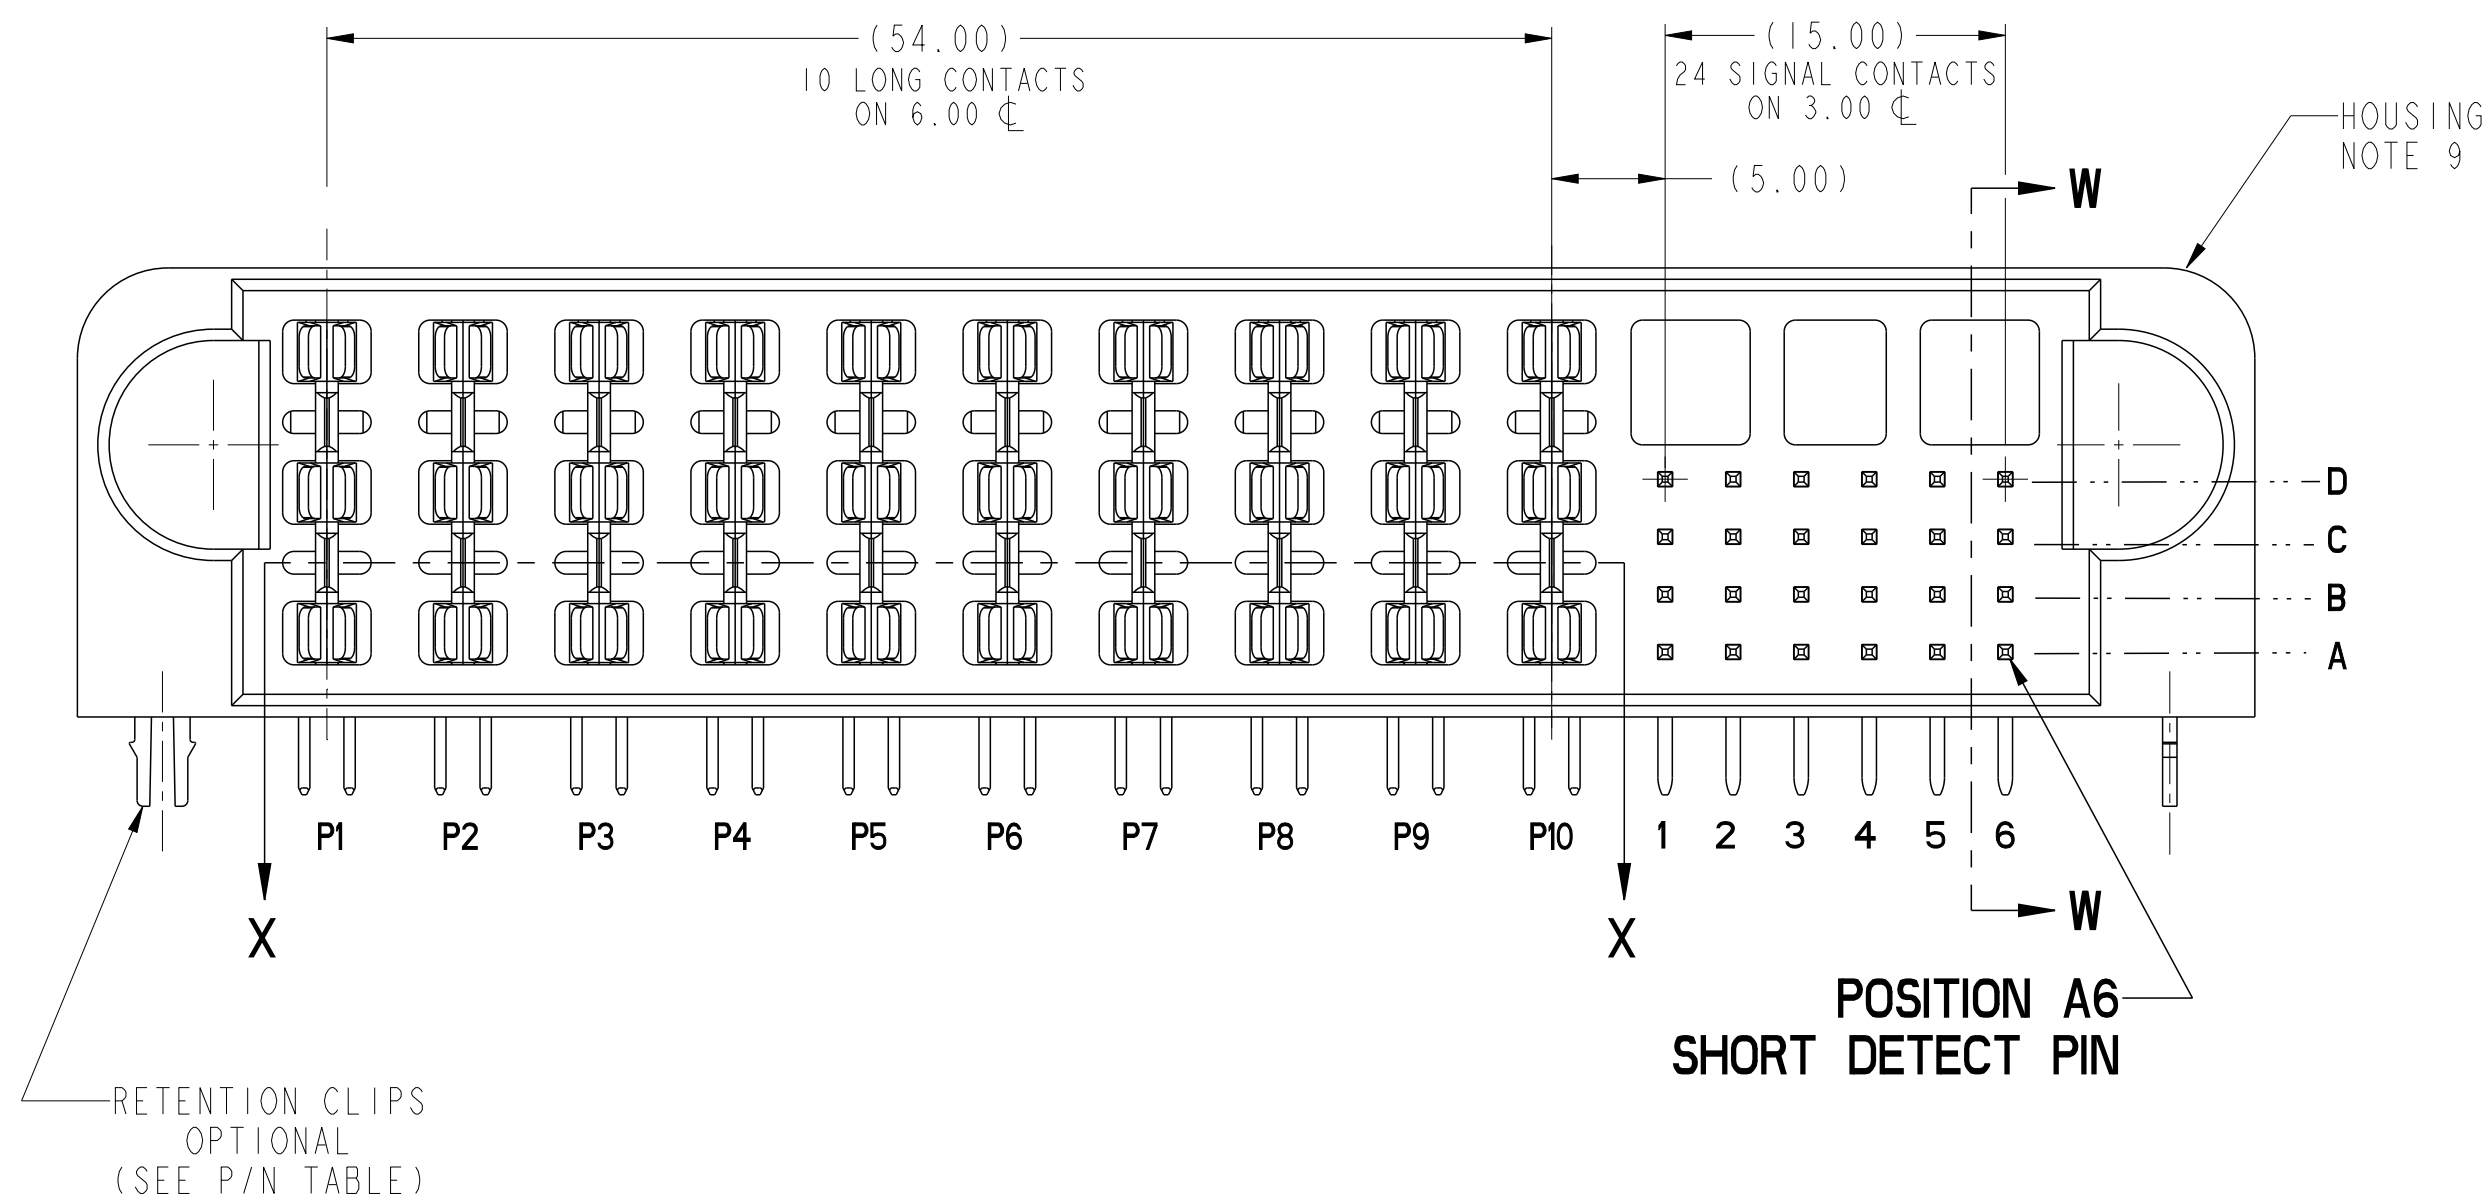
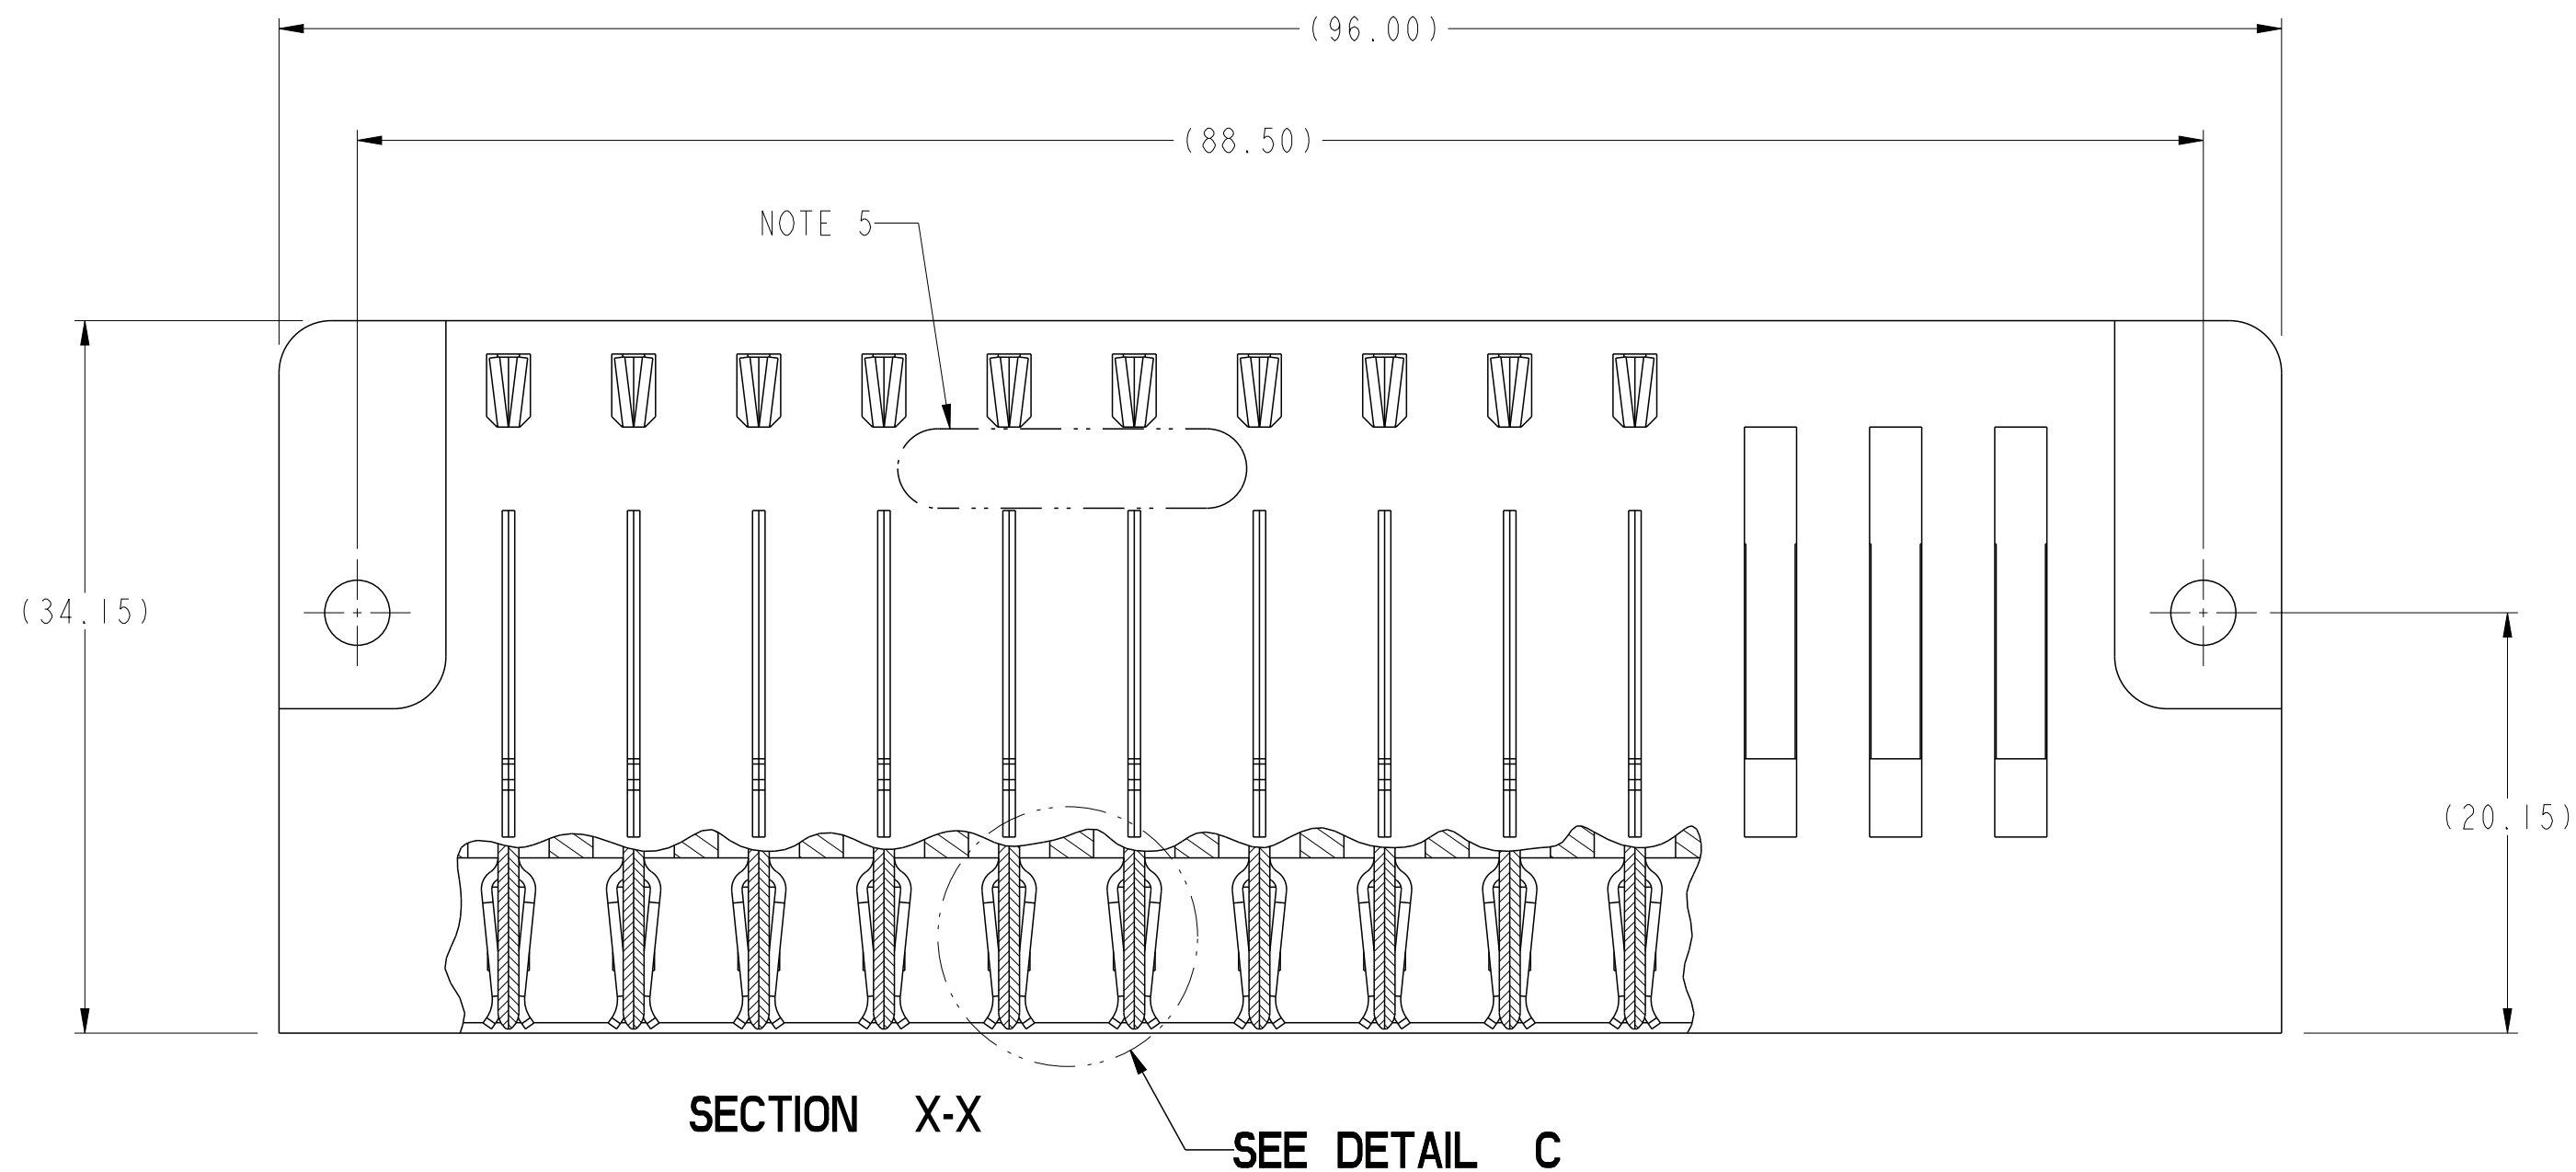





spec ref		-		dr		NotFound DuWa		2010/04/28		projection		MM		size		A2		scale		1:1					
tolerance std		-		eng		De-Ming Lu		2014/12/28						ecn no		ELX-DG-19849-1									
ASME Y14.5		TOLERANCES UNLESS OTHERWISE SPECIFIED		chr		-		-						rel level		Released									
				appr		Pei-Ming Zheng		2014/12/29						product family		HCI									
surface				linear				title		R/A HEADER ASSY 10DC-24S						dwg no		10088054						rev	
										HCI POWER CONNECTOR														C	
ASME Y14.5				angular				0°		±2°		www.fci.com		cat. no.		-		Product - Customer Drw		sheet 1 of 5					

PDS: Rev :C


STATUS:Released

Printed: Dec 30, 2014

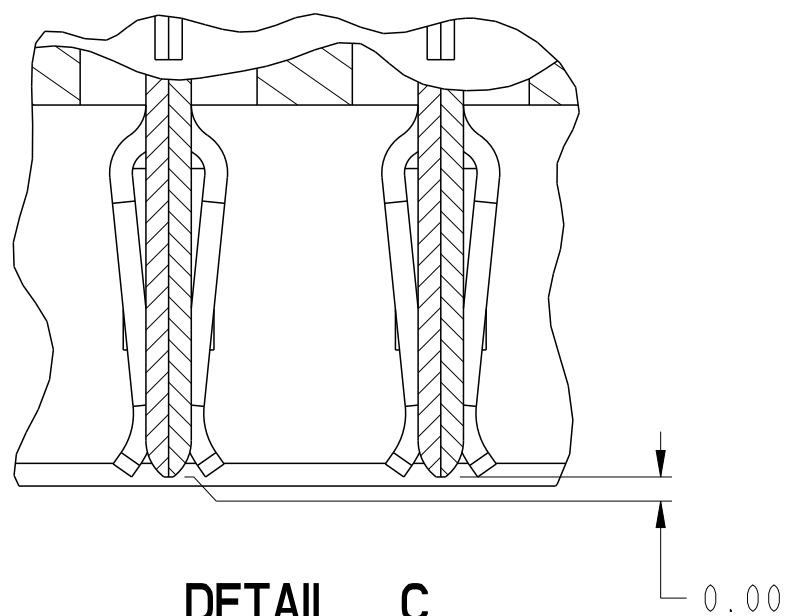


DETAIL C
SCALE 6:1

POWER MATING
SEQUENCE

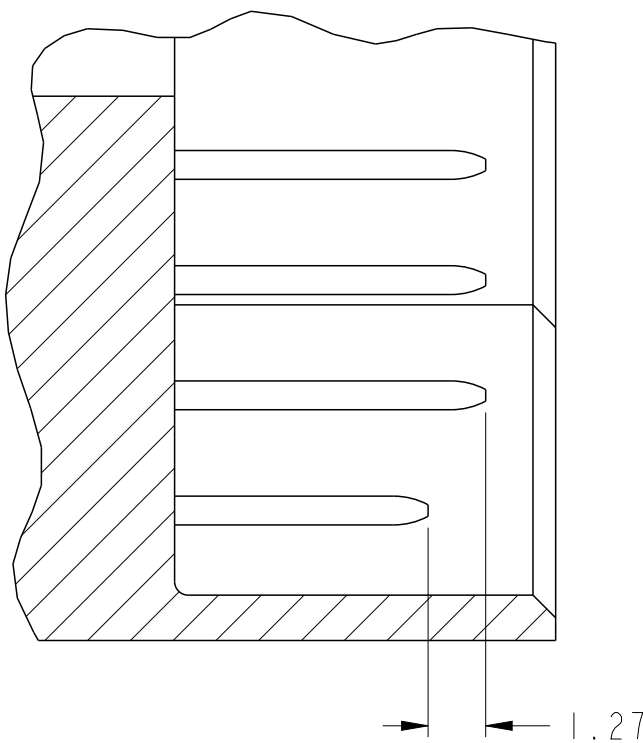

SECTION W-W
SCALE 6:1


SIGNAL MATING
SEQUENCE

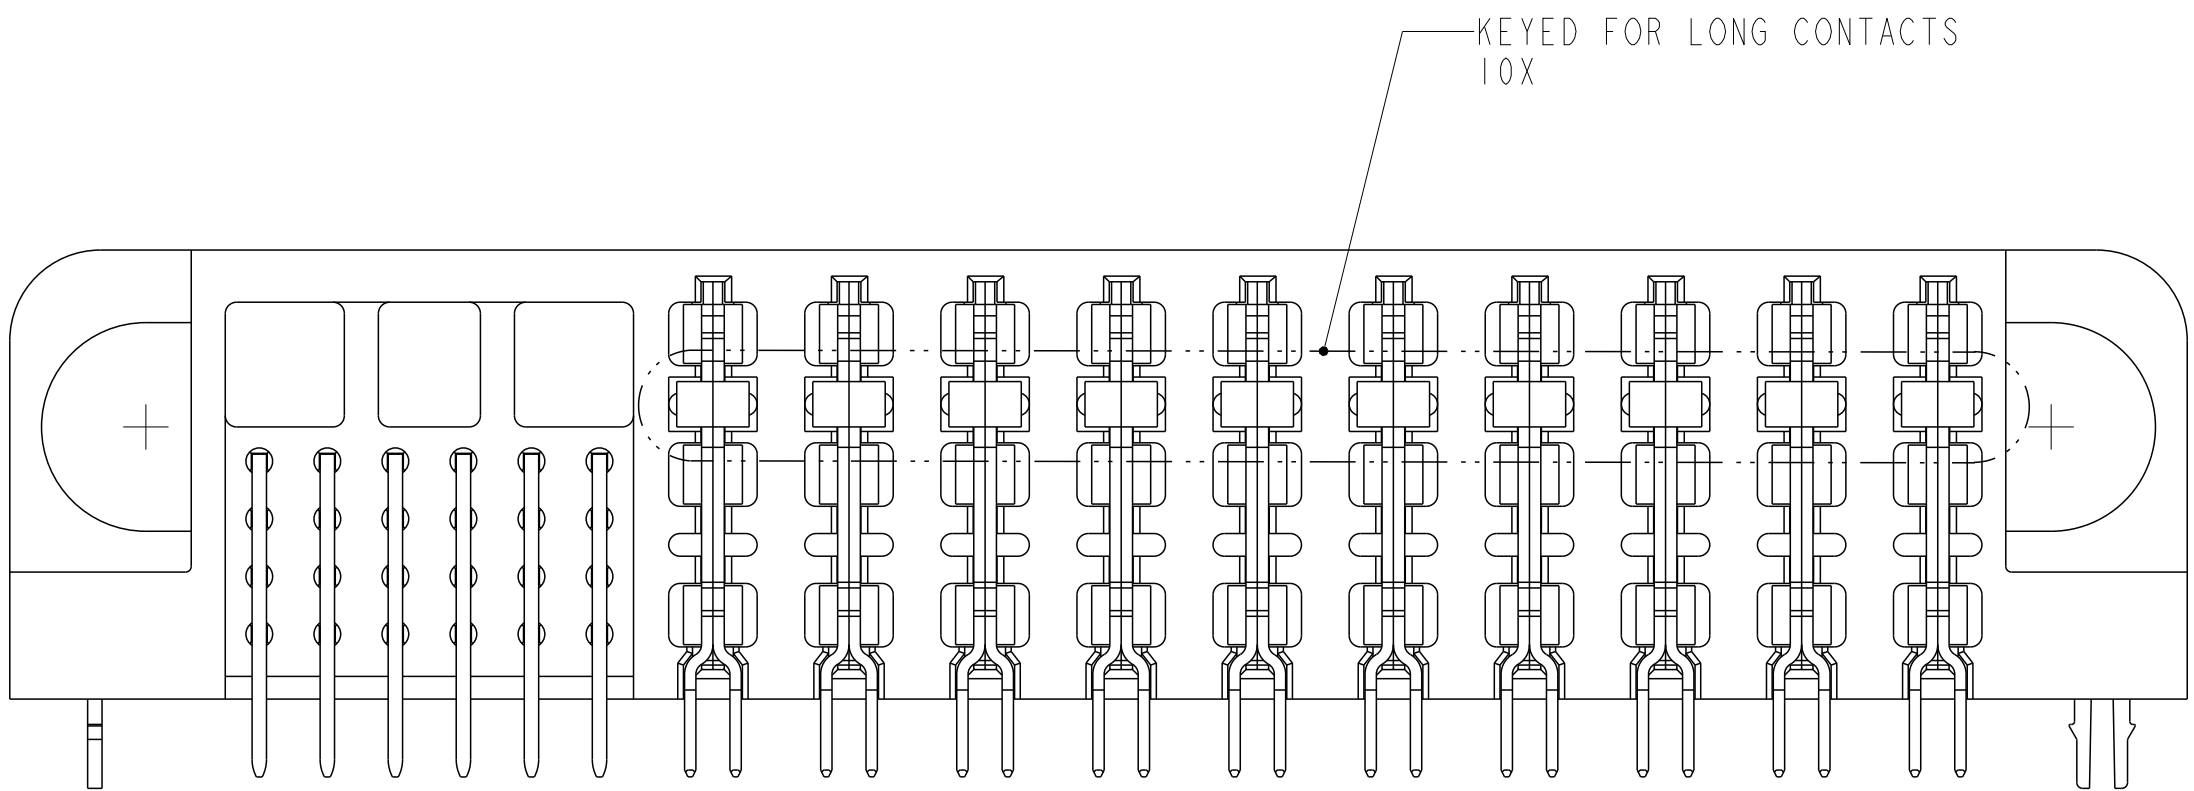


VIEW G-G

dr	Not/Found Du/Wa	2010/04/28	projection	MM	size	A2	scale	1:1
eng	De-Ming Lu	2014/12/28		MM	ecn no	ELX-DG-19849-1		
chr	-	-			rel level	Released		
appr	Pei-Ming Zheng	2014/12/29	product family	HCI	rel level	Released		
		title			dwg no	10088054		
		R/A HEADER ASSY 10DC-24S			rev	C		
www.fci.com		cat. no.	-	Product	Customer Drw		sheet 2 of 5	



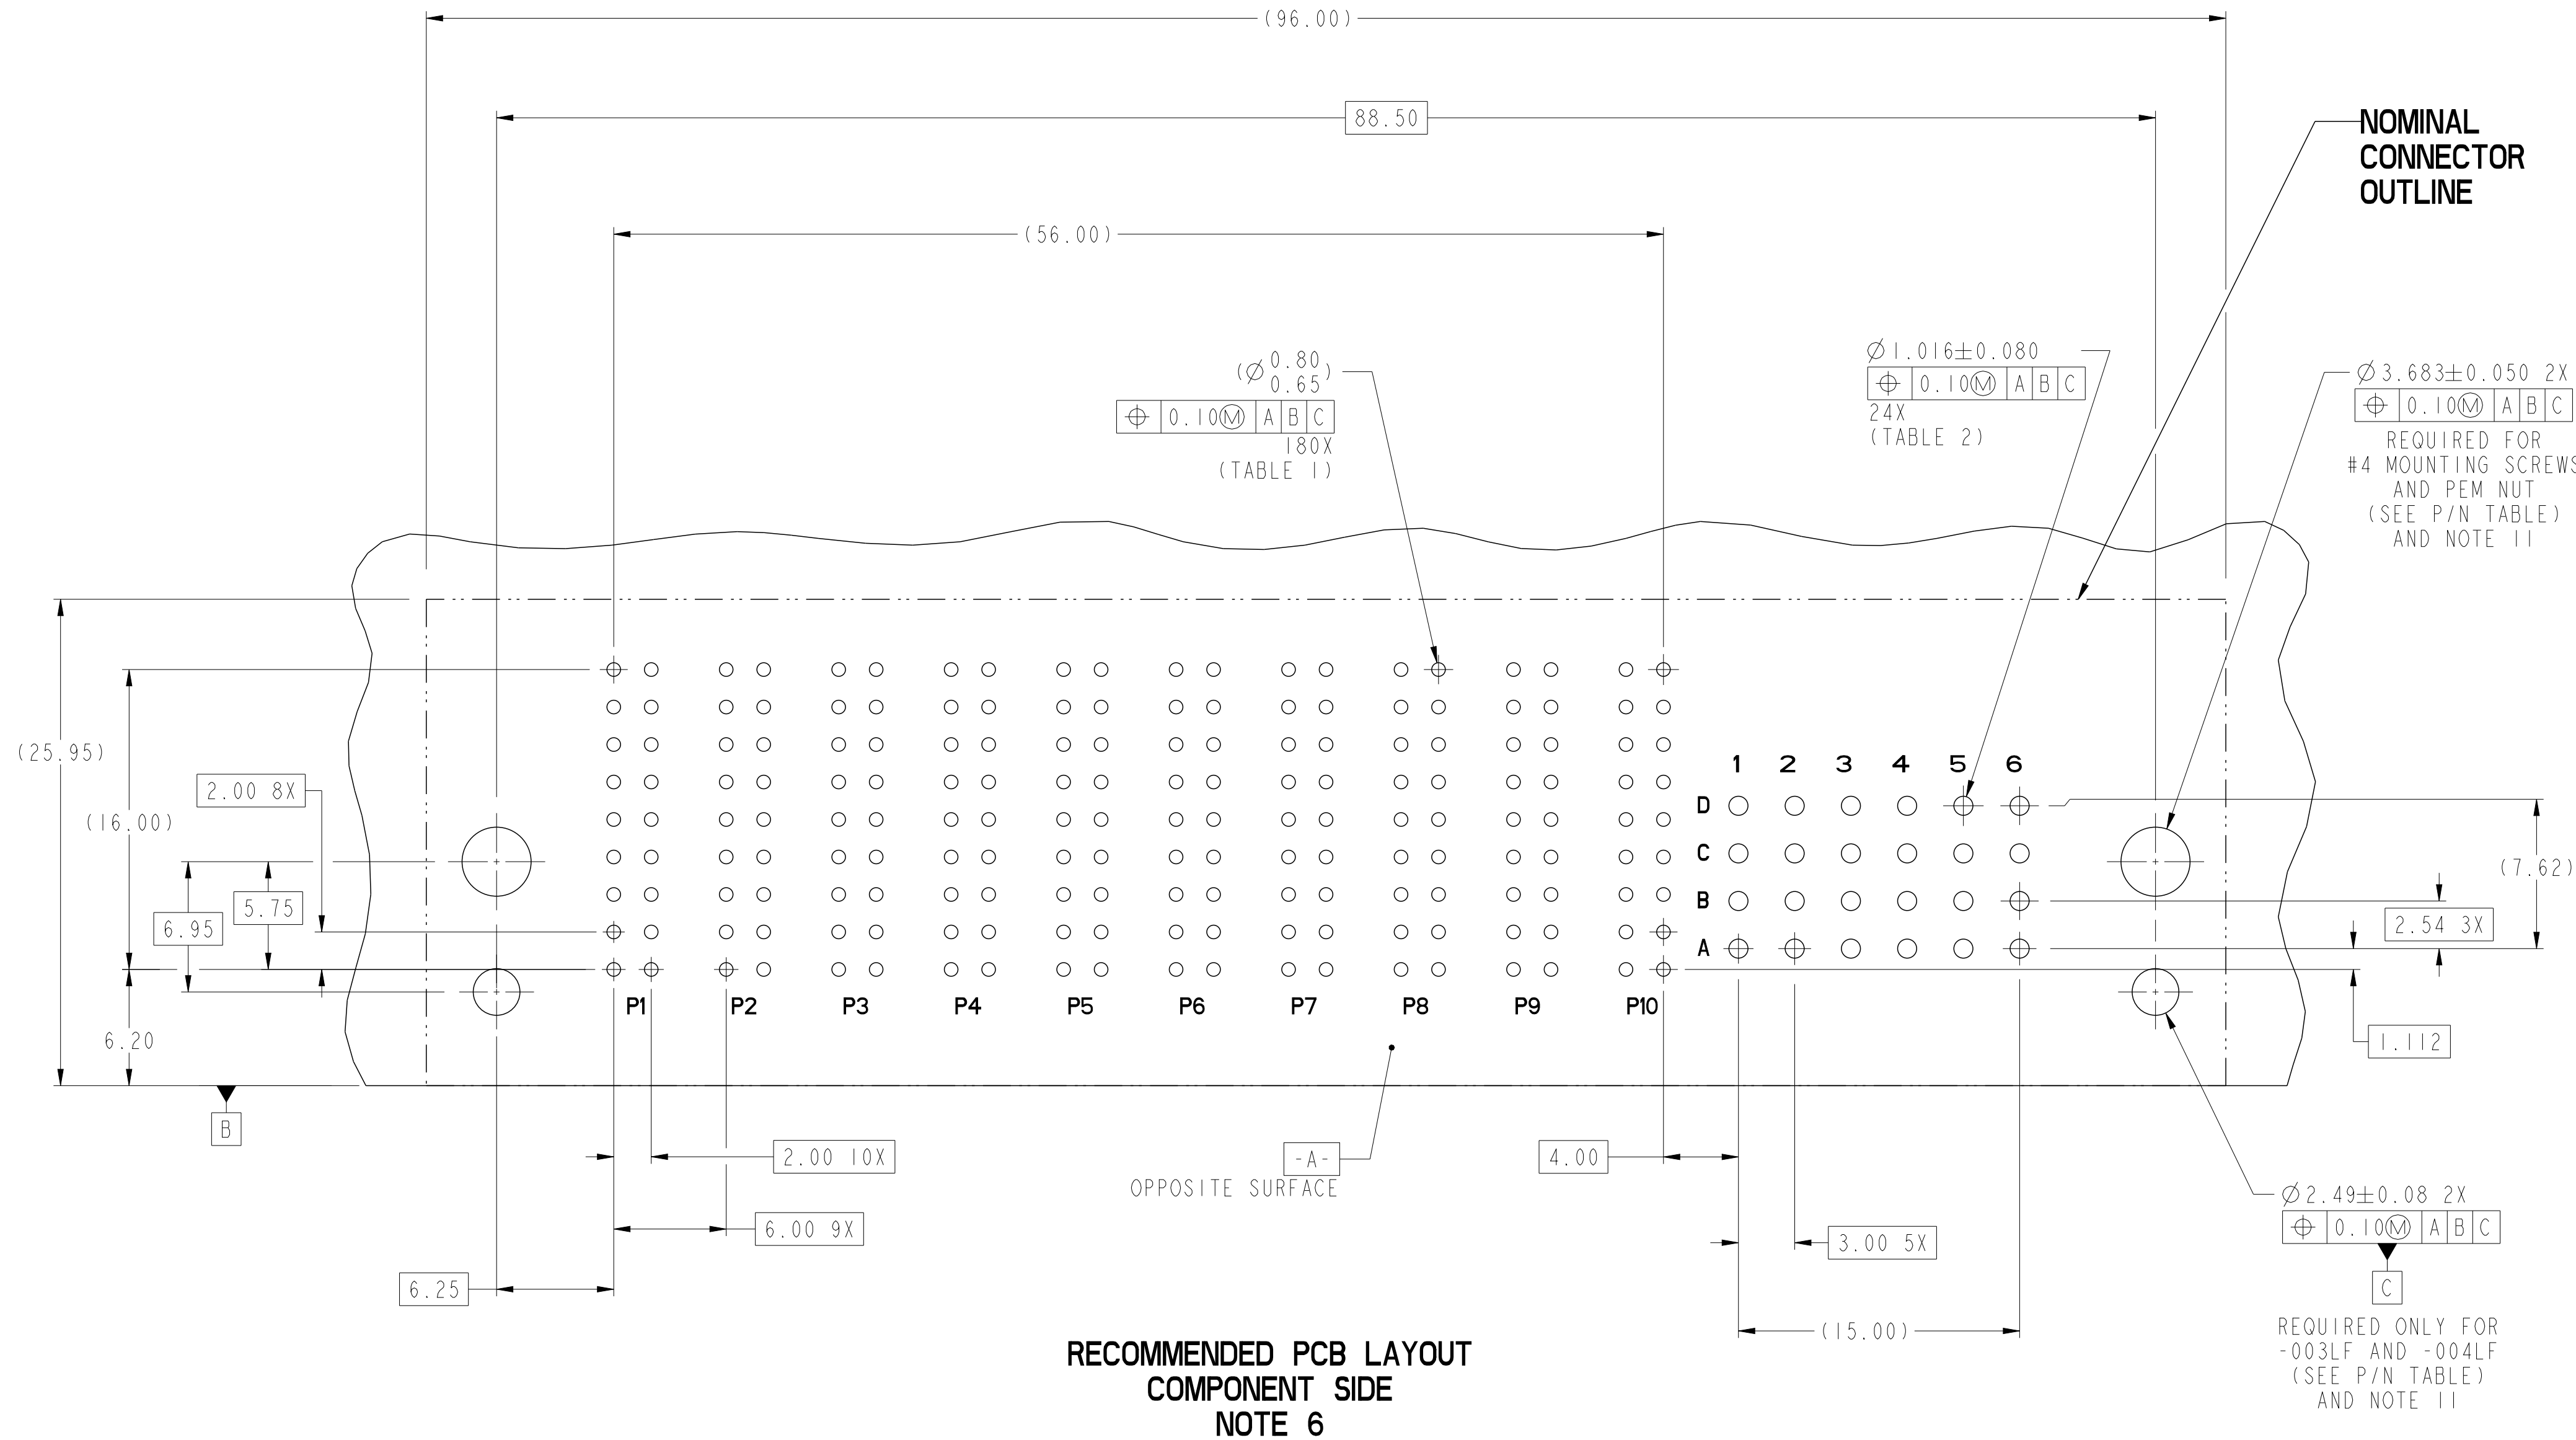

dr	Not Found DuWa	2010/04/28			MM	size	A2	scale	1:1
eng	De-Ming Lu	2014/12/28				ecn no	ELX-DG-19849-1		
chr	-	-				rel level	Released		
appr	Pei-Ming Zheng	2014/12/29	product family		HCL				
			title			R/A HEADER ASSY 10DC-24S			rev
			HCL POWER CONNECTOR			10088054			C
www.fci.com			cat. no.		-	Product - Customer Drw			sheet 3 of 5

	1	2	3	4	5	6	7	8	
A									A
B	TOP LAYER DESCRIPTION	TABLE 1 (HCI POWER) PLATED THROUGH-HOLE REQUIREMENTS							
		DRILLED HOLE DIAMETER	COPPER THICKNESS	TIN-LEAD THICKNESS	NICKEL THICKNESS	GOLD THICKNESS	TIN THICKNESS	SILVER THICKNESS	FINISHED HOLE DIAMETER
	TIN-LEAD	0.81-0.86 (0.85 DRILL)	0.025 - 0.050	0.005 - 0.015	--	--	--	--	0.65 - 0.80
	IMMERSION TIN	0.81-0.86 (0.85 DRILL)	0.025 - 0.050	--	--	--	0.9 - 1.5um	--	0.70 - 0.80
	IMMERSION SILVER	0.81-0.86 (0.85 DRILL)	0.025 - 0.050	--	--	--	--	0.15 - 0.65um	0.70 - 0.80
	COPPER (SEE NOTE 9)	0.81-0.86 (0.85 DRILL)	0.025 - 0.050	--	--	--	--	--	0.70 - 0.80
GOLD	0.81-0.86 (0.85 DRILL)	0.025 - 0.050	--	0.003 - 0.007	FLASH UP TO 0.0002	--	--	0.69 - 0.80	
C	TOP LAYER DESCRIPTION	TABLE 2 (HPC SIGNALS) PLATED THROUGH-HOLE REQUIREMENTS							
		DRILLED HOLE DIAMETER	COPPER THICKNESS	TIN-LEAD THICKNESS	NICKEL THICKNESS	GOLD THICKNESS	TIN THICKNESS	SILVER THICKNESS	FINISHED HOLE DIAMETER
	TIN-LEAD	1.125-1.175 (Ø.0453±.0010)	0.025-0.050	0.005-0.015	--	--	--	--	0.94 - 1.10 (Ø.040±.003)
	IMMERSION TIN			--	--	--	--	--	
	IMMERSION SILVER			--	--	--	--	--	
	COPPER (SEE NOTE 9)			--	--	--	--	--	
GOLD			--			--	--		
D									D
									E
									F
E									E
									F
F									F

1

2

3

4

5

6

7

8

PART NUMBER	RETENTION CLIPS	#4 SCREW	DIM A ±0.25 (TAIL LENGTH)	TAIL TYPE
I0088054-001LF	NO	YES	3.43	SOLDER TAIL
I0088054-002LF	NO	YES	4.70	SOLDER TAIL
I0088054-003LF	YES	NO	3.43	SOLDER TAIL
I0088054-004LF	YES	NO	4.70	SOLDER TAIL

NOTES:

1.

CONNECTOR MATERIALS:
HOUSING: HIGH TEMPERATURE THERMOPLASTIC, BLACK
UL 94V-0 COMPLIANT
CONTACTS: HIGH PERFORMANCE COPPER ALLOY

2.

CONTACT FINISH(REF. GS-12-380 SECTION 5.2)

3.

PRODUCT SPECIFICATION: GS-12-380. (IN PROGRESS)

4.

APPLICATION SPECIFICATION: GS-20-070. (IN PROGRESS)

5.

PRODUCT MARKING (PRODUCT NUMBER & DATE CODE) ON HOUSING IN AREA SHOWN.

6.

MINIMUM NOMINAL PCB THICKNESS: 1.6mm

7.

PACKAGING MEETS FCI SPECIFICATION GS-14-1073.

8.

HOUSING COMPONENT WILL WITHSTAND EXPOSURE TO 260°C
PEAK TEMPERATURE FOR 60 SECONDS IN A CONVECTION, INFRA-RED,
OR VAPOR PHASE REFLOW OVEN.

9.

COPPER PLATING THICKNESS IN CENTER OF VIA-HOLE CAN BE
NO MORE THAN 0.003 LESS THAN OTHER AREAS.

10.

ALL HOLE SIZES ARE FINISHED HOLE SIZES.

11.

MOUNTING HOLES ARE UNPLATED.

FCI

Copyright FCI.

dr

Not Found DuWa

2010/04/28

eng

De-Ming Lu

2014/12/28

chr

-

-

appr

Pei-Ming Zheng

2014/12/29

projection

MM

size

A2

scale

1:1

ecn no

ELX-DG-19849-1

product family

HCI

rel level

Released

FCI

www.fci.com

title

R/A HEADER ASSY 10DC-24S

HCI POWER CONNECTOR

cat. no.

-

Product - Customer Drw

sheet 5 of 5

dwg no

I0088054

rev

C

PDS: Rev :C

STATUS:Released

Printed: Dec 30, 2014

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А