SPECIFICATION

Part No.	:	**MA231.LBC.003**
Product Name	:	MA231 3 in1Stream 3M: GPS-GLONASS-GALILEO RG174 RP-SMA(M), 2G/3G/4G CFD-200 RP-SMA(M), Wi-Fi CFD-200 RP-SMA(M)
Feature	:	IP67 Antenna GPS-GLONASS-GALILEO: 3M RG-174 SMA(M) ST 1.8~5.5V/30dB Cellular 4G/3G/2G: 3M Low Loss CFD-200 SMA(M) ST Wi-Fi: 3M Low Loss CFD-200 RP-SMA(M) ST Dimensions: 200.5*66.5*9mm RoHS Compliant

1. Introduction

The Stream 3in1 MA231 GPS-GLONASS-GALILEO, LTE Cellular 4G/3G/2G and Wi-Fi 2.4/5.8GHz antenna is a low profile, heavy-duty, fully IP67 waterproof external M2M antenna for use by RF professionals in telematics, transportation and remote monitoring applications. The Stream 3in1 is unique in the market as it combines the highest possible efficiency and peak gain for GPS-GLONASS-GALILEO, Wi-Fi dual-band 2.4/5.8GHz and all cellular bands in 4G/3G/2G in a low profile compact format for mounting via high quality first tier automotive approved 3M adhesive foam.

The patent pending design incorporates a custom Taoglas 35mm GPS-GLONASS-GALILEO patch antenna on an extended integral ground-plane. A front-end SAW filter dramatically reduces radiated spurious emissions.

The extended ground-plane used with an innovative internal 4G/3G/2G Cellular PIFA also enables the unique wide-band 4G/3G/2G response to deliver the highest performance possible, at 3 meters cable length. High antenna efficiencies are absolutely critical in today's 4G and 2G systems to achieving targeted data-speeds and coverage.

A powerful Wi-Fi dual-band 2.4/5.8GHz antenna gives maximum gain and coverage for common applications.

The Stream works best when attached to plastic or glass, but can also be used on metal if a minimum of 40mm foam spacing is added.

2. Specification Table

Performance Specifications			
Parameter	GPS-GLONASS-GALILEO Antenna	Cellular Antenna	Wi-Fi Antenna
Frequency Range	1,575.42±10MHz 1,602±8MHz	700-960MHz 1710-2170MHz 2500-2690MHz	2400-2484MHz 5150-5850MHz
Gain	1575.42MHz:1.3dBi typ. @ Zenith 1602MHz:2.9dBi typ. @ Zenith	Listed below	Listed below
VSWR	2.0 Max	3.0 Max	2.0 Max
Impedance	50Ω	50Ω	50Ω
Efficiency	-	≧ 70% @ 700MHz ≧ 60% @ 750MHz ≧ 50% @ 824MHz ≧ 50% @ 880MHz ≧ 40% @ 890MHz ≧ 25% @ 960MHz ≧ 50% @ 1710MHz ≧ 50% @ 1880MHz ≧ 50% @ 1990MHz ≧ 45% @ 2110MHz ≧ 45% @ 2170MHz ≧ 30% @ 2500MHz ≧ 15% @ 2690MHz	≧ 35% @ 2450MHz ≧ 35% @ 5250MHz ≧ 35% @ 5650MHz

MECHANICAL			
Cable / Connector	3M RG-174 with SMA(M) Fully customizable	3M CFD-200 with SMA(M) Fully customizable	3M CFD-200 with RP-SMA(M) Fully customizable
Housing	ABS		
Adhesive Mount	3M 1600TB(196.57*62.57*1.25mm)		
Protection Class	IP-67		
Weight	180g		

ENVIRONMENTAL	
Operation Temperature	-40°C to +85°C
Storage Temperature	-40°C to +85°C
Relative Humidity	20% to 95%

3. GPS-GLONASS-GALILEO Antenna

3.1. Return Loss

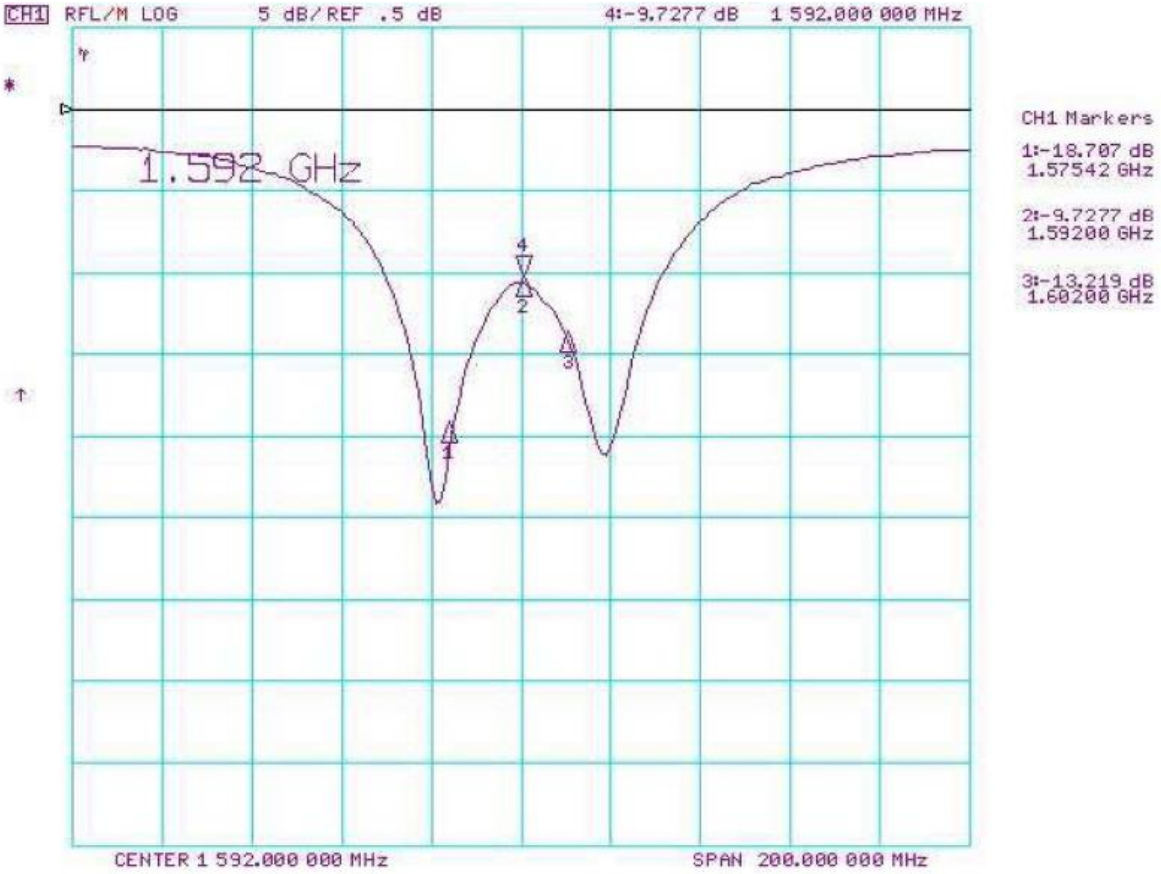

Return Loss: -18.70 dB@1575.42MHz

Return Loss: -13.21 dB@1602MHz

3.2. Smith Chart

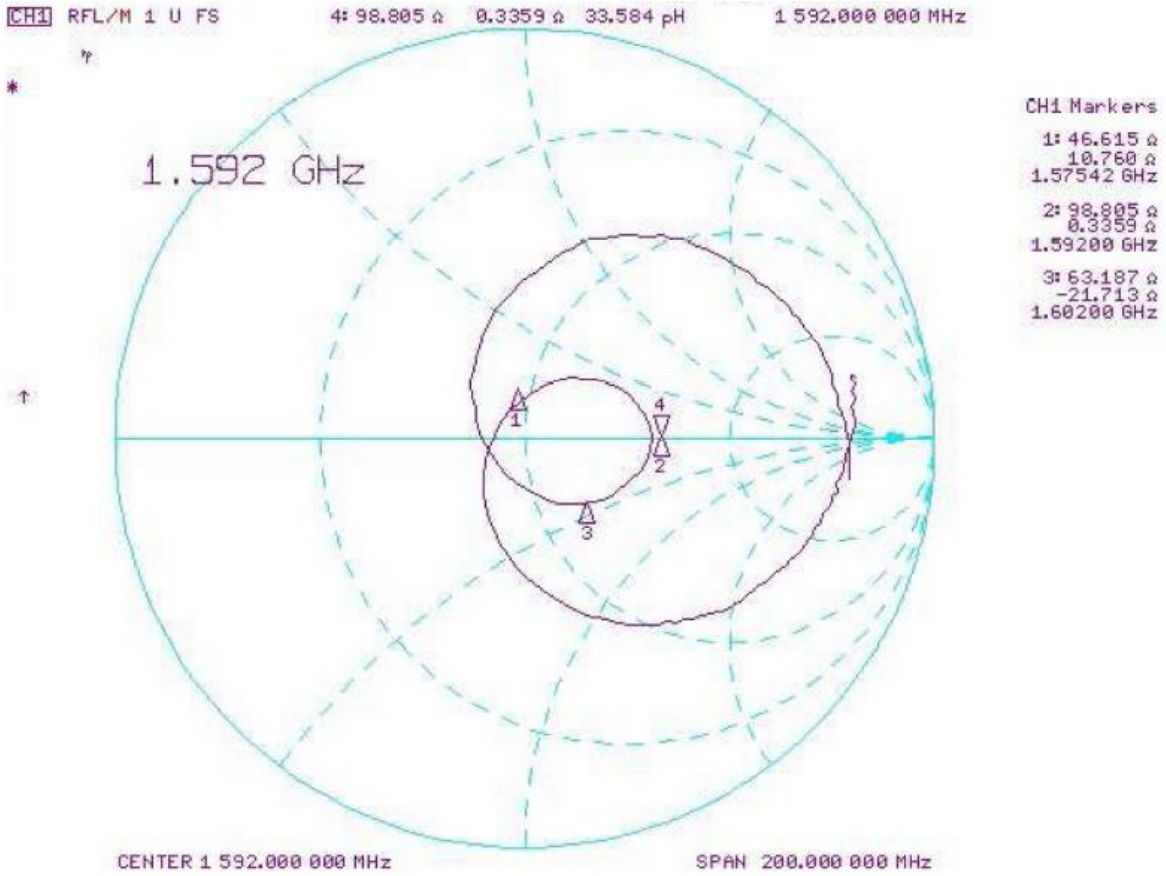

Impedance: 46.61+j10.76 Ohm@1575.42MHz

Impedance: 63.18-j21.73 Ohm@1602MHz

3.3. Radiation Patterns

XZ-Plane

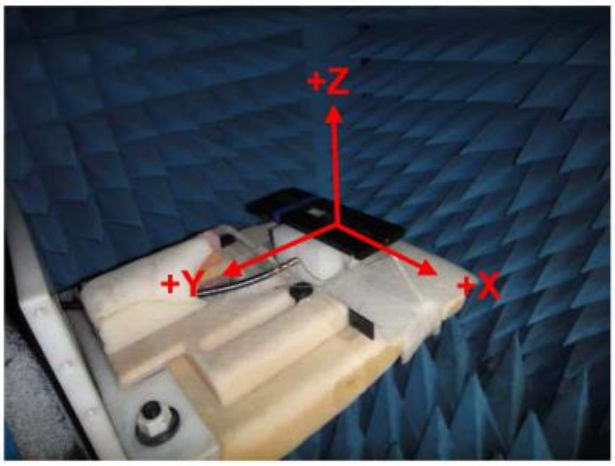

YZ-Plane

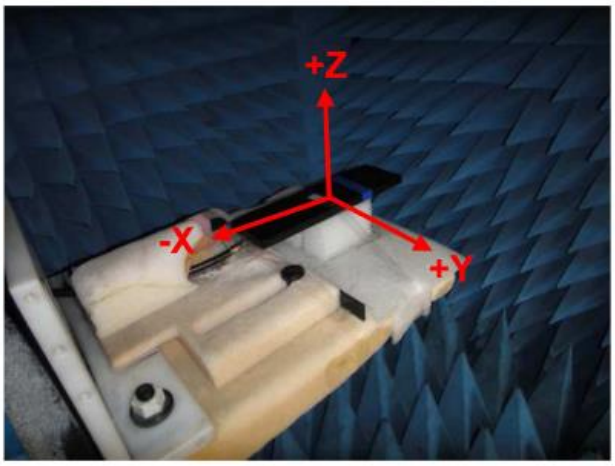

3.3.1. XZ Plane 1575.42MHz

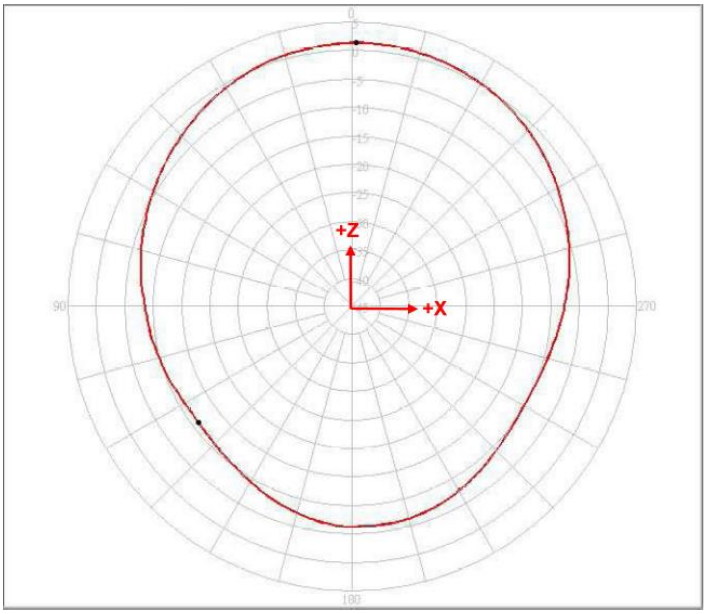

1575.42MHZ	Peak Gain	Zenith Gain
V+H	1.39 dBi	1.35 dBi

3.3.2. XZ Plane 1602MHz

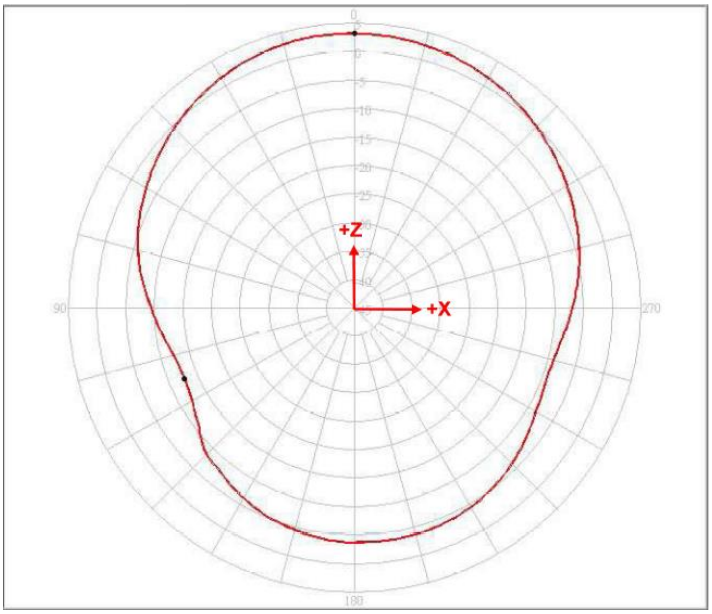

1602MHZ	Peak Gain	Zenith Gain
V+H	3.19 dBi	3.19 dBi

3.3.3. YZ Plane 1575.42MHz

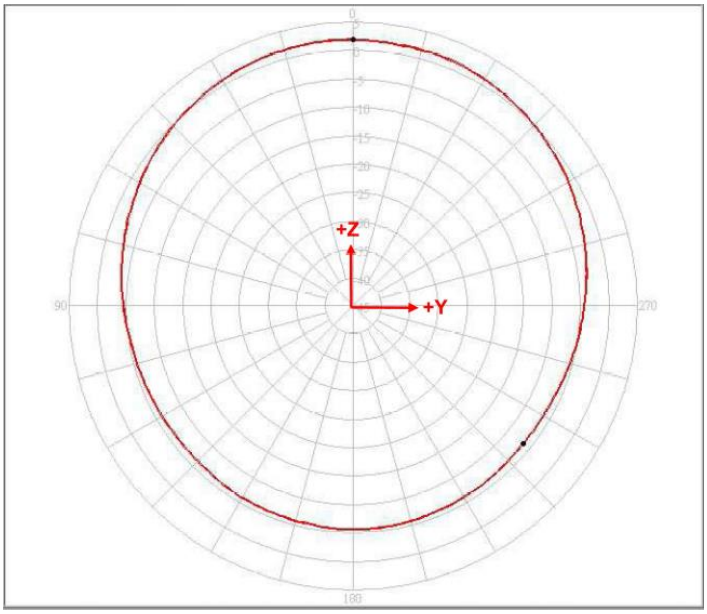

1575.42MHZ	Peak Gain	Zenith Gain
V+H	1.92 dBi	1.92 dBi

3.3.4. YZ Plane 1602MHz

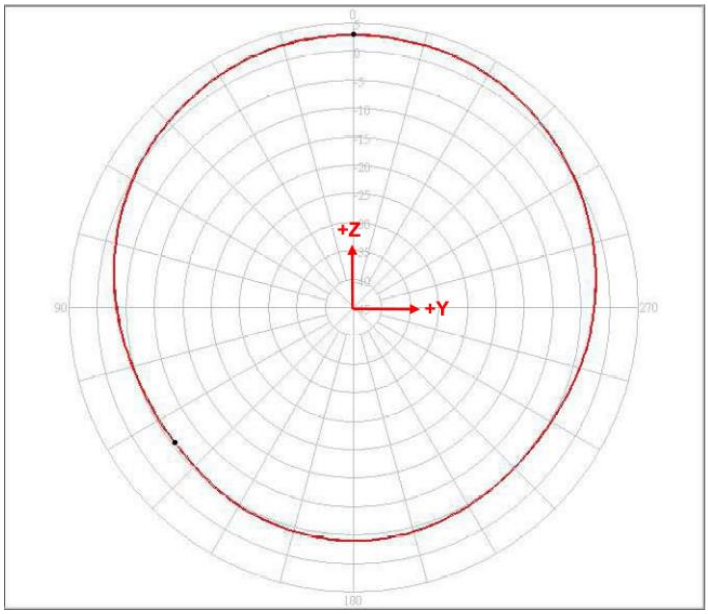

1602MHZ	Peak Gain	Zenith Gain
V+H	2.92 dBi	2.92 dBi

3.4. Axial Ratio Pattern

3.4.1. 1575.42MHz

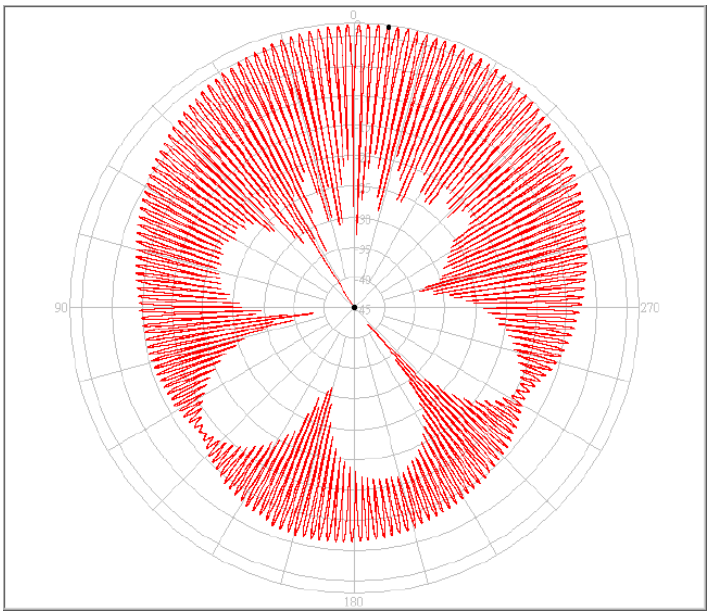

3.4.2. 1602MHz

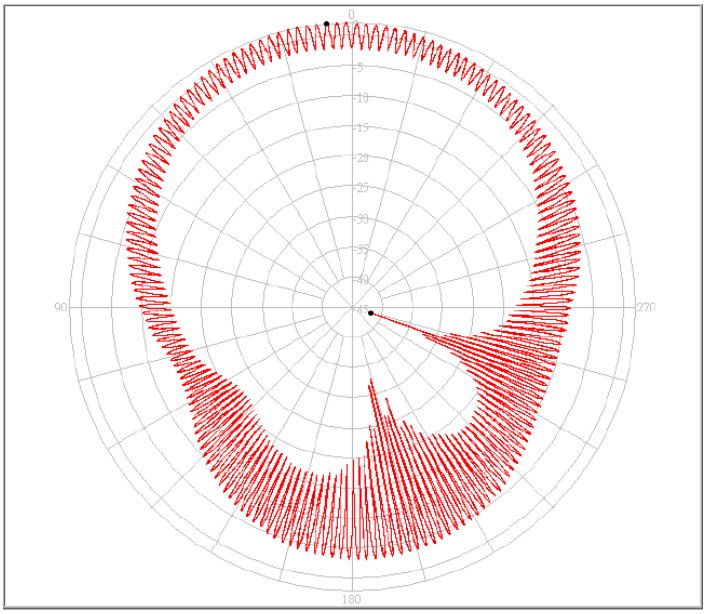

3.5. LNA characteristics

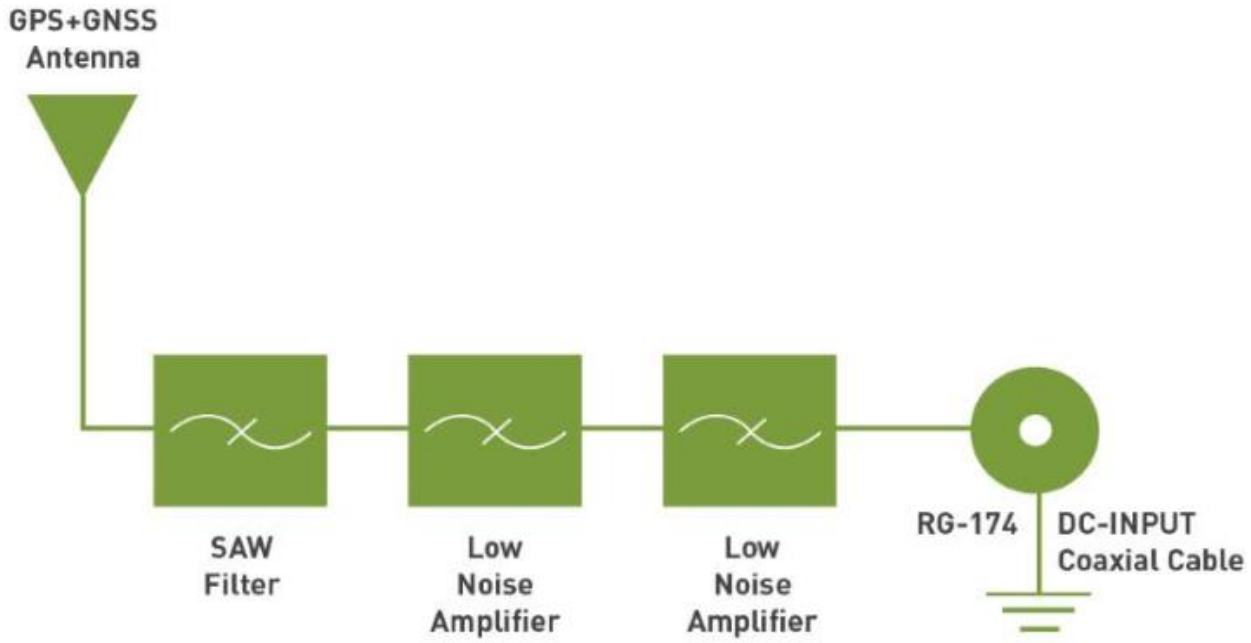

Parameter	
Frequency Range	1,575.42±10MHz For GPS/GALILEO 1,602±8MHz For GLONASS
Output Impedance	50 Ohm
Output VSWR	2.0 max

Supply Voltage	Gain(Typ)	Noise Figure(Typ)	Power Consumption(Typ)
1.8V	24dB	-	5.5mA
3.0V	30dB	2.4dB For GPS/GALILEO 2.7dB For GLONASS	13.2mA
5.5V	32dB	-	16.2mA

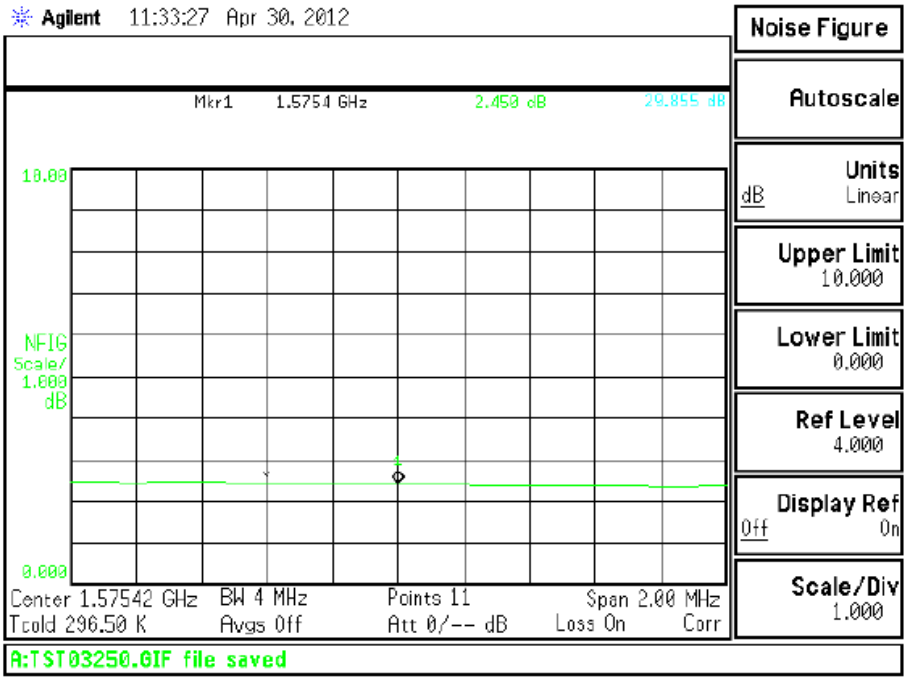

LNA Noise Figure@3.0V for 1575.42MHz

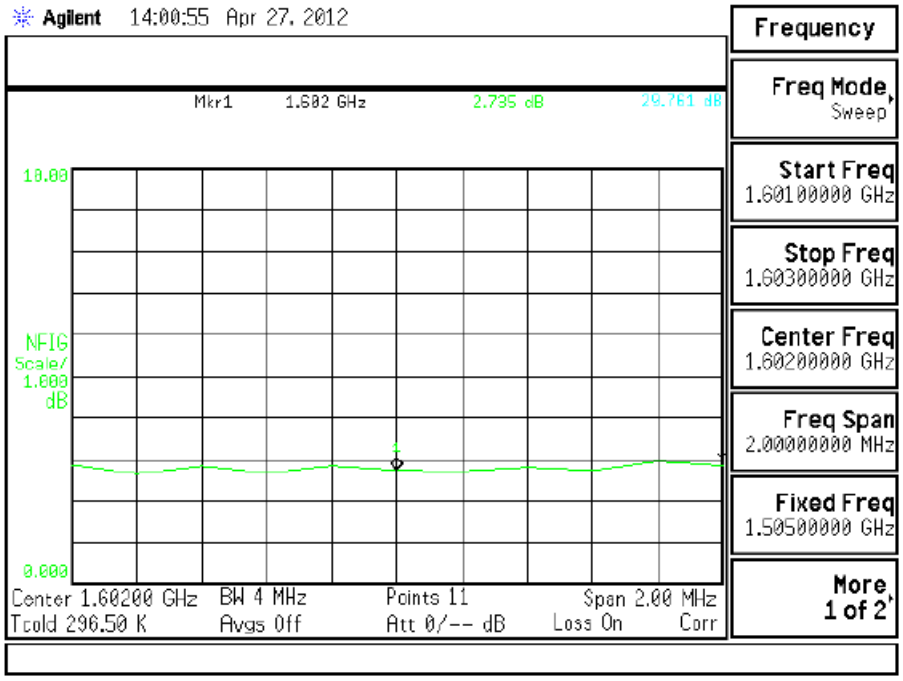

LNA Noise Figure@3.0V for 1602MHz

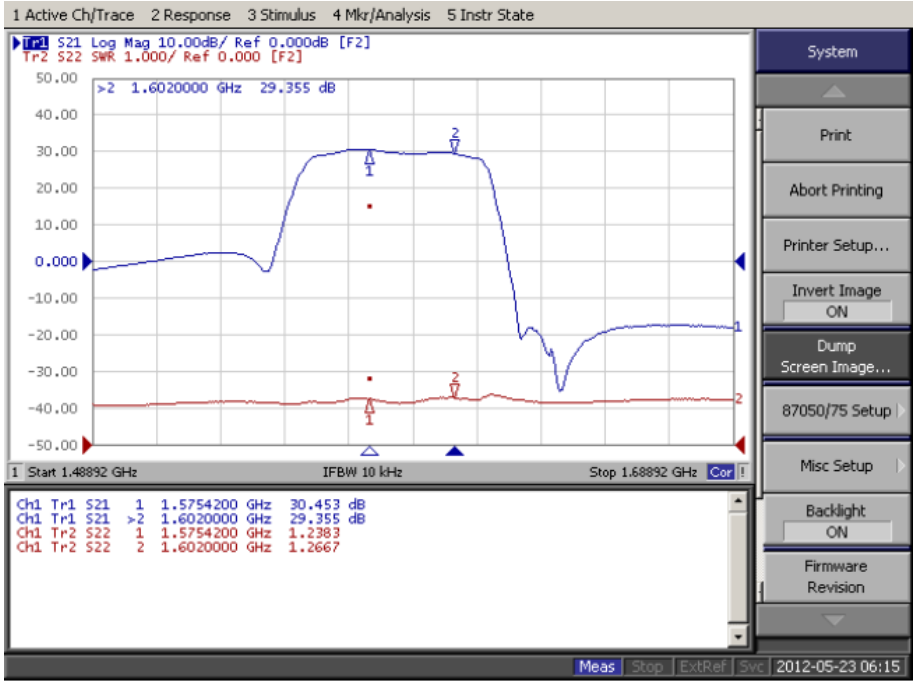

LNA Gain and Output of VSWR at 3.0V

4. Cellular 4G/3G/2G antenna

4.1. VSWR

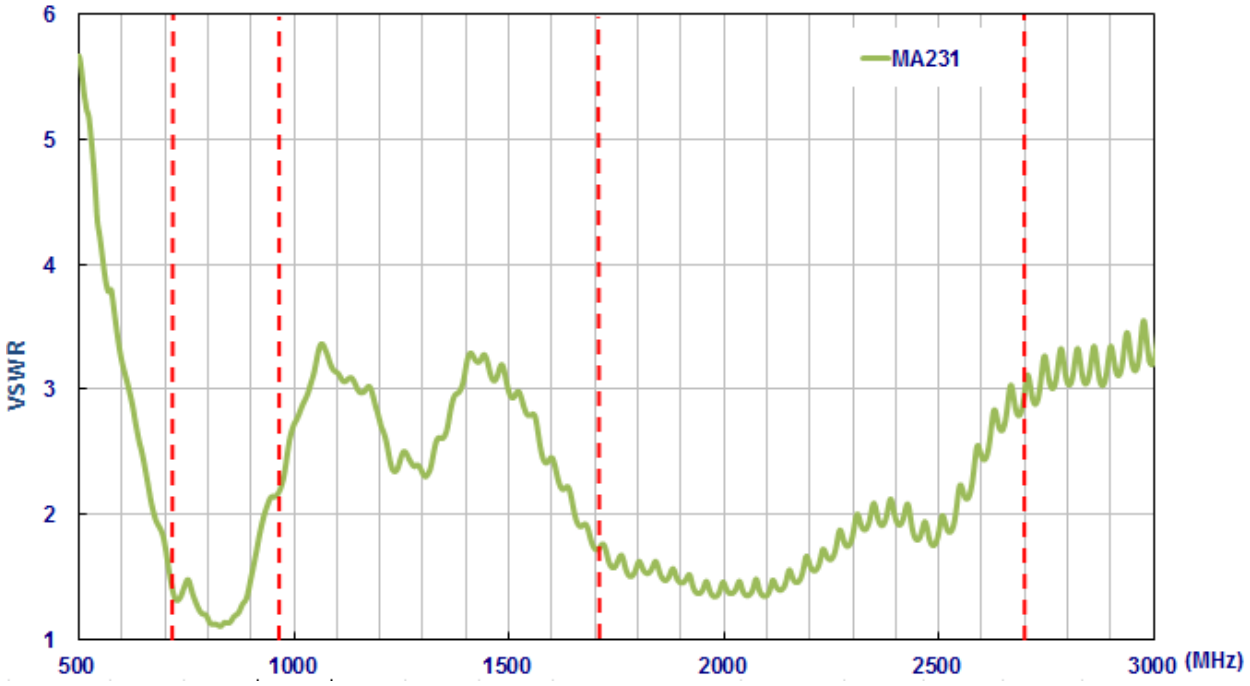

4.2. Efficiency

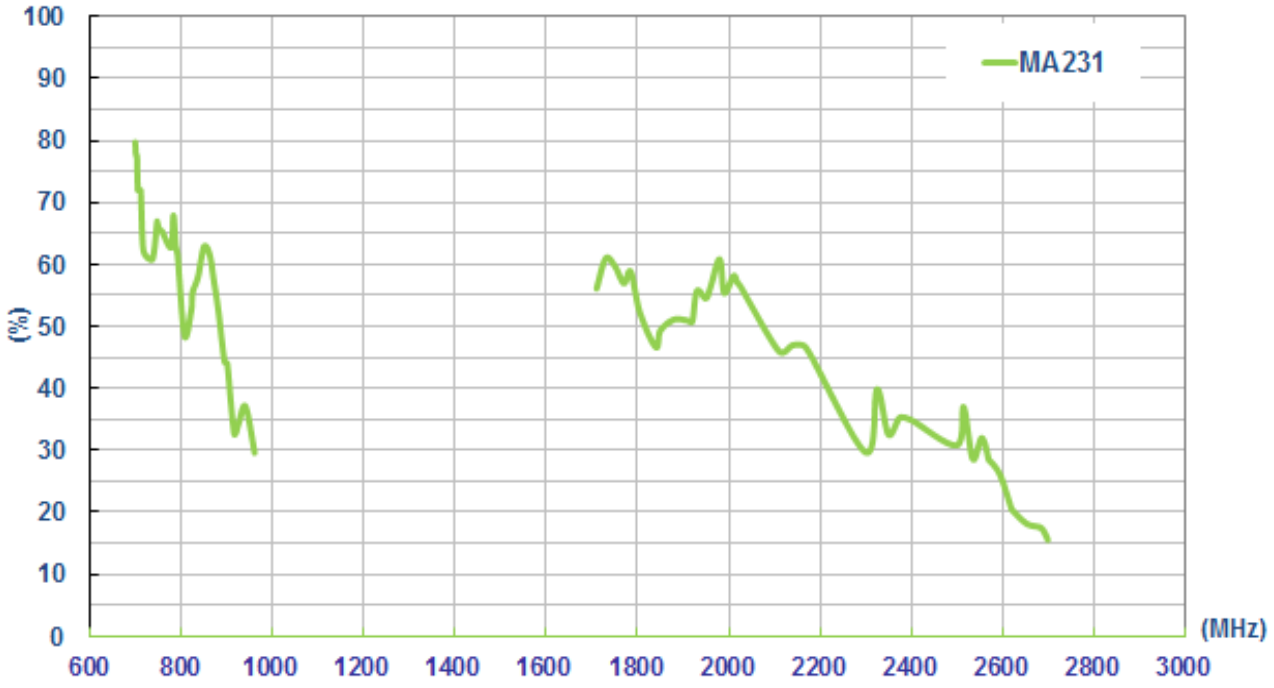

4.3. Peak Gain

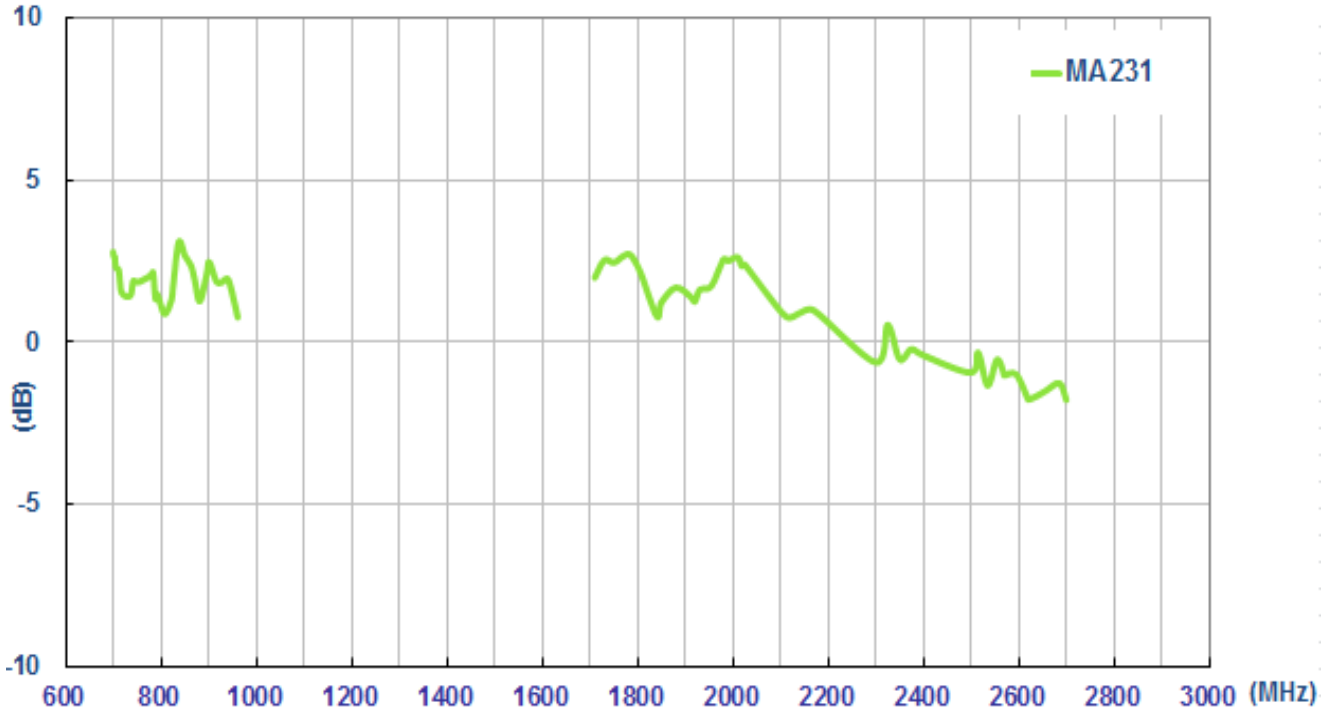

4.4. Average Gain

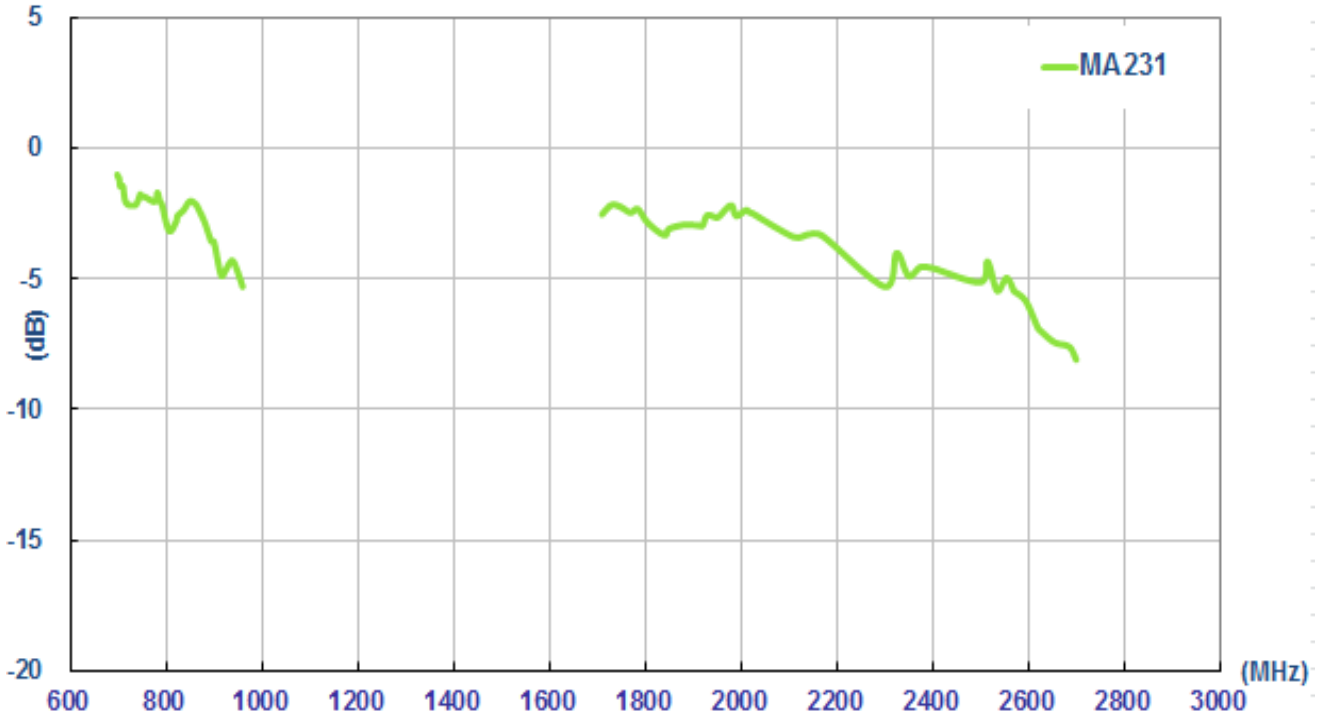

4.5. Antenna Radiation Pattern

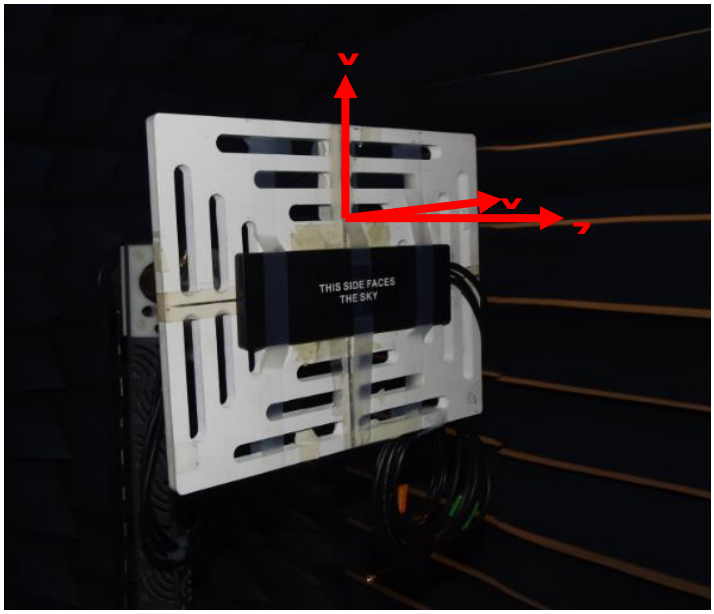

XY Plane

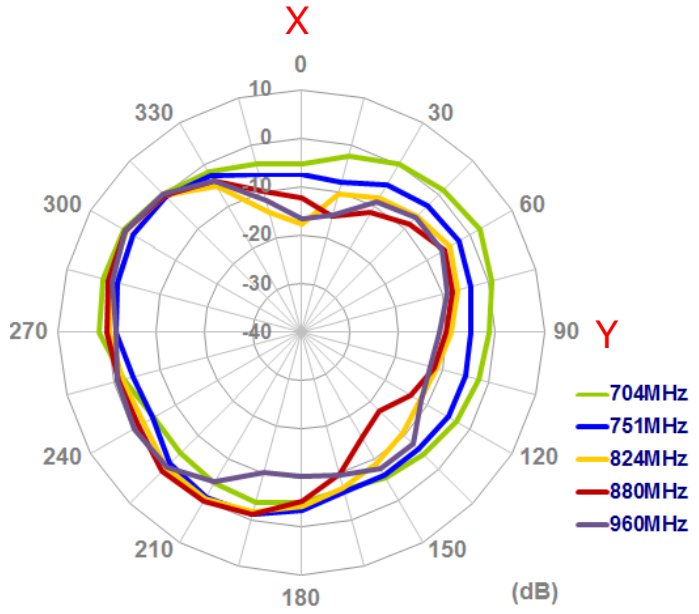
X
Y
0
30
60
90
120
150
180
210
240
270
300
330
10
0
-10
-20
-30
-40
(dB)
704MHz
751MHz
824MHz
880MHz
960MHz

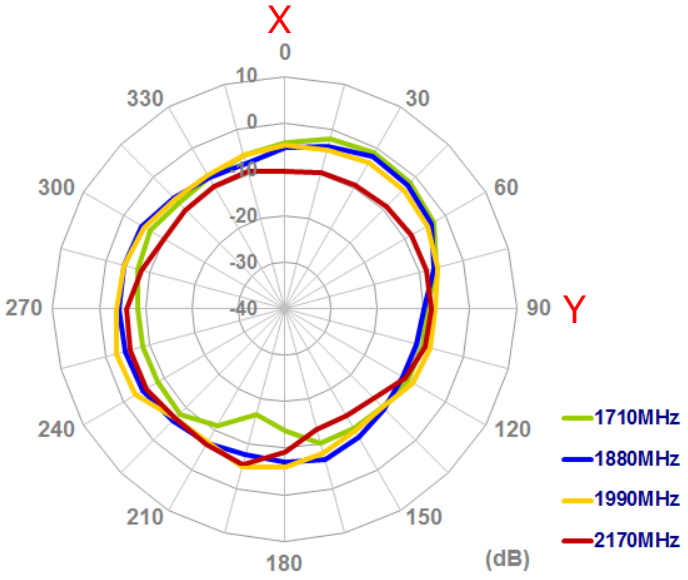
X
Y
0
30
60
90
120
150
180
210
240
270
300
330
10
0
-10
-20
-30
-40
(dB)
1710MHz
1880MHz
1990MHz
2170MHz

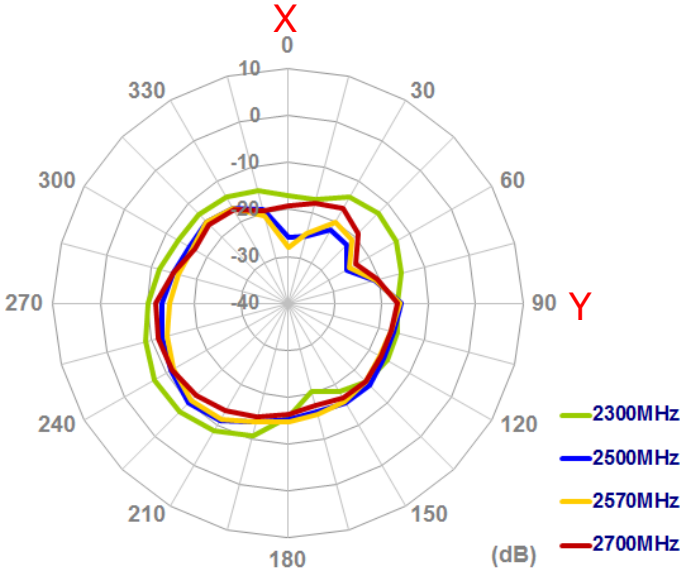
X
Y
0
30
60
90
120
150
180
210
240
270
300
330
10
0
-10
-20
-30
-40
(dB)
2300MHz
2500MHz
2570MHz
2700MHz

ZX Plane

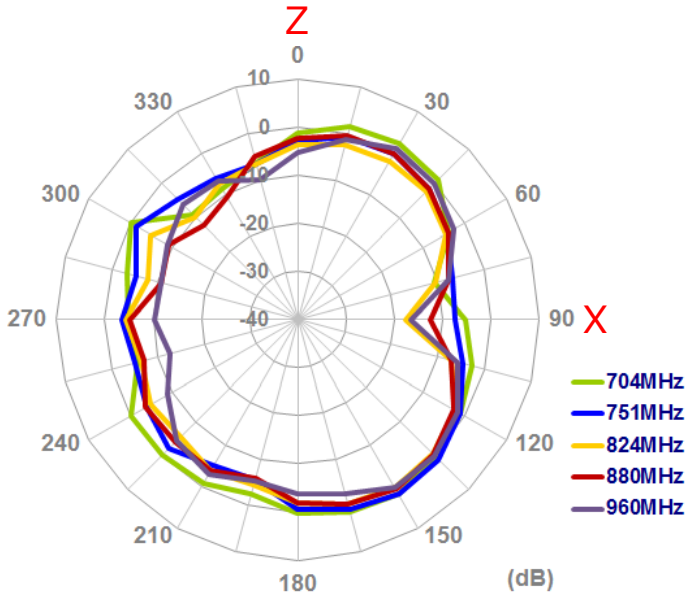
Z
0
30
60
90
X
120
150
180
210
240
270
300
330
10
0
-10
-20
-30
-40
(dB)
704MHz
751MHz
824MHz
880MHz
960MHz

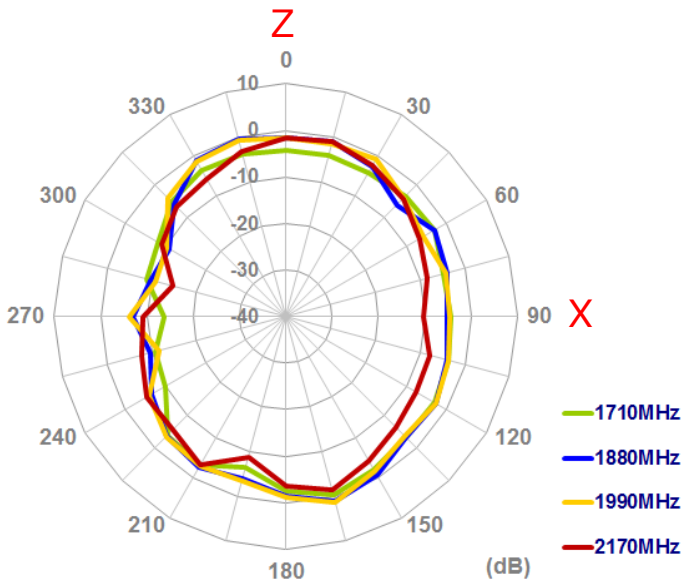
Z
0
30
60
90
X
120
150
180
210
240
270
300
330
10
0
-10
-20
-30
-40
(dB)
1710MHz
1880MHz
1990MHz
2170MHz

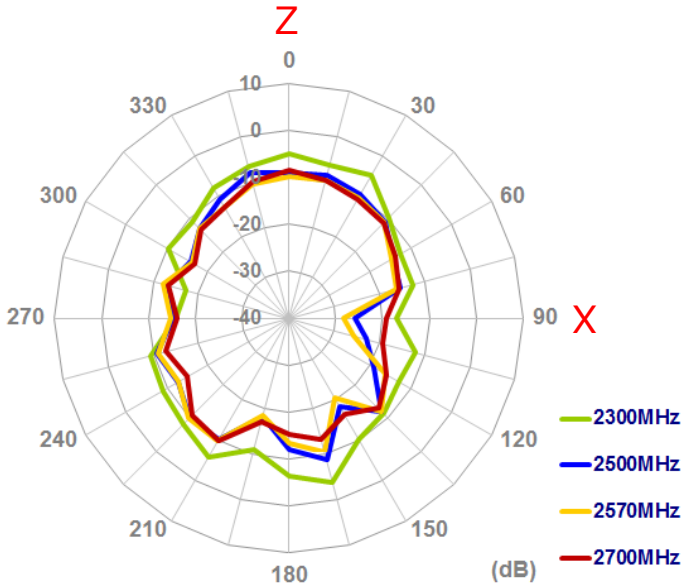
Z
0
30
60
90
X
120
150
180
210
240
270
300
330
10
0
-10
-20
-30
-40
(dB)
2300MHz
2500MHz
2570MHz
2700MHz

ZY Plane

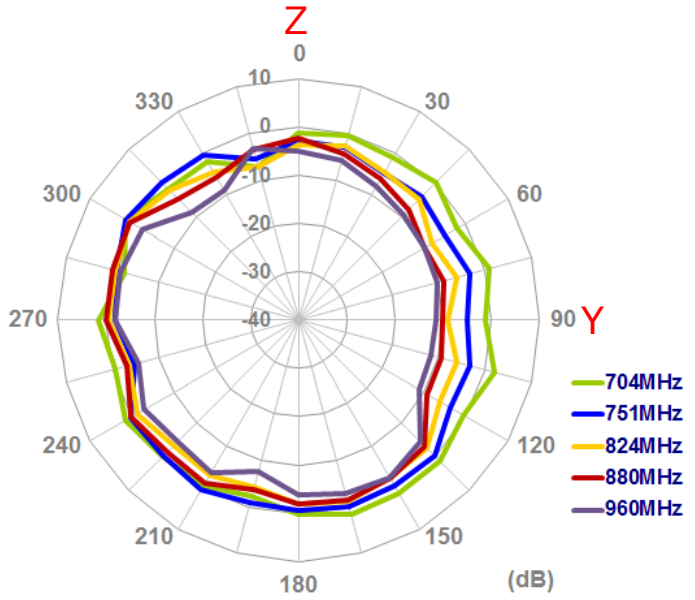
Z
0
30
60
90 Y
120
150
180
210
240
270
300
330
10
0
-10
-20
-30
-40
(dB)
704MHz
751MHz
824MHz
880MHz
960MHz

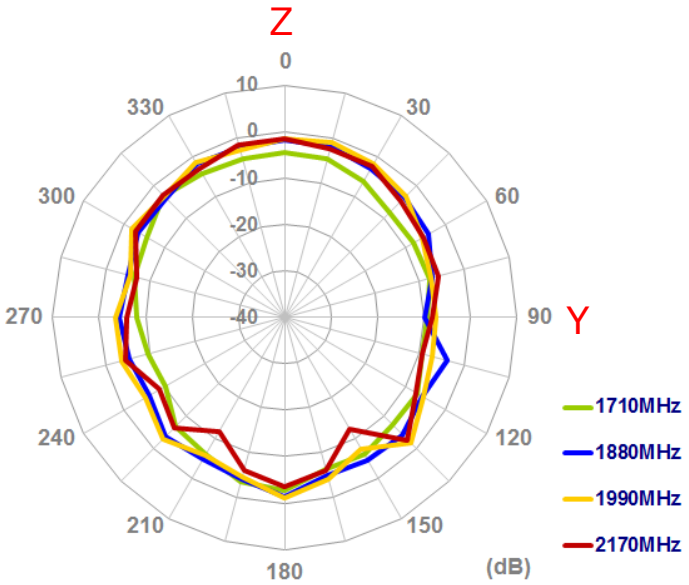
Z
0
30
60
90 Y
120
150
180
210
240
270
300
330
10
0
-10
-20
-30
-40
(dB)
1710MHz
1880MHz
1990MHz
2170MHz

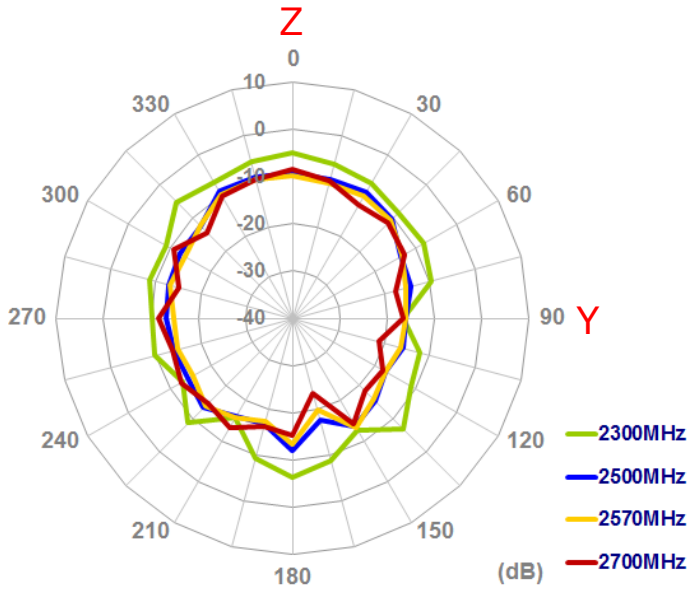
Z
0
30
60
90 Y
120
150
180
210
240
270
300
330
10
0
-10
-20
-30
-40
(dB)
2300MHz
2500MHz
2570MHz
2700MHz

5. Wi-Fi 2.4/5.0 GHz antenna

5.1. VSWR

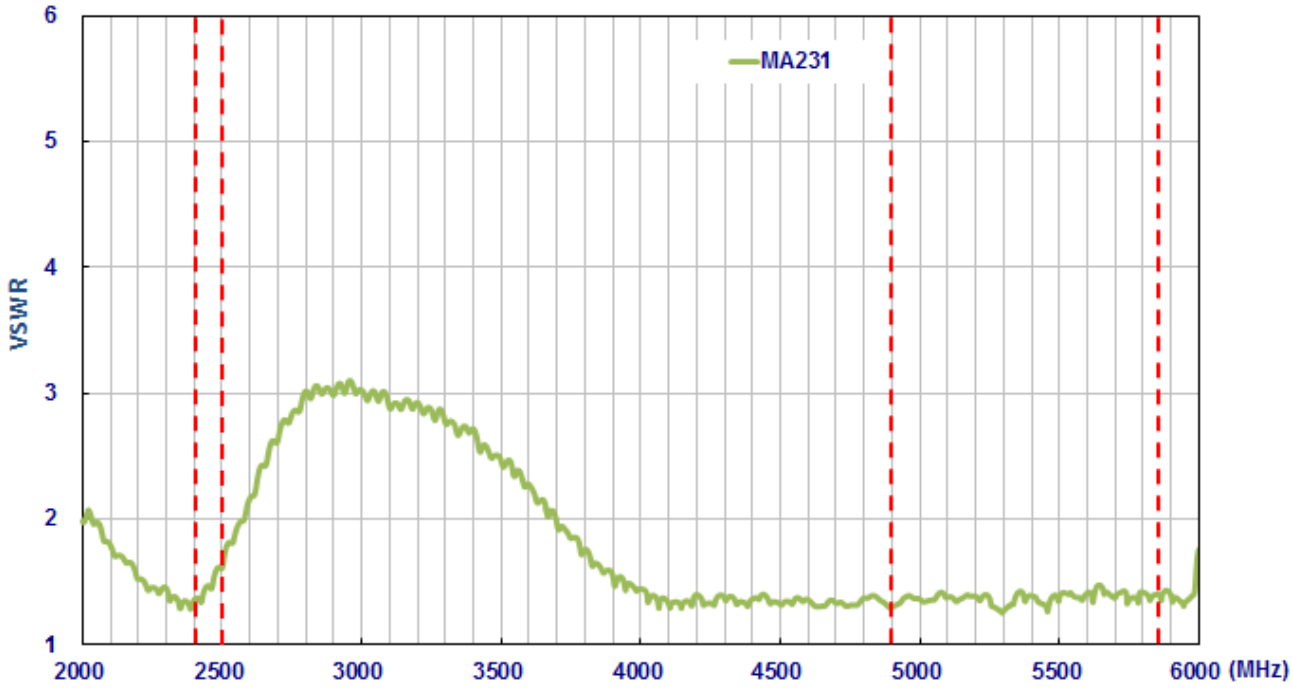

5.2. Efficiency

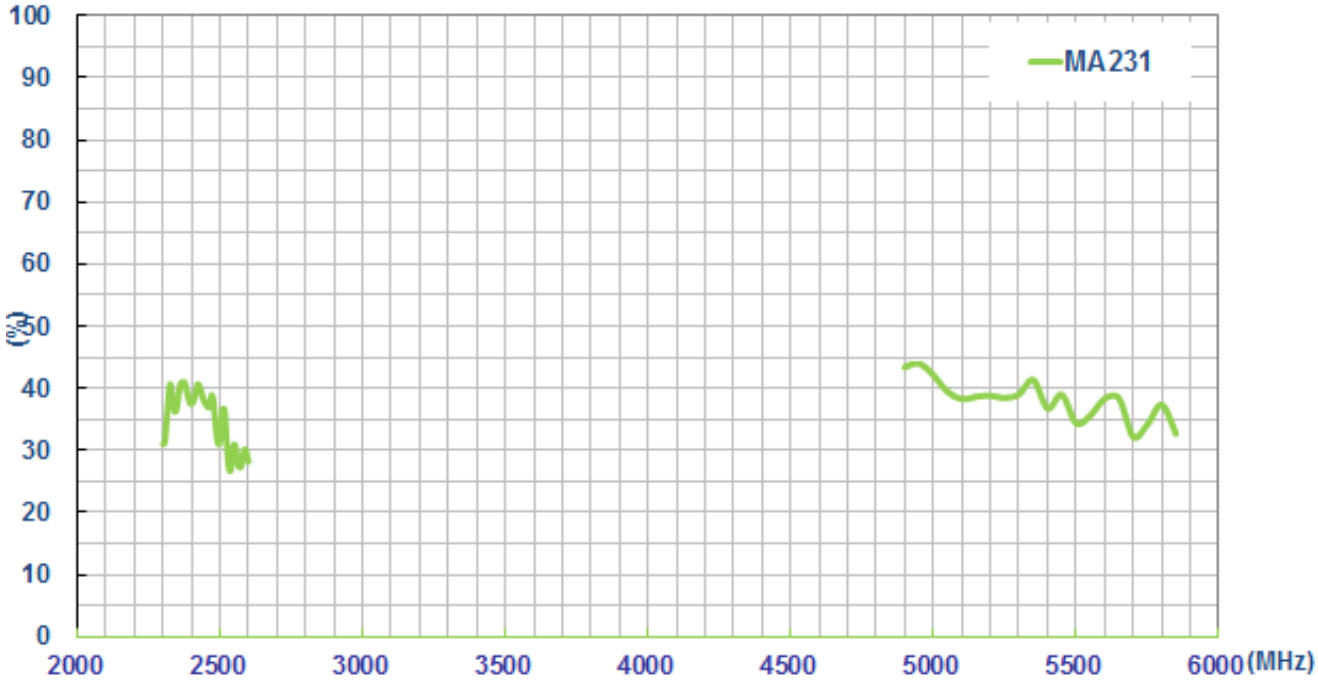

5.3. Peak Gain

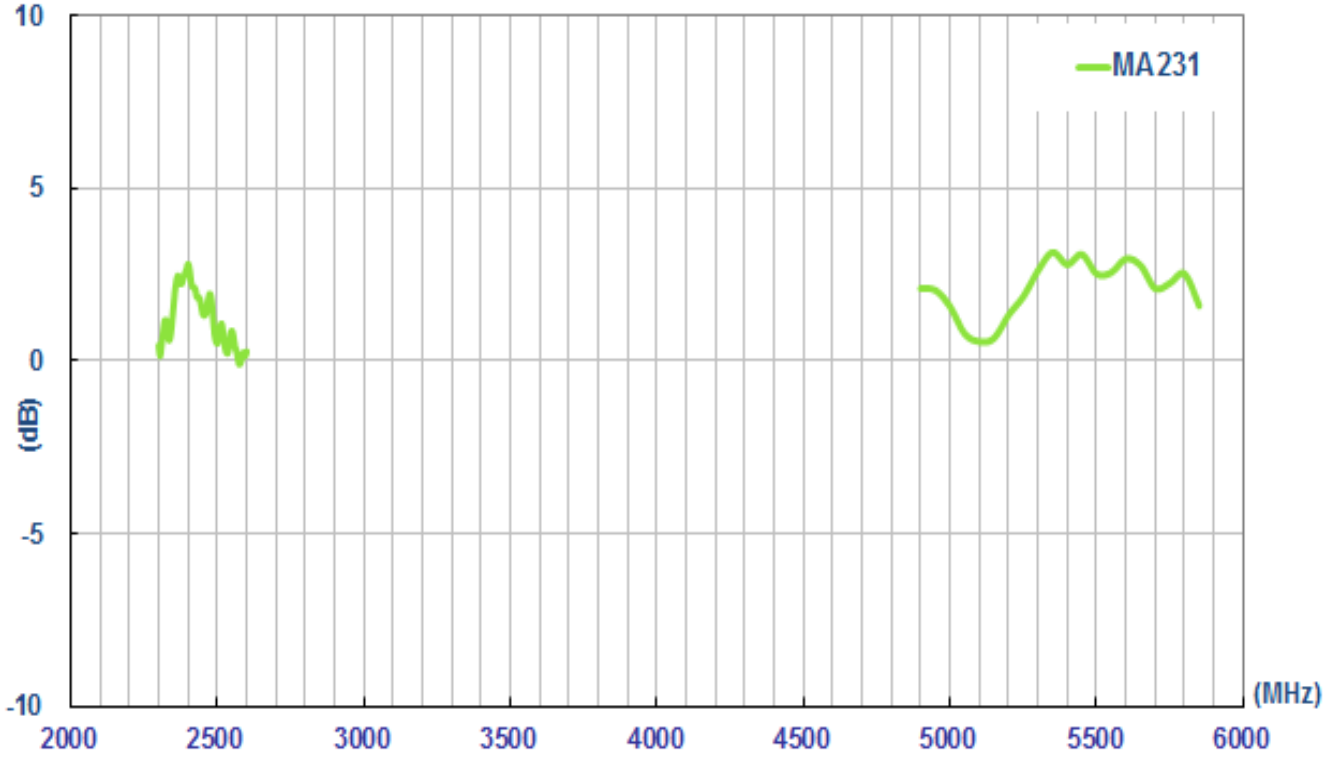

5.4. Average Gain

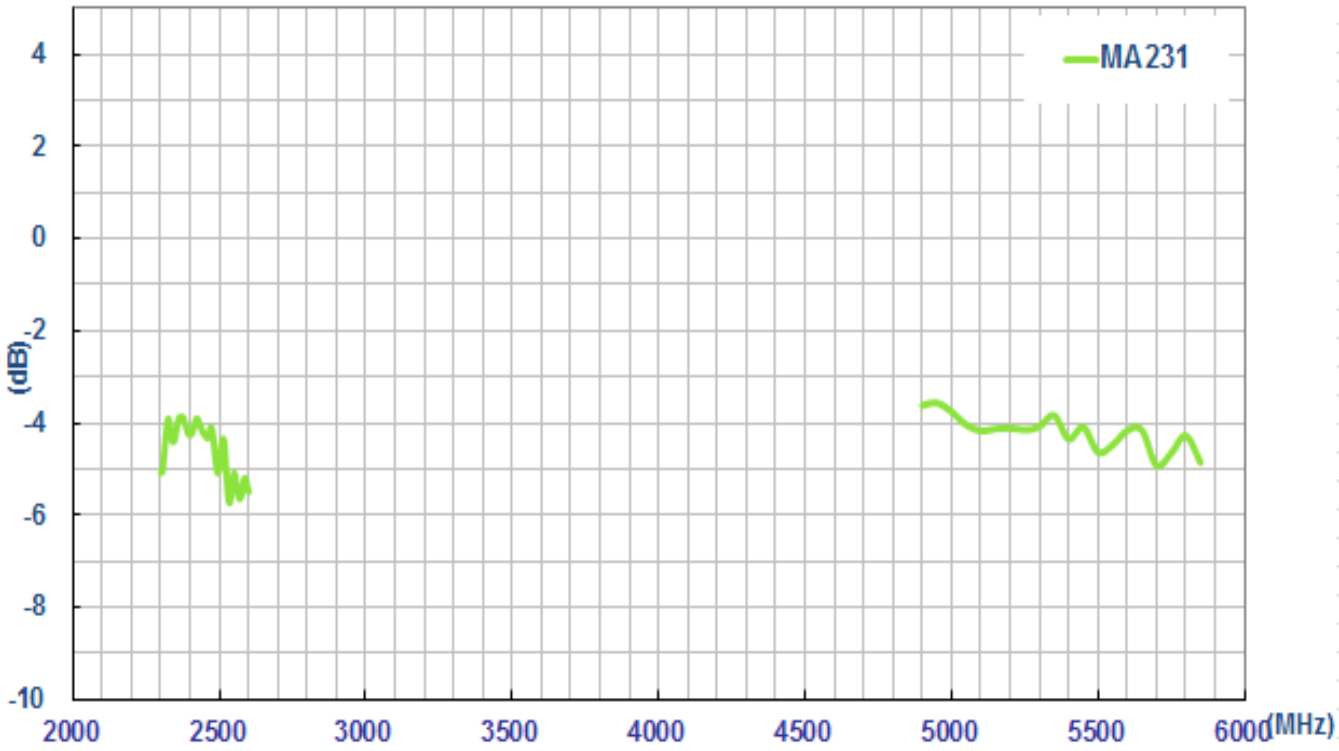

5.5. 2D Radiation Pattern

XY Plane

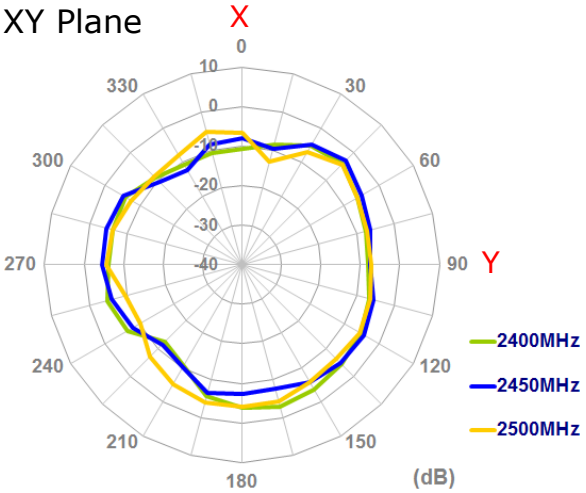

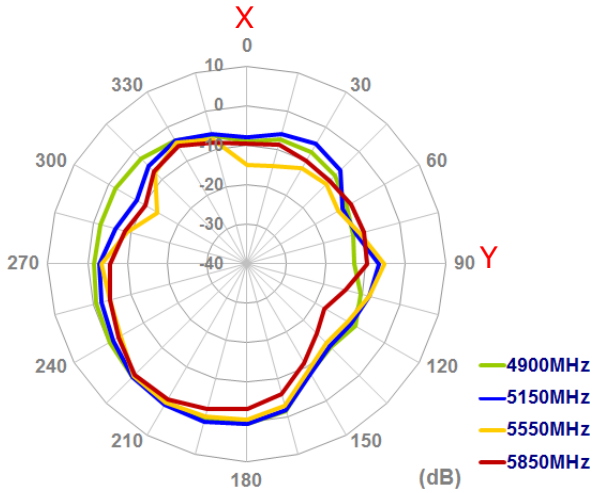

XZ Plane

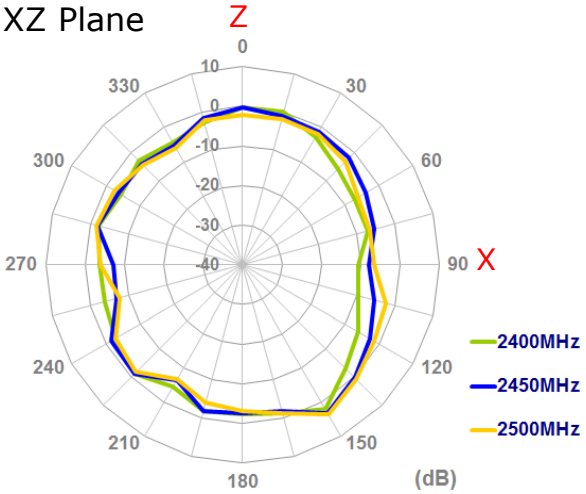

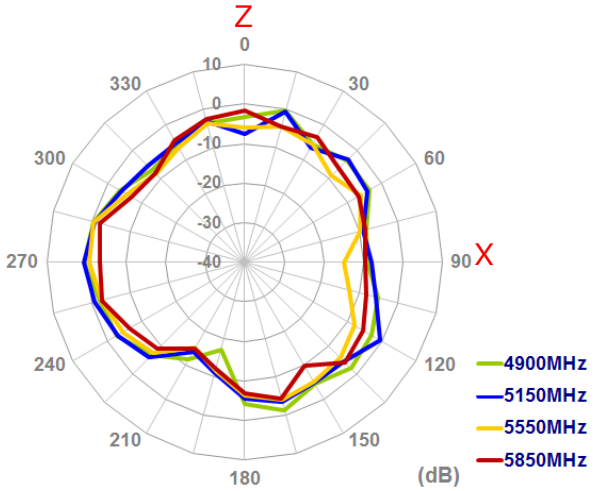

YZ Plane

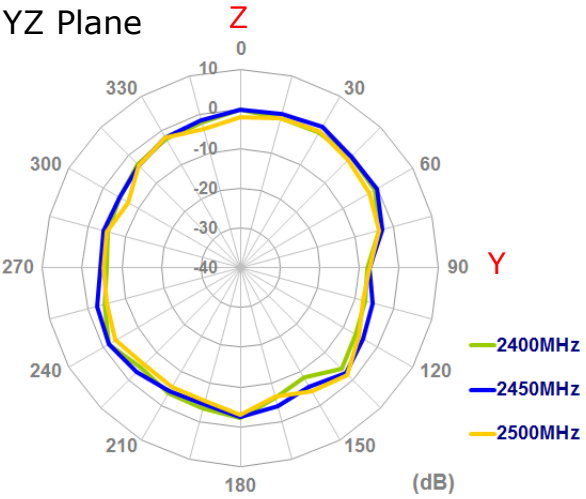

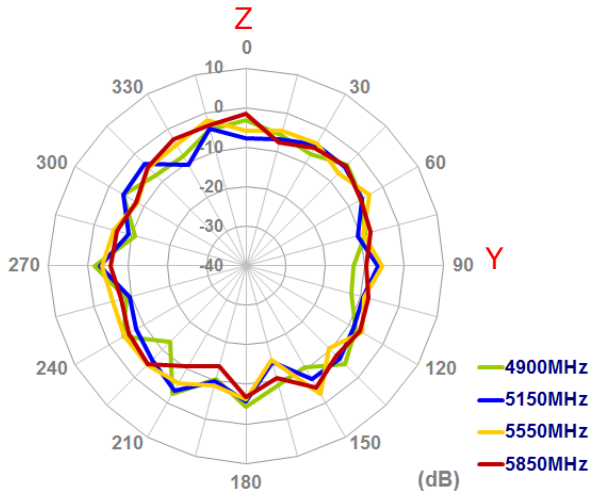

6. Mechanical Drawing

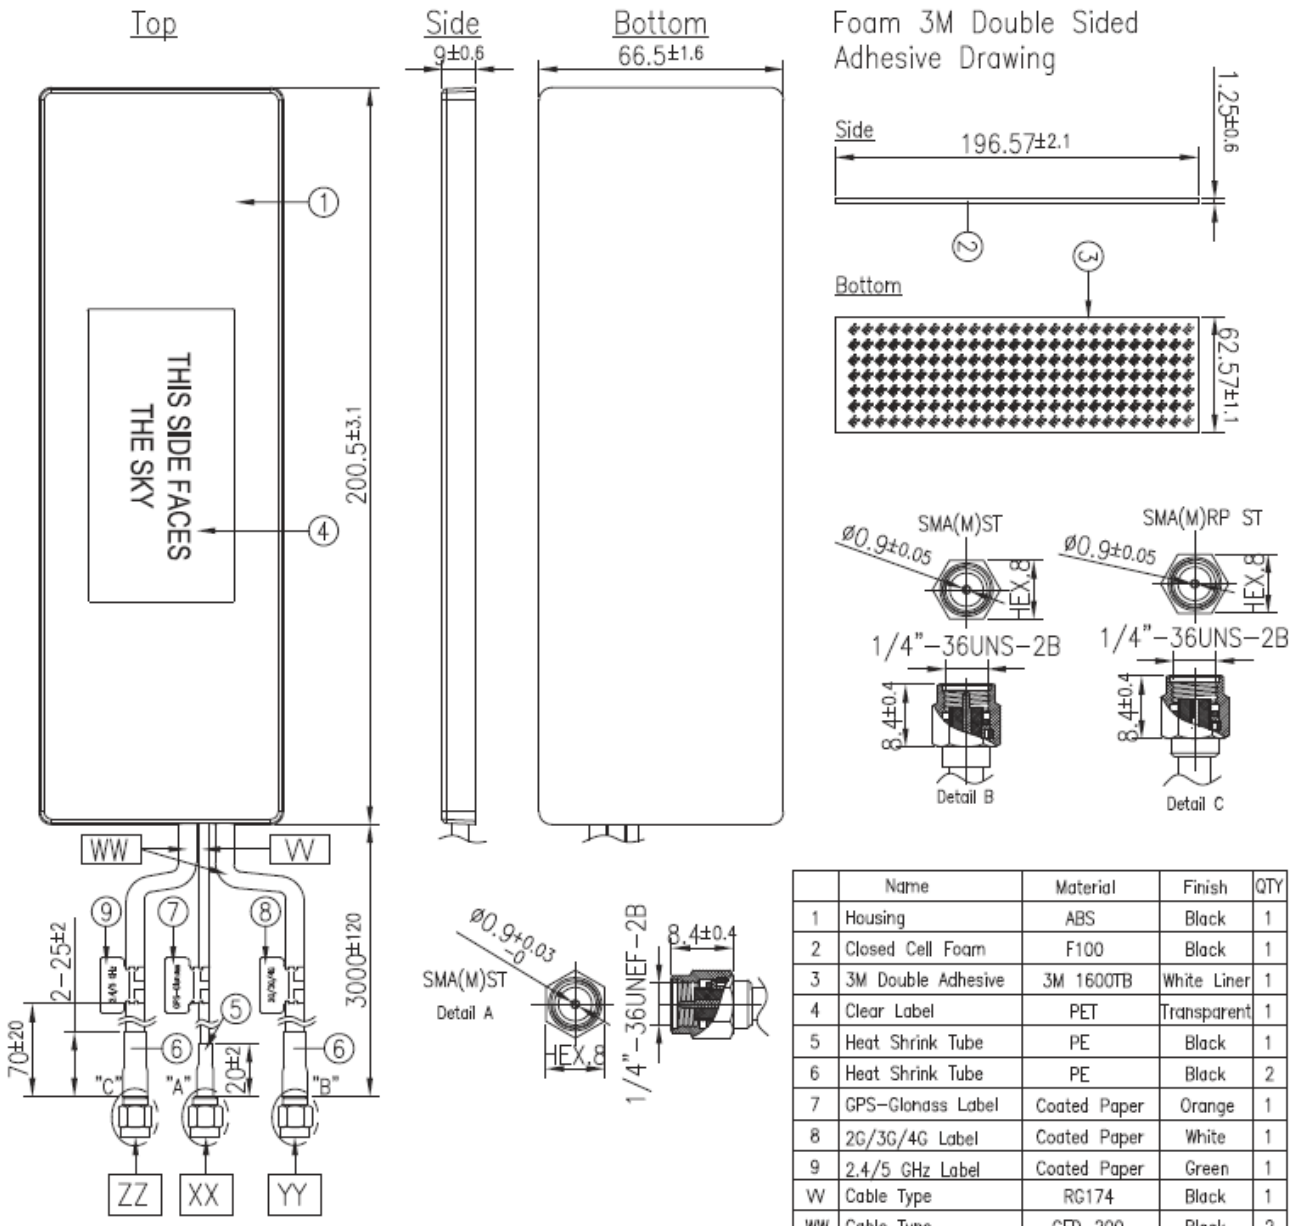

	Name	Material	Finish	QTY
1	Housing	ABS	Black	1
2	Closed Cell Foam	F100	Black	1
3	3M Double Adhesive	3M 1600TB	White Liner	1
4	Clear Label	PET	Transparent	1
5	Heat Shrink Tube	PE	Black	1
6	Heat Shrink Tube	PE	Black	2
7	GPS-Glonass Label	Coated Paper	Orange	1
8	2G/3G/4G Label	Coated Paper	White	1
9	2.4/5 GHz Label	Coated Paper	Green	1
VV	Cable Type	RG174	Black	1
WW	Cable Type	CFD-200	Black	2
XX	Connector Type	SMA(M)ST	Gold Plated	1
YY	Connector Type	SMA(M)ST	Gold Plated	1
ZZ	Connector Type	SMA(M)RP ST	Gold Plated	1

7. Packaging

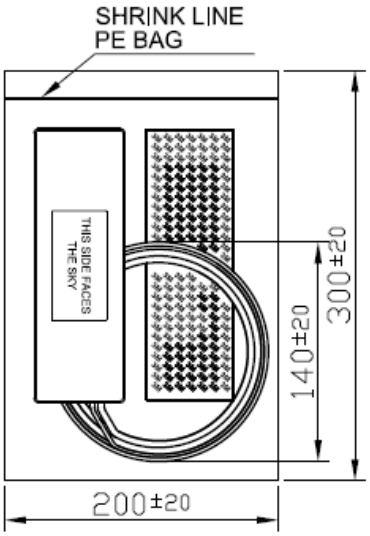

PACKING:1PCS/BAG

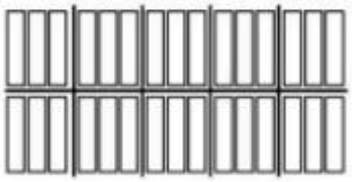

30pcs antennas
in one box



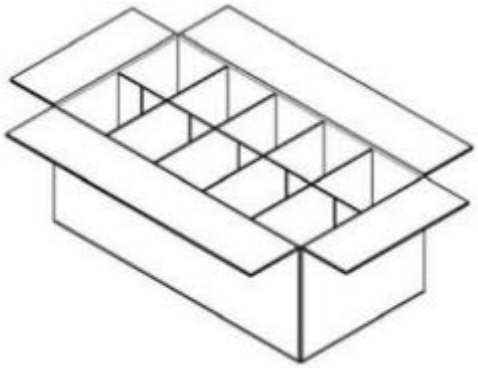

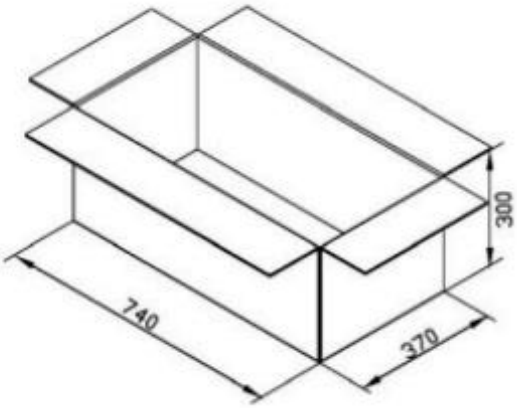

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.

OCEAN CHIPS
Океан Электроники
Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения **«JONHON»**, а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов **«FORSTAR»**.

AVIC JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).

FORSTAR®

Телефон: 8 (812) 309-75-97 (многоканальный)
Факс: 8 (812) 320-03-32
Электронная почта: ocean@oceanchips.ru
Web: http://oceanchips.ru/
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А